
Meridian 1

Digital telephone line engineering

Document Number: 553-2201-180

Document Release: Standard 4.00

Date: April 2000

Copyright © 1989–2000 Nortel Networks
All Rights Reserved

Printed in Canada

Information is subject to change without notice. Nortel Networks reserves the right to make changes in design or components as progress in engineering and manufacturing may warrant. This equipment has been tested and found to comply with the limits for a Class A digital device pursuant to Part 15 of the FCC rules, and the radio interference regulations of Industry Canada. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.

SL-1 and Meridian 1 are trademarks of Nortel Networks.

Revision history

April 2000

Standard 4.00. This is a global document and is up-issued for X11 Release 25.0x.

December 1994

Standard, release 3.00. Reissued to include editorial changes and indexing. Due to the extent of the changes, revision bars are not used.

December 1, 1991

Standard, release 2.00. Reissued to include technical content updates. Due to the extent of the changes, revision bars are not used.

August 10, 1990

Standard, release 1.00. Reissued for compliance with Northern Telecom standard 164.0.

Contents

| | |
|--|-----------|
| Engineer a telephone line | 7 |
| Select a loop | 17 |
| Calculate DC loop resistance | 19 |
| Perform loop diagnostic tests | 21 |
| Testing foreign voltage | 21 |
| Testing insulation resistance | 21 |
| Testing DC continuity | 22 |
| Testing capacitance unbalance | 22 |
| Measure impulse noise | 23 |
| Measure background noise | 25 |
| Calculate expected pulse loss | 27 |
| Example of applying Procedure 6 | 28 |
| Measure DC loop resistance | 31 |
| Index | 33 |

Engineer a telephone line

Use Procedure 1 to engineer a digital telephone line.

Procedure 1

- 1 Be sure that cable pair selections meet the following requirements:
 - AC signal loss is less than 12 dB at 256 kHz due to all sources.
 - DC loop resistance is less than 175 ohm.
 - Minimum loop length (mainframe bulkhead to telephone) is 30 m (100 ft).
 - Near-end crosstalk coupling loss is >38 dB at Nyquist frequency of 256 kHz (not an issue for typical 22, 24, and 26 AWG twisted pair cable).
 - No bridge taps are permitted.
 - No loading coils are permitted.
 - Protection devices of the carbon-block and gas-filled type are permitted if the off-state shunting impedance is better than 10 M Ω resistive and less than 0.5 pF capacitive.
- 2 Be sure that the following criteria are met where under-carpet cabling is used:
 - Characteristic impedance is at 256 kHz, 100 \pm 10 ohm.
 - Insertion loss is at 256 kHz, <4.6 dB/kft.
 - The next pair-to-pair coupling loss is at 256 kHz, >40 dB.
- 3 For a typical system with 22, 24, or 26 AWG standard twisted-pair cable, the requirements translate to the following allowable loops:
 - up to 915 m (3000 ft) of 22 or 24 AWG cable
 - up to 640 m (2100 ft) of 26 AWG cable

- 4 If the selected cable pair does not work satisfactorily, select another cable pair as shown in Figure 1.

Figure 1
Engineer a telephone line (Part 1 of 8)


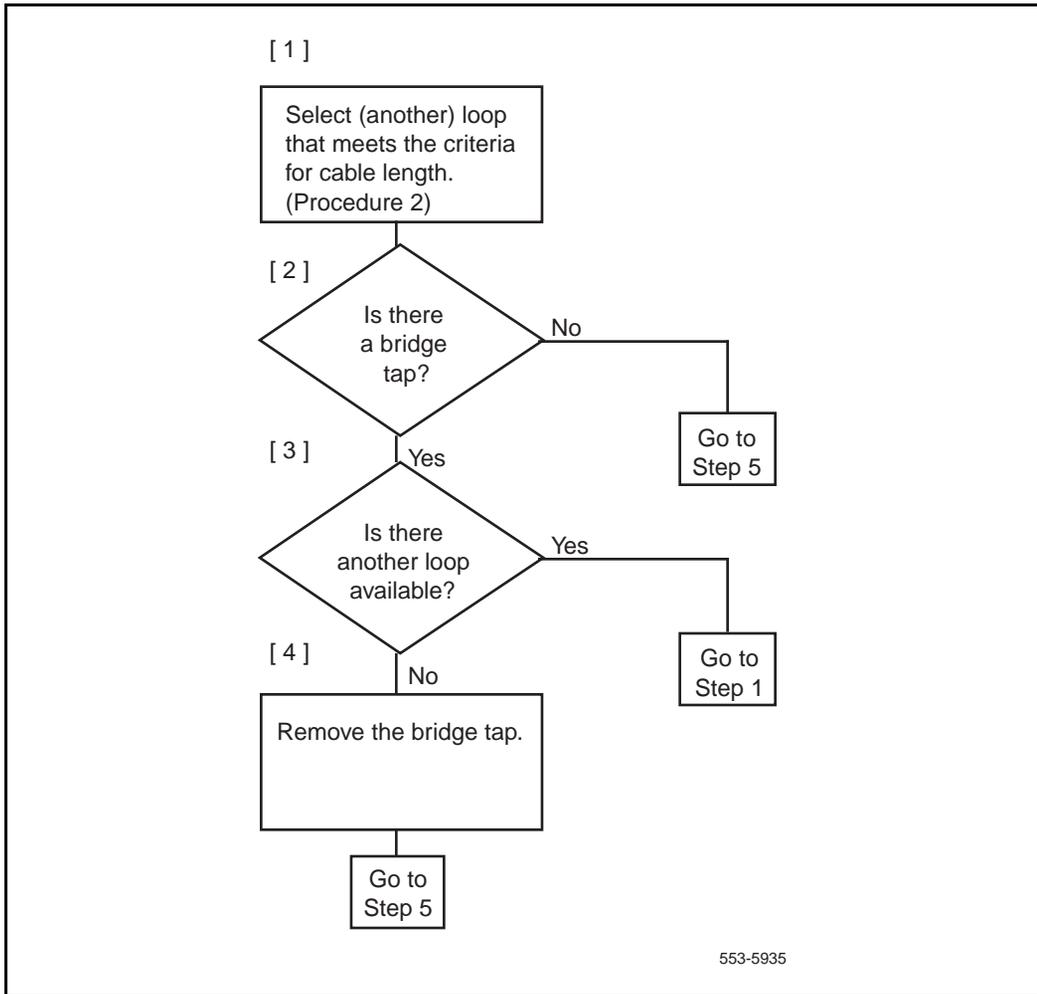


Figure 1
Engineer a telephone line (Part 2 of 8)

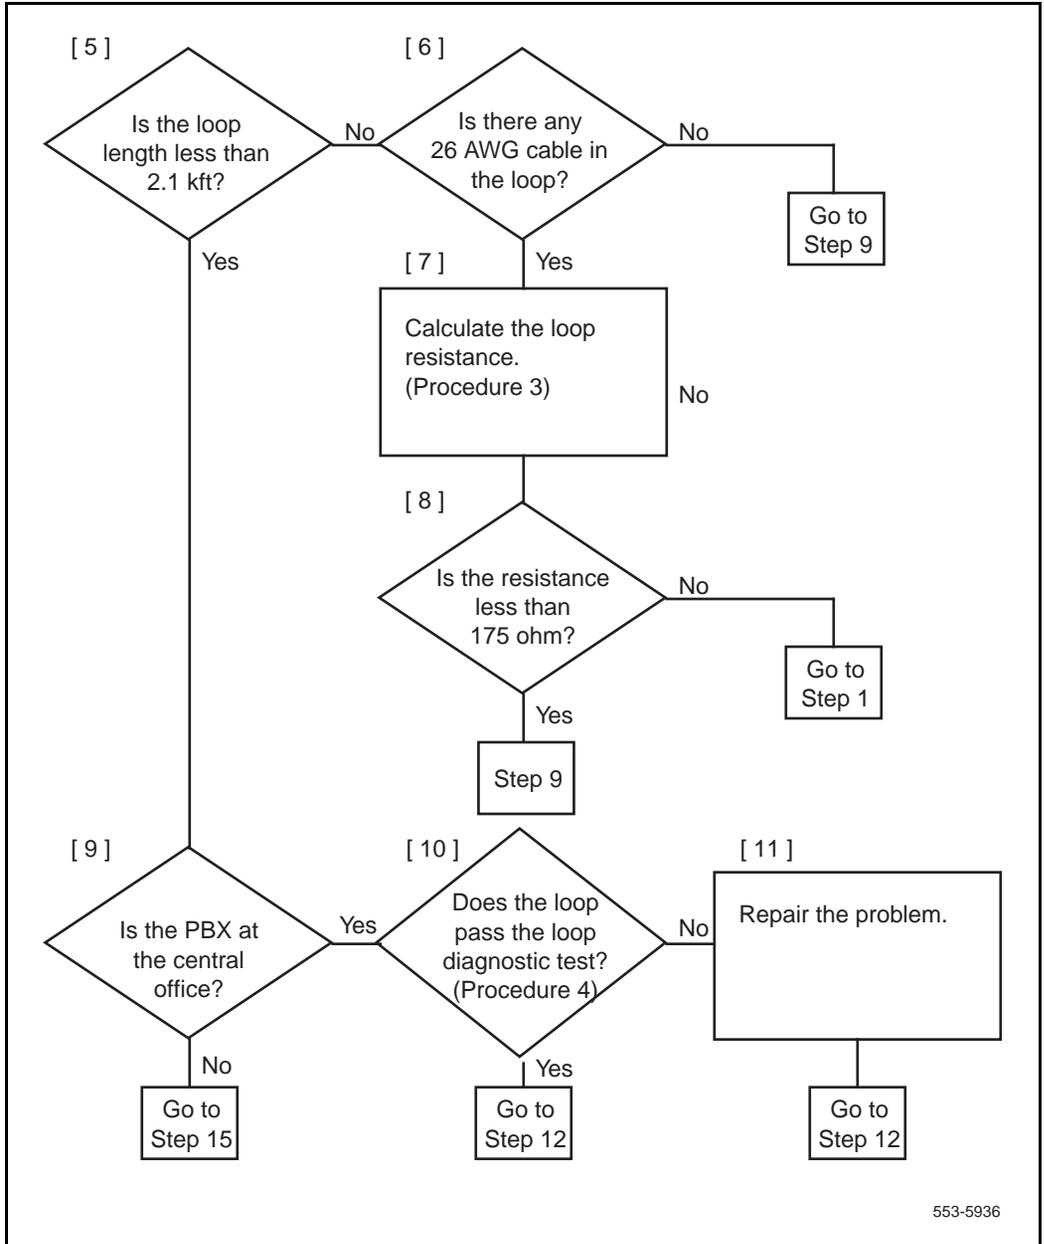

553-5936

Figure 1
Engineer a telephone line (Part 3 of 8)

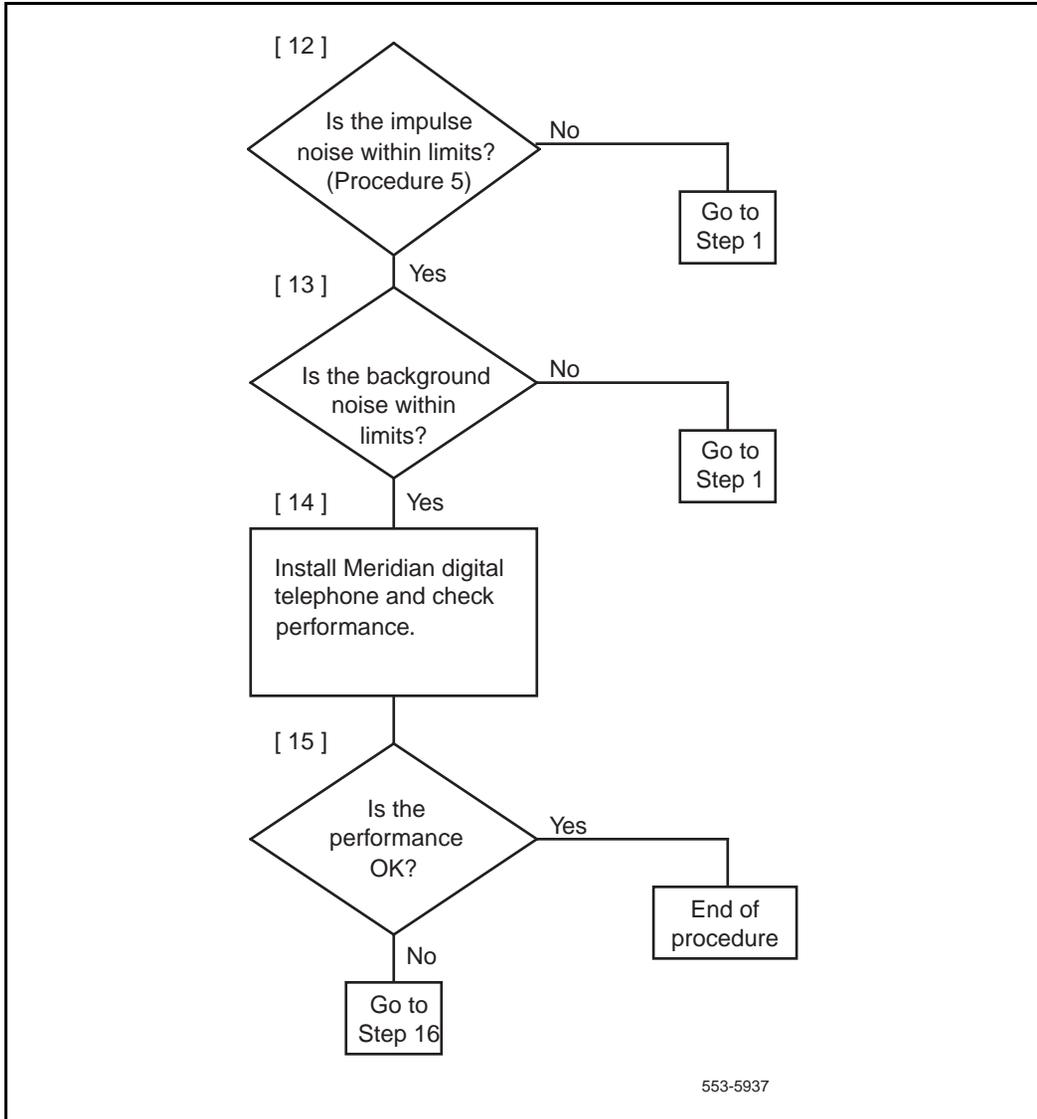


Figure 1
Engineer a telephone line (Part 4 of 8)

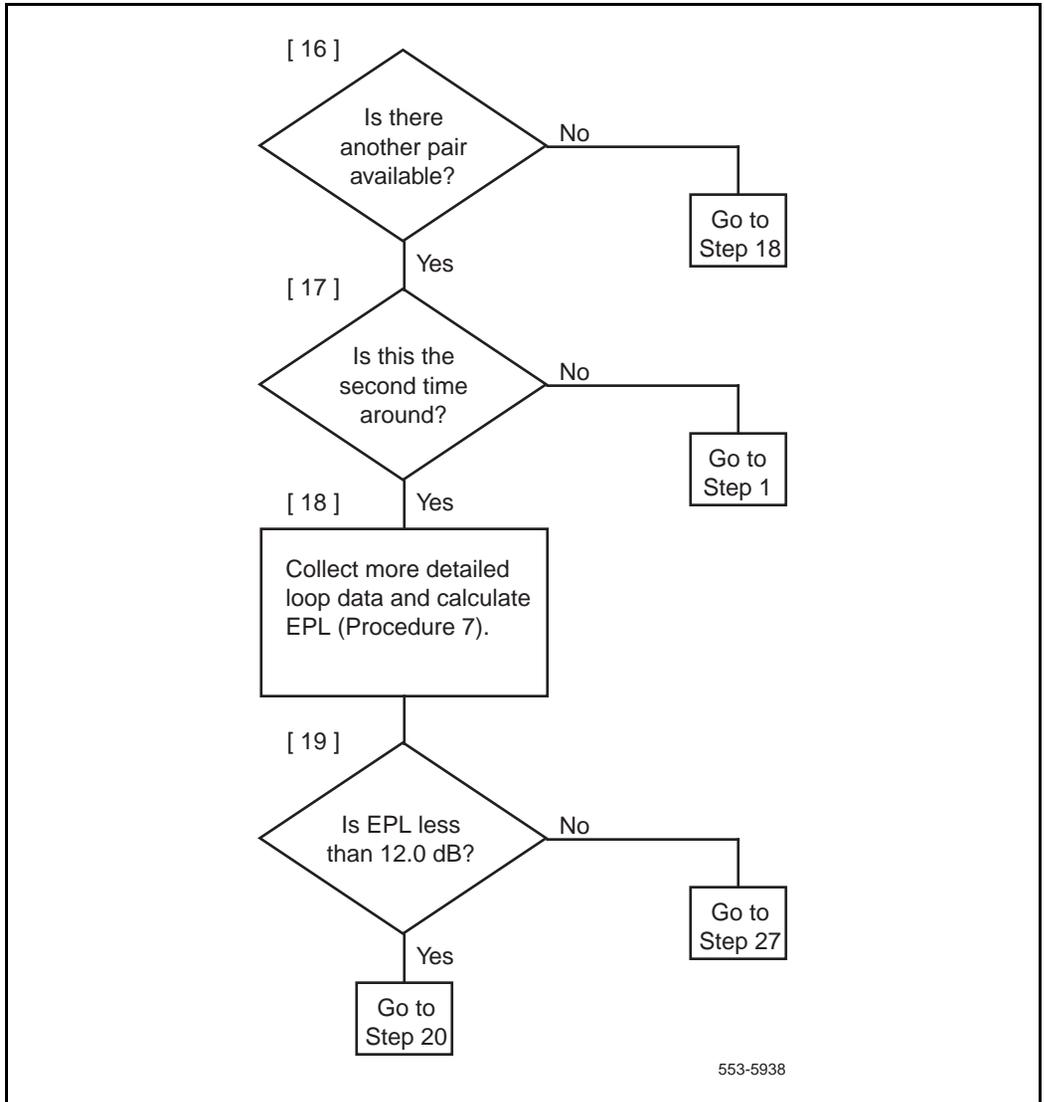


Figure 1
Engineer a telephone line (Part 5 of 8)

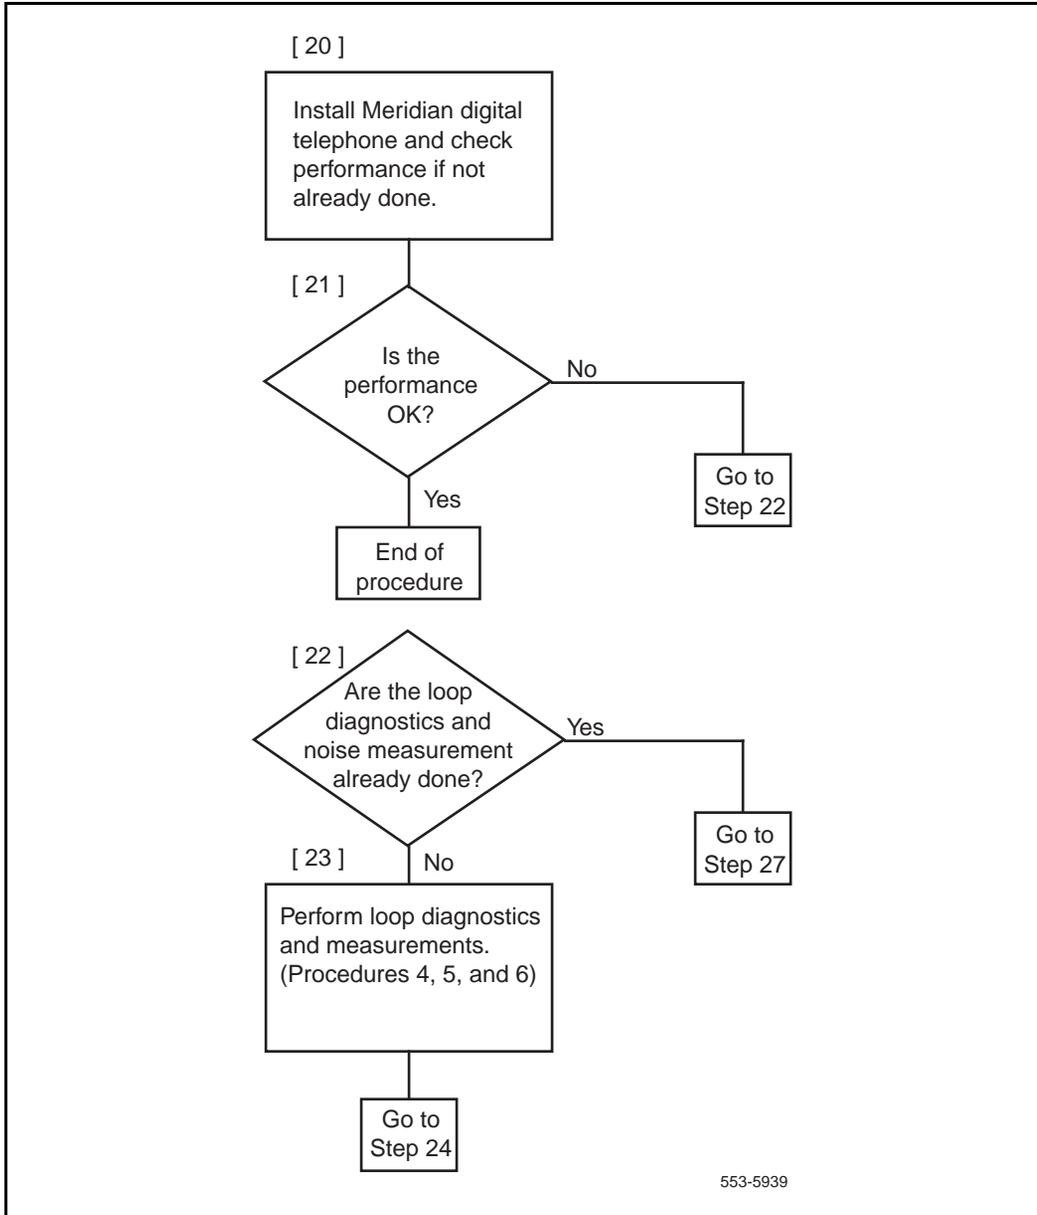


Figure 1
Engineer a telephone line (Part 6 of 8)

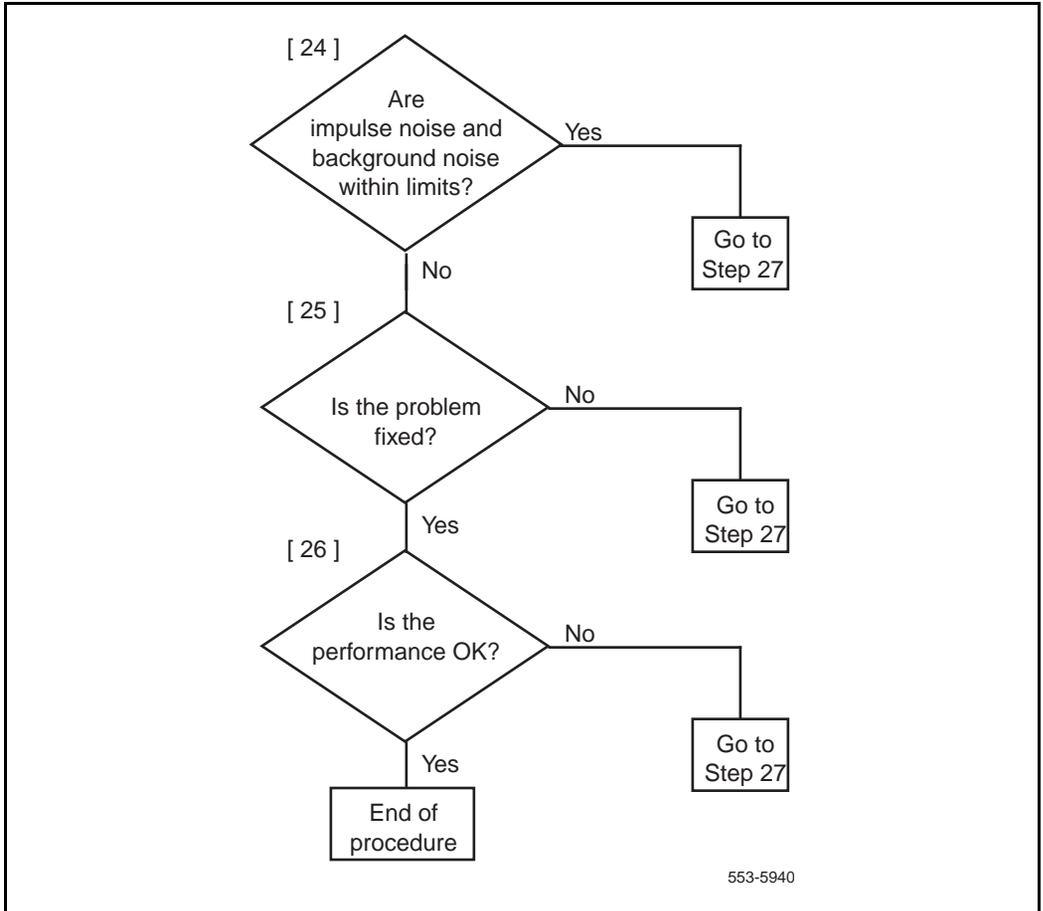


Figure 1
Engineer a telephone line (Part 7 of 8)


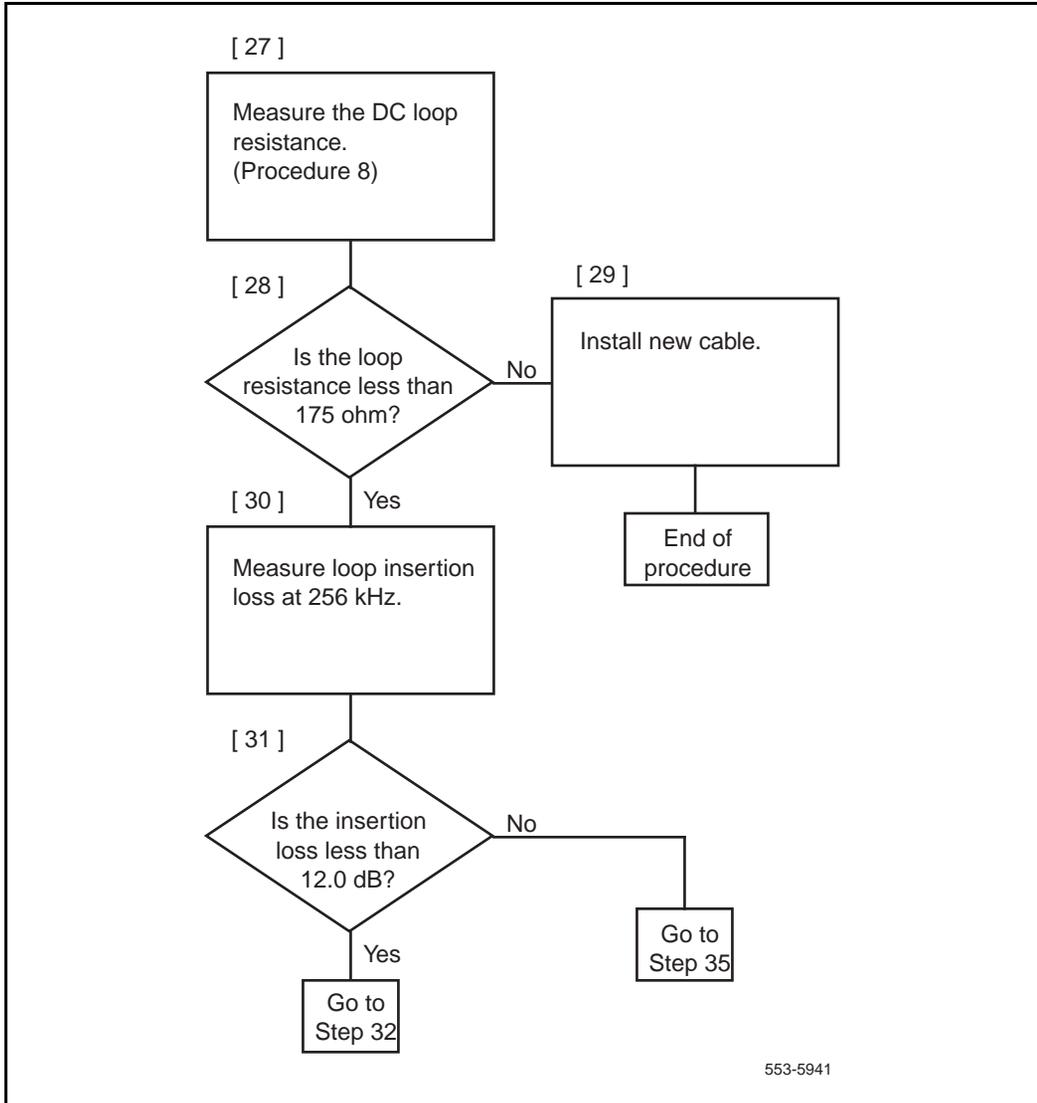


Figure 1
Engineer a telephone line (Part 8 of 8)

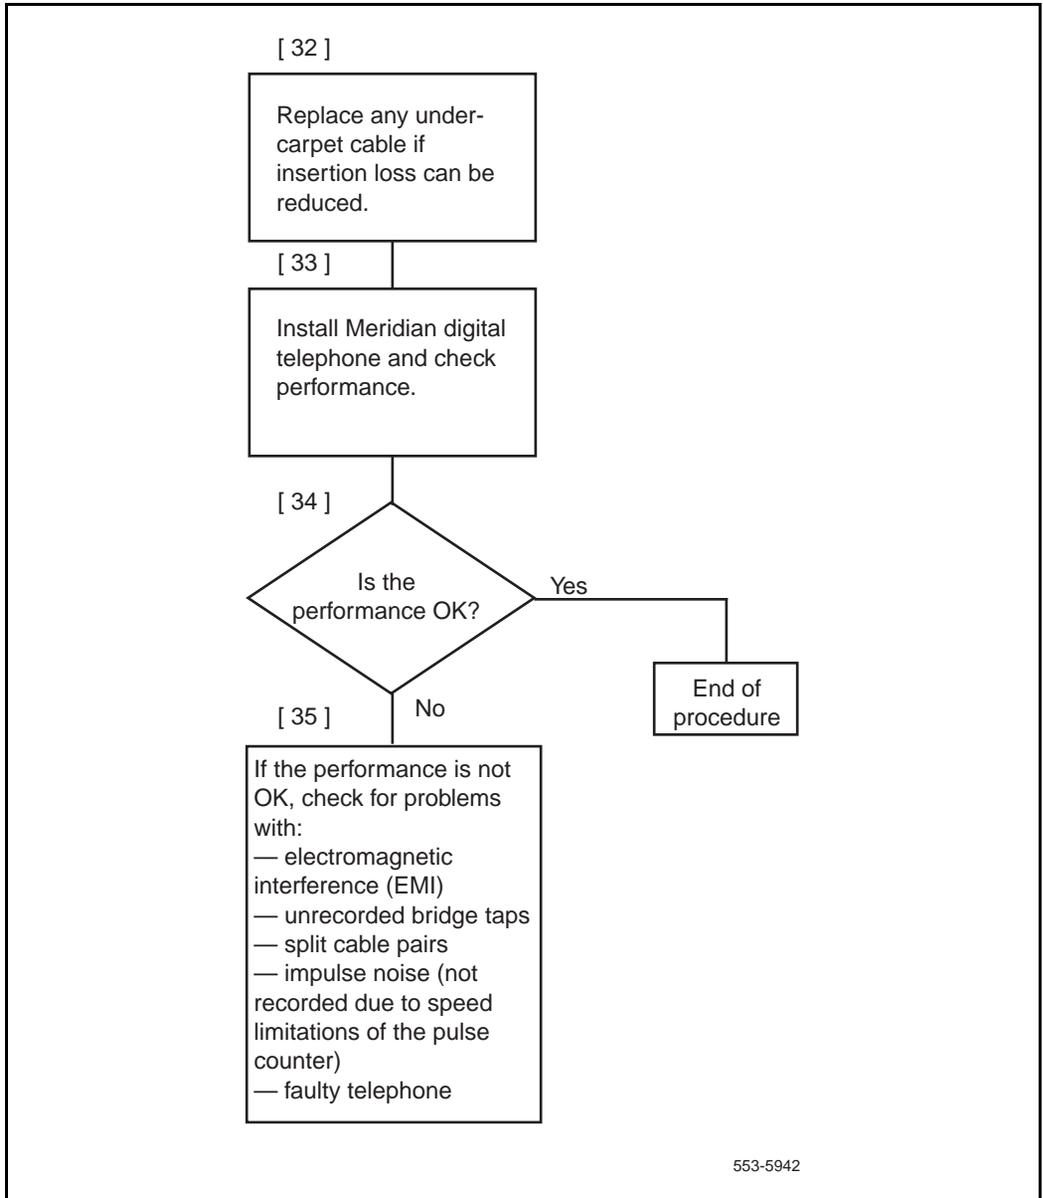

Select a loop

For a Meridian digital telephone, the loop must be without bridge taps, less than 175 ohm DC resistance, and less than 12.0 dB loss at 256 kHz. For single-gauge 22 and 24 AWG cable, and D inside wiring, the length limit is 914.4 m (3000 ft). For single-gauge 26 AWG cable, the length limit is 640.08 m (2100 ft).

The allowable loop length assumes there is no under-carpet cable. If there is under-carpet cable that is a different type than Western Electric (WE) 4-pair cable, reduce the allowable loop length by using the following equation:

$$LM = [12 - (UC \times UL)] / LL$$

where:

- LM = loop length limit in km (kft) (excluding the length of the under-carpet cable)
- LL = loop loss in dB/km (dB/kft) at 256 kHz
- UC = length of the under-carpet cable in km (kft)
- UL = loss of the under-carpet cable in dB/km (dB/kft) at 256 kHz (see Table 3 for dB values)

Calculate DC loop resistance

Use Procedure 2 to calculate the DC loop resistance.

Procedure 2

- 1 Calculate the DC loop resistance by adding the resistance of each cable section. Calculate the resistance of each cable section by using the following formula (cable resistances are given in Table 1):

$$LR_i = CR_i \times SL_i$$

where:

LR_i = DC resistance for cable section i

CR_i = conductor resistance per unit length for the cable section i

SL_i = length of cable section i

- 2 Add the total of all cable sections. If the total of all sections exceeds 175 ohm, select another loop.

Note: The loop resistance limit of 175 ohm must be reduced by 1 ohm for each percent of the loop that is aerial cable (see Table 1).

Table 1
Conductor resistance per unit

| Gauge | Ohm per loop kft | Ohm per loop km |
|-------|------------------|-----------------|
| 26 | 83 | 278 |
| 24 | 52 | 173 |
| 22 | 33 | 109 |
| 19 | 16 | 54 |

Perform loop diagnostic tests

The following equipment is required for the loop diagnostic tests in Procedure 3:

- one volt-ohmmeter (VOM) for each test
- one 77 cable analyzer or equivalent for each test

Procedure 3

Testing foreign voltage

- 1 Set the VOM range switch to a scale 60 V dc/V ac or greater.
- 2 Connect the VOM test probes to the loop at the line card or distributing frame.
- 3 Measure the DC and AC voltage between the following points under no-load conditions:
 - tip (T) and ring (R)
 - T and ground (GND)
 - R and GND

Requirement: Voltage readings should be less than 1 V dc/V ac.

Testing insulation resistance

- 1 Set the VOM range switch to ohm x 10,000 and adjust the meter to zero.
- 2 Connect the VOM test probes to the loop at the line card or distribution frame.

- 3 Measure the resistance between the following points under no-load conditions:
 - T and R
 - T and GND
 - R and GND

Requirement: Resistance readings must be greater than 10 M ohm.

Testing DC continuity

- 1 Short circuit the T and R at the far end.
- 2 Using the VOM, measure the resistance between the T and R.

Requirement: Resistance measurement should be approximately equal to the calculated loop resistance as described in Procedure 2.

Testing capacitance unbalance

- Using the cable analyzer, measure the capacitance between the following points:
 - T and GND
 - R and GND

Requirement: The difference between the two readings must be $<0.002 \mu\text{F}>$.

Measure impulse noise

Use Procedure 4 to measure impulse noise.

Procedure 4

- 1 Measure impulse noise on selected lines during busy hours. Use an NE-58B noise measurement set or the equivalent.


Note: The termination and weighting filter required are 135 ohm and 100 kHz, respectively, and the blanking interval is 25 μ s.

- 2 Using Figure 2, determine that for a given loop loss and noise threshold the impulse noise counts for each 15-minute interval are below the corresponding curve.

Note 1: The values in Figure 2 were derived by assuming that the counter has a count rate of 512 pulses per second.

Note 2: Due to the inaccuracy of the noise-measuring set, additional errors may occur during the blanking interval, and the reading consequently will be lower than the actual measurement.

Figure 2
Maximum allowable impulse noise counts versus loop loss

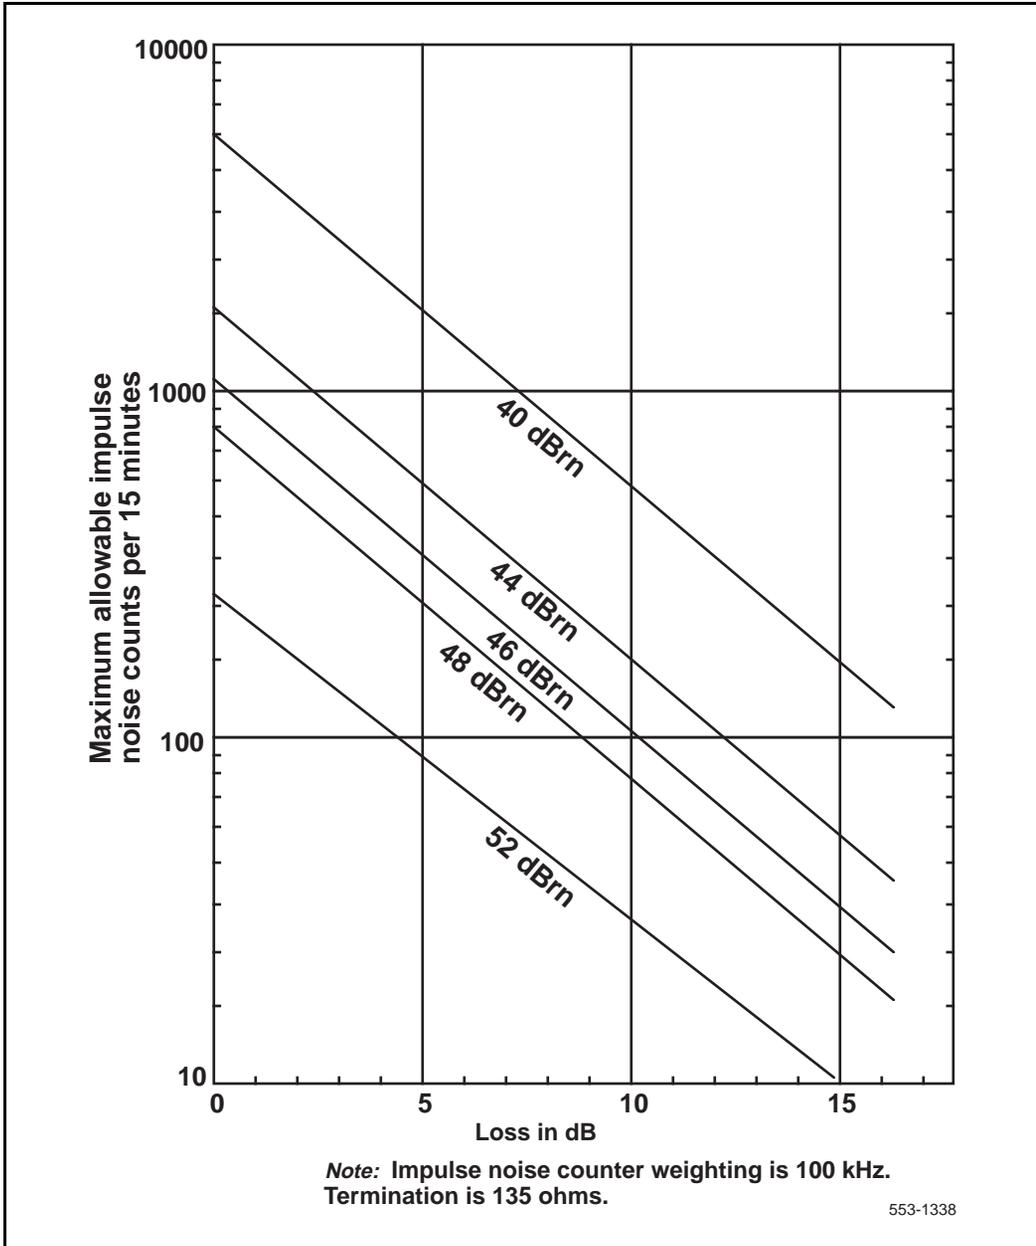

Measure background noise

Use Procedure 5 to measure background noise.

Procedure 5

- 1 Measure background noise on the loop by using an NE-58B noise-measuring set.

Note: The weighting and termination to be used are 100 kHz flat and 135 ohm, respectively.

- 2 Reject the loop being tested if the measured background noise is not less than 51 dBrn.

Calculate expected pulse loss

Use Procedure 6 to calculate expected pulse loss.

Procedure 6

- 1 Collect loop makeup data between the line card and the terminal. For each cable section, the data required is:
 - cable type (PIC or pulp)
 - gauge
 - length
 - type of plant construction (underground, aerial, or in-building)
- 2 Calculate individual cable section losses by using the figures in Tables 2 through 4, and the following equation:
$$CSLi = SLi \times Li$$
 - $CSLi$ = cable section loss for section i
 - SLi = section length of section i
 - Li = loss per unit length for section i

- 3 Correct individual cable section losses for maximum cable temperature by using the following equation:

$$TCLi = CSLi \times TCFi$$

- $TCLi$ = temperature corrected loss for section i
- $TCFi$ = temperature correction factor for section i

Correction factors:

- aerial cable TCF = 1.1
- underground cable TCF = 1.04
- in-building cable TCF = 1

- 4 Determine junction loss (see Figure 3).

Note: Junction loss due to gauge discontinuity of outside plant cables and D inside wire varies between 0.03 dB and 0.07 dB and can be ignored. However, AMP 25-pair under-carpet wiring has a characteristic impedance of 40 ohm at 256 kHz, and its junction loss is approximately 2 dB. This must be included in the calculation.

- 5 Calculate the expected pulse loss (EPL) by finding the sum of the items.
- 6 Reject loops whose expected pulse loss is greater than 12 dB.

Example of applying Procedure 6

Section 1:

Mainframe bulkhead to DF1 - 500m, 26 AWG PIC, underground

Section 2:

DF1 to DF2 - 200m, 26 AWG PIC, inside

Section 3:

DF2 to terminal - 24 AWG NT D-inside

Therefore:

$SL1 = 1.5$ km, $SL2 = 0.2$ km, $SL3 = 0.1$ km

From Tables 2 and 3:

$L1 = 13.7$ dB/km, $L2 = 13.7$ dB/km, $L3 = 13.3$ dB/km.

Using the equation in Step 2, we arrive at the following:

$CSL1 = 6.85$ dB, $CSL2 = 2.74$ dB, and $CSL3 = 1.33$ dB

Temperature corrections:

Using correction factors of TCF1 = 1.04, and TCF2 and TCF3 = 1, and using the equation in Step 3 results in TCL1 = 7.12 dB, TLC2 = 2.74 dB, and TCL3 = 1.33 dB.

Expected pulse loss (EPL) value:

Neglecting any junction loss (see the note in Step 4), Step 5 results in an EPL value of TSL1 + TSL2 + TSL3 + 0 = 11.19 dB.

This is under the 12 dB limit and meets the criteria.

Table 2
Cable attenuation at 256 kHz and 21.1 degrees C (70 degrees F)

| Cable type | 26 AWG | | 24 AWG | | 22 AWG | | 19 AWG | |
|------------|--------|-------|--------|-------|--------|-------|--------|-------|
| | dB/kft | dB/km | dB/kft | dB/km | dB/kft | dB/km | dB/kft | dB/km |
| PIC | 4.2 | 13.7 | 3.1 | 10.2 | 2.5 | 8.1 | 1.7 | 5.6 |
| Pulp | 4.3 | 14.3 | 3.5 | 11.4 | 2.7 | 9.0 | 2.0 | 6.6 |


Table 3
Attenuation at 256 kHz for U/C cable

| WE 4-pair | | AMP 25-pair | |
|-----------|-------|-------------|-------|
| dB/kft | dB/km | dB/kft | dB/km |
| 4.6 | 15.3 | 19.0 | 63.3 |

Table 4
Attenuation at 256 kHz for D inside wiring cable

| NT | | WE | | Superior | | General | |
|--------|-------|--------|-------|----------|-------|---------|-------|
| dB/kft | dB/km | dB/kft | dB/km | dB/kft | dB/km | dB/kft | dB/km |
| 4.0 | 13.3 | 3.2 | 10.7 | 3.7 | 13.3 | 4.6 | 15.3 |

Figure 3
Junction loss versus cable characteristic impedance

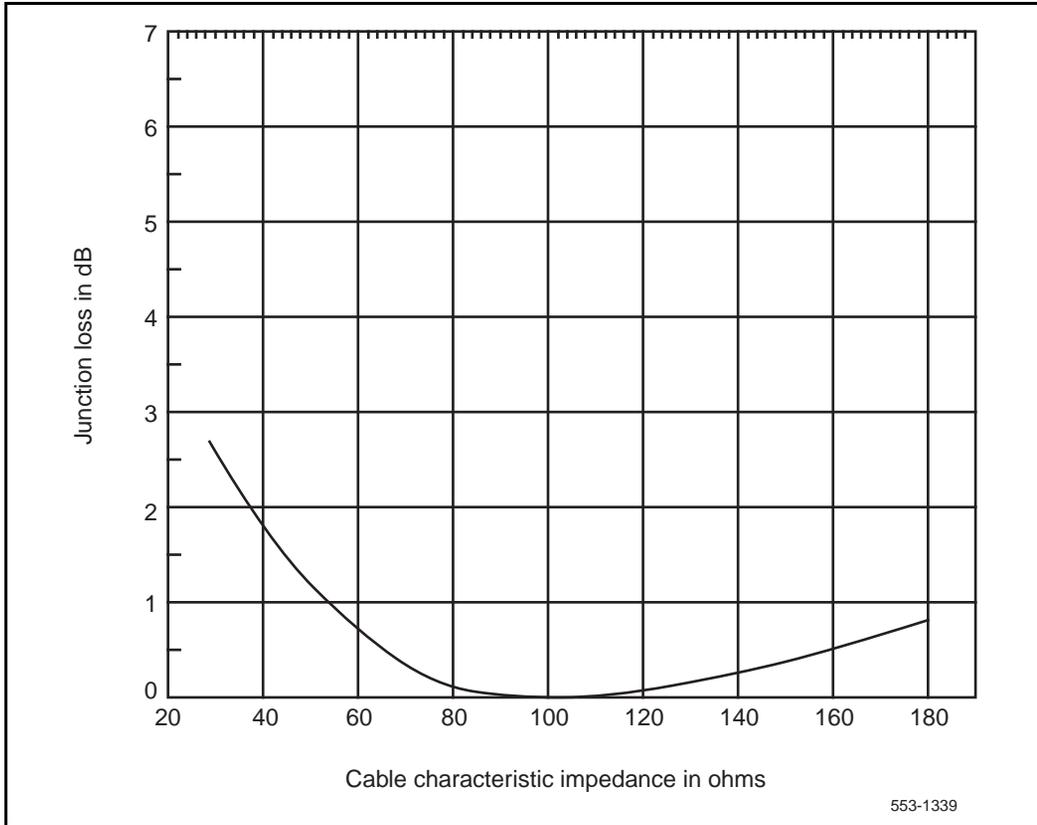

Measure DC loop resistance

Use Procedure 7 to measure DC loop resistance.

Procedure 7

Measure DC loop resistance by using standard procedures.

Note: The DC loop resistance limit of 175 ohm should be reduced by 1 ohm for each one percent of the total loop that is aerial cable.

Index

A

attenuation, cable, 29

B

background noise, 25

C

cable attenuation, 29

cable lengths, maximum, 17

cable pairs, engineering requirements, 7

cabling, under-carpet

allowable loop length, 17

attenuation, 29

characteristic impedance, 7

requirements, 7

calculating

DC loop resistance, 19

expected pulse loss, 27

capacitance unbalance, testing, 22

characteristic impedance

and junction loss, 30

under-carpet cabling, 7

continuity, testing DC, 22

D

DC loop resistance

calculating, 19

maximum, 17

measuring, 31

diagnostic tests, loop, 21

E

engineering telephone lines

flowchart, 8

procedure, 7

expected pulse loss, calculating, 27

I

impedance, cable characteristic

under-carpet cabling, 7

vs. junction loss, 30

impulse noise

measuring, 23

vs. loop loss, 24

insulation resistance, testing, 21

J

junction loss

determining, 28

vs. cable characteristic impedance, 30

L

loop resistance. *See* DC loop resistance

loops

diagnostic tests, 21

distances vs. AWG, 7

requirements, 17

selecting, 17

loss, loop

maximum allowable, 17

vs. impulse noise counts, 24

M

measuring
background noise, 25
DC loop resistance, 31
impulse noise, 23

N

noise measurements
background, 25
impulse noise, 23

R

resistance. *See* DC loop resistance; insulation
resistance, testing

S

selecting loops, 17

T

telephone lines, engineering, 7
temperature, cable
and cable attenuation, 29
correcting for, 28
testing
capacitance unbalance, 22
DC continuity, 22
foreign voltage, 21
insulation resistance, 21
See also measuring
tests, loop diagnostic, 21

V

voltage, testing foreign, 21

Meridian 1

Digital telephone line engineering

Copyright © 1989–2000 Nortel Networks
All Rights Reserved

Information is subject to change without notice. Nortel Networks reserves the right to make changes in design or components as progress in engineering and manufacturing may warrant. This equipment has been tested and found to comply with the limits for a Class A digital device pursuant to Part 15 of the FCC rules, and the radio interference regulations of Industry Canada. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.

SL-1 and Meridian 1 are trademarks of Nortel Networks.

Publication number: 553-2201-180

Document release: Standard 4.00

Date: April 2000

Printed in Canada

NORTEL
NETWORKS

How the world shares ideas.