
Meridian 1

Software Input/Output Guide

X11 Administration

Document Number: 553-3001-311

Document Release: Standard 7.00

Date: April 2000

Copyright © 1995–2000 Nortel Networks
All Rights Reserved

Printed in Canada

Information is subject to change without notice. Nortel Networks reserves the right to make changes in design or components as progress in engineering and manufacturing may warrant. This equipment has been tested and found to comply with the limits for a Class A digital device pursuant to Part 15 of the FCC rules, and the radio interference regulations of Industry Canada. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.

SL-1 and Meridian 1 are trademarks of Nortel Networks.

Revision history

April 2000

Standard 7.00. This is a global document and is up-issued for X11 Release 25.0x. Document changes include removal of: redundant content; references to equipment types except Options 11C, 51C, 61C and 81C; and references to previous software releases.

June 1999

Standard 6.00. This document is up-issued to include updates and changes required for X11 Release 24.2x.

March 1999

Standard 5.00. This document is up-issued to include updates and changes required for X11 Release 24.0x.

October 1997

Standard 4.00. This document is up-issued to include updates and changes required for X11 Release 23.0x.

April 1996

Standard 3.00. This document is up-issued to include updates and changes required for X11 Release 22.0x.

December 1995

Standard 2.00. This document is up-issued to include updates and changes required for X11 Release 21.1x.

July 1995

Standard 1.00. This document is issued to include updates and changes required for X11 Release 21.0x. This document has the new NTP number 553-3001-311 and replaces NTP 553-2311-311.

Contents

General	15
Format of Administration NTP	16
Notational conventions	18
Related documentation	19
Communicating with the Meridian 1	21
Accessing the Meridian 1	22
Preview of overlay content	28
System Look up Messages	29
Multi-User Login	29
Maintenance display codes	30
Time and date of fault	31
Alphabetical List of Packages	33
Numerical List of Packages	43
Overlay Loader and Multi-User Login	53
LD 02: Traffic	57
Basic commands	58
How to use traffic commands	59
Print alarm and exception filter summary	72

LD 10: Analog (500/2500) Telephone Administration	73
Prompts and responses	75
Prompts and responses	75
Prompts and responses by task	78
Alphabetical list of prompts	84
LD 11: Meridian Digital Telephone Administration	115
Prompts and responses	117
Prompts and responses	118
Prompts and responses by task	122
Alphabetical list of prompts	131
LD 12: Attendant Consoles	189
Prompts and responses	190
Alphabetical list of prompts	191
LD 13: Digitone Receivers, Tone Detectors, Multifrequency Senders and Receivers	199
Prompts and responses	200
Alphabetical list of prompts	201
LD 14: Trunk Data Block	205
Prompts and responses	206
Alphabetical list of prompts	209
LD 15: Customer Data Block	233
Prompts and responses	234
Prompts and responses	235
Customer data block	235
Default Customer Data Block	236
Data Block: AML (Application Module Link)	238
Data Block: ANI (Automatic Number Identification)	238

Data Block: ATT (Attendant Consoles)	241
Data Block: AWU (Automatic Wake Up Data)	243
Data Block: CAS (Centralized Attendant Service Data)	244
Data Block: CCS (Controlled Class of Service)	244
Data Block: CDR (Call Detail Recording)	245
Data Block: FCR (Flexible Code Restriction)	246
Data Block: FFC (Flexible Feature Codes)	246
Data Block: FTR (Features and options)	247
Data Block: HSP (Hospitality Management)	249
Data Block: ICP (Intercept Computer Update)	250
Data Block: IMS (Integrated Message Service)	250
Data Block: INT (Intercept Treatments)	251
Data Block: LDN (Listed Directory Numbers)	253
Data Block: MPO (Multi-Party Operations)	254
Data Block: NET (Networking)	255
Data Block: NIT (Night Service)	258
Data Block: OAS (Off Hook Alarm Security)	259
Data Block: PPM (Periodic Pulse Metering)	260
Data Block: PWD (Password)	260
Data Block: RDR (Call Redirection)	261
Data Block: ROA (Recorded Overflow Announcement)	262
Data Block: TIM (Timers)	263
Data Block: TST (Test lines)	264
Alphabetical list of prompts	265
LD 16: Route Data Block, Automatic Trunk Maintenance	333
Prompts and responses	334
Alphabetical list of prompts	350

LD 17: Configuration Record 1	419
Prompts and responses	423
Gate Opener: ADAN (Action Device and Number)	424
Gate Opener: ALARM (Alarm filters)	428
Gate Opener: ATRN (Aries Transmission)	428
Gate Opener: CEQU (Common Equipment)	429
Gate Opener: OVLY (Overlay)	430
Gate Opener: PARM (System Parameters)	431
Gate Opener: PWD (Password)	434
Gate Opener: VAS (Value Added Server)	435
ROLR / TOLR / AOLR Offsets and Values	437
HRLR / HTLR Offsets and Values	438
Alphabetical list of prompts	439
LD 18: Speed/Group Call, Pretranslation, Special Service, 16-Button DTMF and Hotline	505
Prompts and responses	506
Flexible feature code information	512
Alphabetical list of prompts	515
LD 19: Code Restriction	523
Prompts and responses	524
Alphabetical list of prompts	527
LD 20-22: Print Reports Guide	533
LD 20: Print Routine 1	537
Prompts and responses	539
Alphabetical list of print reports	540
Alphabetical list of prompts	559

LD 21: Print Routine 2	573
Prompts and responses	574
Alphabetical list of print reports	575
Alphabetical list of prompts	585
LD 22: Print Routine 3	589
Prompts and responses	591
Alphabetical list of prompts	597
LD 23: Automatic Call Distribution, Management Reports, Message Center	605
Prompts and responses	606
Prompts and responses	606
Prompts and responses by data block	610
Alphabetical list of prompts	614
LD 24: Direct Inward System Access	635
Prompts and responses by gate opener	636
Prompts and responses	637
Alphabetical list of prompts	638
LD 25: Move Data Blocks	643
Prompts and responses	644
Move and Swap Rules	645
Alphabetical list of prompts	646
LD 26: Group Do Not Disturb	649
Prompts and responses	649
Alphabetical list of prompts	650
LD 27: ISDN Basic Rate Interface (BRI) Administration	651
Prompts and responses	652

Alphabetical list of prompts	662
LD 28: Route Selection for Automatic Number Identification	683
Prompts and responses	683
Alphabetical list of prompts	684
LD 29: Memory Management	685
Prompts and responses	686
Alphabetical list of prompts	687
LD 49: New Flexible Code Restriction and Incoming Digit Conversion	693
Prompts and responses	694
Alphabetical list of prompts	695
LD 50: Call Park and Modular Telephone Relocation	699
Prompts and responses	700
Alphabetical list of prompts	701
LD 52: 2.0 Mb/s Remote Peripheral Equipment	703
Prompts and responses	704
Alphabetical list of prompts	708
LD 56: Flexible Tones and Cadences	711
What are tones and cadences?	711
Flexible Tone and Cadence (FTC) Tables	711
Master Cadence Table (MCAD)	712
Firmware Cadence Table (FCAD)	713
TDS and NT8D17 Conference/TDS/MFS cards	715
Time interval for Call Forward	715
Installing FTC	716

Prompts and responses	719
Default Master Cadence (MCAD) tables	733
Default Firmware Cadence (FCAD) tables	734
Alphabetical list of prompts	738
LD 57: Flexible Feature Codes	753
Prompts and responses	754
Alphabetical list of prompts	762
LD 58: Radio Paging	771
Prompts and responses	772
Alphabetical List of Prompts	775
LD 73: Digital Trunk Interface	781
DDB: Digital data block	783
PRI2 data block (FEAT = LPTI)	784
DTI2 / JDMI data block (FEAT = LPTI)	785
Prompts and responses for setting pad values	786
Signaling category assignment and modification	793
Prompts and responses for ABCD signaling category	795
Alphabetical list of prompts	802
LD 74: Digital Private Network Signaling System Link	833
Prompts and responses	834
Alphabetical list of prompts	835
LD 79: Virtual Network Service	839
Prompts and responses	839
Alphabetical list of prompts	840
LD 81: Features and Station Print.	841
Prompts and responses	842

Alphabetical list of prompts	843
LD 82: Print Hunt Chain, Multiple Appearance Group	861
Prompts and responses	862
Alphabetical list of prompts	863
LD 83: Terminal Number Sort and Print	865
Prompts and responses	865
Alphabetical list of prompts	866
LD 84, 85: Set Designation Entry (ODAS)	867
Prompts and responses	867
Alphabetical list of prompts	868
LD 86: Electronic Switched Network 1	869
Prompts and responses	870
Alphabetical list of prompts	875
LD 87: Electronic Switched Network 2	885
Prompts and responses	886
Alphabetical list of prompts	889
LD 88: Authorization Code	895
Prompts and responses	896
Alphabetical list of prompts	898
LD 90: Electronic Switched Network 3	903
Prompts and responses	904
Alphabetical list of prompts	910
LD 93: Multi-Tenant Service	919
Prompts and responses	920
Alphabetical list of prompts	922

LD 94: Multifrequency Signaling. 931
 Prompts and responses 932
 Prompts and responses 933
 Alphabetical list of prompts 955

LD 95: Call Party Name Display 959
 Prompts and responses 960
 Alphabetical list of prompts 964

LD 97: Configuration Record 2 969
 Prompts and responses 970
 Alphabetical list of prompts 982

Index of Prompts 1007

General

This Nortel Networks Technical Publication (NTP) is a reference guide to be consulted when adding, modifying or deleting a feature or service. This NTP is applicable to Meridian 1 and Meridian SL-1 switches equipped with Generic X11 (Release 25) software.

The Meridian 1 uses a prompt-response system for switch configuration and alteration. When the data administrator loads an Administration Overlay into memory on a Terminal, the switch outputs a prompt. The data administrator is then able to type a response to answer that prompt. If the response is valid, the program outputs the next prompt. If the response is invalid, an SCHxxxx message is output.

To configure or change a feature, the data administrator may have to respond specifically to several prompts. This Data Administration NTP documents input and output in the Meridian prompt-response system. (The term “overlay” is synonymous with the terms “load” and “overlay program”.)

A listing of Feature Packages appears twice in this NTP. An alphabetical listing (sorted by Package mnemonic) of Feature Packages can be found on page 33. A numerical listing (sorted by Package number) of Feature Packages can be found on page 43.

Format of Administration NTP

This NTP presents only data administration overlays and text supplementary to these overlays. Overlay programs are identified by LD XX or XXX for certain Option 11C, 51C, 61C and 81C programs, where XX or XXX is the load number. Administration overlays are arranged in numerical order and appear in this NTP as separate modules.

Two general table types appear in each Load. The first table type is the *Prompts and responses* table. It appears at the front of each load and often follows introductory text. The second general table concludes each Administration Load and is titled *Alphabetical list of prompts*.

The *Prompts and responses* table

Many *Prompts and responses* tables present a complete list of an overlays prompts. When this is the case, they are simply titled *Prompts and responses*. Other *Prompts and responses* tables present only a subset of an overlays prompts. These tables present a list of prompts associated with a given data block, task, or feature.

In some LDs, the complete prompt list as well as several prompt sublists are presented in a *Prompts and responses* section. Overlays which feature multiple *Prompts and responses* tables begin with a *Table of contents* box to help you find a particular prompt listing.

All *Prompts and responses* tables list prompts in the order in which they are output in each overlay. Acceptable responses or response variables are listed beside each prompt. A brief explanation of the prompt is provided in a *Comment* column. Subprompts (prompts which are indented with a hyphen) also appear in the *Prompts and responses* table. To have subprompts appear on the TTY, the data administrator must enter specific responses at the previous non-indented prompt. Shown below is an excerpt from a *Prompts and responses* table.

Prompt	Response	Comment
REQ	aaa	Request
TYPE	aaa	Type of data block
TN	l s c u	Terminal Number
CDEN	SD, DD	Card Density

Note that in a *Prompts and responses* table:

- a Responses are often left as generic variables.
- b The comment entry is typically brief and explains the prompt.

The *Alphabetical list of prompts* table

This table provides a more detailed description of a response. Shown below is an excerpt from an *Alphabetical list of prompts* table:

Prompt	Response	Comment	Package Release
REQ		Request	basic-1
	CHG	Change existing data	
	END	Exit overlay program	

Note that in an *Alphabetical list of prompts* table:

- a Responses are actual alternatives and not generic variables.
- b The comment entry is often expansive and may explain the prompt, the response, or both.
- c The package and release column provides the mnemonic of the package that must be equipped on the switch in order to receive this prompt. (In this example, the “basic” package must be equipped to view REQ.) The number following the hyphen (“1” in this example) denotes the Release of software in which the package was made available.

Notational conventions

- Both upper and lower case are used in this book to distinguish between Prompts, Commands, and Variables.
- Lowercase variables are used in this book to represent many possible responses. The following table lists a few key variables which appear throughout this NTP.

Variable	Meaning
a	Alphabetic characters
#	Alphanumeric characters
x	Numeric characters
c	Customer Number (0-99)
c (u)	Option 11C Terminal Number (TN) Card, Unit; where unit is optional
c u	Option 11C Terminal Number (TN) Card and Unit
c 0 0 u	Terminal Number (TN) for Option 11C. A TN consists of a card, two filler digits, and a unit.
dn	Directory Number (DN)
hh mm	Hours (0 - 23) and Minutes (00 - 59)
loop	Network Loop Number (0-159)
l s c (u)	Terminal Number (TN), Loop, Shelf, Card, Unit; where unit is optional
l s c u	Terminal Number (TN) (loop, shelf, card, and unit number)
mmm	Month (JAN - DEC) when used in a date.
nnn xxx	Numeric characters
xxx	Numeric value of set number of digits
x...x	Numeric value of several digits
yy mm dd	Year (00 - 99), Month (1 - 12) and Day (1 - 31)

- **<cr>** denotes that the carriage return key is to be depressed without inputting any data. The carriage return leaves the existing value unchanged, or enters the default value if there is no existing value.

- **<space>** denotes that the space bar is to be depressed instead of **<cr>**.
- **<value>** denotes a variable value, generally for a prompt response.
- For example, **<NIPN>** is the value responded to the NIPN prompt and **<min>** is a minimum value.
- Default values are shown in parentheses.
- A range of numbers is denoted by giving the lower and upper limits of the range. For example, given the range **0 - (2) - 3**, the user may manually enter 0, 1, 2, or 3, or carriage return (press **<cr>**) to enter the default of 2.
- Default values are shown in brackets in the response column where applicable. Pressing **<cr>** enters the default.
- Where applicable, precede an entry with an **X** to delete that entry or set your entry to default value.

Related documentation

Feature description

Feature information is provided in the X11 Features and Services NTP.

Operational testing

Information and instruction regarding the testing of features and services for telephone sets and attendant (ATT) consoles is contained in the X11 Features and Services NTP.

Maintenance Overlays

Information and instruction regarding maintenance overlay programs is provided in NTP 553-3001-511.

Error Messages

Information is provided to interpret and respond to system error messages in NTP 553-3001-411.

Communicating with the Meridian 1

To communicate with the system, the following input/output devices at either on-site (local) or remote locations are required:

- TTY or VDT terminal as an input/output device
- RS-232-C compatible printer as an output only device
- Meridian SL-1 maintenance telephone set as an input only device

The input/output system can operate with terminals having the following characteristics:

- Interface: RS-232-C
- Code: ASCII
- Speed: 110, 300, 1200, 2400, 4800, and 9600 baud
- Loop Current: 20 mA

Accessing the Meridian 1

Logging in and out

When you access the system through a system terminal, a login procedure is required (refer to Procedure 1). All system passwords are initially set as 0000, but you can change passwords through the Configuration Record (LD 17). See also “Limited Access to Overlays” in the *X11 features and services* NTP.

Level 1 password. This general password is used in the log in sequence to provide general access to the system by service personnel. Once the system is accessed, the service personnel may then perform any necessary administration or maintenance tasks.

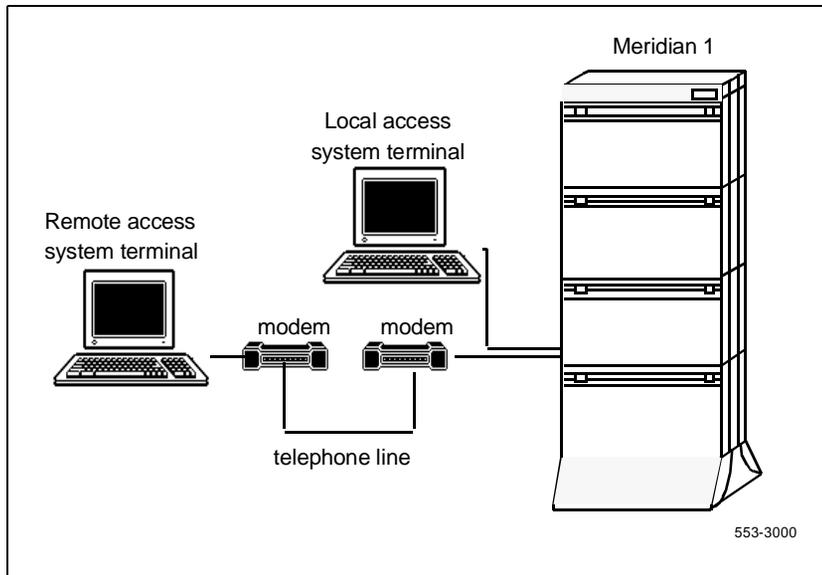
Level 2 password. This administrative password is known and used only by the data administration manager. The password is used to protect the system configuration record and is required when using LD 17 to change either the general or the administrative passwords.

Local and remote access

Input/output terminals may operate either locally or remotely. However, data modems are required for terminals located more than 50 feet (15 meters) from the central control interface. Both local and remote terminals interface with the system through Serial Data Interface (SDI) packs.

Many devices can be installed at local and remote locations. When a system terminal is installed locally, it is connected directly to a SDI Card. When a system terminal is installed at a remote location, modems (or data sets) and a telephone line are required between the terminal and the SDI card. Figure 1 : Local and remote access to a system terminal shows typical system terminal configurations.

Multiple devices can simultaneously communicate with the Meridian 1 if Multi User Login is enabled. Refer to the *X11 System Management Applications* NTP for details regarding the Multi User Login Feature.

Figure 1: Local and remote access to a system terminal

HOST mode access

A system terminal is connected through an SDI port. SDI ports are defined in LD 17 and may be configured for different types of outputs. For example, one terminal may be defined for traffic reports, another for maintenance messages. Two ports may be defined for the same output.

It is possible to log in as a HOST. When in the HOST mode, the outputs defined for the port are only output to that port. This is useful for applications, such as Meridian Manager, which require high speed ports. Once the HOST port has logged out, the outputs to the other ports are restored.

To configure a system terminal, see the “System and limited access passwords” in the configuration record (LD 17). See also OVL403 and OVL404 messages, which are output to the ports affected by a HOST log in.

Line mode interface log in procedure

The Overlay Loader offers a Line Mode interface. With Line Mode enabled (LON), the backspace can be used to edit input. The entered information (responses, for example) is not processed until the <CR> is entered. When the Line Mode is disabled (LOF), the system terminal interface processes information as it is entered.

Note: Line Mode interface requires the setting: seven data bits, space parity and one stop bit.

The Serial Data Interface (SDI) application on the Multi-Purpose Serial Data Link (MSDL) card offers the Line Mode Editing (LME) function. With the LME function enabled (FUNC=LME), the backspace can be used to edit input. The LME function is only supported on VT200 type terminals running EM200 emulation mode.

Procedure 1 Logging in and out

1 Press <cr>

- If the response is: **OVL111 nn TTY** or **OVL111 nn SL-1**
- That means: Someone else is logged into the system. When they have logged off, press <cr> and go to Step 2.
- If the response is: **OVL111 nn IDLE** or **OVL111 nn BKGD**
- That means: You are ready to log into the system. Go to Step 2.
- If the response is: **OVL000 >**

That means: This is the program identifier which indicates that you are have already logged into the system. Go to Step 4.

2 Enter: **LOGI**, then press <cr>

The normal response is: **PASS?**

If there is any other response, refer to the message text in the System Error Messages NTP.

3 Enter: **Level 1 or Level 2 password** and press <cr>.

If the password is correct, the system responds with the prompt: >

- 4 Load a program by entering: **LD XXX**(where *XXX* represents the overlay program number).
- 5 Perform tasks
- 6 End the program by entering: **END** or ********
7. Always end the log in session with: **LOGO**

The background routines are then loaded automatically.

Access through the maintenance telephone

A telephone functions as a maintenance telephone when you define the class-of-service as MTA (maintenance telephone allowed) in the Multi-line Telephone Administration program (LD 11). A maintenance telephone allows you to send commands to the system, but you can only use a subset of the commands that can be entered from a system terminal.

You can test tones and outpulsing through the maintenance telephone. Specific commands for those tests are given in the Tone and Digit Switch and Digitone Receiver Diagnostic (LD 34).

To access the system using the maintenance telephone, see Procedure 2. To enter commands, press the keys that correspond to the letters and numbers of the command (for example, to enter LD 42 return, key in 53#42##). Table 2 shows the translation from a keyboard to a dial pad.

The following overlays (LDs) ARE accessible from a maintenance telephone: 30, 32, 33, 34, 35, 36, 37, 38, 41, 42, 43, 45, 46, 60, 61, and 62

The following overlays (LDs) ARE NOT accessible from a maintenance telephone: 31, 40, 48, 77, 80, 92, 96, 135, 137

Note: To use the maintenance telephone, the loop for that telephone must be operating.

Table 2
Translation from keyboard to dial pad

Keyboard				Dial pad
			1	1
A	B	C	2	2
D	E	F	3	3
G	H	I	4	4
J	K	L	5	5
M	N	O	6	6
P	R	S	7	7
T	U	V	8	8
W	X	Y	9	9
			0	0
			Space or #	#
			Return	##
			*	*

Note: There is no equivalent for Q or Z on a dial pad.

Procedure 2
Access through the maintenance telephone

- 1 Press the prime DN key.
- 2 Place the set in maintenance mode by entering: **xxxx91**
 Where: "xxxx" is the customer Special Prefix (SPRE) number. It is defined in the Customer Data Block and can be printed using LD 21. The SPRE number is typically "1" (which means you would enter 191).
- 3 Check for busy tone by entering "return" : **##**
 - If there is no busy tone, go to Step 4.
 - If there is a busy tone, a program is active. To end an active program and access the system enter: ********
- 4 Load a program by entering: **53#xx##**
 Where: "xx" represents the number of the overlay program
- 5 Perform tasks.
- 6 To exit the program and return the telephone to call processing mode, enter: ********

Background routines are then loaded automatically.

Accessing Meridian Mail

Option 11C allows access to Meridian Mail Administration & Maintenance through a shared terminal on the Option 11C. To access the Meridian Mail system, log in and enter: AX. To exit from Meridian Mail, press the Control key and the closed square bracket (]) simultaneously.

Preview of overlay content

System information, call information, features and services are all controlled by overlays (LDs). Data blocks are used to control this information. Listed below are some of the items accessible through the overlays.

Type	Overlay(s)	Item
Terminal Number data block	10, 11, 12, 14	busy lamp field Class of Service (CLS) feature access and requirements key assignments route assignment telephone features (# of key strips, data modules) telephone type trunk access trunk type
Customer data block	15	attendant console information customer number feature access codes incoming call identification intercept options Listed Directory Number (LDN) night service Recorded Announcement (RAN)
Route data block	16	access codes Call Detail Recording (CDR) information code restrictions network trunk features route number trunk route type trunking features (timers, starting arrangements)
Configuration data block	17	input/output devices memory location network loop usage number of memory modules number of network loops system parameters (call register, buffer sizes, traffic)

System Look up Messages

On Option 11C, 51C, 61C, or 81C systems equipped with System Errors and Events Lookup package 245, it is possible to display system messages on screen. Specific system messages may then be viewed on screen if the user enters ERR followed by the desired system error code and <cr>. The following example shows the data entries necessary to view error message: SCH946.

- Login to switch
- PASS(Enter only your password)
- ERR SCH946<cr>(The user must type “ERR SCH946” and press return)

The screen will now display the error message corresponding to SCH946. In this case, that message is:

Invalid User Type

Multi-User Login

Meridian 1 Multi-User Login (MULTI_USER) (package 242) enables up to five users to log in, load, and execute overlays simultaneously. These users are in addition to an attendant console or maintenance terminal. The multi-user capability increases the efficiency of craftpersons by enabling them to perform tasks in parallel. To facilitate this operating environment, Multi-User Login includes significant functionality:

- Database conflict prevention
- Additional user commands
- TTY log files
- TTY directed I/O

With multiple overlays operating concurrently, there is the potential for a database conflict if two or more overlays attempt to modify the same data structure. Multi-User Login software prevents such conflicts. When a user requests that an overlay be loaded, the software determines if it could pose a potential conflict with an overlay that is already executing. If no conflict exists, the requested overlay is loaded. If a conflict does exist, the system issues the following message:

OVL429-OVERLAY CONFLICT

The user can try again later, or try to load a different overlay.

Multi-User Login also introduces several user commands. With these commands, the user has the ability to:

- communicate with other users
- determine who is logged into the system
- halt and resume background and midnight routines
- initiate and terminate terminal monitoring
- change printer output assignment

Note: For complete feature information on Multi-User Login, consult the *Management Applications NTP* and *Overlay Loader and Multi-User Login* section in this NTP.

Maintenance display codes

Maintenance displays are located on the faceplate of certain Meridian SL-1 circuit cards. A maintenance display code is a one-, two-, or three-digit alphanumeric code which can indicate the status of the system and identify faulty equipment. For a detailed definition of these codes, see the section titled "HEX" in the System Error Messages NTP.

Time and date of fault

The system identifies the time that faults are detected. When a diagnostic message is output, a timestamp is output within 15 minutes. The format is:

TIMxxx hh:mm dd/mm/yy CPU x

Where: **xxx** is the system ID

The time, date, and system ID are set in LD 2.

Alphabetical List of Packages

Listed below is a comprehensive alphabetical list of packages which may be equipped on your Meridian 1. For a numerical list of available packages, refer to the section titled “Numerical List of Packages” on page 43.

Mnemonic	Feature Name	Number	Release
AA	Attendant Administration	54	1
AAA	Attendant Alternative Answering	174	15
AAB	Automatic Answerback	47	1
ABCD	16-Button Digitone/Multifrequency Telephone	144	14
ACDA	Automatic Call Distribution, Package A	45	1
ACDB	Automatic Call Distribution, Package B	41	1
ACDC	Automatic Call Distribution Package C	42	1
ACDD	Automatic Call Distribution Package D	50	2
ACLI	Analog Calling Line Identification	349	24
ACNT	Automatic Call Distribution, Account Code	155	13
ACRL	AC15 Recall	236	20
ADMINSET	Set Based Administration	256	21
ADSP	ACD Night Call Forward without Disconnect Supervision	289	23
AFNA	Attendant Forward No Answer	134	14
AINS	Automatic Installation (Option 11C only)	200	16
AIOD	Automatic ID of Outward Dialing	3	1
ALRM_FILTER	Alarm Filtering	243	19
AMP	Automated Modem Pooling	78	5
ANI	Automatic Number Identification	12	1
ANIR	ANI Route Selection	13	1
AOP	Attendant Overflow Position	56	1

Mnemonic	Feature Name	Number	Release
APL	Auxiliary Processor Link	109	10
ARDL	Automatic Redial	304	22
ARFW	Attendant Remote Call Forward	253	20
ARIE	Aries Digital Sets	170	14
ATM	Automatic Trunk Maintenance	84	7
ATX	Autodial Tandem Transfer	258	20
AUXS	Automatic Call Distribution Package D, Auxiliary Security	114	12
AWU	Automatic Wake-Up	102	10
BACD	Basic Automatic Call Distribution	40	1
BARS	Basic Alternate Route Selection	57	1
BASIC	Basic Call Processing	0	1
BAUT	Basic Authorization Code	25	1
BGD	Background Terminal	99	10
BKI	Attendant Break-In/Trunk Offer	127	1
BNE	Business Network Expansion	367	25
BQUE	Basic Queuing	28	1
BRI	Basic Rate Interface	216	18
BRIL	BRI line application	235	18
BRIT	ISDN BRI Trunk Access	233	18
BRTE	Basic Routing	14	1
BTD	Busy Tone Detection Tone	294	21
CAB	Charge Account/Authorization Code	24	1
CALL ID	Call ID (for AML applications)	247	19
CASM	Centralized Attendant Services (Main)	26	1
CASR	Centralized Attendant Services (Remote)	27	1
CBC	Call-by-Call Service	117	13
CCB	Collect Call Blocking	290	21
CCDR	Calling line Identification in Call Detail Recording	118	13
CCOS	Controlled Class Of Service	81	7
CDP	Coordinated Dialing Plan	59	1
CDR	Call Detail Recording	4	1
CDRE	Call Detail Recording Expansion (7 digit)	151	13
CDRQ	ACD CDR Queue Record	83	3
CDRX	Call Detail Recording Enhancement	259	20

Mnemonic	Feature Name	Number	Release
CHG	Charge Account for CDR	23	1
CHINA	China Attendant Monitor Package	285	21
CHTL	China Toll Package	292	21
CISMFS	Commonwealth of Independent States Multifrequency Shuttle Signalling	326	23
CIST	Commonwealth of Independent States - Trunk	221	21
CLNK	Call Detail Recording, Data Link	6	1
CMAC	N/W Communications Management Center	30	1
CNAME	Calling Name Delivery	333	23
CNUMB	Calling Number Delivery	332	23
COOP	Console Operations	169	14
CORENET	Core Network Module	299	21
CDIR	Corporate Directory	381	25
CPCI	Called Party Control on Internal Calls	310	22
CPGS	Console Presentation Group	172	15
CPIO	Call Processor Input/Output (Option 81C)	298	21
CPND	Calling Party Name Display	95	10
CPP	Calling Party Privacy	301	21
CPP_CNI	CP Pentium Backplane for Intel Machine	368	25
CPRK	Call Park	33	2
CPRKNET	Call Park Networkwide	306	22
CSL	Command Status Link	77	8
CSLA	CSL with Alpha Signalling	85	8
CTY	Call Detail Recording on Teletype Terminal	5	1
CUST	Multiple-Customer Operation	2	1
CWNT	Call Waiting Notification (Meridian 911)	225	19
DASS2	Digital Access Signaling System 2	124	16
DBA	Data Buffering and Access	351	24
DCON	M2250 Attendant Console	140	15
DCP	Directed Call Pickup	115	12
DDSP	Digit Display	19	1
DHLD	Deluxe Hold	71	4
DI	Dial Intercom	21	1
DISA	Direct Inward System Access	22	1
DKS	Digit Key Signaling	180	1

Mnemonic	Feature Name	Number	Release
DLDN	Departmental Listed Directory Number	76	5
DLT2	M2317 Digital Sets	91	9
DMWI	DPNSSI Message Waiting Indication	325	23
DNDG	Do-Not-Disturb, Group	16	1
DNDI	Do-Not-Disturb, Individual	9	1
DNIS	Dialed Number Identification System	98	10
DNWK	DPNSS Network Services	231	16
DNXP	Directory Number Expansion (7 Digit)	150	13
DPNA	Direct Private Network Access	250	21
DPNSS189I	Enhanced DPNSS1 Gateway	284	20
DPNSS	Digital Private Network Signaling System 1	123	16
DPNSS_ES	DPNSS Enhanced Services	288	21
DRNG	Distinctive Ringing	74	4/9
DSET	M2000 Digital Sets	88	7
DTI2	2 Mbit Digital Trunk Interface	129	10
DTD	Dial Tone Detector	138	10
DTOT	DID to Tie (Japan only)	176	16
EAR	Enhanced ACD Routing	214	17
ECCS	Enhanced Controlled Class of Service	173	15
ECT	Enhanced Call Trace	215	18
EDRG	Executive Distinctive Ringing	185	16
EES	End-To-End Signaling	10	1
EMUS	Enhanced Music	119	12
ENS	Enhanced Night Service	133	20
EOVF	ACD Enhanced Overflow	178	15
ESA	Emergency Services Access	329	23
ESA_CLMP	Emergency Services Access Calling Number Mapping	331	23
ESA_SUPP	Emergency Services Access Supplementary	330	23
ETSI_SS	Euro Supplementary service	323	22
EURO	Euro ISDN	261	20
FAXS	HiMail Fax Server	195	18
FCC68	FCC Compliance for DID Answer Supervision	223	17
FCA	Forced Charge Account	52	1
FCBQ	Flexible Call Back Queuing	61	1

Mnemonic	Feature Name	Number	Release
FCDR	New Format CDR	234	18
FDID	Flexible DID	362	24
FFC	Flexible Feature Codes	139	15
FGD	Feature Group D	158	17
FIBN	Fibre Network	365	25
FNP	Flexible Numbering Plan	160	14
FRTA	French Type Approval	197	15
FTC	Flexible Tones and Cadences	125	16
FFCSF	Boss Secretary Filtering (FFC activation)	198	15
FTDS	Fast Tone and Digit Switch	87	7
GCM	General Call Monitor	344	24
GRP	Group Call	48	1
GPRI	International 1.5/2.0 Mb/s Gateway	167	18
GSCM	Global Call Monitoring	344	24
HIST	History File	55	1
HOSP	Hospitality Management	166	16
HOT	Enhanced Hot Line	70	4/10
HSE	Hospitality Screen Enhancement	208	17
HVS	Meridian Hospitality Voice Service	179	16
IAP3P	Integrated Services Digital Network Application Module Link for Third Party Vendors	153	13
ICDR	Internal CDR	108	10
ICP	Intercept Computer Interface	143	10
IDA	Integrated Digital Access	122	16
IDC	Incoming DID Digit Conversion	113	12
IEC	Inter-Exchange Carrier	149	13
IMS	Integrated Message System UST and UMG are part of IMS Package.	35	2
INBD	International nB+D	255	20
INTR	Intercept Treatment	11	1
IPRA	International Primary Rate Access	202	15
ISDN	Integrated Services Digital Network	145	13
ISDN INTL SUP	ISDN Supplementary Features	161	14
ISL	ISDN signaling Link	147	13
ISPC	ISDN Semi-Permanent Connection	313	22

Mnemonic	Feature Name	Number	Release
IVR	Hold in Queue for IVR	218	18
JDMI	Japan Digital Multiplex Interface	136	14
JPN	Japan Central Office Trunks	97	9
JTDS	Japan Tone and Digit Switch	171	14
JTTC	Japan Telecommunication Technology Committee	335	23
KD3	Spanish KD3 DID/DOD interface	252	20
LAPW	Limited Access to Overlays	164	16
L1MF	X08 to X11 Gateway	188	15
LLC	Line Load Control	105	10
LMAN	Automatic Call Distribution Load Management (C2)	43	1
LNK	ACDD, Auxiliary Link Processor	51	2
LNR	Last Number Redial	90	8
LSCM	Local Steering Code Modifications	137	10
LSEL	Automatic Line Selection	72	4
M911 ENH	M911 Enhancement Display	249	25
MAID	Maid Identification	210	17
MASTER	Euro ISDN Trunk - Network Side	309	22
MAT	MAT 5.0	296	22
MC32	Meridian Companion Enhanced Capacity	350	24
MCBQ	Network callback Queuing	38	2
MCDR	Mini CDR	31	1
MCMO	Meridian 1 Companion Option	240	19
MCT	Malicious Call Trace	107	10
MEET	MCDN End to End Transparency	348	24
MFC	Multifrequency Compelled Signaling	128	9
MFE	Multifrequency Signaling for Socotel	135	10
MINT	Message Intercept	163	15
MLIO	Multi-Language I/O Package	211	16
MLM	Meridian Link Modular Server	209	16
MLMS: Brazilian	Brazilian	264	20
MLMS: Chinese (PRC)	Chinese (PRC)	265	20
MLMS: Chinese (ROC)	Chinese (ROC)	266	20
MLMS: Dainish	Dainish	267	20

Mnemonic	Feature Name	Number	Release
MLMS: Dutch	Dutch	268	20
MLMS: Finnish	Finnish	269	20
MLMS: Canadian French	Canadian French	270	20
MLMS: European French	European French	271	20
MLMS: German	German	272	20
MLMS: Italian	Italian	273	20
MLMS: Japanese	Japanese	274	20
MLMS: Korean	Korean	275	20
MLMS: Norwegian	Norwegian	276	20
MLMS: Russian	Russian	277	20
MLMS: European Spanish	European Spanish	278	20
MLMS: Latin Am. Spanish	Latin American Spanish	279	20
MLMS: Swedish	Swedish	280	20
MLWU	Multi-Language Wake Up	206	16
MMOPKG	M1 Microcellular Option	303	22
MMSN	M1 Mobility Multi-Site Networking	314	22
MPH	Meridian 1 Packet Handler	248	19
MPO	Multi-Party Operations	141	20
MOSRPKG	Mobility Server	302	22
MQA	Multiple Queue Assignment	297	21
MR	PPM/Message Registration	101	10
MSB	Make Set Busy	17	1
MSDL	Multipurpose Serial Data Link	222	18
MSDL SDI	MSDL Serial Data Interface	227	19
MSDL STA	MSDL Single Terminal Access	228	19
MSMN	Mobility Networking	370	25
MULTI_USER	Multi-User Login	242	19
MUS	Music	44	1
MUSBRD	Music Broadcast	328	23
MWC	Message Waiting Center	46	1
MWI	Message Waiting Indication Interworking with DMS	219	19

Mnemonic	Feature Name	Number	Release
M911	Meridian 911	224	19
NACD	Network Automatic Call Distribution	207	15
NARS	Network Alternate Route Selection	58	1
NAS	Network Attendant Service	159	20
NAUT	Network Authorization Code	63	1
NCOS	Network Class Of Service	32	1
NFCR	New Flexible Code Restriction	49	2
NGCC	Nortel Symposium Call Center	311	22
NGEN	Next Generation Connectivity	324	22
NI2	North America National ISDN Class II Equipment	291	21
NI-2 CBC	NI-2 Call By Call Service Selection	334	23
NMCE	NGenR2/Meridian Communications Exchange Connectivity	364	24
NMS	Network Message Services	175	16
NSC	Network Speed Call	39	2
NSIG	Network Signaling	37	2
NTRF	Network Traffic Measurements	29	1
NTWK	Advanced ISDN Network Services	148	13
NXFR	Network Call Transfer	67	3
ODAS	Office Data Administration System	20	1
OHOL	On Hold On Loudspeaker	196	20
OHQ	Off-Hook Queuing	62	1
OOD	Optional Outpulsing Delay	79	5
OPAO	Outpulsing, asterisk (*) and octothorpe (#)	104	
OPCB	Operator Call Back (China #1)	126	14
OPEN ALARM	Open Alarms	315	22
OPTF	Optional Features	1	1
ORC_RVQ	Remote Virtual Queueing	192	18
OVLP	Overlap Signaling (M1 to M1 and M1 to 1TR6 CO)	184	15
PAGENET	Call Page Networkwide	307	22
PAGT	Automatic Call Distribution, Priority Agent	116	12
PBXI	1.5 Mbit Digital Trunk Interface	75	5
PEMD	Pulsed E&M (Indonesia, French Colisée)	232	18
PHTN	Phantom TN	254	20
PLDN	Group Hunt/DN Access to SCL	120	15

Mnemonic	Feature Name	Number	Release
PLUGIN	Plug-In	366	24
PMSI	Property Management System Interface	103	10
POVR	Priority Override/Forced Camp-On	186	20
PQUE	Network Priority Queuing	60	1
PRA	Primary Rate Access (CO)	146	13
PRI2	2.0 Mb/s Primary Rate Interface	154	14
PXLT	Pretranslation	92	8
QSIG	Q reference signaling point Interface	263	20
QSIG GF	QSIG Generic Functional protocol	305	22
QSIG SS	QSIG Supplementary service	316	22
RAN	Recorded Announcement	7	1
RANBRD	Recorded Announcement Broadcast	327	23
RCK	Ringing Change Key	193	15
REMOTE_IPE	Remote IPE	286	
RMS	Room Status	100	10
ROA	Recorded Overflow Announcement	36	2
RPA	Radio Paging	187	15
RPE1.5	1.5 Mbit Remote Peripheral Equipment	15	1
RPE2	2.0 Mb/s Remote Peripheral Equipment	165	15
RSDB	Resident Debug	82	9
RUCM	Russian Call Monitoring	353	24
RVQ	Remote Virtual Queuing	192	18
SACP	Semi-Automatic Camp-On	181	15
SAMM	Stand-alone Meridian Mail	262	20
SAR	Scheduled Access Restrictions	162	20
SCC	Tone Detector Special Common Carrier	66	7
SCDR	Station Activity Records	251	20
SCI	Station Category Indication	80	7
SCMP	Station Camp-On	121	20
SECL	Series Call	191	15
SLP	Station Loop Preemption	106	10
SLST	Meridian SL-1 ST Package	96	9
SMS	Short Message Service	346	24
SNR	Stored Number Redial	64	3

Mnemonic	Feature Name	Number	Release
SR	Set Relocation	53	1
SSAU	Station Specific Authorization Codes	229	19
SS5	500 Set Dial Access to Features	73	4
SS25	2500 Set Features	18	1
SSC	System Speed Call	34	2
STA	Single Term Access	228	19
STS	Set to Set Messaging	380	25
SUPP	International Supplementary Features	131	9
SUPV	Supervisory Attendant Console	93	8
SVCT	Supervisory Console Tones	189	20
SYS_MSG_LKUP	System Errors and Events Lookup	245	19
TAD	Time and Date	8	1
TAT	Trunk AntiTromboning	293	21
TATO	Trunk AntiTromboning	312	
TBAR	Trunk Barring	132	20
TDET	Tone Detector	65	7
TENS	Multiple-Tenant Service	86	7
TFM	Trunk Failure Monitor	182	15
THF	Trunk Hook Flash (Centrex)	157	14
TMON	Traffic Monitoring	168	
TOF	Automatic Call Distribution, Timed Overflow Queuing	111	10
TSET	M3000 Digital Sets	89	7
TVS	Trunk Verification from Station	110	9.32
TWR1	Tiawan R1	347	24
UIGW	Universal ISDN Gateways	283	20
UK	United Kingdom	190	16
VAWU	VIP Auto Wake Up	212	17
VMBA	Voice Mailbox Administration	246	19
VIRTUAL_OFFICE	Virtual Office	382	25
VNS	Virtual Network Services	183	16
XCT0	M1 Enhanced Conference, TDS and MFS	204	15
XCT1	M1 Superloop Administration (LD 97)	205	15
XPE	Meridian 1 XPE	203	15
ZPAG	Zone Paging	281	25

Numerical List of Packages

Listed below is a comprehensive numerical list of available packages which may be equipped on your Meridian 1. For an alphabetical list of packages, “Alphabetical List of Packages” on page 33.

Number	Mnemonic	Name
0	BASIC	Basic Call Processing
1	OPTF	Optional Features
2	CUST	Multi-Customer Operation
3	AIOD	Automatic ID of Outward Dialing
4	CDR	Call Detail Recording, Teletype Terminal
5	CTY	Call Detail Recording, Teletype Terminal
6	CLNK	Call Detail Recording, Data Link
7	RAN	Recorded Announcement
8	TAD	Time and Date
9	DNDI	Do Not Disturb Individual
10	EES	End-to-End Signaling
11	INTR	Intercept Treatment
12	ANI	Automatic Number Identification
13	ANIR	Automatic Number Identification, Route Selection
14	BRTE	Basic Routing
15	RPE1.5	1.5-Mbit Remote Peripheral Equipment
16	DNDG	Do Not Disturb Group
17	MSB	Make Set Busy
18	SS25	Special Service for 2500 Sets
19	DDSP	Digit Display
20	ODAS	Office Data Administration System
21	DI	Dial Intercom

Number	Mnemonic	Name
22	DISA	Direct Inward System Access
23	CHG	Charge Account for CDR
24	CAB	Charge Account/Authorization code
25	BAUT	Basic Authorization code
26	CASM	Centralized Attendant Service (Main)
27	CASR	Centralized Attendant Service (Remote)
28	BQUE	Basic Queuing
29	NTRF	Network Traffic must have NWK packages.
30	CMAC	N/W Communications Management Center
31	MCDR	Mini CDR
32	NCOS	Network Class of Service
33	CPRK	Call Park
34	SSC	System Speed Call
35	IMS	Integrated Message Services. UST and UMG are part of the IMS package.
36	ROA	Recorded Overflow Announcement
37	NSIG	Network Signaling
38	MCBQ	Network Call Back Queuing
39	NSC	Network Speed Call
40	BACD	Basic Automatic Call Distribution
41	ACDB	Automatic Call Distribution, Package B
42	ACDC	Automatic Call Distribution, Package C
43	LMAN	Automatic Call Distribution, Load Management Reports
44	MUS	Music
45	ACDA	Automatic Call Distribution, Package A
46	MWC	Message Waiting Center
47	AAB	Automatic Answerback
48	GRP	Group call
49	NFCR	New Flexible Code Restriction
50	ACDD	Automatic Call Distribution, Package D
51	LNK	ACDD, Auxiliary Link Processor
52	FCA	Forced Charge Account
53	SR	Set Relocation
54	AA	Attendant Administration
55	HIST	History File

Number	Mnemonic	Name
56	AOP	Attendant Overflow Position
57	BARS	Basic Alternate Route Selection
58	NARS	Network Alternate Route Selection
59	CDP	Coordinated Dialing Plan
60	PQUE	Network Priority Queuing
61	FCBQ	Flexible Call Back Queuing
62	OHQ	Off-Hook Queuing
63	NAUT	Network Authorization code
64	SNR	Stored Number Redial
65	TDET	Tone Detector
66	SCC	Tone Detector Special Common Carrier
67	NXFR	Network Call Transfer
68	ATVN	Autovon
69	ACDR	
70	HOT	Enhanced Hot Line
71	DHLD	Deluxe Hold
72	LSEL	Automatic Line Selection
73	SS5	500 Set Dial Access to Features
74	DRNG	Distinctive Ringing
75	PBXI	1.5 Mbit Digital Trunk Interface
76	DLDN	Departmental Listed Directory Number
77	CSL	Command Status Link
78	AMP	Automated Modem Pooling
79	OOD	Optional Outpulsing Delay
80	SCI	Station Category Information
81	CCOS	Controlled Class of Service
82	RSDB	Resident Debug
83	CDRQ	ACD CDR Queue Record
84	ATM	Automatic Trunk Maintenance
85	CSLA	CSL with Alpha Signaling
86	TENS	Multi-Tenant Service
87	FTDS	Fast Tone and Digit Switch
88	DSET	M2000 Digital Sets
89	TSET	M3000 Digital Sets

Number	Mnemonic	Name
90	LNR	Last Number Redial
91	DLT2	M2317 Digital Sets
92	PXLT	Pretranslation
93	SUPV	Supervisory Console
95	CPND	Calling Party Name Display
96	SLST	Meridian SL-1 ST Package
97	JPN	Japan Central Office Trunks
98	DNIS	Dialed Number Identification System
99	BGD	Background Terminal
100	RMS	Room Status
101	MR	PPM / Message Registration
102	AWU	Automatic Wake Up
103	PMSI	Property Management System Interface
104	OPAO	Outpulsing, asterisk (*) and octothorpe (#)
105	LLC	Line Load Control
106	SLP	Station Loop Pre-emption
107	MCT	Malicious Call Trace
108	ICDR	Internal CDR
109	APL	Auxiliary Processor Link
110	TVS	Trunk Verification from Station
111	TOF	Automatic Call Distribution, Timed Overflow Queuing
112	NKL	
113	IDC	Incoming Digit Conversion
114	AUXS	Automatic Call Distribution Package D, Auxiliary Security
115	DCP	Directed Call Pickup
116	PAGT	Automatic Call Distribution, Priority Agent
117	CBC	Call by Call Service
118	CCDR	Calling Line Identification in Call Detail Recording
119	EMUS	Enhanced Music
120	PLDN	Group Hunt/DN Access to SCL
121	SCMP	Station Camp-On
122	IDA	Integrated Digital Access. COMDT is part of IDA Package
123	DPNSS	Digital Private Network Signaling System 1
124	DASS2	Digital Access Signaling System 2

Number	Mnemonic	Name
125	FTC	Flexible Tones and Cadences
126	OPCB	Operator Call Back (China #1)
127	BKI	Attendant Break-In/Trunk Offer
128	MFC	Multifrequency Compelled Signaling
129	DTI2	2 Mbit Digital Trunk Interface
131	SUPP	International Supplementary Features
132	TBAR	Trunk Barring
133	ENS	Enhanced Night Service
134	AFNA	Attendant Forward No Answer
135	MFE	Multifrequency Signaling for Socotel
136	JDMI	Japan Digital Multiplex Interface
137	LSCM	Local Steering Code Modification
138	DTD	Dial Tone Detection
139	FFC	Flexible Feature Codes
140	DCON	M2250 Attendant Console
141	MPO	Multi-Party Operations
143	ICP	Intercept Computer Interface
144	ABCD	16-Button Digitone/Multifrequency Telephone
145	ISDN	Integrated Services Digital Network
146	PRA	Primary Rate Access (CO)
147	ISL	ISDN Signaling Link
148	NTWK	Advanced ISDN Network Services
149	IEC	Inter-Exchange Carrier
150	DNXP	DN Expansion (7 digit)
151	CDRE	CDR Expansion (7 digit)
153	IAP3P	ISDN AP for 3rd Party Vendors
154	PRI2	2.0 Mb/s Primary Rate Interface
155	ACNT	Automatic Call Distribution, Account Code
157	THF	Trunk Hook Flash (Centrex)
158	FGD	Feature Group D
159	NAS	Network Attendant Service
160	FNPN	Flexible Numbering Plan
161	ISDN INTL SUP	ISDN Supplementary Features
162	SAR	Scheduled Access Restrictions

Number	Mnemonic	Name
163	MINT	Message Intercept
164	LAPW	Limited Access to Overlays
165	RPE2	2.0 Mb/s Remote Peripheral Equipment
166	HOSP	Hospitality Management
167	GPRI	International 1.5/2.0 Mb/s Gateway
168	TMON	Traffic Monitoring
169	COOP	Console Operations
170	ARIE	Aries Digital Sets
171	JTDS	Japan Tone and Digit Switch
172	CPGS	Console Presentation Groups
173	ECCS	Enhanced Controlled Class of Service
174	AAA	Attendant Alternative Answering
175	NMS	Network Message Services
176	DTOT	DID To Tie (Japan only)
178	EOVF	ACD Enhanced Overflow
179	HVS	Meridian Hospitality Voice Service
180	DKS	Digit Key Signaling
181	SACP	Semi-Automatic Camp-On
182	TFM	Trunk Failure Monitor
183	VNS	Virtual Network Services
184	OVLP	Overlap Signaling (M1 to M1 and M1 to 1TR6 CO)
185	EDRG	Executive Distinctive Ringing
186	POVR	Priority Override/Forced Camp-On
187	RPA	Radio Paging
188	L1MF	X08 to X11 Gateway
189	SVCT	Supervisory Console Tones
190	UK	United Kingdom
191	SECL	Series Call
192	ORC_RVQ	Remote Virtual Queuing
193	RCK	Ringing Change Key
195	FAXS	HiMail Fax Server
196	OHOL	On-Hold On-Loudspeaker
197	FRTA	French Type Approval
198	FFCSF	Boss Secretary Filtering (FFC activation)

Number	Mnemonic	Name
200	AINS	Automatic Installation (Option 11C only)
202	IPRA	International Primary Rate Access (CO)
203	XPE	Meridian 1 XPE
204	XCT0	M1 Enhanced Conference, TDS and MFS
205	XCT1	M1 Superloop Administration (LD 97)
206	MLWU	Multi Language Wake Up
207	NACD	Network Automatic Call Distribution
208	HSE	Hospitality Screen Enhancement
209	MLM	Meridian Link Modular Server
210	MAID	Maid Identification
211	MLIO	Multi Language Input/Output
212	VAWU	VIP Automatic Wake Up
214	EAR	Enhanced ACD Routing
215	ECT	Enhanced Call Trace
216	BRI	Basic Rate Interface
218	IVR	Hold in queue for IVR
219	MWI	Message Waiting Indication Interworking with DMS
221	CIST	Commonwealth of Independent States -Trunk
222	MSDL	Multi-purpose Serial Data Link
223	FCC68	FCC Compliance for DID Answer Supervision
224	M911	Meridian 911
225	CWNT	Call Waiting Notification (Meridian 911)
227	MSDL SDI	MSDL Serial Data Interface
228	MSDL STA	Single Terminal Access
229	SSAU	Station Specific Authorization Codes
231	DNWK	DPNSS Network Services
232	PEMD	Pulsed E & M (Indonesia, French Colisée)
233	BRIT	ISDN BRI Trunk Access
234	FCDR	New Format CDR
235	BRIL	BRI line application
236	ACRL	AC15 Recall
240	MCMO	Meridian 1 Companion Option
242	MULTI_USER	Multi-User Login
243	ALRM_FILTER	Alarm Filtering

Number	Mnemonic	Name
245	SYS_MSG_LKUP	System Errors and Events Lookup (Option 81C)
246	VMBA	Voice Mailbox Administration
247	CALL ID	Call ID (for AML applications)
248	MPH	Meridian1 Packet Handler
249	M911 EHN	M911 Enhancement Display
250	DPNA	Direct Private Network Access
251	SCDR	Station Activity Records
252	KD3	Spanish KD3 DID/DOD interface
253	ARFW	Attendant Remote Call Forward
254	PHTN	Phantom TN
255	INBD	International nB+D
256	ADMINSET	Set Based Administration
257	EQA	Equal Access
258	ATX	Autodial Tandem Transfer
259	CDRX	Enhanced Call Detail Recording
261	EURO	EuroISDN
262	SAMM	Standalone Meridian Mail
263	QSIG	QSIG Interface
264	MLMS: Brazilian	
265	MLMS: Chinese (PRC)	
266	MLMS: Chinese (ROC)	
267	MLMS: Danish	
268	MLMS: Dutch	
269	MLMS: Finnish	
270	MLMS: Canadian French	
271	MLMS: European French	
272	MLMS: German	
273	MLMS: Italian	
274	MLMS: Japanese	
275	MLMS: Korean	
276	MLMS: Norwegian	
277	MLMS: Russian	
278	MLMS: European Spanish	
279	MLMS: Latin Am. Spanish	

Number	Mnemonic	Name
280	MLMS: Swedish	
281	ZPAG	Zone Paging
283	UIGW	Universal ISDN Gateways
284	DPNSS 189I	Enhanced DPNSS1 Gateway
285	CHINA	China Attendant Monitor Package
286	REMOTE_IPE	Remote IPE
288	DPNSS_ES	DPNSS Enhanced Services
289	ADSP	ACD Night Call Forward without Disconnect Supervision
290	CCB	Collect Call Blocking
291	NI2	North American National ISDN Class II Equipment
292	CHTL	China Toll Package
293	TAT	Trunk Anti-Tromboning
294	BTD	Busy Tone Detection
296	MAT	MAT 5.0
297	MQA	Multiple Queue Assignment
298	CPIO	Call Processor Input/Output (Option 81C)
299	CORENET	Core Network Module
301	CPP	Calling Party Privacy
302	MOSRPKG	Mobility Server
303	MMOPKG	M1 Microcellular Option
304	ARDL	Automatic Redial
305	QSIG GF	QSIG Generic Functional protocol
306	CPRKNET	Call Park Networkwide
307	PAGENET	Call Page Networkwide
308	PTU	Preference Trunk Usage
309	MASTER	Euro ISDN Trunk - Network Side
310	CPCI	Called Party Control on Internal Calls
311	NGCC	Nortel Symposium Call Center
312	TATO	Trunk Anti Tromboning
313	ISPC	ISDN Semi-Permanent Connection
314	MMSN	M1 Mobility Multi-Site Networking
315	OPEN ALARM	Open Alarms
316	QSIG SS	QSIG Supplementary service
321	QTN	

Number	Mnemonic	Name
323	ETSI_SS	Euro Supplementary service
324	NGEN	Next Generation Connectivity
325	DMWI	DPNSSI Message Waiting Indication
326	CISMFS	Commonwealth of Independent States Multifrequency Shuttle Signalling
327	RANBRD	Recorded Announcement Broadcast
328	MUSBRD	Music Broadcast
329	ESA	Emergency Services Access
330	ESA_SUPP	Emergency Services Access Supplementary
331	ESA_CLMP	Emergency Services Access Calling Number Mapping
332	CNUMB	Calling Number Delivery
333	CNAME	Calling Name Delivery
334	NI-2 CBC	NI-2 Call By Call Service Selection
335	JTTC	Japan Telecommunication Technology Committee
344	GCM	General Call Monitoring
346	SMS	Short Message Service
347	TWR1	Taiwan R1
348	MEET	MCDN End to End Transparency
349	ACLI	Analog Calling Line Identification
350	MC32	Meridian Companion Enhanced Capacity
351	DBA	Data Buffering and Access
353	RUCM	Russian Call Monitoring
362	FDID	Flexible DID
364	NMCE	NGenR2/Meridian Communications Exchange Connectivity
365	FIBN	Fibre Network
366	PLUGIN	Plug-In
367	BNE	Business Network Express
368	CPP_CNI	CP Pentium Backplane for Intel Machine
370	MSMN	Mobility Networking
380	STS	Set to Set Messaging
381	CDIR	Corporate Directory
382	VIRTUAL_OFFICE	Virtual Office

Overlay Loader and Multi-User Login

Overlay loader

The Overlay loader becomes active after the login sequence and password , it will then accept input commands from the Serial Data Interface Terminals (SDI) after the “>” prompt (after login but with no overlay executing).

Overlay loader commands (OVL) C-Type Processors

Options 11C, 51C, 61C, and 81C Overlay loader commands are as follows:

Command	Description
ERR x..x	Specific system messages are displayed (package 245 required). Where: x..x = specific error type and number (ex. ERR SCH1001)
FDLC	Cancel or stop the system wide download for M39xx units
ERR x..x	Specific system messages are displayed (package 245 required). Where: x..x = specific error type and number (ex. ERR SCH1001)
LD xxx	Load overlay program into the overlay area, then the loaded program assumes control. Where: xxx = number of the desired overlay program.
LOF	Disable Line Mode interface (TTY setup: 7 data bits, space parity, 1 stop bit).
LOGO	Exit overlay loader and Log-off the system.
LON	Enable Line Mode interface (TTY setup: 7 data bits, space parity, 1 stop bit).
****	Aborts the current overlay program, allowing another overlay program to be loaded into the overlay area.

Overlay loader commands (OVL)

A set of instructions or program used to load the nonresident programs, from tape or disk. The overlay loader becomes active after the login sequence and password. It will then accept the following commands from the Serial Data Interface terminal:

Command	Description
DIST	Disable the tape interface or the MSI, FDU, MDU card.
ENLT	Enable the tape interface or the MSI, FDU, MDU card.
LD xx	Load overlay programs from tape, disk or cache memory into the overlay area, then the loaded program assumes control. Where: xx = number of the desired overlay.
LD xx D	Load overlay programs from disk into the overlay area, even if the program resides in cache memory. Where: <ul style="list-style-type: none">• xx = number of the desired overlay.• D = entered as part of command to specify the active disk.
LOGO	Exit overlay loader and Log-off the system.
STAT	Print the status of the tape interface or the MSI, FDU, MDU card.
****	Aborts the current overlay program, allowing another overlay program to be loaded into the overlay area.

Multi-User Login commands

Multi-User Login enables up to five users to log in, load, and execute overlay programs simultaneously. These five users are in addition to an attendant console or maintenance terminal. The Multi-User capability also introduces several user commands. With these commands, the user has the ability to:

- determine who is logged into the system
- communicate with other connected users
- halt and resume background and midnight routines
- initiate and terminate terminal monitoring
- change printer output assignment

Note: MULTI_USER must be enabled in LD 17.

Multi-User commands

A user can issue any of the commands listed in the following table from Overlay loader or from any position within an overlay. Precede the command with an exclamation point (!) to issue a command from within an overlay.

For example, to issue the WHO command from within an overlay, type:

!

>WHO

> <CR> takes user back to the same position in current overlay

Command	Description
WHO	Displays user name, port ID, and overlay loaded for each logged-in terminal, as well as the user's MON and SPRT commands (see below).
SEND xx	Sends a message to logged-in terminal xx. When the system responds with a "SEND MSG: " prompt, enter the message text yy...yy (up to 80 characters). The text of a message is considered private and therefore is not written to any log file.
SEND ALL	Sends a message to all logged-in terminals. When the system responds with a "SEND MSG: " prompt, enter the message text yy...yy (up to 80 characters). The text of a message is considered private and therefore is not written to any log file.

Command	Description
SEND OFF	Prevents messages sent by other terminals from appearing at the user's terminal.
SEND ON	Enables messages sent by other terminals to appear at the user's terminal.
FORC xx	Forces terminal xx to log off (the requesting user must log in with LAPW or a level 2 password).
HALT	Stops background and midnight routines during a login session.
HALT OFF	Resumes halted background and midnight routines.
MON xx	Initiates monitoring for terminal xx (the requesting user must log in with LAPW or a level 2 password). The monitored terminal receives a message at the beginning and end of the monitored period.
MON OFF	Turns off the monitor function.
SPRT xx	Assigns printer output to port xx.
SPRT OFF	Resets printer output assignment.

Note: For complete feature information on Multi-User Login, consult the *Management Applications NTP*.

LD 02: Traffic

Contents

- Basic commands
- How to use traffic commands
- Set traffic report schedules
- Set report types
- System reports
- Customer reports
- Network report
- Set customer for feature key usage measurement
- Stop printing of title, date and time
- Set traffic measurement on selected terminals
- Set blocking probability for Line Load Control (LLC)
- Set time and date
- Set daily time adjustment
- Set system ID
- Set thresholds
- Perform threshold tests on last reports
- Print last reports

Basic commands

ASUM	Print Alarm/Exception summary
ASUM A	Print all the alarms that have at least one occurrence
ASUM E	Print all the alarms that have escalated
BWTM	Set the date and time for the clock to move backward
CITM	Clear Individual Traffic Measurement from TNs
COPC C R R	Clear one or more customer report types
COPN C R R	Clear one or more network report types
COPS R R	Clear one or more system report types
FWTM	Set the date and time for the clock to move forward
IDLT 0	No title is printed unless further data is also printed
IDLT 1	The title is always printed
INVC C R R ...	Print one or more of the last customer reports
INVN C R R ...	Print one or more of the last network reports
INVS R R ...	Print one or more of last system reports
ITHC C TH	Perform threshold tests on customer reports
ITHS TH	Perform threshold tests on system reports
SCFT C	Set the customer to be measured for feature key usage
SCTL X	Set blocking probability
SDTA X X Y	Set the time of day adjustment
SDST	Enable or disable the automatic daylight savings time adjustment
SITM	Set Individual Traffic Measurement on terminals
SLLC X	Activate Line Load Control at Level X
SOPC C R R	Set one or more customer report types
SOPN C R R	Set one or more network report types
SOPS R R	Set one or more system report types
SSHC C	Set customer report schedule
SSHS	Set system report schedule
SSID SID	Change the system ID number
STAD	Set the time and date
STHC C TH TV	Set the customer thresholds
STHS TH TV	Set the system thresholds
TCFT	Print current customer being measured for feature key usage
TDST	Query the daylight savings time adjustment information
TDTA X	Print the current time of day adjustment
TITM	Print the current TNs with Individual Traffic Measurement set
TLLC	Print current LLC level and blocking probability
TOPC C	Print the current customer report types
TOPN C	Print the current network report types
TOPS	Print the current system report types
TSHC C	Print current customer report schedule
TSHS	Print current system report schedule

TSID	Print the current system ID number
TTAD	Print the current time and date
TTHC C TH	Print the current customer thresholds
TTHS TH	Print the current system thresholds

How to use traffic commands

The Traffic Control program is used to set traffic options, system ID, date and time. The conventions used to describe the traffic commands are:

- data entered by the user is shown in upper case, data output by the system is shown in lower case
- a period (.) prompt indicates that the system is ready to receive a new command
- a double dash (--) indicates that the system is ready to receive data
- a <cr> indicates that the return key should be pressed

Note: The message TFC000 output on your switch indicates that the traffic program is running.

Set traffic report schedules

To print current customer report schedule:

```
TSHC C sd sm ed em
sh eh so
d d ...
```

To print current system report schedule:

```
TSHS sd sm ed em
sh eh so
d d ...
```

To set customer report schedule:

```
SSHC C sd sm ed em -- SD SM ED EM
sh eh so -- SH EH SO
d d ... -- D D ...<cr>
```

To set system report schedule:
SSHS sd sm ed em -- SD SM ED EM
sh eh so -- SH EH SO
d d ... -- D D ...<cr>

Legend

C = customer number

D = day of the week:

1 = Sunday

2 = Monday

3 = Tuesday

4 = Wednesday

5 = Thursday

6 = Friday

7 = Saturday

ED = end day (1-31)

EH = end hour (0-23)

EM = end month (1-12)

SD = start day (1-31)

SH = start hour (0-23)

SM = start month (1-12)

SO = schedule options:

0 = no traffic scheduled

1 = hourly on the hour

2 = hourly on the half-hour

3 = every half-hour

Example

To change the system reports schedule:

```
SSHS 25 4 16 7 -- 1 10 1 12
```

```
12 21 2 -- 0 23 1
```

```
2 3 4 5 6 -- 1 7<cr>
```

Old schedule

start time: April 25 at 12 noon
end time: July 16 at 9 P.M.
frequency: hourly on the half-hour (SO = 2)
days of the week: Monday to Friday

New schedule

start time: October 1 at 12 midnight
end time: December 1 at 11 P.M.
frequency: hourly on the hour (SO = 1)
days of the week: Sunday and Saturday

Note 1: In order to obtain traffic reports at the scheduled intervals, the output device must have prompt USER = TRF in (LD 17). If TRF is not defined for any device, reports are still generated to allow the printing of the last reports.

Note 2: Half hour start and end times are not possible.

Set system ID

Each Meridian 1 system has a unique system ID number (SID) selected from 0000 to 9999. The 4-digit ID number can be printed or set by the following commands.

To print the current SID: TSID sid

To change the SID: SSID sid -- SID

System reports

To print the current report types: TOPS r r ...

To set one or more report types: SOPS r r ... -- R R ...<cr>

To clear one or more report types: COPS r r ... -- R R ...<cr>

Legend

R is traffic report type:

- 1 = networks
- 2 = service loops
- 3 = dial tone delay
- 4 = processor load
- 5 = selected terminals
- 7 = junctor group traffic
- 8 = CSL and ISDN/AP links
- 9 = D-channel
- 10 = ISDN GF Transport
- 11 = MISP and EIMC traffic
- 12 = MISP D-channel management
- 13 = MISP messaging
- 14 = ISDN BRI trunk DSL system report
- 15 = MPH traffic

Note 1: To use the print command enter a space (not a carriage return) after the customer number.

Note 2: If no reports are currently set, NIL is output by the system.

Customer reports

To print the current report types: `TOPC C r r ...`

To set one or more report types: `SOPC C r r ... -- R R<cr>`

To clear one or more report types: `COPC C r r ... -- R R<cr>`

Legend

C = customer number

R is traffic report type:

1 = networks

2 = trunks

3 = customer console measurements

4 = individual console measurement

5 = feature key usage

6 = Radio Paging

7 = Call Park

8 = messaging and auxiliary processor links

9 = Network Attendant Service

10 = ISPC links establishment

11 = useage of broadcasting routes

Note 1: To use the print command enter a space (not a carriage return) after the customer number.

Note 2: If no reports are currently set, NIL is output by the system. For report 5, see "Set customer for feature key usage measurement".

Network reports

To print the current report types: TOPN C r r ...

To set one or more report types: SOPN C r r ... -- R R<cr>

To clear one or more report types: COPN C r r ... -- R R<cr>

Legend

C = customer number

R is traffic report type:

1 = route list measurements

2 = network class of service measurements

3 = incoming trunk group measurements

Note 1: To use the print command enter a space (not a carriage return) after the customer number.

Note 2: If no reports are currently set, NIL is output by the system.

Set customer for feature key usage measurement

To print current customer being measured: TCFT c

To set the customer to be measured: SCFT c -- C

Note: Where C is the customer number. Only one customer can have feature measurement set at a time.

Stop printing of title, date and time

It is possible to suppress the printing of the title (TFS000), date and time in cases where traffic measurement is scheduled but no other data is printed. The command format is:

```
IDLT 0,1
```

0 = no title is printed unless further data is also printed

1 = the title is always printed

Set traffic measurement on selected terminals

These commands are used to print, set and clear the Individual Traffic Measurement (ITM) class of service for given terminal numbers for traffic report TFS005. Telephone sets, trunk and DTI channels can have this class of service. Terminals with ITM set are included in the groups for which Line Traffic Measurements are recorded.

Note: Do not use these commands on superloops or octal density cards (NT8D02, NT8D03, NT8D09, NT8D14, or NT8D16).

To print the current TNs with ITM set: TITM

Example

```
TITM
```

```
shelf 4 0 (all units on loop 4 shelf 0 have ITM set)
```

```
loop 5 (all units on loop 5 have ITM set)
```

```
tn 11 3 4 1 (unit on TN 11 3 4 1 has ITM set)
```

```
card 13 2 1 (all units on card 13 2 1 has ITM set)
```

```
chnl 34 18 (loop 34 channel 18 has ITM set)
```

To set ITM on terminals: SITM

Example

```
SITM (prints current settings)
shelf 4 1 (current settings)
loop 05 (all units on loop 5 have ITM set)
tn 11 3 4 1 (unit on TN 11 3 4 1 has ITM set)
card 13 2 1(all units on card 13 2 1 has ITM set)
chnl 34 18(only loop 34 channel 18 has ITM set)
-- 7 (set ITM on all units on this loop)
-- 6 1(set ITM on all units this shelf, or on channel 1)
-- 8 1 1(set ITM on all units on this card)
-- 8 1 1 1(set ITM on this unit)
-- 30 18(set ITM on this loop 30 channel 18)
-- <cr>(stop "--" prompt)
```

To clear line traffic TNs: CITM (the ITM class of service is removed from all units)

Example

```
CITM (print current settings)
shelf 4 1 (all units on loop 4 shelf 1 have ITM set)
loop 05 (all units on loop 5 have ITM set)
tn 11 3 4 1(unit on TN 11 3 4 1 has ITM set)
card 19 1 1(all units on card 13 2 1 has ITM set)
chnl 34 18 (only loop 34 channel 18 has ITM set)
-- 4 1(clear ITM on all units on this loop 4 shelf 1)
-- 5 (clear ITM on all units on this loop)
-- 11 3 4 1(clear ITM on this unit)
-- 19 1 1(clear ITM on all units on this card)
-- 34 18(clear ITM on this loop 34 channel 18)
-- <cr>(stop "--" prompt)
```

To clear line traffic TNs: CITM (the ITM class of service is removed from all units)

Set blocking probability for Line Load Control (LLC)

To print current LLC level and blocking probability: TLLC

To set blocking probability: SCTL X aaa

To activate Line Load Control at level X : SLLC X

Legend

x = F, S or T (for LLC level F, S, or T)

aaa = blocking probability in %

Set time and date

To print the current time and date:

TTAD day-of-week day month year hour minute second

Example

TTAD WED 24 11 1976 15 41 49

To set the time and date:

STAD DAY MONTH YEAR HOUR MINUTE SECOND

Example

STAD 24 11 1976 15 41 49

Note: Except for the year, the other entries in the time of day output are 2-digit numbers. The year may be any year from 1901 to 2099 inclusive. It may be input as a full 4-digit field or as a 2-digit short form. The 2-digit short form is assumed to be in the range 1976 to 2075 and the appropriate addition is made when calculating the day-of-week and leap years.

Set daily time adjustment

The time of day can be adjusted during the midnight routines to compensate for a fast or slow system clock.

To print the current adjustment: `TDTA X y`

To set the adjustment: `SDTA X y -- X Y`

Legend

x = 0 (negative increment) or 1 (positive increment)

y = 0-60 second adjustment in increments of 100 ms

Set and print Daylight Savings Time

The daylight savings time adjustment can be programmed to take place automatically. You can set the date to change to daylight savings, and to return to standard time. This information can be queried at any time.

The following commands are accepted by this program for this capability. The system clock **MUST ALREADY** be set for the daylight savings time to be updated. This information survives sysload.

- `FWTM` = Set the date and time for the clock to move forward.
- `BWTM` = Set the date and time for the clock to move backward.
- `SDST` = Enable or disable the automatic change.
- `TDST` = Query the change information.

To implement these commands, use the following.

- FWTM <month> <week> <day> <hour>
month = 1-(4)-12 [January-December]
week = (1)-5, L [1st-5th, L is the last week of the month]
day = (1)-7 [Sunday-Saturday]
hour = 1-(2)-22 [Midnight-11:00 pm]
- BWTM <month> <week> <day> <hour>
month = 1-(10)-12 [January-December]
week = (1)-5, L [1st-5th, L is the last week of the month]
day = (1)-7 [Sunday-Saturday]
hour = 1-(2)-22 [Midnight-11:00 pm]
- SDST ON, (OFF)
ON enables the automatic change capability
OFF disables the automatic change capability
- TDST <CR>

The output reflects the input format to indicate the change information.

Set thresholds

To print the current system thresholds: TTHS TH tv

To set the system thresholds: STHS TH tv -- TV

The system thresholds (TH) and range of values (TV) are:

- 1 = dial tone speed (range 0.00% to 99.9%)
- 2 = loop traffic (range 000 to 999 CCS)
- 3 = junctor group traffic (range 0000 to 9999 CCS)
- 4 = superloop traffic (range 0000 to 9999 CCS)

To print the current customer thresholds: TTHC C TH tv

To set the customer thresholds: `STHC C TH tv -- TV`

Legend

The thresholds (TC) and range of values (TV) for customer C are:

- 1 = incoming matching loss (TV range 00.0% to 99.9%)
- 2 = outgoing matching loss (TV range 00.0% to 99.9%)
- 3 = average Speed of Answer (TV range 00.0 to 99.9 seconds)
- 4 = percent All Trunks Busy (TV range 00.0% to 99.9%)
- 5 = percent OHQ Overflow (TV range 00.0% to 99.9%)

Perform threshold tests on last reports

To perform threshold tests on customer reports: `ITHC C TH`

Legend

C = customer number

TH is the threshold type:

- 1 = incoming matching loss
- 2 = outgoing matching loss
- 3 = average speed of answer
- 4 = percent all trunks busy
- 5 = percent OHQ overflow

To perform threshold tests on system reports: `ITHS TH`

Legend

TH is the threshold type:

- 1 = dial tone speed
- 2 = loop traffic
- 3 = junctor group traffic
- 4 = superloop traffic

Note: When a threshold test passes, OK is output.

Print last reports

The last traffic reports can be printed or tested against threshold values. Data accumulating for the next reports is not accessible.

To print one or more of the last customer reports: INVC C R R ...

Legend

C = customer number

R is traffic report type:

1 = networks

2 = trunks

3 = customer console measurements

4 = individual console measurement

5 = feature key usage

6 = Radio Paging

7 = Call Park

8 = messaging and auxiliary processor links

9 = Network Attendant Service

10 = ISPC links establishment

11 = useage of broadcasting routes

To print one or more of the last network reports: INVN C R R ...

Legend

C = customer number

R is traffic report type:

1 = route list measurements

2 = network class of service measurements

3 = incoming trunk group measurements

To print one or more of last system reports: INVS R R ...

Legend

R is traffic report type:

- 1 = networks (per loop)
- 2 = services
- 3 = dial tone delay
- 4 = processor load
- 5 = selected terminals
- 7 = junctor group traffic
- 8 = CSL and ISDN/AP links
- 9 = D-channel
- 10 = ISDN GF Transport
- 11 = MISP traffic
- 12 = MISP D-channel management
- 13 = MISP messaging
- 14 = ISDN BRI trunk DSL system report
- 15 = MPH traffic

Print alarm and exception filter summary

Alarms status summaries can be printed by this overlay. The alarms printed by this overlay are discussed in the *x11 Software Management NTP*.

Enter any of the following commands at the dot (.) prompt.

Command	Description	Release
ASUM	Print Alarm/Exception summary	alm_filter-19
ASUM A	Print all the alarms that have at least one occurrence	alm_filter-21
ASUM E	Print all the alarms that have escalated	alm_filter-21

LD 10: Analog (500/2500) Telephone Administration

This Overlay program allows data blocks for the 500/2500, DTMF type telephones and Displayphone 1000/220 to be created or modified.

When the Overlay is loaded the available system memory, disk records and system configuration limits are output in a header as follows:

```
>ld 10
```

```
PBX000
```

```
MEM AVAIL: (U/P): xxxxxx USED U P: xxxxxx xxxxxx TOT: xxxxxx
```

```
DISK RECS AVAIL: xxx
```

```
TNS AVAIL: xxx USED: xxx TOT: xxx
```

```
ACD AGENTS AVAIL: xxx USED: xxx TOT: xxx
```

```
ANALOGUE TELEPHONES AVAIL: xxx USED: xxx TOT: xxx
```

```
AST AVAIL: xxx USED: xxx TOT: xxx
```

```
ANALOGUE TELEPHONES AVAIL : xxxxxUSED: xx TOT: xxxxx
```

```
AST AVAIL: xxxxxUSED: XX TOT: xxxxx
```

```
WIRELESS TELEPHONES AVAIL: xxxxx USED: xx TOT: xxxxx
```

```
CLASS TELEPHONES AVAIL: xxxxx USED: xx TOT: xxxxx
```

```
DATA PORTS AVAIL: xxxxx USED: xx TOT: xxxxx
```

```
PHANTOM PORTS AVAIL: xxxxx USED: xx TOT: xxxxx
```

If an Incremental Software Management (ISM) limit is set to the maximum value 32767, then the information for that ISM will not be printed. This does not apply for the TNs ISM.

The Group Hunt/DN Access to SCL (PLDN) package 120 allows an asterisk (*) or double asterisk(**) as a valid input to a number of prompts. Usually the asterisk will be part of a dialed number. Without this package, for example, inputting one asterisk will cause the system to reissue the last prompt, and two asterisks will cause a restart of the Overlay at REQ.

Linked Overlay programs

Overlay programs 10, 11, 20 and 32 are linked thus eliminating the need to exit one Overlay and enter another. Once one of the above Overlays has been loaded it is possible to add, print and get the status of a set without having to exit one Overlay and load another.

The input processing has also been enhanced. Prompts ending with a colon (:) allow the user to enter either:

- 1 a question mark (?) followed by a carriage return (<cr>) to get a list of valid responses to that prompt or
- 2 an abbreviated response. The system then responds with the nearest match. If there is more than one possible match the system responds with SCH0099 and the input followed by a question mark and a list of possible responses. The user can then enter the valid response.

Fiber Network Fabric

The Fiber Network Fabric extends and enhances the 5-group network architecture to 8 non-blocking (inter-group) Network groups, with a resulting expansion in network capacity to 8k timeslots available for Intergroup traffic. This is achieved by using OC-12 SONET rings, and adding additional network and PE shelves, packs and cables and software changes to allow using the expanded network capacity. This expansion increases the number of available loops from 160 to 256. This applies to the Option 81C only.

Prompts and responses

Table of Contents

Section	Page
Prompts and responses	page 75
<i>Prompts and responses by task :</i>	
Add a telephone	page 78
Copy a set	page 81
Easy change	page 82
Remove a telephone	page 82
Move a telephone	page 83

Prompts and responses

Prompt	Response	Comment
REQ:	a...a	Request (REQ responses begin on page 108)
DMC	l s c	DECT Mobility Controller Location
TYPE:	a...a	Type of data block (TYPE responses begin on page 113)
MODL	1-127	Model number (Option 11C)
CFTN	l s c u	Copy From Terminal Number (l s c u ranges are defined on page 112)
SFMT	a...a	Select format for copy command (a...a = TNDN, TN, DN, or AUTO)
TN	l s c u	Terminal Number (l s c u ranges are defined on page 112)
DELETE_VMB	(YES) NO	Delete Voice Mailbox
ECHG	(NO) YES	Easy Change
- ITEM	aaaa yyy	Item (aaaa = Program mnemonic ; yyy = its new value)
TOTN	l s c u	To Terminal Number (l s c u ranges are defined on page 112)
CDEN	aa	Card Density (aa = SD, DD, 4D, or 8D)
DES	d...d	Office Data Administration System Station Designator
CUST	xx	Customer number associated with this set

LD 10

WRLS	(NO) YES	TN corresponds to a portable personal telephone
- WTYP	aaaa	Meridian Companion Mobility Option
- MWUN	(16) 32	Maximum number of Wireless Units
- DMC	l s c	DECT Mobility Controller Location
- INDX	0-509	DECT Mobility Controller index to map hand set to Virtual TN
- VSIT	(NO) YES	Visiting DECT set
- HMDN	x..x	Home Directory Number
DIG	0-2045 0-99	Dial Intercom Group number and Member number
DN	x..x yyyy	Directory Number and CLID table entry (Range is (0)-value entered for SIZE prompt in LD 15 minus one)
- MARP	(NO) YES	Multiple Appearance Redirection Prime
- - CPND_LANG	aaa	Calling Party Name Display Language (aa = (ROM) or KAT)
- - NAME	aaaa,bbbb	Calling Party Name Display Name
- - XPLN	xx	Expected name length
- DISPLAY_FMT	aaaa,bbbb	Display Format for Calling Party Name Display
- VMB	aaa	Voice Mailbox (aaa = NEW, CHG, or OUT)
- - VMB_COS	0-127	Voice Mailbox Class Of Service
- - SECOND_DN	x...x	Second DN sharing the Voice Mailbox
- - THIRD_DN	x...x	Third DN sharing the Voice Mailbox
- - KEEP_MSGS	(NO) YES	Preserve Meridian Mail messages and current password
- ANIE	(0)-n	Automatic Number Identification Entry
AST	(NO) YES	Associate Set assignment
IAPG	(0)-15	Meridian Link Unsolicited Status Message (USM) group
HUNT	x...x	Hunt DN of the next station in the Hunt chain
TGAR	xx	Trunk Group Access Restriction
LDN	a...a	Departmental Listed DN (a...a = (NO), 0-3, or 0-5)
NCOS	(0)-99	Network Class Of Service group number
RNPG	(0)-4095	Ringing Number Pickup Group
XLST	(0)-254	Pretranslation group with which this station is associated
SCPW	xxxx	Station Control Password
SGRP	(0)-999	Scheduled Access Restriction group number
CRCS	0-7	Code Restriction Block
ELKP	x...x	Electronic Lock Password
SFLT	a...a	Secretarial Filtering (a...a = (NO), BOSS, or SEC)
- SFDN	xxxx	Secretarial Forwarding DN of secretary set
CAC	(0)-10	Category Code for outgoing CNI of MFC trunks
CAC_CIS	0-(3)-9	CIS ANI Category Code

CAC_MFC	(0)-10	MFC CNI Category Code
CLS	a...a	Class of Service options (CLS responses begin on page 85)
MAUT	(NO) YES	Modify assigned authorization codes for this telephone
- SPWD	xxxx	Secure data password
- AUTH	n xxxx	Authorization code
RCO	(0)-2	Ringing cycle option for Call Forward No Answer
DCLP	0-159	Dealer Conference Loop
ICT	0-<NIPN>	Intercept Computer Terminal or printer number
LNRS	4-(16)-31	Last Number Redial Size
TEN	1-51	Tenant Number
OHID	(0)-9	Off-Hook Alarm Security DN Index defined in LD 15
HDID	(0)-9	Off-Hook Alarm Security Half Disconnect Index defined in LD 15
PLEV	0-(2)-7	Priority Level
SCI	(0)-7	Station Category Indication priority level
FCAR	(NO) YES	Forced Charge Account Restriction
MLWU_LANG	(0)-5	Language choice for Automatic Wake Up service
PLEV	0-(2)-7	Priority Level
SPID	x...x	Supervisor Position ID
PRI	(1)-48	Priority level for ACD Agent
AACD	(NO) YES	AST ACD telephone
ARTO	(0)-3	Alternate Redirection Time Option for call redirection
ADAY	(0)-3	Alternate Days as defined in LD 15
AHOL	(0)-3	Alternate Redirection Holiday as defined in LD 15
FTR	a...a x...x	Feature name and related data (FTR responses begin on page 99)
TIMP	xxx	Termination Impedance for XOPS unit (xxx = (600) or 900)
BIMP	a...a	Balance Impedance for XOPS unit (a...a = 600, 900, 3COM, or 3CM2)

LD 10

Prompts and responses by task

Add a telephone

Prompt	Response	Comment
REQ:	NEW	
TYPE:	a...a	Type of data block (TYPE responses begin on page 113)
MODL	1-127	Model number (Option 11C)
TN	l s c u	Terminal Number (l s c u ranges are defined for TN on page 112)
CDEN	aa	Card Density (aa = SD, DD, 4D, or 8D)
DES	d...d	Office Data Administration System Station Designator
CUST	xx	Customer number associated with this set
WRLS	(NO) YES	TN corresponds to a portable personal telephone
- WTYP	aaaa	Meridian Companion Mobility Option
- MWUN	(16) 32	Maximum number of Wireless Units
- DMC	l s c	DECT Mobility Controller Location
- INDX	0-509	DECT Mobility Controller index to map hand set to Virtual TN
- VSIT	(NO) YES	Visiting DECT set
- HMDN	x..x	Home Directory Number
DIG	0-2045 0-99	Dial Intercom Group number and Member number
DN	x..x yyyy	Directory Number and CLID table entry (Range is (0)-value entered for SIZE prompt in LD 15 minus one)
- MARP	(NO) YES	Multiple Appearance Redirection Prime
- CPND	aaa	Calling Party Name Display
-- CPND_LAN	aaa	Calling Party Name Display Language (aaa = (ROM) or KAT)
-- NAME	aaaa,bbbb	Calling Party Name Display Name
-- XPLN	xx	Expected name length
- DISPLAY_FMT	aaaa,bbbb	Display Format for Calling Party Name Display
- VMB	aaa	Voice Mailbox (aaa = NEW, CHG or OUT)

-- VMB_COS	0-127	Voice Mailbox Class Of Service
-- SECOND_DN	x...x	Second DN sharing the Voice Mailbox
-- THIRD_DN	x...x	Third DN sharing the Voice Mailbox
-- KEEP_MSGS	(NO) YES	Preserve Meridian Mail messages and current password
- ANIE	(0)-n	Automatic Number Identification Entry
AST	(NO) YES	Associate Set assignment
IAPG	(0)-15	Meridian Link Unsolicited Status Message (USM) group
HUNT	x...x	Hunt DN of the next station in the Hunt chain
TGAR	xx	Trunk Group Access Restriction
LDN	aaa	Departmental Listed DN (aaa = (NO), 0-3, or 0-5)
NCOS	(0)-99	Network Class of Service group number
RNPG	(0)-4095	Ringing Number Pickup Group
XLST	(0)-254	Pretranslation group with which this station is associated
SCPW	xxxx	Station Control Password
SGRP	(0)-999	Scheduled Access Restriction Group number
CRCS	0-7	Code Restriction Block
ELKP	x...x	Electronic Lock Password
SFLT	aaa	Secretarial Filtering (aaa = (NO), BOSS, or SEC)
- SFDN	xxxx	Secretarial Forwarding DN of secretary set
CAC	(0)-10	Category Code for outgoing CNI of MFC trunks
CAC_CIS	0-(3)-9	CIS ANI Category Code
CAC_MFC	(0)-10	MFC CNI Category Code
CLS	a...a	Class of Service options (CLS options begin on page 85)
MAUT	(NO) YES	Modify assigned authorization codes for this telephone
- SPWD	xxxx	Secure Data Password
- AUTH	n xxxx	Authorization code
RCO	(0)-2	Ringing Cycle Option for Call Forward No Answer
DCLP	0-159	Dealer Conference Loop
ICT	0-<NIPN>	Intercept Computer Terminal or printer number
LNRS	4-(16)-31	Last Number Redial Size
TEN	1-51	Tenant Number
OHID	(0)-9	Off-Hook Alarm Security DN Index defined in LD 15

LD 10

HDID	(0)-9	Off-Hook Alarm Security Half Disconnect Index defined in LD 15
SCI	(0)-7	Station Category Indication priority level
FCAR	(NO) YES	Forced Charge Account Restriction
MLWU_LANG	(0)-5	Language choice for Automatic Wake Up service
PLEV	0-(2)-7	Priority Level
SPID	x...x	Supervisor Position ID
PRI	(1)-48	Priority level for ACD Agent
AACD	(NO) YES	AST ACD telephone
ARTO	(0)-3	Alternate Redirection Time Option for call redirection
ADAY	(0)-3	Alternate Days as defined in LD 15
AHOL	(0)-3	Alternate Redirection Holiday as defined in LD 15
FTR	a...a x...x	Feature name and related data (FTR options begin on page 99)
TIMP	xxx	Termination Impedance for XOPS unit (xxx = (600) or 900)
BIMP	a...a	Balance Impedance for XOPS unit (a...a = 600, 900, 3COM, or 3CM2)

Copy a set

Prompt	Response	Comment
REQ:	CPY 1-32	Request = CPY x
TYPE:	a...a	Type of data block
CFTN	l s c u	Copy from Terminal Number (l s c u ranges are defined on page 112)
SFMT	aaaa	Select Format. You may respond to SFMT with: AUTO, TNDN, TN or DN. Subprompts follow each of these responses as follows:
	AUTO	The system provides the new TNs, DNs and ACD position ID for ACD telephones are provided by the system.
- TN	l s c u	TN of new set (l s c u ranges are defined on page 112)
- DN	x..x yyyy	Directory Number and CLID table entry (Range is (0)-value entered for SIZE prompt in LD 15 minus one)
- POS	xxxx	ACD position ID
	TNDN	Manual selection of TNs, DNs and ACD position IDs for ACD telephones. TN, DN and are prompted -n- times as defined by the CPY command.
- TN	l s c u	TN of new set (l s c u ranges are defined on page 112)
- DN	x..x yyyy	Directory Number and CLID table entry (Range is (0)-value entered for SIZE prompt in LD 15 minus one)
- POS	xxxx	ACD position ID
	TN	New DNs and ACD position IDs for ACD telephones are provided by the system. TN is prompted -n- times as defined in the CPY command.
- DN	x..x yyyy	Directory Number and CLID table entry (Range is (0)-value entered for SIZE prompt in LD 15 minus one)
- POS	xxxx	ACD position ID
- TN	l s c u	TN of new set (l s c u ranges are defined on page 112)
	DN	The new TNs are provided by the system. You are prompted for the starting TN and each DN and ACD position ID for ACD telephones. DN and/or POS are prompted n times as defined in the CPY command.
- TN	l s c u	TN of new set (l s c u ranges are defined on page 112)

LD 10

- DN	x..x yyyy	Directory Number and CLID table entry (Range is (0)-value entered for SIZE prompt in LD 15 minus one)
- POS	xxxx	ACD position ID

Easy change

Prompt	Response	Comment
REQ:	CHG	Request = CHG
TYPE:	a...a	Type of data block
MODL	1-127	Model number (Option 11C)
TN	l s c u	Terminal Number (l s c u ranges are defined on page 112)
ECHG	YES	Easy Change
ITEM	aaaa yyy	Item (aaaa = Program mnemonic ; yyy = its new value)

Remove a telephone

When removing more than one telephone at a time, you are prompted for the starting TN. The next consecutive assigned TNs are removed.

Prompt	Response	Comment
REQ:	OUT 1-32	Request = OUT x
TYPE:	a...a	Type of data block
TN	l s c u	Terminal Number (l s c u ranges are defined on page 112)
DELETE_VMB	(YES) NO	Delete Voice Mailbox

Move a telephone

Telephones with mixed directory numbers can only be moved to a TN on the same loop unless the prompt MLDN = YES in LD 17.

Prompt	Response	Comment
REQ:	MOV	Request = MOV
TYPE:	a...a	Type of data block
TN	l s c u	Terminal Number (l s c u ranges are defined on page 112)
TOTN	l s c u	To Terminal Number

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
AACD	(NO) YES	Associate set (AST) ACD telephone	ism-17
ADAY	(0)-3	Alternate Days as defined in LD 15 Prompted if CLS = RBDA	basic-24
AHOL	(0)-3	Alternate Redirection Holiday as defined in LD 15 Prompted if CLS = RBHA	basic-24
ANIE	(0)-n	ANI Entry: it is of (0)-N where N=S_SIZE in customer data block. If ANIE=0, no entry is associated with the set. The old mechanism will be used for building the ANI message. If ANIE is of 1-N: <ul style="list-style-type: none"> • If ANIC = YES for the outgoing CIS route where the call takes place, then the components of the ANI message are retrieved from the ANI entry in Customer Data Block, if configured. • If the given ANI Entry is not configured, or if ANIC = NO for the outgoing CIS route where the call takes place, then the old mechanism is used for building the ANI message. 	cist-24
ARTO	(0)-3	Alternate Redirection Time Option for call redirection, defined in the customer data block. Prompted if CLS = RTDA.	basic-22
AST	(NO) YES	Associate Set assignment For sets associated with ISDN Applications Protocol features.	iap3-12
AUTH	n xxxx	Authorization code. Where: <ul style="list-style-type: none"> • n = number (1-6) of assigned authorization code • xxxx = assigned authorization code (Any customer authorization code assigned in LD 88 is valid.) <p>AUTH is prompted when CLS = AUTR (Class of Service = Authorization code required).</p>	ssau-19

Prompt	Response	Comment	Pack/Rel
BIMP		Balance Impedance for Enhanced Off-Premise Station (XOPS) unit	basic-20
	600	600 ohms. This is the default, except when CLS = OPS.	
	900	900 ohms	
	3COM	3 component	
	3CM2	3 component 2. This is the default if CLS = OPS.	
CAC		Category code	mfc-14
	(0)-10	Category Code range for outgoing CNI of MFC trunks when Multifrequency Compelled Signaling (MFC) package 128 is equipped.	
	0-(3)-9	Category Code for CIS ANI when Commonwealth of Independent States (CIST) package 211 is equipped.	cist-21
CAC_CIS	0-(3)-9	CIS ANI Category Access Code	cist-24
CAC_MFC	(0)-10	MFC CNI Category Access Code	cist-24
CDEN	SD	Single Density Card	basic-7
	DD	Double Density Card	
	4D	Quadruple Density Card	
	8D	Octal Density Card	
		XOPS cards are configured as DD on superloops or Option 11C systems.	
		If REQ=NEW and the loop is a superloop, the default is 4D. If REQ=NEW and the XOPS card is to be configured on the loop, set CDEN to DD. If REQ=CHG, the card density is not changed.	
		Note: If a QPC192 (off-premises extension) card is configured in superloop, then the response for CDEN should be Quadruple Density.	
CFTN	l s c u	Copy From Terminal Number. Prompted if REQ = CPY.	basic-12
	c u	For Meridian: l s c u = loop, shelf, card, unit Copy From Terminal Number for Option 11C Use this TN as a template for the new sets. Associate set (AST) assignments are not copied to the new telephones.	
CLS		Class of Service options	basic-1
		The following CLS assignments determine the calling options and features available to an analog telephone. Defaults are shown in parentheses. Enter each non-default option required, separated by a space.	

LD 10

Prompt	Response	Comment	Pack/Rel
		Access Restrictions	basic-1
	(CTD)	Conditionally Toll Denied (default)	
	UNR	Unrestricted	
	CUN	Conditionally Unrestricted.	
	TLD	Toll Denied.	
	SRE	Semi-Restricted.	
	FRE	Fully Restricted.	
	FR1	Fully Restricted 1.	
	FR2	Fully Restricted 2.	
	(ABDD)	Abandoned call record and time to answer denied	fcdr-18
	ABDA	Abandoned call record and time to answer allowed	
	(AGTD)	ACD services for 500/2500 type telephone sets denied	phtn-20
	AGTA	ACD services for 500/2500 type telephone sets allowed	
		An AGTA entry will not be validated if you do not define FEAT = ACD in the same pass through this overlay.	
	(ALCA)	ALC loss plan class A port type	cdr-18
	ALCB	ALC loss plan class B port type	
	(ARHD)	Audible Reminder of Held Call Denied	basic-14
	ARHA	Audible Reminder of Held Call Allowed	
	(ASCD)	Alarm Security Denied	ohas-18
	ASCA	Alarm Security Allowed Mutually exclusive with Three-Party Service Allowed (TSA)	
	(AUTU)	Unrestricted Authcode	ssau-19
	AUTD	Denied Authcode	
	AUTR	Restricted Authcode	
		When the CLS is changed from AUTR to either AUTU or AUTD, all previous telephone authorization code information is removed. Must have Station Specific Authorization Codes (SSAU) package 229.	
	(BNRD)	Busy Number Redial Denied	ffc-21
	BNRA	Busy Number Redial Allowed Must have ADL configured and Flexible Feature Codes (FFC) package 139.	

Prompt	Response	Comment	Pack/Rel
(C6D) C6A		Six-Party Conference Denied Six-Party Conference Allowed C6A requires Transfer Allowed (XFA) Class of Service.	basic-10
(CCBD) CCBA		Collect Call Blocking Denied (permits a set to accept collect calls) Collect Call Blocking Allowed (prevents a set from accepting collect calls) Must have Collect Call Blocking (CCB) package 290.	ccb-21
(CCSD) CCSA		Controlled Class of Service Denied Controlled Class of Service Allowed CCSA is required for the Electronic Lock feature. See the Flexible Feature Codes section in the <i>X11 features and services</i> NTP. Must have Controlled Class of Service (CCOS) package 81.	phtn-20
(CDMD) CDMA		CDMD denies record generation CDMA allows external station activity records to be generated for the set	emct-20
(CFHD) CFHA		Call Forward/HUNT Override Denied Call Forward/HUNT Override Allowed	cfho-20
(CFTD) CFTA		Call Forward by Call Type Denied Call Forward by Call Type Allowed Call Forward by Call Type enhances Hunt and Call Forward No Answer. CFTA requires Hunting Allowed (HTA) and/or Call Forward Allowed (FNA) Class of Service.	opft-10

LD 10

Prompt	Response	Comment	Pack/Rel
(CFXD) CFXA	Call Forward All Calls to external DN Denied Call Forward All Calls to external DN Allowed	Examples of external DNs are: <ul style="list-style-type: none">• Route Access Code• ESN Access Code• CDP Distant Steering Code When Denied, a call can only be forwarded to the following internal DNs: <ul style="list-style-type: none">• Single or multi-line telephone• Attendant DN or CAS local attendant DN• Listed DN as defined in LD 15• Message center DN where MWC = YES	optf-19
(CLBD) CLBA	Deactivate Calling Party Number and Name per-line blocking Activate Calling Party Number and Name per-line blocking The user may still request CPP by dialing the CPP code.		cpp-21
(CLTD) CLTA	Network Call Trace from this telephone Denied Network Call Trace from this telephone Allowed		pra-17
(CNAD) CNAA	CLASS Calling Name Denied. CLASS Calling Name Multiple Data Format Allowed.	Note: CNUD/CNUD/CNUS/CNAD/CNAA are not a valid input for a Dial Intercom Group (DIG) set.	cname-23
(CNAD) CNAA	CLASS Calling Name Denied. CLASS Calling Name Multiple Data Format Allowed.	Note: CNUD/CNUD/CNUS/CNAD/CNAA are not a valid input for a Dial Intercom Group (DIG) set.	cname-23
(CNDD) CNDA	Call Number Display Denied Call Number Display Allowed	Allows user to see calling or called name associated with the number dialed if CPND is set up for the customer associated with the portable personal telephone. Allowed if WRLS = YES.	mcmo-20

Prompt	Response	Comment	Pack/Rel
	(CNID)	Call Number Information Denied	bgd-10
	CNIA	Call Number Information Allowed	
	(CNUD)	CLASS Calling Number Delivery Denied.	cnumb-23
	CNUA	CLASS Calling Number Multiple Data Format Allowed.	
	CNUS	CLASS Calling Number Single Data Format Allowed.	
	(CNUD)	CLASS Calling Number Delivery Denied.	cnumb-23
	CNUA	CLASS Calling Number Multiple Data Format Allowed.	
	CNUS	CLASS Calling Number Single Data Format Allowed.	
	(CPFA)	Forced Camp-On from another set Allowed	scmp-15
	CPFD	Forced Camp-On from another set Denied	
	(CPTA)	Forced Camp-On to another set Allowed	scmp-15
	CPTD	Forced Camp-On to another set Denied	
	(CRD)	Continuous Ring Denied	scmp-15
	CRA	Continuous Ring Allowed	
	(CWD)	Call Waiting Denied	basic-1
	CWA	Call Waiting Allowed The telephone should also have CLS = HTD (Hunting Denied) since hunting takes precedence.	
	(CWND)	Call Waiting Notification Denied	cwnt-19
	CWNA	Call Waiting Notification Allowed Must have Call Waiting Notification (CWNT) package 225.	
	(DDGA)	DN display on other set Allowed	dpd-21
	DDGD	DN display on other set Denied	
	(DNAA)	DN of set will be used in 3WT ANI messages.	cist-21
	DNAD	Outgoing 3WT route will be used as DN in 3WT ANI messages. Must have Commonwealth of Independent States (CIST) package 221.	
	(DNDY)	Diversion Notification with called party's number and name when available.	qsigss-23
	DNDN	Diversion Notification without called party's number and name.	
	(DNO3)	Diversion Notification Option with diverted-to party's number and name when available.	qsigss-23
	DNO1	Diversion Notification Option without notification.	

LD 10

Page 90 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	DNO2	Diversion Notification Option without diverted-to party's number and name.	
(DTN)		Digitone. DTN is used for 2500, UNITY and digitone telephones.	basic-20
DIP		Dial Pulse. DIP is used for 500, rotary and dial pulse telephones.	
MNL		Manual service. MNL is used for manual service to the attendant and Flexible Hot Line	
(DPUD)		DN Pickup Denied	dcp-12
DPUA		DN Pickup Allowed DN Pickup is not allowed on telephones in group zero (RNPG = 0). Must have Directed Call Pickup (DCP) package 115.	
(DSH)		Digital Short telephone set	ida-16
DLO		Digital Long telephone set Select DLO for line lengths of 2 km or 1.2 miles or more. Must have Integrated Digital Access (IDA) package 122.	
(EHTD)		Enhanced Hot Line Denied	phtn-20
EHTA		Enhanced Hot Line Allowed Cannot be assigned with LLC1, LLC2, LLC3, LNA, MNL or Permanent Hold feature.	
(EXR0)		Executive Distinctive Ringing Off 0	edrg-16
EXR1		Executive Distinctive Ringing On 1	
EXR2		Executive Distinctive Ringing On 2	
EXR3		Executive Distinctive Ringing On 3	
EXR4		Executive Distinctive Ringing On 4	
		The digit indicates which of the four distinctive ringing tones and cadences defined in LD 56 is to be used. Must have Executive Distinctive Ringing (EDRG) package 185.	
(FAXD)		Fax denied	euroisdn-22
FAXA		Fax allowed. ISDN call is generated with 3.1 KHz Bearer Capability. Set is a modem or a FAX machine.	

Prompt	Response	Comment	Pack/Rel
	(FBD) FBA	Call Forward Busy Denied Call Forward Busy Allowed	basic-1
		Call Forward Busy Allowed sends DID calls which encounter a busy condition to the attendant. Call Forward Busy should have Hunting and Call Waiting Denied or CLS = HTD and CWD, since Hunting and Call Waiting take precedence over FBA.	
	(FND) FNA	Call Forward No answer Denied Call Forward No answer Allowed	basic-1
	(FTTC) FTTR FTTU	Flexible Trunk to Trunk Connections Conditional allows trunk to trunk connections for supervised Conference. Flexible Trunk to Trunk Connections Restricted denies trunk to trunk connections for Transfer and unsupervised Conference. Flexible Trunk to Trunk Connections Unrestricted allows trunk to trunk connections for both Conference and Transfer.	basic-23
	(GPUD) GPAU	Group Pickup Denied Group Pickup Allowed Group Pickup is not allowed on telephones in group zero. Must have Directed Call Pickup (DCP) package 115.	dcp-12
	(HBTD) HBTA	Hunt By call Type Denied Hunt By call Type Allowed	basic-10
	(HSPD) HSPA	Hospitality Denied. HSPD is for administration sets. Hospitality Allowed. HSPA is for room sets. For HSPA, you must also enter CLS = CCSA and CLS = MRA. HSPA CLS cannot be entered for a set with transfer or conference capability. This feature is used for Hospitality Management.	hvs-16
	(HTD) HTA	Hunting Denied Hunting Allowed	basic-1
	(IAMD) IAMA	ICP Answering Machine Denied ICP Answering Machine Allowed This features allows a 2500 set to be a channel in the Intercept Computer Interface (ICP) Answering Machine.	icp-16

LD 10

Prompt	Response	Comment	Pack/Rel
	(ICDD) ICDA	Internal Call Detail Recording Denied Internal Call Detail Recording Allowed	icdr-10
	(IRGD) IRGA	Interrogation set Denied for intercept computer Interrogation set Allowed for intercept computer	icp-14
	(LDTD) LDTA	Line Disconnect Tone Denied Line Disconnect Tone Allowed	basic-17
	(LLCN) LLC1 LLC2 LLC3	Line Load Control off Line Load Control Class 1 Line Load Control Class 2 Line Load Control Class 3	llc-13
	(LND) LNA	Last Number Redial Denied Last Number Redial Allowed Must have OPT = LRA in LD 15	lnr-8
	(LPD) LPA	Message Waiting Lamp Denied Message Waiting Lamp Allowed If a modem is connected to a port on the message waiting line card, that port should be defined as LPD. With LPA the modem may be damaged by the message waiting lamp voltage 150 V.	phntn-20
	(LPR) HPR	Low Priority station High Priority station High Priority will place this set or trunk at the top of the dial tone queue.	povr-1
	(MBXD) MBXA	Multi-Party Operation (MPO) Blind Transfer Denied. When CLS = MBXD, blind transfers occur with mis-operation treatment. Multi-Party Operation (MPO) Blind Transfer Allowed. When CLS = MBXA, blind transfers occur without mis-operation treatment. To configure CLS = MBXA, CLS must first be defined as TSA or XFA. Multi-Party Operations (MPO) package 141 must be equipped to enter MBXD or MBXA.	mpo-21
	(MCRD) MCRA	Multiple Call Arrangement Denied Multiple Call Arrangement Allowed	basic-15

Prompt	Response	Comment	Pack/Rel
(MCTD) MCTA		Malicious Call Trace signal Denied Malicious Call Trace signal Allowed MCT is applied on a TN basis.	mct-10
(MIND) MINA		Message Interrupt Denied Message Interrupt Allowed	mr-15
(MRD) MRA		Message Registration Denied Message Registration Allowed	mr-10
(MWD) MWA		Message Waiting Denied Message Waiting Allowed	mwc-1
(NAMA) NAMD		Name display Allowed Name display Denied	dpd-21
(NRCD) NRCA		Night Restriction for forced Camp-On Denied Night Restriction for forced Camp-On Allowed If night restriction is allowed, then forced Camp-On for this set is allowed during night service only.	povr-16
(NROD) NROA		Night Restriction for Priority Override Denied Night Restriction for Priority Override Allowed If night restriction is allowed, then Priority Override for this set is allowed during night service only.	povr-16
(NRWD) NRWA		Night Restriction for Call Waiting Denied Night Restriction for Call Waiting Allowed If Night Restriction is allowed, then Call Waiting for this set is allowed during night service only.	povr-16
(OCBD) OCBA		Outgoing Call Barring Denied Outgoing Call Barring Allowed Must have FFC and NFCR packages.	ccb-21
(ONP) OPX		On-Premises extension Off-Premises extension Supported by QPC192 only.	basic-1
OPS ONS		Off-Premises Station (default if CDEN is DD) On-Premises Station (default for all others)	xpe-20
(OVDD) OVDA		Override Denied Override Allowed Must have Flexible Feature Codes (FFC) package 139	ffc-15

LD 10

Page 94 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	(PDN) LDN	Primary Directory Number Listed Directory Number The number used for the Calling Line Identification (CLID). 500/2500 sets have no display capability but prompt functions to transmit CLID information to sets with digit displays.	pra-12
	(PGND) PGNA	Deny PAGENET access Allow PAGENET access PGND/A allowed if PAGENET package 307 is equipped.	pagenet-22
	(PRSD) PRSA	Priority Call Pickup Station Denied Priority Call Pickup Station Allowed	poivr-15
	(PUD) PUA	Call Pickup Denied Call Pickup Allowed Default changes to PUA if Ringing Number Pickup Group (RNPG) is defined. Call Pickup is not allowed on telephones in group zero or RNPG = 0.	grp-1
	(RBDD) RBDA	Redirection By Day Denied Redirection By Day Allowed	basic-24
	(RBHD) RBHA	Redirection By Holiday Denied Redirection By Holiday Allowed	basic-24
	(RCC) UCC	Restricted from Receiving Collect Calls Unrestricted from Receiving Collect Calls	fca-10
	(RMMD) RMMA RMMO	Remote Monitoring of Messages Denied Remote Monitoring of Messages Allowed Allow Remote Monitoring of Messages and to Override, if it is being already monitored	vmba-24
	(RTDD) RTDA	Call Redirection by Time of day denied Call Redirection by Time of day allowed If CLS = RTDD, AFD/AHNT/AEFD/AEHT will be removed, and ARTO will be reset to zero.	basic-22
	(SFD) SFA	Second Level CFNA Denied Second Level CFNA Allowed SFA requires FNA Class of Service.	basic-10

Prompt	Response	Comment	Pack/Rel
(SHL) LOL		Short line Class of Service Long line Class of Service (default if CLS = OPS) Enter ALC Loss Plan Class of Service to be used for determining the Loss Plan Classification for this unit. If neither SHL or LOL is specified for a NEW unit, then SHL will be set as the default.	xops-20
(SMSD) SMSA		Standalone Mail Server Denied Standalone Mail Server Allowed	samm-20
(SMWD) SMWA		Extended Message Waiting Indication Denied. Extended Message Waiting Indication Allowed.	vmba-24
(SPKD) SPKA		Speaker Denied Speaker Allowed Must have On-Hold on Loudspeaker (OHOL) package 196.	ohol-15
(SWD) SWA		Station-to-Station Call Waiting Denied Station-to-Station Call Waiting Allowed Enhances Call Waiting Allowed. Must have CLS = CWA. Must also have CLS = HTD, because hunting takes precedence over Station-to-Station Call Waiting.	basic-8
(TEND) TENA		Tenant Service Denied Tenant Service Allowed	tens-7
(THFD) THFA		Centrex Trunk Switch Hook Flash on this set denied Centrex Trunk Switch Hook Flash on this set allowed	thf-14
TSA		Three-Party Service allowed TSA is mutually exclusive with ASCA and XFA. If TSA is requested and XFA is currently set, then XFA will be changed to XFD.	mpo-20
(TVD) TVA		Trunk Verification from station Denied Trunk Verification from station Allowed	tvs-10
(UDI) RDI		Station is not restricted from receiving DID calls Station is restricted from receiving DID calls	supp-10
(ULAD) ULAA		Set Based Administration User Access Denied Set Based Administration User Access Allowed	adminset-21

LD 10

Page 96 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	(USMD) USMA	Meridian 911 position Denied Meridian 911 position Allowed Must have Meridian 911 (M911) package 224	m911-19
	(USRD) USRA	User Selectable Call Redirection Denied User Selectable Call Redirection Allowed	uscr-19
	(WTA) WTD	Warning Tone Allowed Warning Tone Denied	basic-1
	(XFD) XFA XFR	Call Transfer Denied Call Transfer Allowed Call Transfer Restricted TSA is mutually exclusive with XFA. If TSA is requested and XFA is currently set, then XFA will be changed to XFD. The most recently entered CLS overwrites the prior CLS of the same category. Note that one can specify XFR instead of XFD.	basic-1
	(XHD) XHA	Exclusive Hold Denied Exclusive Hold Allowed	dhld-4
	(XMWD) XMWI	Extended Message Waiting indication Denied Extended Message Waiting indication Allowed	vmba-24
	(XRD) XRA	Ring Again Denied Ring Again Allowed Must have CLS= XFA. RANA may be activated if OPT = RNA in LD 15. When OPT = RND in LD 15, all sets with CLS = XRA will be able to activate only Ring Again Busy.	optf-1
CPND	NEW CHG OUT	Calling Party Name Display Add data block Change existing data block Remove existing data block Must have CPND data block defined in LD 95.	cpnd-19

Prompt	Response	Comment	Pack/Rel
CPND_LANG	(ROM) KAT	Calling Party Name Display Language Roman Katakana CPND_LANG applies when FTR = CPND. CPND_LANG appears only when Multi-Language I/O (MLIO) package 211 is equipped.	cpnd-19
CRCS	0-7	Code Restriction Block	nfc-2
CUST	xx	Customer number associated with this set as defined in LD 15.	cust-1
DCLP	0-159	Dealer Conference Loop DCLP input defines the conference loop assigned to the unit. The loop should be in the same group as the unit.	ohol-20
DELETE_VMB	(YES) NO	Delete Voice Mailbox Remove the Voice Mailbox from the Meridian 1 and Meridian Mail Remove the Voice Mailbox from the Meridian 1 Prompted if REQ = OUT and TN has an associated Voice Mailbox. Allowed if the DN is either a single appearance or a multiple appearance DN on a single TN.	vmba-19
DES	d...d	ODAS Station Designator Enter a 1-6 alphanumeric character representing an Office Data Administration System (ODAS) Station Designator.	odas-1

LD 10

Prompt	Response	Comment	Pack/Rel
DIG	0-2045 0-99	<p>Dial Intercom Group (DIG) number and Dial Intercom Member (DIM) numbers.</p> <p>The value entered for the member number cannot be equal to the SPRE code. In the case of double-digit values, the first digit cannot be the same as the SPRE code. For example, if SPRE = 1, the member number cannot be 10, 11...19.</p> <p>Single line telephones assigned as Dial Intercom sets can only make calls within their own dial intercom groups. No DN can be assigned to them.</p> <p>If any member in the group has a two digit member number, all members have a two digit number. The system enters leading zeros.</p> <p>Must have maximum number of Dial Intercom Groups (DGRP) defined in LD 15.</p>	di-1
DISPLAY_FMT	(FIRST, LAST) LAST, FIRST	<p>Display Format for CPND name</p> <p>May be input as FIRST To view names as John Doe</p> <p>May be input as Last To view names as Doe John</p>	cpnd-19
DMC	l s c c	<p>Digital Enhanced Cordless Telecommunications (DECT) Mobility Controller Location</p> <p>Option 11C format</p>	mc32-25
DN	x..x yyyy	<p>Directory Number (x..x) and CLID table entry (yyyy)</p> <p>The DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. DN is not prompted for Option 11C model sets or if DIG is defined.</p> <p>Range for CLID table entry is: [(0) - (value entered for SIZE prompt in LD 15 minus 1)]</p>	basic-1

Prompt	Response	Comment	Pack/Rel
		<p>If the new DN entered already exists, one of the following messages will be output when the TNB is updated:</p> <ul style="list-style-type: none"> • MIX (DN entered already appears on another set) • PVR (DN is a Private Line number) • HNT (DN exists and is defined as Hunting Allowed) • FNA (DN exists and has Forward No Answer) <p>Before the DN can be modified, the station DN must be removed from all Group Hunt lists in which it is a member.</p> <p>ISDN is not required for Calling Line Identification entry.</p>	
ECHG	(NO) YES	<p>Easy Change. Prompted when REQ = CHG.</p> <p>This allows change to any prompt in this program without toggling through all the prompts.</p>	basic-12
ELKP	x...x	<p>Electronic Lock Password</p> <p>Prompted with the Flexible Feature Codes (FFC) package 139. Password length is one to 15 digits, and is set in LD 15.</p>	ffc-14
FCAR	(NO) YES	<p>Forced Charge Account</p> <p>Must use Forced Charge Account</p> <p>Restrict from using Forced Charge Account</p> <p>Prompted if FCAF = YES in LD 15 and CLS = TLD, CUN or CTD. TLD is recommended.</p>	fca-1
FTR		<p>Enter the feature name and related data.</p> <p>Precede feature mnemonic with X to remove it from the allowed features for the telephone. Prompted with Special Service for 2500 sets (SS25) package 18.</p>	ss25-1
	ACD x...x yyyy	<p>The ACD DN and the ACD position (POS ID)</p> <p>The ACD queue must be set in LD 23. ACD can be up to 4 digits; up to 7 digits with Directory Number Expansion (DNXP) package 150.</p> <p>An ACD entry is only allowed if you have already defined CLS = AGTA in the same pass through this overlay.</p>	ism-16

LD 10

Prompt	Response	Comment	Pack/Rel
ADL nn x..x	Auto Dial	Auto Dial cannot be configured if Hot Line is defined. nn = number of digits, up to 31 maximum in Auto Dial DN x..x = Auto Dial DN Auto Dial is required for BNRA. Must have Flexible Feature Codes (FFC) package 139.	ffc-15
AEFD y...y	Alternate External Flexible Call Forward DN, up to 13 digits. Remove by setting CLS = RTDD or CFTD. Where yyyy = Alternate Redirection DN.		basic-22
AEHT y...y	Alternate External Hunt DN, up to 13 digits. Remove by setting CLS = RTDD or CFTD. Where yyyy = Alternate Redirection DN.		basic-22
AFD y...y	Alternate Flexible Call Forward DN, up to 13 digits. Remove by setting CLS = RTDD. Where yyyy = Alternate Redirection DN.		basic-22
AHNT y...y	Alternate Hunt DN, up to 13 digits. Remove by setting CLS = RTDD. Where yyyy = Alternate Redirection DN.		basic-22
CFW nn x...x	Call Forward all calls Valid entries are any integer in the range of (4)-31. Where: nn = maximum number of digits in the CFW DN; it must be large enough to hold the customer Reply DN. Where: x...x = Call Forward DN If the Enhanced System Access feature is configured, valid entries are 4, 8, 12, (16), 20, 24, 28, 31. Numbers between 4 and 31 are rounded up to the next valid number. If the Enhanced System Access feature is not configured you may input any integer in the range of (4)-23.		ss25-1

Prompt	Response	Comment	Pack/Rel
CPND		Call Party Name Display, name assignment allowed Response required only if Background Terminal or PMSI is used to configure names. Response is not required if CPND is programmed in LD 95.	cpnd-10
DCFW nn x...x		Default Call Forward Where: nn = maximum number of digits in the DCFW DN. Valid entries for nn are: 4, 8, 12, 16, 20, 24, 28, 31. Where: x...x = Default Call Forward DN.	supp-10
EFD x...x		External Flexible call forward DN (a Group Hunt pilot DN can be entered) This is the DN to which external no answer calls are routed when Class of Service is Call Forward by Call Type allowed (CLS = CFTA). Must also have CLS = FNA. EFD is only used if one of the following customer options are defined in LD 15: <ul style="list-style-type: none"> • FNAD = FDN • FNAT = FDN • FNAL = FDN Listed DNs, Departmental Listed DNs and prime DNs are accepted as valid input. EFDs can be up to 13 digits.	basic-10
EHT x...x		External Hunt DN This is the DN to which external busy calls Hunt when Class of Service is Call Forward by Call Type allowed (CLS = CFTA). Must also have CLS = HTA. Listed DNs, Departmental Listed DNs and prime DNs are accepted as valid input. A Group Hunt pilot DN can be entered with up to: <ul style="list-style-type: none"> • 4 digits without DNX package 150 • 7 digits with DNX package 150 • 13 digits for Network Call Redirection 	basic-10

LD 10

Prompt	Response	Comment	Pack/Rel
FAXS x...x		<p>Facsimile server and command sequence</p> <p>The command sequence includes the following:</p> <ul style="list-style-type: none">• Wx = waiting time of 0 to 9 seconds• Cxxx = control command digits• Oxxxx = originating or designated fax DN• D = the called fax DN <p>For HiMail server, if the designated fax DN is 1234: FTR FAXS W6 O1234 C#10* D C## W4, or FTR FAXS W6 O1234 C#20* D C## W4</p> <p>For Phi-Net server, if the designated fax DN is 1234: FTR FAXS W4 C30 O1234 C*0 D C#</p> <p>The facsimile server TNs must have Digitone (DTN) Class of Service and cannot have FNA, CWA, or FBA Class of Service, or FTR CFW feature.</p> <p>Use the HUNT feature to define the DN of the next port on the facsimile server.</p>	faxs-18
FDN x...x		<p>Flexible Call Forward No Answer</p> <p>The DN cannot be an LDN</p> <p>A Group Hunt pilot DN can be entered of up to:</p> <ul style="list-style-type: none">• 4 digits without DNXF package 150• 7 digits with DNXF package 150• 13 digits for Network Call Redirection <p>FDN is used for internal calls, if CLS is CFTA and FNA. FDN is used for all calls if CLS is CFTD and FNA. FDN requires that CLS = MWA or FNA.</p> <p>FDN is only used if one or more of the following customer options are defined in LD 15:</p> <ul style="list-style-type: none">• FNAD = FDN• FNAT = FDN• FNAL = FDN	basic-1
HOT		<p>Option 11C model set</p> <p>Direct entry for Hotline model set. Automatic termination DN is 8 digits.</p>	hot-16

Prompt	Response	Comment	Pack/Rel
HOT D nn x...x		<p>Direct entry for one way Enhanced Hot Line. Where:</p> <ul style="list-style-type: none"> • nn = up to 31 digits maximum in Target DN • x...x = Terminating DN <p>CLS = EHTA and DIP or DTN</p>	hot-10
HOT D nn x...x yyyy		<p>Direct entry for two way Enhanced Hot Line. Where:</p> <ul style="list-style-type: none"> • nn = up to 31 digits maximum in Target DN • x...x = Terminating DN • yyyy = optional two way Hot Line DN. This DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. <p>CLS = EHTA and DIP or DTN.</p>	hot-10
HOT nn x..x		<p>Flexible Hot Line. Where: nn = up to 31 digits maximum in Target DN and x..x = Terminating DN. Flexible Hot Line requires that CLS = MNL.</p>	
HOT L bbb		<p>One way list entry for Enhanced Hot Line Where: bbb = list entry position from Hot Line list in LD 18. The Hot Line list NCOS overrides the set NCOS.</p> <p>Enhanced Hot Line requires CLS = EHTA, LLCN, PHTD and DIP or DTN. To remove Hot Line DN, change CLS EHTA to EHTD.</p> <p>Hot Line DN's can be programmed with * as operands only if OPAO is enabled.</p>	hot-10
HOT L bbb x...x		<p>Two way list entry for Enhanced Hot Line. Where:</p> <ul style="list-style-type: none"> • bbb = list entry position • xxxx = optional two way Hot Line DN. This DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. <p>Enhanced Hot Line requires CLS = EHTA, LLCN, PHTD and DIP or DTN. To remove Hot Line DN, change CLS EHTA to EHTD.</p> <p>Hot Line DN's can be programmed with * as operands only if OPAO is enabled.</p>	hot-10

LD 10

Prompt	Response	Comment	Pack/Rel
	ICF x...x	Internal Call Forward and Forward DN length. Valid entries for x...x are: any integer in the range of (4)-31.	icf-19
	ISP 1-(75)-255	Enable hook flash disconnect supervision with flash timer in 10 milliseconds units. If the numeric parameter is not entered and the saved value is null, it is defaulted to 75 (750 ms). Otherwise, it does not change.	basic-21
	OSP (1)	Enable battery reversal answer and disconnect supervision for outgoing calls with absolute and assumed answer indication.	basic-21
	OSP 2	Enable battery reversal answer and disconnect supervision for outgoing calls with absolute answer indication only. If the numeric parameter is not entered and the saved value is null, it is defaulted to 1. Otherwise, it does not change.	
	PHD	Permanent Hold. Allowed with CLS = XFA.	basic-1
	RDL nn	Stored Number Redial Where: nn = DN length 4, 8, 12, (16), 24, 28, 31. Numbers between 5 and 30 are rounded up to the next valid number. Allowed with CLS = XFA.	snr-3
	SCC 0-8190	Speed Call Controller list number The speed call list must be defined in LD 18.	optf-1
	SCU 0-8190	Speed Call User list number The speed call list must be defined in LD 18.	optf-1
	SSU 0-4095	System Speed call User list number The speed call list must be defined in LD 18.	ssc-2
	XISP	Disable hook flash disconnect supervision	

Prompt	Response	Comment	Pack/Rel
	XOSP	Disable battery reversal answer and disconnect supervision	
HDID	(0)-9	Off-Hook Alarm Security Half Disconnect Index defined in LD 15	basic-24
HMDN	x..x	Home Directory Number Sets the DN as a valid MCDN network DN	msmn-32
HUNT	x...x	Hunt DN of the next station in the Hunt chain A Group Hunt pilot DN can be entered of up to: <ul style="list-style-type: none"> • 4 digits without DNX package 150 • 13 digits with DNX package 150 Precede with X to remove. With Call Forward and Hunt by Call Type, this is the Hunt DN for: <ul style="list-style-type: none"> • internal calls if CLS = CFTA, or • all busy calls if CLS = CFTD A A Control Directory Number (CDN) can be defined as a Hunt DN for both physical and phantom 500/2500 sets. When a CDN is configured in this way, a call which comes to a busy DN can be Hunting or Call Forward Busy to a CDN.	basic-1
IAPG	(0)-15	Meridian Link Unsolicited Status Message (USM) group Assign Associate (AST) telephones to an USM group defined in LD 15. These groups determine which status messages are sent to the host computer for an AST telephone. The default Group 0 sends no messages, while Group 1 sends all messages.	aml-16 aml-16
ICT	0-<NIPN>	Intercept Computer Terminal or Printer Number The Number of Intercept Positions (NIPN) is defined in LD 15.	icp-16
INDX	0-509	DECT Mobility Controller index Maps hand set to Virtual TN	mc32-25
ITEM	aaaa yyy	Change any prompt Respond with the desired program mnemonic (aaaa) and its new value (yyy). ITEM is reprompted until only a carriage return <cr> is entered.	basic-12

LD 10

Prompt	Response	Comment	Pack/Rel
KEEP_MSGS	(NO) YES	Keep Messages Preserve Meridian Mail messages and current password	vmba-19
LDN	(NO) 0-5	Departmental Listed Directory Number is not activated for this set Departmental Listed Directory Number (LDN) as defined in LD 15	dldn-5
LNRS	4-(16)-31	Last Number Redial Size Enter the maximum number of digits that can be stored. Valid entries are 4, 8, 12, (16), 24, 28, 31. Invalid entries are rounded up to the next valid entry. Prompted if CLS = LNA.	lnr-8
MARP	(NO) YES	Multiple Appearance Redirection Prime Use TN as the Multiple Appearance DN Redirection Prime. The MARP prompt, or MARP information, is given only when assigning a DN.	basic-18
MAUT	(NO) YES	Modify assigned authorization codes for this telephone Prompted with Station Specific Authorization Codes (SSAU) package 229 and CLS = AUTR.	ssau-19
MLWU_LANG		Language choice for Automatic Wake Up service. Prompted with Multi-Language Wake Up (MLWU) package 206. This entry defines the language presented for the Automatic Wake Up recorded announcement (RAN) for language 0 through 5 as follows:	mlwu-19
	(0)	See RAN1/RAN2 in LD 15	
	1	See LA11/LA12 in LD 15	
	2	See LA21/LA22 in LD 15	
	3	See LA31/LA32 in LD 15	
	4	See LA41/LA42 in LD 15	
	5	See LA51/LA52 in LD 15	
	X	Remove entry	
MODL	1-127	Model number Prompted for Option 11C model sets.	basic-16
MWUN	(16) 32	Maximum number of Wireless Units Standard line card = 16 Octal line card = 32	mc32-24

Prompt	Response	Comment	Pack/Rel
NAME	aaaa,bbbb	Calling Party Name Display Name First name comma Last name. For example, John Doe is entered as John,Doe. The first single comma is treated as the delimiter. Up to 27 characters (including the comma) may be input. The last occurrence of the first comma group serves as the name delimiter and is translated into a space between the first and last name.	cpnd-21
	aaaa	When the delimiter is omitted, the input is stored as a first name.	
	aaaa,	When the delimiter follows the input, the input is stored as the first name.	
	,bbbb	When the delimiter precedes the input, the input is stored as a last name.	
NCOS	(0)-3 (0)-7 (0)-15 (0)-99	Network Class of Service group number CDP BARS or NFCR NARS Network Class of Service group number	ncos-2
OHID	(0)-9	Off-Hook Alarm Security DN index Enter the index number 0-9 of the DN defined by LD 15 prompt ODNx. When a dial tone or interdigit timeout occurs on a set with Alarm Security Allowed (ASCA) Class of Service, the set is intercepted to a predefined DN.	basic-18
PLEV	0-(2)-7	Priority Level Where: 2 = set can override sets of level 1 and 2, and can be overridden by sets of level 2-7. Prompted with Priority Override/ Forced Camp-On (POVR) package 186 or Enhanced DPNSS1 Services (DPNSS_ES) package 288.	povr-20
POS	xxxx	ACD position ID. Prompted when SFMT = AUTO, TNDN, TN or DN.	basic-12
PRI	(1)-48 (1)-32	Priority level for ACD Agent. Valid range for systems 11C, 51C, 61C, and 81C. Valid range for all other system options.	pagt-16

LD 10

Prompt	Response	Comment	Pack/Rel
		The agent with the lowest number assigned has the highest priority and is the first ACD agent to receive calls. (Priority 1 has the highest priority level) PRI is prompted if Automatic Call Distribution, Priority Agent package 116 is equipped and CLS = AGTA.	
RCO	(0)-2	Ringling cycle option for Call Forward No Answer Prompted when CLS = FNA or MWA (or both).	uscr-19
REQ:		Request A colon following a prompt indicates enhanced processing. Enhanced processing allows a user to either view a list of possible responses or input an abbreviated response.	basic-1
	?	To get a list of valid responses	
	CHG	Change existing data block	
	CDCS	Convert Digital Communications Set	mc32-25
	CPY n	Copy or create 1 to 32 new station data block or blocks automatically from the specified station data block. Not valid for Option11 models.	
	END	Exit Overlay program	
	MOV	Move data block from one TN to another Not valid for Option 11C models.	
	NEW X	Add new data block or blocks Follow NEW with a value of 1-255 to create that number of consecutive telephone data block or blocks.	
	OUT X	Remove data block or blocks Follow OUT with a value of 1-255 to remove that number of consecutive telephones.	
		 This load is linked with LDs 11, 20 and 32. You may enter one of the responses listed below at the REQ: prompt. Then go to that Load and follow its Prompts and Responses sequence. See "Linked Overlay programs" on page 74 for further information.	

Prompt	Response	Comment	Pack/Rel
		LD 32:CDSP CMIN CONV CPWD DISC DISI DISL DISN DISS DISU DSCT DSPS DSXP ENCT ENLC ENLG ENLL ENLN ENLS ENLU ENPS ENXP IDC IDCS IDU LBSY LDIS LIDL LMNT PBXT SDLC STAT SUPL TRK XNTT XPCT XPEC	
		LD 20:LTN LUC LUDU LUU LUVU PRT	
		LD 11: CHG CPY MOV NEW OUT	
RNPG	(0)-255 (0)-4095	Ringing Number Pickup Group Ringing Number Pickup Group with Capacity Expansion To remove a telephone from a group, enter 0 in response to the RNPG prompt.	grp-1 grp-1
SCI	(0)-7	Station Category Indication priority level The Station Category number 1 to 7 must be defined as attendant console Incoming Call Indicator in LD 15 prompt ICI = CA1-CA7.	sci-7
SCPW	xxxx	Station Control Password The Station Control password is used for the Electronic Lock and Remote Call Forward features. This entry must equal the Station Control Password Length (SCPL) as defined in LD 15. Not prompted if SCPL = 0. See Flexible Feature Codes in the X11 features and services NTP.	ffc-15
SECOND_DN	x...x X	Second Directory Number sharing the Voice Mailbox. This number can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Enter the letter "X" to delete the second directory number	vmba-19
SFDN	xxxx	Secretarial Forwarding DN of secretary set SFDN is prompted if SFLT = BOSS.	ftcsf-15

LD 10

Prompt	Response	Comment	Pack/Rel
SFLT	(NO) BOSS SEC	Secretarial Filtering Assign no designation to telephone set Designate telephone set as a Boss set Designate telephone set as a Secretary set (NO), SEC and <cr> takes you to the next prompt. SFLT is prompted with Boss Secretary Filtering (FTCSF) package 198.	ftcsf-15
SFMT		Select Format for the copy command The DN may be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. The POS prompt appears if CLS = AGTA.	basic-12
	TNDN	Manual selection of TNs, DNs and ACD position IDs for ACD telephones. TN, DN and POS are prompted -n-times as defined by the CPY command.	
	TN	The new DNs and ACD position IDs for ACD telephones are provided by the system. You are prompted for the starting DN, ACD position ID and each TN. TN is prompted n times as defined in the CPY command.	
	DN	The new TNs are provided by the system. You are prompted for the starting TN and each DN and ACD position ID for ACD telephones. DN and/or POS are prompted n times as defined in the CPY command.	
	AUTO	The new TNs, DNs and ACD position ID for ACD telephones are provided by the system. You are prompted for the starting TN, DN and ACD position ID.	
SGRP	(0)-999	Scheduled Access Restriction Group Number Prompted with Schedule Access Restrictions (SAR) package 162. The group must be defined in LD 88.	sar-15
SPID	x...x	Supervisor Position ID This input assigns an agent to a supervisor when agent lamps are not assigned on the supervisor telephone. This number can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. However, ISDN applications can accept up to 13 digits. Prompted for ACD packages B, C and D when CLS = AGTA.	acdb-1

Prompt	Response	Comment	Pack/Rel
SPWD	xxxx	Secure Data Password Prompted if the password is defined in LD 15. If the password is not entered, the security codes will not print when PRT is requested.	ssau-19
TEN	1-51	Multi-Tenant Number Enter the Multi-Tenant number for this telephone. Prompted with Multiple-Tenant Service (TENS) package 86 and Tenant Service enabled.	tens-7
TGAR	0-(1)-31	Trunk Group Access Restriction The default of (1) automatically blocks direct access.	basic-1
THIRD_DN	x...x X	Third DN sharing the Voice Mailbox Third Directory Number. This number can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Deletes the third directory number	vmba-19
TIMP	(600) 900	Termination Impedance for XOPS unit 600 ohms 900 ohms The following combinations of TIMP/BIMP are valid: <ul style="list-style-type: none"> • 600/600 • 900/900 • 600/3COM • 900/3COM • 600/3CM2 • 900/3CM2 <p>These are equivalent to the TIMP/BIMP prompts in LD 14 for the EXUT card. TIMP is prompted if the specified TN will be configured on an XOPS card (DD card on a superloop). If the response to TIMP uniquely describes the TIMP/BIMP combination, then BIMP is not prompted.</p>	basic-20

LD 10

Prompt	Response	Comment	Pack/Rel
TN		Terminal Number The TN defines the location of the telephone set. TN appears when REQ = NEW, CHG, MOV or OUT.	basic-1
	I s c u	General TN format: I s c u = loop, shelf, card, unit Where I = <ul style="list-style-type: none">• 0-159: loops, superloops which are multiples of 4, starting with superloop 0• 0-255: loops, Option 81C with Fiber Network Fabric Where s = <ul style="list-style-type: none">• 0-3: PE shelves on loops defined TERM in LD 17• 0-1: PE shelves on loops defined TERD in LD 17 and superloops• 0: PE shelf on loops defined TERQ in LD 17 Where c = <ul style="list-style-type: none">• 1-10: PE cards of dual and enhanced loops• 0-15: IPE cards of superloops Where u = <ul style="list-style-type: none">• 0-3: single density units• 0-7: double density units• 0-15: quad density units	fnf-25
	c u	Option 11C format: c u = card, unit <ul style="list-style-type: none">• c = 1-50• u = 0-15	basic-16
TOTN		To Terminal Number. Prompted when REQ = MOV.	basic-1
	I s c u	General TN format: I s c u = loop, shelf, card, unit	
	c u	Option 11C TN format TOTN is not prompted for Option 11C model sets.	basic-16

Prompt	Response	Comment	Pack/Rel
TYPE:		Type of data block. A colon following a prompt indicates enhanced processing. Enhanced processing allows a user to either view a list of possible responses or input an abbreviated response. LD 10 is linked with LDs 11, 20 and 32. You may enter any of the response options listed for the TYPE prompt in LDs 11 and 20 or any of the commands listed in LD 32. See "Linked Overlay programs" on page 74 for further information.	basic-20
	?	To get a list of valid responses	
	500	500/2500 telephone set data block	
	500 M	500/2500 Model telephone set data block for Option 11C	
	CARD	500/2500 card block for Automatic Set Relocation (ASR)	
	CARDSLT	Single-line telephone line card	
	DCS	Digital Cordless Set	mc32-25
VMB	OOSLT	Out-of-Service Single Line Terminal unit	
	NEW	Add Voice Mailbox	vmba-19
	CHG	Change Voice Mailbox	
	OUT	Remove Voice Mailbox	
VMB_COS			vmba-19
	0-127	Voice Mailbox Class of Service	
VISIT	(NO) YES	Visiting DECT set Determines the difference between a local handset and a visiting handset.	msmn-32
WRLS	(NO) YES	TN corresponds to a portable personal telephone. Must have Meridian 1 Companion Option (MCMO) package 240. Note: Additional units configured on either the MCMO or DECT card requires identical entries for WRLS, WTYP and MWUN prompts.	mcmo-20
WTYP	(MCMO) DECT	Meridian Companion Mobility Option Digital Enhanced Cordless Telephone	mcmo-23

LD 10

Prompt	Response	Comment	Pack/Rel
XLST	(0)-254	Pretranslation group associated with this station If the user wants to use a 16-button DTMF ABCD set as a call forward destination station to deactivate the call forward all calls function, then XLST must be set equal to the table number defined in LD 18.	pxlt-10
XPLN	xx	Expected name length (this value should be set to a sufficient length for current and future names for that DN) When REQ=NEW, the XPLN prompt defines the maximum name length for that particular DN or DIG. The XPLN for a DN cannot be changed without deleting that name entry. XPLN must range from the actual length of the name string to MXLN, or defaults to DFLN.	cpnd-19

LD 11: Meridian Digital Telephone Administration

This Overlay program allows data blocks for SL-1, Displayphone 1200, M1000 series, M2000 series, and M3000 digital telephones to be created or modified.

When the Overlay is loaded the available system memory, disk records and system configuration limits are output in a header as follows:

```
>ld 11
```

```
SL1000
```

```
MEM AVAIL: (U/P): xxxxxx USED U P: xxxxxx xxxxxx TOT: xxxxxx
```

```
DISK RECS AVAIL: xxx
```

```
TNS AVAIL: xxx USED: xxx TOT: xxx
```

```
INTERNET TELEPHONES AVAIL: xxxx USED: xxx TOT: xxxx
```

```
ACD AGENTS AVAIL: xxx USED: xxx TOT: xxx
```

```
AST AVAIL: xxx USED: xxx TOT: xxx
```

```
DIGITAL TELEPHONES AVAIL: xxx USED: xxx TOT: xxx
```

```
WIRELESS TELEPHONES AVAIL: xxxx USED: xx TOT: xxxx
```

```
DATA PORTS AVAIL: xxxx USED: xx TOT: xxxx
```

If an Incremental Software Management (ISM) limit is set to the maximum value 32767, then the information for that ISM will not be printed. This does not apply for the TNs ISM.

The Group Hunt/DN Access to SCL (PLDN) package 120 allows an asterisk (*) or double asterisk (**) as a valid input to a number of prompts. Usually the asterisk will be part of a dialed number. Without this package, for example, inputting one asterisk will cause the system to reissue the last prompt, and two asterisks will cause a restart of the Overlay at REQ.

Overlay Linking

Overlay programs 10, 11, 20 and 32 are linked, thus eliminating the need to exit one Overlay and enter another. Once one of the above Overlays has been loaded it is possible to add, print and get the status of a set without having to exit one Overlay and load another.

The input processing has also been enhanced so that prompts ending with a colon (:) allow the user to enter either:

- 1 a question mark (?) followed by a carriage return (<cr>) to get a list of valid responses to that prompt, or
- 2 an abbreviated response, the system then responds with the nearest match. If there is more than one possible match the system responds with SCH0099 and the input followed by a question mark and a list of possible responses. The user can then enter the valid response.

Fiber Network Fabric

The Fiber Network Fabric extends and enhances the 5-group network architecture to 8 non-blocking (inter-group) Network groups, with a resulting expansion in network capacity to 8k timeslots available for Intergroup traffic. This is achieved by using OC-12 SONET rings, and adding additional network and PE shelves, packs and cables and software changes to allow using the expanded network capacity. This expansion increases the number of available loops from 160 to 256. This applies to the 81C only.

Prompts and responses

Table of Contents

Section	Page
Prompts and responses	page 118
<i>Prompts and responses by task :</i>	
Add a voice telephone	page 122
Add a data telephone	page 125
Copy a telephone	page 128
Easy change	page 129
Move a telephone	page 130
Remove a telephone	page 130

Prompts and responses

Prompt	Response	Comment
REQ:	a..a	Request
TYPE:	a..a	Type of data block (TYPE responses begin on page 184)
MODL	1-127	Model number (Option 11C)
CFTN	l s c u	Copy From Terminal Number (l s c u ranges are defined on page 183)
SFMT	a..a	Select Format (a..a = TNDN, TN, DN, or AUTO)
TN	l s c u	Terminal Number (l s c u ranges are defined on page 183)
DELETE_VMB	(YES) NO	Delete Voice Mailbox
ECHG	(NO) YES	Easy Change
- ITEM	aaaa yyy	Item (aaaa = Program mnemonic ; yyy = its new value)
TOTN	l s c u	To Terminal Number (l s c u ranges are defined on page 183)
CDEN	aa	Card Density (aa = SD, DD, 4D, or 8D)
DES	d...d	Office Data Administration System Station Designator
CTYP	(XDLC) EDLC	Card type
VISI	(NO) YES	Visiting
CUST	xx	Customer number associated with this set
MPHI	(NO) YES	Meridian Communications Unit used as MPH Interface
KLS	1-7	Number of Key/Lamp Strips
AOM	0-2	Number of Add-on Modules
KBA	(0)-2	Key-Based Accessory
DBA	(0)-1	Display-Based Accessory
PUTYP	(PRIVATE) IS-41	Portable Subscriber Type
DSPL	(0)-500	Length (in characters) of portable display
DSPT	(0)-2	Type of portable display
ESN	x..x	Electronic Serial Number (11 Hex digits)
ZONE	0-255	Zone Number which i2004 set belongs
FDN	x...x	Flexible CFNA DN
TGAR	xx	Trunk Group Access Restriction
LDN	aaa	Listed Directory Number Index as defined in LD 15
MIN	a..a	Mobile Identification Number (10 BCD digits)
NCOS	(0)-99	Network Class of Service group

RNPG	(0)-4095	Ringling Number Pickup Group
SSU	0-4095	System Speed call list number
XLST	(0)-7	Pretranslation group associated with this station
SCPW	xxxx	Station Control Password
SGRP	(0)-999	Scheduled Access Restriction Group number
ELKP	x...x	Electronic Lock Password (1-15 digits)
SFLT	a...a	Secretarial Filtering (a...a = (NO), BOSS, or SEC)
- SFDN	xxxx	Secretarial Forwarding DN of secretary set
CAC	(0)-10	Category Code for CNI of MFC trunks
CAC_CIS	0-(3)-9	CIS ANI category code
CAC_MFC	(0)-10	MFC CNI Category Code
CLS	a...a	Class of Service (CLS responses begin on page 134)
ARTO	(0)-3	Alternate Redirection Time Option for call redirection
ADAY	(0)-3	Alternate Days as defined in LD 15
AHOL	(0)-3	Alternate Redirection Holiday as defined in LD 15
AFD	x...x	Alternate Flexible Call Forward DN
AHNT	x...x	Alternate Hunt DN
AEFD	x...x	Alternate External Flexible Call Forward DN
AEHT	x...x	Alternate External Hunt DN
MAUT	(NO) YES	Modify authorization codes for this telephone
- SPWD	xxxx	Secure Data Password
- AUTH	n xxxx	Authorization code
RCO	(0)-2	Ringling Cycle Option for Call Forward No Answer
ICT	0-<NIPN>	Intercept Computer Terminal or printer number
EFD	x...x	Flexible CFNA DN for External calls
HUNT	x...x	Hunt DN of next station in hunt chain
EHT	x...x	External Hunt DN
LHK	(0)-69	Last Hunt Key number limit
LNRS	4-(16)-31	Last Number Redial Size
TEN	1-511	Tenant number
OHID	(0)-9	Off-Hook Alarm Security DN index for off-hook or interdigit timeout.
FSVC	(0)-9	Forced Out-of-Service Off-Hook Alarm Security DN index
SCI	(0)-7	Station Category Indication priority level
DTYP	aaa	Data Station Type
- TOV	(0)-(0)-23	Timeout Value for the data port

LD 11

- DTAO	a...a	Data Option (a...a = (MPDA) or MCA)
- PSEL	a...a	Protocol Selection (a...a = (DMDM) or TLNK)
- OPE	(NO) YES	Change data port Operating Parameters
- PSDS	(NO) YES	Public Switched Data Service option
- TRAN	a...a	Port Transmission type (a...a = (ASYN) or SYN)
- PAR	a...a	Parity (a...a = (SPACE), EVEN, ODD, or MARK)
- DTR	(OFF) ON	Data Terminal Ready settings
- DUP	aaaa	Duplex (aaaa = (FULL) or HALF)
- HOT	(OFF) ON	Hotline
- AUT	(ON) OFF	Auto-answer
- AUTB	(ON) OFF	Auto Baud rate
- BAUD	0-(7)-10	Baud rate index for the data port
- DCD	(ON) OFF	Dynamic Carrier Detect
- PRM	(ON) OFF	Prompt for terminal or host mode
- VLL	(OFF) ON	Virtual Leased Line
- MOD	(NO) YES	Mode
- INT	(OFF) ON	Meridian 1/SL-100 Interworking
- CLK	(OFF) ON	Clock
- DEM	aaa	Data Equipment Mode (aaa = (DCE) or DTE)
- DLNG	aaa	Language preference for DAC prompts (aaa = (ENG) or FRN)
- KBD	(ON) OFF	Keyboard Dialing
- V25	(NO) YES	V.25 bis option (synchronous mode only)
- HDLC	(NO) YES	High Level Data Link Control
- RTS	(ON) OFF	Request To Send (applies only to asynchronous mode)
- WIRE	(OFF) ON	Wire test
- PBDO	(OFF) ON	Port Busy when DTR off
- ADCP	(NO) YES	All-Digital Connection Prefix
- MPR	0-511	Modem Pool Route number
LPK	(0)-69	Line Preference Key
PLEV	0-(2)-7	Priority Level
FCAR	(NO) YES	Forced Charge Account Restricted
LTN	1-253 0-15	Logical TN and AUX link number
SPID	x...x	ACD Supervisor Position ID DN
AST	xx yy	Associate Set Assignment for Meridian Link applications
IAPG	(0)-15	Meridian Link Unsolicited Status Message (USM) group

ITNA	(NO) YES	Idle TN for the Third Party Application
DGRP	(1)-5	Device Group
PRI	(1)-32	Priority level for ACD agent
LANG	a	Language choice for Automatic Wakeup (AWU) calls (a = (0)-5 or X)
MLWU_LANG	a	Language choice for Automatic Wakeup (AWU) calls (a = (0)-5 or X)
DTMK	x...x	Data Mode Key number for a dynamic voice/data TN
DNDR	(0)-120	Directory Number Delayed Ringing in seconds
KEY	xx aaa yyyy zz..z	Telephone function key assignments (KEY responses begin on page 154)
- MARP	(NO) YES	Multiple Appearance Redirection Prime
- CPND	aaa	Calling Party Name Display
- - CPND_LANG	aaa	Calling Party Name Display Language (aaa = (ROM) or KAT)
- - NAME	aaaa,bbbb	Calling Party Name Display name
- - XPLN	xx	Expected Name Length
- - DISPLAY_FMT	aaaa,bbbb	Display Format for CPND name
- VMB	aaa	Voice Mailbox
- - VMB_COS	0-127	Voice Mailbox Class of Service
- - SECOND_DN	x...x	Second DN sharing the voice mailbox
- - THIRD_DN	x...x	Third DN sharing the voice mailbox
- - KEEP_MSGS	(NO) YES	Preserve Meridian Mail messages and current password
- ANIE	(0)-n	ANI entry
- DNRO	(0)-4	Distinctive Number Ringing index for Outgoing calls
- DNRI	(0)-4	Distinctive Number Ringing index for Incoming calls

Prompts and responses by task

Add a voice telephone

Prompt	Response	Comment
REQ:	NEW	Request = NEW
TYPE:	a...a	Type of data block (TYPE responses begin on page 184)
MODL	1-127	Model number (Option 11C)
TN	l s c u	Terminal Number (l s c u ranges are defined on page 183)
CDEN	aa	Card Density (aa = SD, DD, 4D, or 8D)
DES	d...d	Office Data Administration System Station Designator
CTYP	(XDLC) EDLC	Card type
VISI	(NO) YES	Visiting
CUST	xx	Customer number associated with this set
MPHI	(NO) YES	Meridian Communications Unit used as MPH interface
KLS	1-7	Number of Key/Lamp Strips
AOM	0-2	Number of Add-on Modules
KBA	(0)-2	Key-Based Accessory
PUTYP	(PRIVATE) IS-41	Portable Subscriber Type
DSPL	(0)-500	Length (in characters) of portable display
DSPT	(0)-2	Type of portable display
ESN	x...x	Electronic Serial Number (11 Hex digits)
ZONE	0-255	Zone Number which i2004 set belongs
FDN	x...x	Flexible CFNA DN
TGAR	xx	Trunk Group Access Restriction
LDN	aaa	Listed Directory Number Index as defined in LD 15
MIN	a..a	Mobile Identification Number (10 BCD digits)
NCOS	(0)-99	Network Class of Service group
RNPG	(0)-4095	Ringling Number Pickup Group

SSU	0-4095	System Speed Call list number
XLST	(0)-7	Pretranslation group associated with this station
SCPW	xxxx	Station Control Password
SGRP	(0)-999	Scheduled Access Restriction Group number
ELKP	x...x	Electronic Lock Password (1-15 digits)
SFLT	a...a	Secretarial Filtering (a...a = (NO), BOSS, or SEC)
- SFDN	xxxx	Secretarial Forwarding DN of secretary set
CAC	(0)-10	Category Code for CNI of MFC trunks
CAC_CIS	0-(3)-9	CIS ANI category code
CAC_MFC	(0)-10	MFC CNI Category Code
CLS	aaaa	Class of Service (CLS responses begin on page 134)
ARTO	(0)-3	Alternate Redirection Time Option for call redirection
ADAY	(0)-3	Alternate Days as defined in LD 15
AHOL	(0)-3	Alternate Redirection Holiday as defined in LD 15
AFD	x...x	Alternate Flexible Call Forward DN
AHNT	x...x	Alternate Hunt DN
AEFD	x...x	Alternate External Flexible Call Forward DN
AEHT	x...x	Alternate External Hunt DN
MAUT	(NO) YES	Modify authorization codes for this telephone
- SPWD	xxxx	Secure Data Password
- AUTH	n xxxx	Authorization code
RCO	(0)-2	RinginG Cycle Option for Call Forward No Answer
ICT	0-<NIPN>	Intercept Computer Terminal or printer number
EFD	x...x	Flexible CFNA DN for External calls
HUNT	x...x	Hunt DN of next station in hunt chain
EHT	x...x	External Hunt DN
LHK	(0)-69	Last Hunt Key number limit
LNRS	4-(16)-31	Last Number Redial Size
TEN	1-511	Tenant number
OHID	(0)-9	Off-Hook Alarm Security DN index for off-hook or interdigit timeout.
FSVC	(0)-9	Forced Out-of-Service Off-Hook Alarm Security DN index

LD 11

SCI	(0)-7	Station Category Indication priority level
LPK	(0)-69	Line Preference Key
PLEV	0-(2)-7	Priority Level
FCAR	(NO) YES	Forced Charge Account Restricted
LTN	1-253 0-15	Logical TN and AUX link number
SPID	x...x	ACD Supervisor Position ID DN
AST	xx yy	Associate Set Assignment for Meridian Link applications
IAPG	(0)-15	Meridian Link Unsolicited Status Message (USM) group
ITNA	(NO) YES	Idle TN for the Third Party Application
DGRP	(1)-5	Device Group
PRI	(1)-32	Priority level for ACD agent
LANG	(0)-5 X	Language choice for Automatic Wake Up (AWU) calls
MLWU_LANG	a	Language choice for Automatic Wakeup (AWU) calls (a = (0)-5 or X)
DTMK	x...x	Data Mode Key number for a dynamic voice/data TN
DNDR	(0)-120	Directory Number Delayed Ringing (in seconds)
KEY	xx aaa yyyy zz..z	Telephone function key assignments (KEY responses begin on page 154)
- MARP	(NO) YES	Multiple Appearance Redirection Prime
- CPND	aaa	Calling Party Name Display (aaa = NEW, CHG or OUT)
-- CPND_LANG	aaa	Calling Party Name Display Language (aaa = (ROM) or KAT)
-- NAME	aaaa,bbbb	Calling Party Name Display name
-- XPLN	xx	Expected Name Length
-- DISPLAY_FMT	aaaa,bbbb	Display Format for CPND name
- VMB	aaa	Voice Mailbox
-- VMB_COS	0-127	Voice Mailbox Class of Service
-- SECOND_DN	x...x	Second DN sharing the Voice Mailbox
-- THIRD_DN	x...x	Third DN sharing the Voice Mailbox
-- KEEP_MSGS	(NO) YES	Preserve Meridian Mail Messages and current password
- ANIE	(0)-n	ANI entry

- DNRO	(0)-4	Distinctive Number Ringing index for Outgoing calls
- DNRI	(0)-4	Distinctive Number Ringing index for Incoming calls

Add a data telephone

The following prompts apply to M2006, M2008, M2216, M2616 data ports (MPDA), DAC card units and Meridian Communications Adapter (MCA) only:

All operating parameter information is stored in the MPDA. If the hardware does not exist, the parameter information is lost. The hardware must be connected before configuring the operating parameters in this program. In the event that the parameters are lost, it is possible to enter the data through the data adapter. It is not necessary to re-enter the program.

Prompt	Response	Comment
REQ:	NEW	Request = NEW
TYPE:	a...a	Type of data block (TYPE responses begin on page 184)
TN	l s c u	Terminal Number (l s c u ranges are defined on page 183)
CDEN	aa	Card Density (aa = SD, DD, 4D, or 8D)
DES	d...d	Office Data Administration System Station Designator
CTYP	(XDLC) EDLC	Card type
CUST	xx	Customer number associated with this set
MPHI	(NO) YES	Meridian Communications Unit used as MPH interface
KLS	1-7	Number of Key/Lamp Strips
AOM	0-2	Number of Add-on Modules
KBA	(0)-2	Key-Based Accessory
ZONE	0-255	Zone Number which i2004 set belongs
FDN	x...x	Flexible CFNA DN
TGAR	xx	Trunk Group Access Restriction
LDN	aaa	Listed Directory Number Index as defined in LD 15
NCOS	(0)-99	Network Class of Service group
RNPG	(0)-4095	Ringin Number Pickup Group
SSU	0-4095	System Speed call list number
XLST	(0)-7	Pretranslation group associated with this station

LD 11

SCPW	xxxx	Station Control Password
SGRP	(0)-999	Scheduled Access Restriction Group number
ELKP	x...x	Electronic Lock Password (1-15 digits)
SFLT	a...a	Secretarial Filtering (a...a = (NO), BOSS, or SEC)
- SFDN	xxxx	Secretarial Forwarding DN of secretary set
CAC	(0)-10	Category Code for CNI of MFC trunks
CAC_CIS	0-(3)-9	CIS ANI category code
CAC_MFC	(0)-10	MFC CNI Category Code
CLS	aaaa	Class of Service (CLS responses begin on page 134)
ARTO	(0)-3	Alternate Redirection Time Option for call redirection
AFD	x...x	Alternate Flexible Call Forward DN
AHNT	x...x	Alternate Hunt DN
AEFD	x...x	Alternate External Flexible Call Forward DN
AEHT	x...x	Alternate External Hunt DN
MAUT	(NO) YES	Modify authorization codes for this telephone
- SPWD	xxxx	Secure Data Password
- AUTH	n xxxx	Authorization code
RCO	(0)-2	Ringin cycle option for Call Forward No Answer
ICT	0-<NIPN>	Intercept Computer Terminal or printer number
DTYP	aaa	Data station Type
TOV	(0)-3	Timeout Value for the Data port
DTAO	a...a	Data Option (a...a = (MPDA) or MCA)
PSEL	a...a	Protocol Selection (a...a = (DMDM) or TLNK)
OPE	(NO) YES	Change data port Operating Parameters
- PSDS	(NO) YES	Public Switched Data Service option
- TRAN	a...a	Port Transmission type (a...a = (ASYN) or SYN)
- PAR	a...a	Parity (a...a = (SPACE), EVEN, ODD, or MARK)
- DTR	(OFF) ON	Data Terminal Ready settings
- DUP	aaaa	Duplex (aaaa = (FULL) or HALF)
- HOT	(OFF) ON	Hotline
- AUT	(ON) OFF	Auto Answer
- AUTB	(ON) OFF	Auto Baud rate
- BAUD	0-(7)-10	Baud rate index for the data port
- DCD	(ON) OFF	Dynamic Carrier Detect
- PRM	(ON) OFF	Prompt for terminal or host mode
- VLL	(OFF) ON	Virtual Leased Line

- MOD	(NO) YES	Mode
- INT	(OFF) ON	Meridian 1/SL-100 Interworking
- CLK	(OFF) ON	Clock
- DEM	aaa	Data Equipment Mode (aaa = (DCE) or DTE)
- DLNG	aaa	Language preference for DAC prompts (aaa = (ENG) or FRN)
- KBD	(ON) OFF	Keyboard Dialing
- V25	(NO) YES	V.25 bis option, synchronous mode only
- HDLC	(NO) YES	High Level Data Link Control
- RTS	(ON) OFF	Request To Send (applies to asynchronous mode only)
EFD	x...x	Flexible CFNA DN for External calls
HUNT	x...x	Hunt DN of next station in hunt chain
EHT	x...x	External Hunt DN
LHK	(0)-69	Last Hunt Key number limit
LNRS	4-(16)-31	Last Number Redial Size
TEN	1-511	Tenant number
OHID	(0)-9	Off-Hook Alarm Security DN index for off-hook or interdigit timeout.
FSVC	(0)-9	Forced Out of Service Off-Hook Alarm Security DN index
SCI	(0)-7	Station Category Indication priority level
WIRE	(OFF) ON	Wire test
PBDO	(OFF) ON	Port Busy when DTR off
ADCP	(NO) YES	All-Digital Connection Prefix
MPR	0-511	Modem Pool Route number
LPK	(0)-69	Line Preference Key
PLEV	0-(2)-7	Priority Level
FCAR	(NO) YES	Forced Charge Account Restricted
LTN	1-253 0-15	Logical TN and AUX link number
SPID	x...x	ACD Supervisor Position ID DN
AST	xx yy	Associate Set Assignment for Meridian Link applications
IAPG	(0)-15	Meridian Link Unsolicited Status Message (USM) group
ITNA	(NO) YES	Idle TN for the Third Party Application
DGRP	(1)-5	Device Group
PRI	(1)-32	Priority level for ACD agent
LANG	(0)-5 X	Language choice for Automatic Wake Up (AWU) calls
MLWU_LANG	aaaa,bbbb	Language choice for Automatic Wake Up (AWU) calls
DTMK	x...x	Data Mode Key number for a dynamic voice/data TN

LD 11

DNDR	(0)-120	Directory Number Delayed Ringing (in seconds)
KEY	xx aaa yyyy zz..z	Telephone function key assignments (KEY responses begin on page 154)
- MARP	(NO) YES	Multiple Appearance Redirection Prime
- CPND	aaa	Calling Party Name Display
-- CPND_LANG	aaa	Calling Party Name Display Language
-- NAME	aaaa,bbbb	Calling Party Name Display name
-- XPLN	xx	Expected NameLength
-- DISPLAY_FMT	aaa	Display Format for CPND name
- VMB	aaa	Voice Mailbox
-- VMB_COS	0-127	Voice Mailbox Class of Service
-- SECOND_DN	x...x	Second DN sharing the Voice Mailbox
-- THIRD_DN	x...x	Third DN sharing the Voice Mailbox
-- KEEP_MSGS	(NO) YES	Preserve Meridian Mail Messages and current password

Copy a telephone

ACD supervisory telephones cannot be copied. Associate set (AST) assignments are not copied to the new telephones.

Prompt	Response	Comment
REQ:	CPY n	Request = CPY n
TYPE:	a...a	Type of data block (TYPE responses begin on page 184)
CFTN	l s c u	Copy From Terminal Number (l s c u ranges are defined on page 183)
SFMT	aaaa	Select Format. You may respond to SFMT with: AUTO, TNDN, TN or DN. Subprompts follow each of these responses as follows:
	AUTO	The system provides the new DNs or position IDs (for ACD telephones) and TNs by automatically selecting consecutive unused DNs or ACD position IDs and TNs.
- TN	l s c u	TN of new set (l s c u ranges are defined on page 183)
- DN	x...x yyyy	Directory Number and CLID table entry (Range is (0)-value entered for SIZE prompt in LD 15 minus one)
- POS	xxxx	ACD position ID of new set
	TNDN	Manual selection of DNs or ACD position IDs and TNs. You are prompted for the DN or ACD position ID and TN of each new telephone.
- TN	l s c u	TN of new set (l s c u ranges are defined on page 183)

- DN	x..x yyyy	Directory Number and CLID table entry (Range is (0)-value entered for SIZE prompt in LD 15 minus one)
- POS	xxxx	ACD Position ID of new set
	TN	The new DNs or ACD Position IDs are provided by the system. You are prompted for the starting DN or ACD Position ID and each TN. TN is prompted -n- times as defined in the CPY command.
- TN	l s c u	TN of new set (l s c u ranges are defined on page 183)
- DN	x..x yyyy	Directory Number and CLID table entry (Range is (0)-value entered for SIZE prompt in LD 15 minus one)
- POS	xxxx	ACD Position ID of new set
	DN	The new TNs are provided by the system. You are prompted for the starting TN and each DN or ACD Position ID.
- TN	l s c u	TN of new set (l s c u ranges are defined on page 183)
- DN	x..x yyyy	Directory Number and CLID table entry (Range is (0)-value entered for SIZE prompt in LD 15 minus one)
- POS	xxxx	ACD Position ID of new set

Easy change

Prompt	Response	Comment
REQ:	CHG	Request = CHG
TYPE:	a...a	Type of data block (TYPE responses begin on page 184)
TN	l s c u	Terminal Number (l s c u ranges are defined on page 183)
ECHG	YES	Easy Change
ITEM	aaaa bbbb	Item (aaaa = Program mnemonic ; yy = its new value)

Move a telephone

If moving a voice unit with an associated data unit , the data unit must also be moved. On NT8D02 Digital Line Card, both voice and data TNs can be moved by entering MOV PAIR in response to the REQ prompt.

Prompt	Response	Comment
REQ:	a...a	Request = MOV or MOV PAIR
TYPE:	a...a	Type of data block (TYPE responses begin on page 184)
TN	l s c u	Terminal Number (l s c u ranges are defined on page 183)
TOTN	l s c u	To Terminal Number

Remove a telephone

Before removing an ACD agent telephone, first remove the associated AGT key on the supervisor's telephone.

Prompt	Response	Comment
REQ:	OUT	Request = OUT
TYPE:	a...a	Type of data block (TYPE responses begin on page 184)
TN	l s c u	Terminal Number (l s c u ranges are defined on page 183)

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ADAY	(0)-3	Alternate Days as defined in LD 15 Prompted if CLS = RBDA	basic-24
ADCP	(NO) YES	All-Digital Connection Prefix. ADCP appears when DTYP = ODS or IOS. Do not enable All-Digital Connection Prefix Enable All-Digital Connection Prefix	adm-5
AEFD	x...x	Alternate External Flexible Call Forward DN. Remove by setting CLS = RTDD or CFTD. Alternate Redirection DN (up to 13 digits)	basic-22
AEHT	x...x	Alternate External Hunt DN. Remove by setting CLS = RTDD or CFTD. Alternate Redirection DN (up to 13 digits)	basic-22
AFD	x...x	Alternate Flexible Call Forward DN. Remove by setting CLS = RTDD. Alternate Redirection DN (up to 13 digits)	basic-22
AHNT	x...x	Alternate Hunt DN. Remove by setting CLS = RTDD. Alternate Redirection DN (up to 13 digits)	basic-22
AHOL	(0)-3	Alternate Redirection Holiday as defined in LD 15 Prompted if CLS = RBHA	basic-24
ANIE	(0)-n	ANI Entry: it is of (0)-N where N=S_SIZE in customer data block. If ANIE=0, no entry is associated with the set. The old mechanism will be used for building the ANI message. If ANIE is of 1-N: <ul style="list-style-type: none"> If ANIC = YES for the outgoing CIS route where the call takes place, then the components of the ANI message are retrieved from the ANI entry in Customer Data Block, if configured. If the given ANI Entry is not configured, or if ANIC = NO for the outgoing CIS route where the call takes place, then the old mechanism is used for building the ANI message. 	cist-24

LD 11

Prompt	Response	Comment	Pack/Rel
AOM	0-2	Number of Add-on Modules. AOM appears if TYPE = M2216 and M2616.	arie-14
ARTO	(0)-3	Alternate Redirection Time Option for call redirection, defined in the customer data block. ARTO is prompted if CLS = RTDA.	basic-22
AST	xx yy	Associate Set Assignment for Meridian Link applications A maximum of two DN keys, xx and yy, can be controlled by the host computer. Precede with X to delete.	iap3p-12
AUT	(ON) OFF	Enable Auto-Answer Do not enable Auto-Answer	arie-14
AUTB	(ON) OFF	Auto Baud rate enabled Auto Baud rate disabled AUTB is prompted if TYPE = R232 or R422 and if HOT = OFF.	dac-16
AUTH	n xxxx	Authorization code. Where: <ul style="list-style-type: none">• n = the number of the assigned authorization code (1-6)• xxxx = assigned authorization code (Any authorization code assigned in LD 88 is valid). AUTH appears when CLS = Authorization Code Required (AUTR).	ssau-19
BAUD		Baud rate	mcu/arie-19
	0-(7)-8	Baud rate index for the data port for data port on M2006, M2008, M2216 and M2616 telephones and Data Access Card.	
	0-(7)-10	Baud rate index for the data port for M3901, M3902, M3903, M3904, and M3905 telephones.	basic-24

Prompt	Response	Comment	Pack/Rel
		<p>The following values apply to:</p> <ul style="list-style-type: none"> • MPDA-1 • MCA with DTAO = MPDA and TRAN = ASYN • MCA with DTAO = MCA • TYPE = MCU and TRAN = ASYN <p>Where: 0 = 110, 1 = 150, 2 = 300, 3 = 600, 4 = 1200, 5 = 2400, 6 = 4800, (7) = 9600, 8 = 19,200, 9=28,800, and 10=33,600.</p>	
	0-(11)-12	<p>The following values apply to:</p> <ul style="list-style-type: none"> • MCA with DTAO = MPDA, with MCA hardware • TRAN = SYN, MCA with TRAN = SYN • MCA with DTAO = MCA <p>Where: 0 = 1200, 1 = 2400, 2 = 3600, 3 = 4800, 4 = 7200, 5 = 9600, 6 = 14,400, 7 = 19,200, 8 = 38,400, 9 = 40,800, 10 = 48,000, (11) = 56,000, and 12 = 64,000.</p> <p>With DAC, BAUD is only prompted if AUTB (Auto Baud Rate) = OFF.</p>	
CAC_CIS	0-(3)-9	CIS ANI Category Access Code	cist-24
CAC_MFC	(0)-10	MFC CNI Category Access Code	cist-24
CDEN	SD DD 4D 8D	<p>Single Card Density Double Card Density Quadruple Card Density Octal Card Density CDEN defaults to the density of the network loop. CDEN is not prompted for Option 11C model sets or superloops.</p>	basic-7

LD 11

Prompt	Response	Comment	Pack/Rel
CFTN	l s c u c u	<p>Copy From Terminal Number General TN format</p> <p>For Meridian: l s c u = loop, shelf, card, unit Option 11C format</p> <p>Use this TN as a template for new sets. ACD supervisory sets cannot be copied. Associate set (AST) assignments are not copied to the new sets.</p> <p>With the introduction of Phantom TNs, the system checks to be sure that TNs are not moved or copied from phantom TNs to non-Phantom TNs or visa versa.</p> <p>CFTN appears if REQ = CPY.</p>	basic-12
CLK	(OFF) ON	<p>Clock off Clock on</p>	arie-14
CLS		<p>Class of Service options</p> <p>The following CLS assignments determine the calling options and features available to the telephone. Defaults are shown in parentheses. Enter each non-default option required, separated by a space.</p> <p>Access Restrictions</p> <p>(CTD) Conditionally Toll Denied (default) UNR Unrestricted CUN Conditionally Unrestricted. TLD Toll Denied. SRE Semi-Restricted. FRE Fully Restricted. FR1 Fully Restricted 1. FR2 Fully Restricted 2.</p>	basic-1
	(AAD) AAA	<p>Automatic Answerback Denied Automatic Answerback Allowed</p> <p>Automatic Answerback can be used on M2112, M2317, M2616, M3000 and SL-1 telephones with handsfree capability. A special hardware kit is required for SL-1 sets and Companion 4 speakerphones.</p> <p>Automatic Answerback must have CLS = HFA for M2616 telephones. CLS AAA or AAK keys are not allowed for M2317 TNs.</p>	aab-10

Prompt	Response	Comment	Pack/Rel
(ABDD)		Abandoned call record and time to answer Denied	fcd-18
ABDA		Abandoned call record and time to answer Allowed	
		Digit Display	ddsp-1
ADD		Automatic Digit Display, default for M2008, M2216, M2317, M2616, M3000, M3902, M3903, M3904, and M3905	
DDS		Delay Display, display activates after call is answered	
NDD		No Digit Display, default for SL-1, M2006, M2009, M2112, M2018	
TDD		Tandem Digit Display. Automatic set display feature, TDD Class of Service is applicable to all Meridian 1 proprietary sets except for the M2006 which does not have display capability. Note: Manufacturer discontinued sets, such as the M2317 and the SL1, can be configured with TDD Class of Service however, may not have full functionality of the Automatic Set Display feature.	
(AGN)		ACD Agent	
SPV		ACD Supervisor	
(AGRD)		Agent Greeting Denied	fxs-25
AGRA		Agent Greeting Allowed	
(AHD)		Automatic Hold Denied	supp-10
AHA		Automatic Hold Allowed	
(ARHD)		Audible Reminder of Held Call Denied	basic-14
ARHA		Audible Reminder of Held Call Allowed	
(ASCD)		Alarm Security Denied	ohas-18
ASCA		Alarm Security Allowed	
(AUTU)		Unrestricted Authorization code Class of Service	ssau-19
AUTD		Denied Authorization code Class of Service	
AUTR		Restricted Authorization code Class of Service When the CLS is changed from AUTR to AUTU or AUTD, all previous telephone authorization code information is removed. This Class of Service is valid only when Station Specific Authorization Codes (SSAU) package 229 is equipped.	
(BFED)		Boss Secretary Feature Enhancement Denied	ffcsf-24

LD 11

Page 136 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	BFEA (BUZZ) RNGI RNGB	Boss Secretary Feature Enhancement Allowed Buzz Apply ringing when idle but off hook Apply ringing when idle but off hook or busy on the other line	basic-24
	(CCBD)	Collect Call Blocking Denied (permits a set to accept collect calls)	ccb-21
	CCBA	Collect Call Blocking Allowed (prevents a set from accepting collect calls Collect Call Blocking (CCB) package 290 is required.	
	(CCSD) CCSA	Controlled Class of Service Denied Controlled Class of Service Allowed CCSA is required for the Electronic Lock feature. Must have Controlled Class of Service (CCOS) package 81.	ccos-7
	(CDCA) CDCD	Conferee Display Count Allowed. Conferee Display Count Denied.	basic-23
	(CDMD)	CDMD denies external station activity records to be generated for the set	emct-20
	CDMA	CDMA allows external station activity records to be generated for the set	
	(CFHD) CFHA	Call Forward Hunt Override Denied Call Forward Hunt Override Allowed	cfho-20
	(CFTD) CFTA	Call Forward by Call Type Denied/Allowed If response is CFTA, you must also designate HTA, FNA or both.	optf-10

Prompt	Response	Comment	Pack/Rel
(CFXD) CFXA		<p>Call Forward All Calls to External DN Denied Call Forward All Calls to External DN Allowed Examples of external DNs are:</p> <ul style="list-style-type: none"> • Route Access Code • ESN Access Code • CDP Distant Steering Code <p>When denied, a call can only be forwarded to the following internal DNs:</p> <ul style="list-style-type: none"> • Single or multi-line telephone • Attendant DN or CAS local attendant DN • Listed DN as defined in LD 15 • Message Center DN where MWC = YES 	optf-19
(CLBD) CLBA		<p>Deactivate Calling Party Number and Name per-line blocking Activate Calling Party Number and Name per-line blocking The user may still request CPP by dialing the CPP code.</p>	cpp-21
(CLTD) CLTA		<p>Network Call Trace from this telephone Denied Network Call Trace from this telephone Allowed</p>	pra-17
(CMSD) CMSA		<p>Command and Status link Denied Command and Status link Allowed CMSA is not supported by M2009, M2018, M2112, M2317, and M3000.</p>	csi-8
(CNDD) CNDA		<p>Call Party Name Display Denied Call Party Name Display Allowed CNDA allows user names to be displayed on the telephone's digit display.</p>	cpnd-10
(CNID) CNIA		<p>Call Number Information Denied Call Number Information Allowed</p>	bgd-10
(CNTD) CNTA		<p>Network ACD Countdown Denied Network ACD Countdown Allowed Only allowed on ACD agent telephones.</p>	nacd-15
(CPFA) CPFD		<p>Forced Camp-On from another set Allowed Forced Camp-On from another set Denied</p>	scmp-15

LD 11

Page 138 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
(CPTA)		Forced Camp-On to another set Allowed. CPTA is the default for VCE TNs.	scmp-15
CPTD		Forced Camp-On to another set Denied	
(CRPD)		Corporate Directory Denied	arie-25
CRPA		Corporate Directory Allowed Only applies for M3903 and M3904 units.	
(DAPA)		Display Access Prefix Allowed	isdn-24
DAPD		Display Access Prefix Denied	
(DDGA)		DN Display on other set Allowed	dpd-21
DDGD		DN Display on other set Denied	
(DDV)		Data Port Verification Denied	amp-5
ADV		Data Port Verification Allowed	
(DELD)		Dealer Denied	ohol-20
DELA		Dealer Allowed Must have On-Hold On Loudspeaker (OHOL) package 196.	
(DNAA)		DN of the key that makes the call used in ANI messages.	cist-21
DNAD		Outgoing CDTI2/CSDTI2 route ANDN used as DN in ANI messages Must have Commonwealth of Independent States Trunk Interface (CIST) package 221.	
(DNDD)		Dialed Name Display Denied	cpnd-13
DNDA		Dialed Name Display Allowed DNDA allows the display of the originally dialed DN's names on redirected calls. Name display applies to M2317, M3000 or Meridian Modular telephones with displays. Must have Calling Party Name Display (CPND) package 95. Must also have CLS = CNDA. CLS is not DTA.	
(DNDY)		Diversion Notification with called party's number and name when available.	qsig ss-23
DNDN		Diversion Notification without called party's number and name notification.	

Prompt	Response	Comment	Pack/Rel
(DNO3)		Diversion Notification Option with diverted-to party's number and name when available.	qsig ss-23
DNO1		Diversion Notification Option without notification.	
DNO2		Diversion Notification Option without diverted-to party's number and name.	
(DOS)		ACD Supervisory Set Denied observation of other supervisory sets	acdb-1
AOS		ACD Supervisory Set Allowed observation of other supervisory sets Must have CLS = SPV.	
(DPUD)		DN Pickup Denied	dcp-12
DPUA		DN Pickup Allowed	
(DRDD)		Distinctive Ringing by Directory Number Denied.	edrg-24
DRDA		Distinctive Ringing by Directory Number Allowed.	
		Digital telephone distinctive ringing	drng-7
(DRG1)		High fast tone, frequency 667 Hz/500 Hz, warble rate 10.4 Hz	
DRG2		High slow tone, frequency 667 Hz/ 500 Hz, warble rate 2.6 Hz	
DRG3		Low fast tone, frequency 333 Hz/ 250 Hz, warble rate 10.4 Hz	
DRG4		Low slow tone, frequency 333 Hz/ 250 Hz, warble rate 2.6 Hz	
		DRG3 and DRG4 distinctive ringing for M2006 and M2008 telephones are different.	
DRG3		Low fast tone, frequency 1600/ 2000 Hz, warble rate 10.0 Hz	
DRG4		Low slow tone, frequency 1600/ 2000 Hz, warble rate 2.5 Hz	
(DSX)		Data Service access or IS Server TN Denied	cls-8
DSI		Data Service access or IS Server TN Allowed CLS is automatically set to DTA.	
(EXR0)		Executive Distinctive Ringing Off (0)	edrg-16
EXR1		Executive Distinctive Ringing Tone 1	
EXR2		Executive Distinctive Ringing Tone 2	
EXR3		Executive Distinctive Ringing Tone 3	
EXR4		Executive Distinctive Ringing Tone 4	

LD 11

Prompt	Response	Comment	Pack/Rel
		<p>The digit indicates which of the four distinctive ringing tones and cadences defined in LD 56 is to be used. Executive Distinctive Ringing (EDRG) package 185 is required.</p> <p>Must have (DRDD) class of service</p>	
(FBD) FBA	Call Forward Busy Denied Call Forward Busy Allowed		basic-1
		<p>This feature sends DID calls encountering a busy condition to the attendant. Call Forward Busy should have Hunting and Call Waiting denied, CLS = HTD and CWD, since Hunting and Call Waiting take precedence over FBA.</p>	
(FICD) FICA	Forward Intercom Calls Denied Forward Intercom Calls Allowed		basic-21
(FITD) FITA	Flexible Incoming Tones Denied Flexible Incoming Tones Allowed	<p>For SL-1 sets OPT must be SBA in LD 15. For Digital sets OPT must be DBA in LD 15.</p>	basic-14
(FLXD) FLXA	Flexible voice/data Denied Flexible voice/data Allowed	<p>FLXA is only allowed for Aries sets.</p> <p>By entering FLXA, you may configure dynamic voice/data TNs by assigning VCE to the upper TN (unit 16-31) and DTA to the lower TN (unit 0-15). You also have the option of designating a SCR key as DTM (data mode).</p> <p>Warning: If connecting the Aries set only to the TCM loop, this option should not be specified. External equipment which can use this capability should be connected.</p> <p>Warning: When changing from CLS DTA to CLS VCE, CLS WTA should also be assigned to avoid conflict with CLS CPTA. CLS CPTA is the default for VCE TNs.</p>	basic-22
(FND) FNA	Call Forward No Answer Denied Call Forward No Answer Allowed		basic-1

Prompt	Response	Comment	Pack/Rel
	(FRN) ENG	French language display English language display For M2317 alphanumeric display sets.	dlt2-12
	(FTTC) FTTR FTTU	Flexible Trunk to Trunk Connections Conditional allows trunk to trunk connections for supervised Conference. Flexible Trunk to Trunk Connections Restricted denies trunk to trunk connections for Transfer and unsupervised Conference. Flexible Trunk to Trunk Connections Unrestricted allows trunk to trunk connections for both Conference and Transfer.	basic-23
	FXSP	Flexible Services Port	fxs-25
	(GPUD) GPUA	Group Pickup Denied Group Pickup Allowed Group Pickup is not allowed on telephones in group zero, RNPG = 0.	dcp-12
	(GRLD) GRLA	Group Listening Denied Group Listening Allowed For M3902, M3903, M3904 Taurus sets.	basic-24
	(HBTD) HBTA	Hunt By Call Type Denied Hunt By Call Type Allowed	basic-10
	(HFD) HFA	Digital Telephone Handsfree Denied Digital Telephone Handsfree Allowed Only available for M2616 telephones. Handsfree capability on all other telephones is a function of the hardware and does not require HFA Class of Service in order to operate.	arie-14
	(HSPD) HSPA	Hospitality Denied, used for Hospitality Management HSPD is for administration sets. Hospitality Allowed, used for Hospitality Management HSPA is for room sets. For HSPA, you must also enter CLS = CCSA and CLS = MRA. HSPA CLS cannot be entered for a set with transfer or conference capability. Prime DN must be single appearance, single call ringing or non-ringing.	hvs-16
	(HSTD) HSTA	Host Terminal Denied Host Terminal Allowed	arie-25

LD 11

Page 142 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	(HTD) HTA	Hunting Denied Hunting Allowed	basic-1
	(ICDD) ICDA	Internal Call Detail Recording Denied Internal Call Detail Recording Allowed	icdr-10
	(IMD) IMA	Integrated Messaging Service Attendant Denied Integrated Messaging Service Attendant Allowed	ims-2
	(IPND) IPNA	Intercept Position Denied Intercept Position Allowed	icp-10
	(IRD) IRA	Incoming Ringing Line Preference Denied Incoming Ringing Line Preference Allowed	lsel-4
	(LLCN) LLC1 LLC2 LLC3	Line Load Control off Class 1 Class 2 Class 3	llc-10
	(LMPN) LMPX	Red LED on Meridian Modular Telephone reflects the status of the mailbox associated with the PDN Red LED on Meridian Modular Telephone reflects the status of the mailbox associated with the PDN and non-PDNs	vmba-24
	(LND) LNA	Last Number Redial Denied Last Number Redial Allowed Must have OPT = LRA in LD 15.	lnr-8
	(LPR) HPR	Low Priority Station High Priority Station High Priority will place this set or trunk at the top of the dial tone queue.	povr-16
	(LVXD) LVXA	LOGIVOX Class of Service Denied LOGIVOX Class of Service Allowed	supp-10
	(MCTD) MCTA	Malicious Call Trace Denied Malicious Call Trace Allowed The MCT key must be removed before changing MCTA to MCTD. MCT is applied on a TN basis.	mct-10
	(MIND) MINA	Message Interrupt Denied Message Interrupt Allowed	mr-15

Prompt	Response	Comment	Pack/Rel
	(MMD) MMA	Multimedia (Denied) Multimedia Allowed	ngen-24
	(MOAD) MOAA	Mute on Answer Denied Mute on Answer Allowed	fxs-25
	(MRD) MRA	Message Registration Denied Message Registration Allowed	mr-10
	(MSID) MSIA	Make Set Busy Improvement Denied Make Set Busy Improvement Allowed	msb-24
	(MTD) MTA	Maintenance Telephone Denied Maintenance Telephone Allowed	basic-1
	(MWD) MWA	Message Waiting Denied Message Waiting Allowed If CLS = MWA and there is no Message Waiting Key (MWK) defined, then the red Message Waiting LED lights to indicate Message Waiting notification.	mwc-1
	(NAID) NAIA	No Answer Indication Denied No Answer Indication Allowed	basic-21
	(NAMA) NAMD	Name Display on other set Allowed Name Display on other set Denied	dpd-21
	(NID) NIA	Non-ringing Incoming Line Preference Denied Non-ringing Incoming Line Preference Allowed	lsl-4
	(NRCD) NRCA	Night Restriction for Forced Campon Denied Night Restriction for Forced Campon Allowed If Night Restriction is allowed, then Forced Campon for this set is allowed during Night Service only.	povr-16
	(NROD) NROA	Night Restriction for Priority Override Denied Night Restriction for Priority Override Allowed If Night Restriction is allowed then Priority Override for this set is allowed during Night Service only.	povr-16
	(NRWD) NRWA	Night Restriction for Call Waiting Denied Night Restriction for Call Waiting Allowed If Night Restriction is allowed Call Waiting for this set is permitted during Night Service only.	povr-16

LD 11

Prompt	Response	Comment	Pack/Rel
(OCBD) OCBA		Outgoing Call Barring Denied Outgoing Call Barring Allowed Flexible Feature Codes (FFC) package 139 and New Flexible Code Restriction (NFCR) package 49 are required.	ccb-21
(OLD) OLA		Outgoing Line Preference Denied Outgoing Line Preference Allowed	lsl-4
(ONDD) ONDA		One Number Delivery Denied for a portable One Number Delivery Allowed for a portable	basic-22
(PBKA) PBKD		System Phone Book Allowed System Phone Book Denied Only applies for M3903 and M3904 units.	arie-25
(PDN) LDN		Primary Directory Number Listed Directory Number Index as defined in LD 15 This is the number used for Calling Line Identification or CLID.	pra-12
(PGND) PGNA		Deny PAGENET access Allow PAGENET access PGND/A allowed if PAGENET package 307 is equipped.	pagenet- 22
(POD) POA		Privacy Override Denied Privacy Override Allowed The Privacy Optional feature is used with multiple appearance DN's.	basic-5
(PRSD) PRSA		Priority Call Pickup Denied Priority Call Pickup Allowed	povr-15
(PUD) PUA		Call Pickup Denied Call Pickup Allowed Default changes to PUA if Ringing Number Pickup Group (RNPG) is defined. Call Pickup is not allowed on telephones in group zero or RNPG = 0.	grp-1
(RBDD) RBDA		Redirection By Day Denied Redirection By Day Allowed	basic-24
(RCC)		Restricted from Receiving Collect Calls	fca-10

Prompt	Response	Comment	Pack/Rel
	UCC (RBHD) RBHA	Unrestricted from Receiving Collect Calls Redirection By Holiday Denied Redirection By Holiday Allowed	basic-24
	(RCBD) RCBA	Recall to Boss Denied Recall to Boss Allowed	bfs-24
	(RDLA) RDLD	Automatic Redial Allowed Automatic Redial Denied	ardl-22
	(RLFD) RLFA	Reversed Lamp Flash Denied Reversed Lamp Flash Allowed LOGIVOX must be assigned RLFA.	supp-10
	(RMMD) RMMA RMMO	Remote Monitoring of Messages Denied Remote Monitoring of Messages Allowed Allow Remote Monitoring of Messages and to Override, if it is being already monitored	vmba-24
	(RTDD) RTDA	Call Redirection by Time of day denied Call Redirection by Time of day allowed	basic-22
	(SFD) SFA	Second level CFNA Denied Second level CFNA Allowed SFA requires the FNA Class of Service.	basic-10
	(SMWD) SMWA	Extended Message Waiting Indication Denied Extended Message Waiting Indication Allowed Only applies for M3903, M3904 and M3905 units.	mw-24
	(STSA) STSD	Set-to-Set Messaging Allowed Set-to-Set Messaging Denied Only applies for M3903 and M3904 units.	arie-25
	(SWD) SWA	Station-to-Station Call Waiting Denied Station-to-Station Call Waiting Allowed A Call Waiting key or CWT must be defined. Must have CLS = HTD since hunting takes precedence.	basic-8
	(TEND) TENA	Tenant Service Denied Tenant Service Allowed	tens-7
	(ULAD) ULAA	Deny access to Set Based Administration Allow access to Set Based Administration	adminset-21

LD 11

Page 146 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
		Must have Set Based Administration (ADMINSET) package 256.	
	(UDI) RDI	Station is (not) restricted from receiving DID calls. Station is restricted from receiving DID calls.	supp-10
	(USMD) USMA	Meridian 911 position denied Meridian 911 position allowed Must have Meridian 911 (M911) package 224.	m911-19
	(USRD) USRA	User Selectable Call Redirection Denied User Selectable Call Redirection Allowed	uscr-19
	(XMWD) XMWI	Extended Message Waiting indication Denied Extended Message Waiting indication Allowed	vmba-24
	(VCE) DTA	Voice Terminal Data Terminal VCE is used for voice TNs. DTA is used for data. For 8 port Digital Line Cards, VCE for units 0-7 and DTA for units 8-15. For 16 port Digital Line Cards, VCE for units 0-15 and DTA for units 16-31. For 24 port Digital Line Card, VCE for units 0-23 and DTA is for units 24-31. Note: 24 port Digital Line Card not supported on Option 11C	basic-5
	(VMD) VMA	Server Voice Messaging Denied Server Voice Messaging Allowed	cls-8
	(WTA) WTD	Warning Tone Allowed Warning Tone Denied	basic-1
	(XHD) XHA	Exclusive Hold Denied Exclusive Hold Allowed	dhld-4
CPND	NEW OUT CHG	Calling Party Name Display New CPND entry Delete CPND entry Change CPND entry Must have Calling Party Name Display (CPND) package 95 and CPND data block defined in LD 95.	cpnd-19
CPND_LANG		Calling Party Name Display Language	cpnd-19

Prompt	Response	Comment	Pack/Rel
	(ROM) KAT	Roman Katakana	
CTYP	(XDLC) EDLC	Card type is 16 port DLC Card type is 24 port DLCVCE/DTA Note: EDLC not supported on Option 11C	basic-25
CUST	xx	Customer number associated with this set as defined in LD 15	basic-1
DBA	(0)-1	Display-Based Accessory Note: The Key-Based Accessory (KBA) and Display-Based Accessory (DBA) are mutually exclusive.	arie-25
DCD	(ON) OFF	Dynamic Carrier Detect Enables Dynamic CD Carrier Detect starts as inactive and follows the state of the call. With DAC, DCD is only prompted if TYPE = R232.	arie-14
DCFW	x...x	Default Call Forward DN. Prompted for Virtual Terminals only. Where: x...x = Default Call Forward DN where calls are to be forwarded. Maximum of 31 digits allowed.	arie-25
DELETE_VMB	(YES) NO	Precede with X to remove. Delete Voice Mailbox Remove the Voice Mailbox from the Meridian 1 and Meridian Mail Remove the Voice Mailbox from the Meridian 1 DELETE_VMB is prompted if REQ = OUT and TN has an associated Voice Mailbox. DELETE_VMB is allowed if the DN is a single appearance or multiple appearance DN on a single TN.	vmba-19
DEM	(DCE) DTE	Data Equipment Mode. Prompted if TYPE = R232. Data Carrier Equipment Data Terminal Equipment	dac-16

LD 11

Page 148 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
DES	d...d	ODAS Station Designator Enter a 1-6 alphanumeric character representing an Office Data Administration System (ODAS) Station Designator.	odas-1
DGRP	(1)-5	Device Group DGRP designates an AST BCS set into a specific device group. It is recommended that an AST phantom (BCS) TN should be a non-display BCS set. An AST BCS set of a phantom loop cannot be an ACD set.	basic-20
DISPLAY_FMT	(FIRST, LAST) LAST, FIRST	Display Format for CPND name May be input as FIRST To view names as John Doe May be input as LAST To view names as Doe John	cpnd-19
DLNG	(ENG) FRN	Language preference for the DAC prompts. English French Prompted if TYPE = R232 or R422.	dac-16
DN	x..x yyyy	Directory Number (x..x) and CLID table entry (yyyy) The DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. DN is not prompted for Option 11C model sets or if DIG is defined. Range for CLID table entry is: [(0) - (value entered for SIZE prompt in LD 15 minus 1)]	basic-12
DNAN	(DNAA) DNAD	Customer Attendant DN (ATDN) + Attendant Number (ANUM) are used as ANI DN in 3WT ANI messages. ANDN of outgoing 3WT route is used as ANI DN in 3WT ANI messages. Prompted with Commonwealth of Independent States (CIST) package 221.	cist-21
DNDR	(0)-120	Delay Value in seconds. A DNDR value of 0 disables this feature. If the DNDR value is an odd number, then it is incremented to the next even number.	basic-21

LD 11

Page 150 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
DTYP	(IOS) IDS ODS	Data Station Type Inbound/Outbound Data Station Inbound Data Station Outbound Data Station	amp-5
DUP	(FULL) HALF	Full Duplex Half Duplex	arie-14
ECHG	(NO) YES	Easy Change This allows change to any prompt in this program without having to <cr> through all unrelated prompts. ECHG is prompted when REQ = CHG.	basic-12
EFD	x...x	Flexible CFNA DN for External calls EFD is the DN to which external calls are routed when there is no answer, if one of the following customer options is defined in LD 15: <ul style="list-style-type: none">• FNAD = FDN• FNAT = FDN• FNAL = FDN A Group Hunt DN can be entered. The DN can be up to 4 digits without Directory Number Expansion (DNXP) package 150, or 13 digits with DNXP package 150. Call Forward by Call Type Allowed and Forward No Answer must be defined as the Class of Service (CLS = CFTA and FNA). LDNs, DLDNs, and Prime DNs will be accepted as valid input.	optf-10

Prompt	Response	Comment	Pack/Rel
EHT	x...x	External Hunt DN EHT is the DN hunted for by external busy calls when: <ul style="list-style-type: none"> Class of Service is Call Forward by Call Type Allowed (CFTA) and Hunting Allowed (HTA) the LD 15 prompt FNAD, FNAT, or FNAL = HNT A Group Hunt DN can be entered. This DN can be up to 4 digits without Directory Number Expansion (DNXP) package 150 or 13 digits with DNXP package 150. LDNs, DLDNs, and Prime DNs are accepted as valid input. To remove EFD or EHT DNs, change CFTA Class of Service to CFTD. Prompted when CFTA is defined.	basic-10
	000	Short Hunt for external calls	
ELKP	x...x	Electronic Lock Password. Length is 1-15 digits	ffc-15
ESN	x...x	Electronic Serial Number for a portable. Length is 11 Hex digits.	basic-22
FCAR	(NO) YES	Forced Charge Account Restricted Must use Forced Charge Account Restricted from using Forced Charge Account Prompted if FCAF = YES in LD 15 and CLS = TLD, CUN or CTD.	chg-1
FDN	x...x	Flexible CFNA DN FDN is used for internal calls, if CLS is CFTA and FNA. FDN is used for all calls if CLS is CFTD and FNA. FDN can be up to 4 digits without Directory Number Expansion (DNXP) package 150 or 13 digits with DNXP package 150. A Group Hunt pilot DN can be entered. Precede with X to delete. FDN requires CLS = MWA or FNA. FDN is only used if one or more of the following customer options are defined in LD 15: <ul style="list-style-type: none"> FNAD = FDN FNAT = FDN FNAL = FDN 	optf-1

LD 11

Prompt	Response	Comment	Pack/Rel
FSVC	(0)-9	<p>Forced Out-of-Service Off-Hook Alarm Security DN index.</p> <p>When Forced Out-of-Service condition occurs on a digital telephone with Alarm Security Allowed (ASCA) Class of Service, the telephone is intercepted to a predefined DN.</p> <p>Enter the index number (0)-9 of the DN defined by LD 15 prompts ODN 0-9. ODN is the acronym for Change Off-Hook Alarm Security Directory Number options (OHAS DN).</p>	basic-18
HDLC	(NO) YES	<p>High Level Data Link Control Prompted if V25 = YES.</p>	arie-18
HOT	(OFF) ON	<p>Hotline Hotline is inactive for data port. Enables Hotline for data port. If HOT = ON, Auto Baud is forced OFF for the Data Access Card.</p>	arie-14
HUNT	x...x	<p>Hunt DN of next station in hunt chain</p> <p>This Hunt DN can be up to 4 digits without Directory Number Expansion (DNXP) package 150 or 13 digits with Directory Number Expansion (DNXP) package 150.</p> <p>Precede with X to delete.</p>	basic-10
	000	<p>Short Hunting</p> <p>A Group Hunt pilot DN can be entered.</p> <p>A Control Directory Number (CDN) can be defined as a Hunt DN for both physical and phantom 500/2500 sets. When a CDN is configured in this way, a call which comes to a busy DN can be Hunting or Call Forward Busy to a CDN.</p> <p>With Call Forward and Hunt by Call Type, this is the Hunt DN for:</p> <ul style="list-style-type: none">• internal calls if CLS = CFTA, or• for all busy calls if CLS = CFTD	

Prompt	Response	Comment	Pack/Rel
IAPG	0-9 (0)-15	Meridian Link Unsolicited Status Message (USM) group IAPG assigns AST DNs to a status message group defined in LD 15. These groups determine which status messages are sent for an AST set. The default Group 0 sends no messages, while Group 1 sends all messages.	aml-16
ICT	0-<NIPN>	Intercept Computer Terminal or printer number Number of Intercept Positions (NIPN) is defined in LD 15.	icp-16
INT	ON (OFF)	Meridian 1/SL-100 Interworking Enable Meridian 1 and SL-100 interworking Do not enable Meridian 1 and SL-100 interworking	arie-14
ITEM	aaaa yy	Respond with the desired program mnemonic (aaaa) and its new value (yy). ITEM is reprompted until only a carriage return <cr> is entered. For example: REQ CHG TYPE SL1 TN Ill ss cc uu ECHG YES ITEM KEY 07 ADL KEY <cr> KEY is prompted until <cr> is entered ITEM <cr> REQ	basic-12
	<cr>	Return to REQ	
ITNA	(NO) YES	Idle TN for the Third Party Application. Do not identify an Associated Set (AST) to be used only by Third Party Application Identify an Associated Set (AST) to be used only by Third Party Application	basic-20
KBA	(0) 1 2	Key-Based Accessory for M3904 and M3905 which support key-based modules. Configure keys up to and including 31 Configure keys up to and including 53 Configure keys up to and including 75	basic-24

LD 11

Prompt	Response	Comment	Pack/Rel
KBD	(ON) OFF	Keyboard Dialing Option Enable Keyboard Dialing for data port Enables Hayes mode	dac-16
KEEP_MSGS	(NO) YES	Preserve Meridian Mail Messages and current password	vmba-19
KEY	xx aaa yyyy (cccc or D) zz..z	Telephone function key assignments The following key assignments determine calling options and features available to a telephone. Note that KEY is prompted until just a carriage return <cr> is entered. Where: <ul style="list-style-type: none">• xx = key number• aaa = key name or function• yyyy = additional information required for the key• zz..z = additional information required for the key aaa. The cccc or D entry deals specifically with the Calling Line identification feature. Where: <ul style="list-style-type: none">• cccc = CLID table entry of (0)-N, where N = the value entered at the SIZE prompt in LD 15 minus 1.• D = the character "D". When the character "D" is entered, the system searches the DN keys from key 0 and up, to find a DN key with CLID table entry. The CLID associated with the found DN key will then be used. <p>Note: The position of the (cccc or D) field varies depending on the key name or function.</p> You may enter a CLID table entry if aaa = ACD , HOT d, HOT L, MCN, MCR, PVN, PVR, SCN or SCR. Type xx NUL to remove a key function or feature. Some data ports require specific key assignments. Refer to the <i>Meridian Data Services</i> NTPs for information regarding these requirements.	basic-1

Prompt	Response	Comment	Pack/Rel
		<p>Key number limits that can be assigned are as follows:</p> <ul style="list-style-type: none"> • 0-5 for M2006 • 0-7 for M2008 • 0-59 for M2616, varies with number of add-on modules • 0-69 for SL1, varies with number of key/lamp strips <p>If either the Meridian Programmable Data Adapter (MPDA) or the Display Module is equipped, then key 7 on sets M2008, M2216, and M2616 sets and key 5 on set M2006 will become Program keys which cannot be used as function keys.</p> <p>Any printout of the TN block will not show key 7 because it is a local function key.</p> <p>On the M2616, if CLS = HFA, key 15 on the voice TN defaults to the Handsfree key. No other feature assignment is accepted.</p> <p>Primary and secondary data DNs must be unique.</p> <p>A station SCR, SCN, MCR, or MCN DN must be removed as a member from all Group Hunt lists before the DN can be modified.</p>	
		<p>On the M3903, keys 4-15 are blocked. No feature assignment is accepted for keys 2-15.</p> <p>On the M3903, M3904, M3905, keys 27-31 are reserved. No feature assignment is accepted for keys 17-31 other than NUL.</p> <p>On M3904, no feature assignment is accepted for keys 12-15.</p> <p>On M3905, the craftsperson can assign NUL or a server application on key 5. On key 6, the craftsperson can assign NUL or a local application.</p> <p>On M3905, the craftsperson can assign NUL or the program key on key 7.</p> <p>On M3905, the craftsperson can assign AAG, AMG, ASP, DWC, EMR, MSB, or NRD on keys 8-11. Other features are blocked.</p>	basic-24

LD 11

Prompt	Response	Comment	Pack/Rel
xx AAG		ACD Answer Agent key Must have CLS = SPV. On the M3905 key numbers 8-11 are reserved for AAG, AMG, ASP, DWC, MSB and NRD.	acdb-1 basic-24
xx AAK		Automatic Answerback key AAA CLS and AAK key cannot be assigned to the same telephone. Only one type of Automatic Answerback is allowed. M2616 telephone must have CLS = HFA.	aab-1
xx ACD yyyy (cccc or D) zzz		Automatic Call Distribution key Where: <ul style="list-style-type: none">• xx = key number (<i>must be key 0</i>)• yyyy = ACD DN or Message Center DN• cccc = CLID table entry of (0)-N, where N = the value entered at the SIZE prompt in LD 15 minus 1.• D = the character "D". When the character "D" is entered, the system searches the DN keys, from key 0, up to find a DN key with CLID table entry. The CLID associated with the found DN key will then be used.• zzzz = agent's position ID yyyy and zzzz can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Only ACD DN for Option 11C model set.	bacd-1
xx ACNT		Activity Code entry key This key must have an associated lamp and applies to ACD-D and ACD-MAX only. ADS data block must be configured in LD 23.	acdd-13

Prompt	Response	Comment	Pack/Rel
xx ADL yy z...z		Autodial key Where: <ul style="list-style-type: none"> xx = key number yy = maximum length of the ADL DN. Valid entries are: 4, 8, 12, (16), 20, 24, 28, 31. Note that other values are rounded up to the next valid number. z...z = actual Autodial DN (this entry is optional) 	optf-1
xx AGT yyyy		ACD Agent status key Where: yyyy = agent's ID. The agent ID number can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Must have CLS = SPV.	bacd-1
xx AMG		ACD Answer Emergency call key Must have CLS = SPV. The Answer Emergency Key can be defined as a secondary supervisor's Position ID. The secondary supervisor's Position ID can be NULL by default. The Position ID of the ACD set cannot be changed once the ACD set is acquired as a Human Agent. On the M3905 key numbers 8-11 are reserved for AMG	acdb-1 basic-24
xx AO3		Three-Party Conference key On the M3902 key number 4 is reserved for AO3, AO6, TRN, or NUL On the M3903, M3904, M3905 key number 18 is reserved for AO3, AO6, or NUL. On thel2004 key number 18 is reserved for AO3, AO6, or NUL.	basic-1 basic-24 basic-24 mit-25
xx AO6		Six-Party Conference key On the M3902 key number 4 is reserved for AO3, AO6, TRN, NUL On the M3903, M3904, M3905 key number 18 is reserved for AO3, AO6, or NUL. On thel2004 key number 18 is reserved for AO3, AO6, or NUL.	basic-1 basic-24 basic-24 mit-25

LD 11

Prompt	Response	Comment	Pack/Rel
xx ARC		Attendant Recall key	basic-1
xx ASP		ACD Supervisor call key (must have CLS = AGN) On the M3905 key numbers 8-11 are reserved for NRD, MSB, AAG, AMG, DWC and ASP.	acdb-1 basic-24
xx ATW		ACD Call Waiting Time indication key	supp-14
xx AWC		ACD Calls Waiting key Must have CLS = AGN and Supervisor Position ID or SPID must be configured.	bacd-1
xx BFS TN		Busy Forward Status key Where: TN = Terminal Number to be screened. A Key cannot be assigned to a BRI set. Note: It is possible to configure the TN of the same set against the BFS key only if the Class of Service is BFEA.	bfs-20
xx CA yy z...z		Combined No Hold Conference and Autodial key Where: <ul style="list-style-type: none">yy = maximum length of the CA DN. Valid entries are: 4, 8, 12, (16), 20, 24, 28, 31. Note that other values are rounded up to the next valid number.z...z = actual Autodial DN (this entry is optional)	basic-14
xx CAS		Centralized Attendant Service key	casm-1

Prompt	Response	Comment	Pack/Rel
xx CFW yy z...z		<p>Call Forward key</p> <p>Where: yy = maximum length of the CFW DN</p> <p>Valid entries for M2317 or M3000 sets are any integer in the range of (4)-23. For all other BCS type sets, you may enter any integer in the range of (4)-31.</p> <p>Note: The default for M3900 series telephones is (16).</p> <p>Where: z...z = Call Forward DN or range of DNs where calls are to be forwarded (the target DN). Must be key 11 for LOGIVOX telephones.</p> <p>A Group Hunt DN can be entered. If CLS = CFXD, the Call Forward number must be an internal DN.</p>	optf-1
		On the M3903, M3904, M3905 key number 19 is reserved for CFW or NULL.	basic-24
		On the I2004 key number 19 is reserved for CFW or NULL.	mit-25
xx CH D yy z...z		<p>Combined No Hold Conference and Direct Hotline key</p> <p>Where:</p> <ul style="list-style-type: none"> • yy = number of digits in target DN (1-31) • z...z = target DN 	basic-14
xx CH L yyy		<p>Combined No Hold Conference and Hotline List key</p> <p>Where: yyy = 0-999 for Hotline list entry as defined in LD 18.</p>	basic-14
xx CHG		<p>Charge account key</p> <p>On the M3903, M3904, M3905 key number 25 is reserved for CHG or NUL.</p> <p>On the I2004 key number 25 is reserved for CHG or NUL.</p>	chg-1 basic-24 mit-25
xx COS		Controlled Class of Service key	ccos-7
xx CPN		<p>Calling Party Number key</p> <p>On the M3903, M3904, M3905 key number 26 is reserved for CPN or NUL.</p> <p>On the I2004 key number 25 is reserved for CPN or NUL.</p>	chg-1 basic-24 mit-25

LD 11

Prompt	Response	Comment	Pack/Rel
	xx CS yyyy	Combined No Hold Conference and Speed Call key Where: yyyy = Speed Call list number from 0-8190. Not available on M3000 telephones.	basic-14
	xx CSD	Conferee Selectable Display key.	basic-23
	xx CWT	Call Waiting key Only one CWT Key is allowed. Should have CLS = HTD since Hunting takes precedence.	basic-1
	xx DAG	Display ACD Agents key This key displays the status of ACD agents appearing on the supervisor's telephone. Must have CLS = SPV and ADD or DDS.	bacd-1
	xx DIG yyyy zz R/V	Dial Intercom Group key Where: <ul style="list-style-type: none">• yyyy = group number, from 0-2045.• zz = member number from 0-99. The zz value cannot be equal to or share the first digit of a 2 digit number with the SPRE code. For example, if SPRE = 1, zz cannot be 1, 10, 11...19.• R = Ring option• V = Voice option Must have maximum number of Dial Intercom Groups DGRP defined in LD 15. If any member in a group has a two-digit member number, then all members have a two-digit number. The system adds leading zeros to other entries. Prompted with Dial Intercom (DI) package 21.	di-1
	xx DPU	Directed Call Pickup key Key is optional, dial access code can be used if CLS = DPUA. Not available on M3000 telephones. This prompt appears with Directed Call Pickup (DCP) package 115.	dcp-12

Prompt	Response	Comment	Pack/Rel
xx DRC yyy		DID Route Control key Where: yyy = route number = 0-511	basic-15
xx DSP		Display key This key must have an associated key/lamp pair.	ddsp-1
xx DWC yyyy		ACD Supervisor Display Waiting Calls key Where: yyyy = ACD DN. Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. A maximum of eight DWC keys can be assigned per queue on eight supervisors. Agent sets can only have 1 SWC key for their own queue. ACD agent telephones can support the display waiting calls key. Must have CLS = SPV and ADD or DDS. The key can be used with supervisors and agents. On the M3905 key numbers 8-11 are reserved for AAG, AMG, ASP, DWC, MSB and NRD.	bacd-19 basic-24
xx EMR		ACD Emergency key (must have CLS = AGN) On the M3905 key numbers 8-11 are reserved for AAG, AMG, ASP, DWC, MSB and NRD.	acdb-1 basic-24
xx ENI yyyy		ACD Enable Interflow key Where: yyyy = DN. The DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Only one is allowed per ACD DN. Must have CLS = SPV.	acdb-1
xx EOVR		Enhanced Override key	povr-20
xx GHD		Group Hunt Deactivation key A station user can toggle the PDN in and out of all groups of which that PDN is a member.	pldn-15

LD 11

Page 162 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	xx GPU	Group Call Pickup key The key is optional because a dial access code can be used if CLS = GPUUA. Not available on M3000 telephones. Allowed with Directed Call Pickup (DCP) package 115.	dcp-12
	xx GRC yy	Group Call key Where: yy = 0-63 for Group number as defined in LD 18	grp-1
	xx HLD	Hold	supp-10
	xx HOT	Direct entry for Hotline model set key (Option 11C), Automatic termination DN is eight digits	hot-10
	nn HOT D dd num DN m (cccc or D)	Two-way Hotline key Where: <ul style="list-style-type: none">• dd = number of digits dialed• num = target_number (terminating DN is a maximum of 31 digits)• DN = two-way hotline DN• m = one of the following Terminating Modes: H = Hotline (default), N = Non-ringing, R = Ringing, or V = Voice• cccc = CLID table entry of (0)-N, where N = the value entered at the SIZE prompt in LD 15 minus 1.• D = the character "D". When the character "D" is entered, the system searches the DN keys from key 0 and up, to find a DN key with CLID table entry. The CLID associated with the found DN key will then be used.	hot-21
	xx HOT D nn x...x	Direct entry for One-way Enhanced Hotline key Where: <ul style="list-style-type: none">• nn = number of digits dialed• x...x = Hotline terminating DN up to a 31 digit maximum	hot-10

Prompt	Response	Comment	Pack/Rel
xx HOT D nn x...x xxxx (cccc or D)		Direct entry for Two-way Enhanced Hotline key Where: <ul style="list-style-type: none"> • nn = number of digits in Target DN • x...x = Terminating DN up to a 31 digit maximum • xxxx = optional two way Hotline DN. The DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. • cccc = CLID table entry of (0)-N, where N = the value entered at the SIZE prompt in LD 15 minus 1. • D = the character "D". When the character "D" is entered, the system searches the DN keys from key 0 and up, to find a DN key with CLID table entry. The CLID associated with the found DN key will then be used. 	hot-10
nn HOT I dd num m		Intercom key Where: <ul style="list-style-type: none"> • dd = number of digits dialed • num = target_number (terminating DN max 31 digits) • m = one of the following Terminating Modes: V = Voice (default), N = Non-ringing, or R = Ringing 	hot-21
xx HOT L bbb		One-way Hotline key Where: bbb = Hotline list entry = 0-999. The Hotline list entry is defined in LD 18. Note that the Hotline list NCOS overrides the set NCOS.	hot-10

LD 11

Prompt	Response	Comment	Pack/Rel
xx HOT L bbb xxxx (cccc or D)		Two-way list entry for Enhanced Hotline key Where: <ul style="list-style-type: none">• bbb = List entry = 0-999• xxxx = Two-way Hotline DN. This DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.• cccc = CLID table entry of (0)-N, where N = the value entered at the SIZE prompt in LD 15 minus 1.• D = the character "D". When the character "D" is entered, the system searches the DN keys, from key 0, up to find a DN key with CLID table entry. The CLID associated with the found DN key will then be used. Hotline list entry is defined in LD 18. Note that the Hotline list NCOS overrides set NCOS.	hot-10
xx ICF nn xxxx		Internal Call Forward key Where: nn = Forward DN length. Valid entries are any integer in the range of (4)-31. Where: xxxx = Forward DN (this entry is optional) An ICF key can be configured if Call Forward is enabled.	icf-19
KY1 aaa		Key 1 located far left, below dial pad. Where: aaa = VUP (Volume Up) by default for KY1. Any function not requiring a lamp may be assigned. CLS must be LVXA.	
KY2 aaa		Key 2 located middle, below dial pad. Where: aaa = VDN (Volume Down) by default for KY2. Any function not requiring a lamp may be assigned. CLS must be LVXA.	

Prompt	Response	Comment	Pack/Rel
	KY3 aaa	Key 3 located far right, below dial pad. Where: aaa = HLD (Hold) by default for KY3. Any function not requiring a lamp may be assigned. CLS must be LVXA.	supp-10
	xx LNG	M2317 Language Toggle key (No Language) Where: <ul style="list-style-type: none"> • xx = key 29 • LNG = Language Toggle enabled • NUL = Remove Language Option This feature allows set operator to set and reset language display, toggling between French and English versions on the alphanumeric display.	dlt2-9
	xx LNK	Last Number Redial key LNRS defines the Last Number Redial Size. For LOGIVOX telephones, key 8 is defined by set firmware as the Last Number Redial key. The key definition is optional, because the user can press the DN key twice to activate Last Number Redial. Must have OPT = LRA in LD 15 and CLS = LNA.	Inr-8
	xx LSPK yyyy	Loudspeaker key Where: yyyy = associated loudspeaker DN or SPEKABUS channel	ohol-20
	xx MCK	Message Cancellation Key This key should only be programmed on Message Center sets.	mwc-1

LD 11

Prompt	Response	Comment	Pack/Rel
	xx MCN yyyy (cccc or D) zz..z	Multiple Call Non-Ringing key Where: <ul style="list-style-type: none">• yyyy = DN• cccc = CLID table entry of (0)-N, where N = the value entered at the SIZE prompt in LD 15 minus 1.• D = the character "D". When the character "D" is entered, the system searches the DN keys from key 0 and up, to find a DN key with CLID table entry. The CLID associated with the found DN key will then be used.• zz..z = additional information required for the key aaa. The DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. The DN cannot appear simultaneously on a PBX set DN or as an SCR DN or SCN DN. Once the MCN key has been defined, MARP is prompted.	basic-20
		On the M3901 and M3902 MCN cannot be configured on keys 1-5. MCN, if it is configured, must be assigned to key 0.	basic-24

Prompt	Response	Comment	Pack/Rel
xx MCR	yyyy (cccc or D) zz..z	<p>Multiple Call Ringing key</p> <p>Where:</p> <ul style="list-style-type: none"> • yyyy = DN • cccc = CLID table entry of (0)-N, where N = the value entered at the SIZE prompt in LD 15 minus 1. • D = the character "D". When the character "D" is entered, the system searches the DN keys from key 0 and up, to find a DN key with CLID table entry. The CLID associated with the found DN key will then be used. • zz..z = additional information required for the key aaa. <p>The DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. The DN cannot appear simultaneously on a PBX set DN or as a SCR Single Call or SCN DN.</p> <p>Once the MCR key has been defined MARP is prompted.</p> <p>On the M3901 and M3902 MCR cannot be configured on keys 1-5. MCR, if it is configured, must be assigned to key 0.</p>	basic-20
xx MIK		<p>Message Indication Key</p> <p>This key should only be programmed on Message Center sets.</p>	mwc-1
xx MMM		<p>Voice/Data display key</p> <p>Only key numbers 0-7 can be assigned for the M2008. M2x16 varies with additional add-on modules. Maximum key number is 59.</p> <p>The Data Port requires specific key assignments. An ISDL line card, vintage C or higher, is required for M2006, M2008, M2216 and M2616 telephones.</p>	amp-5
xx MRK		<p>Message Registration Key</p> <p>Requires PPM/Message Registration (MR) package 101 and CLS = ADD or DDS.</p>	mr-10

LD 11

Prompt	Response	Comment	Pack/Rel
xx MSB		Make Set Busy key On the M3905 key numbers 8-11 are reserved for AAG, AMG, ASP, DWC, MSB and NRD.	msb-1 basic-24
xx MWK yyyy		Message Waiting Key Where: yyyy = DN. The DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. With the Network Message Service feature equipped, the NMS-DN can be up to 13 digits. On the M3902, key 5 is reserved for MWK or NUL. On the M3903, M3904, M3905, key 16 is reserved for MWK or NUL. On the i2004 key 16 is reserved for MWK or NUL.	mwc-1 basic-24 mit-25
xx NHC		No Hold Conference key	basic-14
xx NRD		Not Ready key AGN or SPV Class of Service must be assigned. On the M3905 key numbers 8-11 are reserved for AAG, AMG, ASP, DWC, MSB and NRD.	bacd-1 basic-24
xx NSVC yyyy		Night Service key (must have CLS = SPV) Where: yyyy = ACD DN associated with that Night Service. The DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	bacd-12
xx NUL		Removes function or feature from key	basic-1
xx OBV		Observe ACD agent key (must have CLS = SPV)	bacd-12
xx OSN		On-Site Notification key.	esa-23
xx OVB		Overflow Position Busy key	aop-1
xx OVR		Override key	optf-1

LD 11

Prompt	Response	Comment	Pack/Rel
xx PVR yyyy (cccc or D) zz..z		Private Line Ringing key Where: <ul style="list-style-type: none">• yyyy = DN• cccc = CLID table entry of (0)-N, where N = the value entered at the SIZE prompt in LD 15 minus 1.• D = the character "D". When the character "D" is entered, the system searches the DN keys from key 0 and up, to find a DN key with CLID table entry. The CLID associated with the found DN key will then be used.• zz..z = additional information required for the key aaa. The DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Must have Private Line Directory Number (PRDN) defined in LD 14. On the M3901, M3902, key 0 is reserved for PRV.	basic-20
xx RAG		ACD Ring Agent key (must have CLS =SPV)	acdb-1
xx RCK y z		Ringling Change Key Where: <ul style="list-style-type: none">• y = first key/lamp strip controlled by key = (0)-6• z = second key/lamp strip controlled by key = 0-(1)-6. Only one ringing change key per set is permitted. Requires International Supplementary Features (SUPP) package 131 and Ringling Change Key (RCK) package 193.	rck-15
xx RDL yy		Redial stored number key Where: yy = number of digits = 4, 8, 12, (16), 20, 23. Numbers between 5 and 22 are rounded up to the next valid number.	snr-3

Prompt	Response	Comment	Pack/Rel
xx RGA		Ring Again key Must be key 10 on LOGIVOX telephones. RANA may be activated if OPT = RNA in LD 15. When OPT = RND in LD 15, all sets with the RGA key will only be able to activate Ring Again Busy. On the M3903, M3904, M3905, key 20 is reserved for RGA or NUL. On the i2004 key 20 is reserved for RGA or NUL.	rga/ optf-20 basic-24 mit-25
xx RLS		Release key Requires CLS = LVXA. Key/lamp pair is not required. Must be KY3 on LOGIVOX telephones.	basic-1
xx RMK		Room Status Key	rms-10
xx RMWK xxxx [yyyy]		Remote Message Waiting indication key Where: xx= key number xxxx = Message Center DN [yyyy] = DN to be monitored [optional]	mw-24
xx RNP yyyy		Ringing Number Pickup key Where: yyyy = Ringing Number Pickup group number is optional If the group number is not entered, the key will pick up the group number assigned to the station. If the group number is entered, the key will pick up calls in the specified group yyyy. On the M3903, M3904, M3905, key 22 is reserved for RNP or NUL. On the i2004 key 22 is reserved for RNP or NUL	basic-1 basic-24 mit-25
xx RPAG yyyy		Radio Paging key Where: yyyy = Route Access Code Coordinated Dialing Plan (CDP) Trunk Steering Codes (TSC) and Distant Steering Codes (DSC) can be entered against yyyy.	rpa-15

Prompt	Response	Comment	Pack/Rel
xx SCR yyyy (cccc or D) zz..z		<p>Single Call Ringing key</p> <p>Where:</p> <ul style="list-style-type: none"> • yyyy = DN • cccc = CLID table entry of (0)-N, where N = the value entered at the SIZE prompt in LD 15 minus 1. • D = the character "D". When the character "D" is entered, the system searches the DN keys from key 0 and up, to find a DN key with CLID table entry. The CLID associated with the found DN key will then be used. • zz..z = additional information required for the key aaa. <p>The DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Use a single appearance DN to terminate VCC Voice Call or SIG Signaling calls.</p> <p>Once the SCR key has been defined, MARP is prompted.</p> <p>On the M3901, M3902, key 0 is reserved for SCR.</p>	basic-20
xx SCU yyyy		<p>Speed Call User key</p> <p>Where: yyyy = SCL list number 0-8190. SCL must be defined in LD 18.</p> <p>On the M3903, M3904, M3905, key 23 is reserved for SCC, SCU, SSU, SSC or NUL.</p> <p>On the i2004 key 23 is reserved for SCC, SCU, SSU, SSC or NUL.</p>	optf-1
xx SIG yyyy		<p>Signal key</p> <p>Where: yyyy = Single appearance DN.</p> <p>The DN can be up to 4 digits, up to 7 digits with DNXP package 150. Key/lamp is not required.</p>	basic-24
xx SSC yyyy		<p>System Speed Call controller key</p> <p>Where: yyyy = SSC list number 0-4095. SSC list must be defined in LD 18.</p> <p>On the M3903, M3904, M3905, key 23 is reserved for SCC, SCU, SSU, SSC or NUL.</p>	mit-25
			basic-1
			optf-1
			basic-24

LD 11

Prompt	Response	Comment	Pack/Rel
xx SSU	yyyy	System Speed Call User key Where: yyyy = SSC list number 0-4095. SSC list must be defined in LD 18.	optf-1
xx TAD		Time and Date key For SL-1 sets only, must have CLS = ADD or DDS, cannot be key 0. Blocked on the M3901, M3902, M3903, M3904, M3905.	ddsp-1 basic-24
xx THF		Centrex Trunk Switch Hook Flash key	thf-14
xx TRC		Malicious Call Trace key Key/lamp not required. MCT is applied on a TN basis. This key can be configured on ACD telephones. Allowed when CLS = MCTA.	mct-10
xx TRN		Call Transfer key On the M3902, key 4 is reserved for TRN or NUL. On the M3903, M3904, M3905, key 17 is reserved for TRN or NUL. On the i2004 key 17 is reserved for TRN or NUL.	basic-1 basic-24 mit-25
xx USR		User Selectable Call Redirection key	usr-19
xx UST		User Status key (must have UST = YES in LD15 and UST = YES in LD 23)	ims-2
xx VCC	yyyy	Voice Call key Where: yyyy = Single appearance DN. Not available on M3000 telephones.	basic-1
xx VUP		Volume Up key (must be assigned if Volume Down is assigned)	
xx VDN		Volume Down key (must be assigned if Volume Up is assigned)	
xx WUK		Guest entry of automatic Wakeup key (Key/lamp pair is required)	gewu-16

Prompt	Response	Comment	Pack/Rel
	xx XMWK xxxx yyyy	Extended Message Waiting indication key Where: xx= key number xxxx = Message Center DN yyyy = DN to be monitored	mw-24
KLS	1-7	Number of key/lamp strips, including add-on key/lamp modules. Prompted if TYPE = SL-1	basic-1
LANG	(0)-5 X	Language choice for Automatic Wakeup (AWU) calls. Prompted with Multi-Language Wakeup (MLWU) package 206. This entry defines the language presented for the Automatic Wakeup Recorded Announcement (RAN), for language 0 through 5 as follows:	mlwu-16
	(0)	See RAN1/RAN2 in LD 15	
	1	See LA11/LA12 in LD 15	
	2	See LA21/LA22 in LD 15	
	3	See LA31/LA32 in LD 15	
	4	See LA41/LA42 in LD 15	
	5	See LA51/LA52 in LD 15	
	X	Remove entry	
LDN	(NO) 0-3 0-5	Listed Directory Number Index as defined in LD 15 Listed Directory Number Index as defined in LD 15 Listed Directory Number Index as defined in LD 15	nldn-20
LHK	(0)-7 (0)-27 (0)-59 (0)-69 (0)	Last Hunt Key number limit For M2008 For M2616, varies with number of add-on modules (Option 11C) For M2616, varies with number of add-on modules For SL-1, varies with number of key/lamp strips No Last Hunt Key or remove Last Hunt Key (used for Internal/External Short Hunt)	basic-10
LNRS	4-(16)-31	Last Number Redial Size Enter the maximum number of digits that can be stored. Valid entries are 4, 8, 12, (16), 24, 28, or 31. Invalid entries are rounded up to the next valid entry.	Inr-8

LD 11

Prompt	Response	Comment	Pack/Rel
LPK	(0)-5 (0)-7 (0)-27 (0)-59 (0)-69	Line Preference Key limit (last key scanned for Automatic Line Preference) For M2006 For M2008 For M2616, varies with number of add-on modules (Option 11C) For M2616, varies with number of add-on modules For SL-1, varies with number of key/lamp strips Prompted when CLS = IRA, NIA or OLA.	Isel-4
LTN	1-253 0-15	Logical TN and AUX link number This prompt appears when CLS = IMA and the valid APL link is defined in LD15.	amp-5
MARP	(NO) YES	Multiple Appearance Redirection Prime Use TN as the Multiple Appearance DN Redirection Prime. The MARP prompt, or MARP information, appears following the DN KEY designation, and is associated with those DN assignments.	basic-18
MAUT	(NO) YES	Modify Authorization Codes for this telephone This prompt appears with Station Specific Authorization Codes (SSAU)package 229 and CLS = AUTR.	ssau-19
MIN	x...x	Mobile Identification Number for a portable. Length is 10 BCD Digits.	basic-22
MLWU_LANG	(0) 1 2 3 4 5 X	Language choice for Automatic Wakeup (AWU) calls. This entry defines the language presented for the Automatic Wakeup Recorded Announcement (RAN), for language 0 through 5 as follows: See RAN1/RAN2 in LD 15 See LA11/LA12 in LD 15 See LA21/LA22 in LD 15 See LA31/LA32 in LD 15 See LA41/LA42 in LD 15 See LA51/LA52 in LD 15 Precede with X to remove	mlwu-19

Prompt	Response	Comment	Pack/Rel
MOD	(NO) YES	Mode Network is required for Meridian Programmable Data Adapter Modem synchronizes to clock in external device, such as QMT21	arie-14
MODL	1-127	Model number This prompt appears for Option 11C model sets.	basic-16
MPHI	(NO) YES	Meridian Communications Unit used as MPH interface Prompted if TYPE = MCU.	mph-19
MPR	0-511	Modem Pool Route number	amp-5
NAME	aaaa,bbbb	Calling Party Name Display name First name comma Last name. For example, John Doe is entered as John,Doe. The first single comma is treated as the delimiter. Up to 27 characters (including the comma) may be input. The last occurrence of the first comma group serves as the name delimiter and is translated into a space between the first and last name.	cpnd-21
	aaaa	When the delimiter is omitted, the input is stored as a first name.	
	aaaa,	When the delimiter follows the input, the input is stored as the first name.	
	,bbbb	When the delimiter precedes the input, the input is stored as a last name.	
NCOS	(0)-99	Network Class of Service group	ncos-1
OHID	(0)-9	Off-Hook Alarm Security DN index for off-hook or interdigit timeout. When a dial tone or interdigit timeout occurs on a set with Alarm Security Allowed (ASCA) Class of Service, the set is intercepted to a predefined DN. Enter the index number (0)-9 of the DN defined by LD 15 prompts ODNx.	basic-18
OPE	(NO) YES	Change data port Operating Parameters	mcu/arie-19

LD 11

Prompt	Response	Comment	Pack/Rel
PAR	(SPAC) EVEN ODD MARK	Space Parity Even Parity Odd Parity Mark Parity	basic-1
PBDO	(OFF) ON	Port Busy when DTR off Disabled Key 7 is automatically assigned as the Make Set Busy (MSB) key	dac-16
PLEV	0-(2)-7	Switching to any other mode will force PBDO to OFF. Prompted if TYPE = R232 in operating modes 8 or 12. Priority Level, prompted with Priority Override/Forced Camp-On (POVR) package 186 or Enhanced DPNSS1 Services (DPNSS_ES) package 288. 2 = set can override sets of level 1 and 2, and can be overridden by sets of level 2-7.	poivr-20
POS	xxxx	ACD position ID. Prompted when SFMT = AUTO, TNDN, TN or DN.	basic-12
PRI	(1)-48 (1)-32	Priority level for Automatic Call Distribution (ACD) agent Valid range for systems 11C, 51C, 61C, and 81C. Valid range for all other system options. The agent with the lowest number assigned has the highest priority and is the first ACD agent to receive calls. (Where Priority 1 has the highest priority level). PRI is prompted with Automatic Call Distribution, Priority Agent (PAGT) package 116 and CLS = AGN or SPV.	pagt-12
PRM	(ON)	Prompt for terminal or host mode Terminal or Keyboard dial mode, prompts are output by data unit	arie-14
PSDS	OFF (NO) YES	Host mode prompts are not output by data unit Public Switched Data Service option With PSDS = YES, transmission will be synchronous and the baud will be 56K or 64K. 56K is the default.	arie-18
PSEL	(DMDM)	Protocol Selection, DM-DM or T-link DMDM is used by Meridian 1 data devices such as ASIM, AIM, ADM, SADM, Asynchronous Data Option or ADO, and MPDA. MCA can use both protocols.	arie-18

Prompt	Response	Comment	Pack/Rel
	TLNK	TLNK protocol is used by SL-100 and DMS data devices This prompt appears if DTAO = MCA, or TYPE = MCU	
PUTYP	(PRIVATE) IS-41	Portable Subscriber Type	IS-41-24
RCO	(0)-2	Ringling cycle option for Call Forward No Answer This prompt appears when CLS = FNA or MWA (or both)	uscr-18
REQ:		Request A colon following a prompt indicates enhanced processing. Enhanced Processing allows a user to either view a list of possible responses or input an abbreviated response.	basic-19
	?	To get a list of possible responses	
	CHG	Change existing data block	
	CPY 1-32	Copy or create 1 to 32 new station data block(s) automatically from the specified station data block. Option 11C model sets cannot be copied.	
	END	Exit overlay program	
	MOV	Move data block from one TN to another. MOV is not valid on Option 11C models.	
	MOV PAIR	Move voice TN and data TN data blocks on NT8D02 Digital Line Card	
	NEW	Add new data block to the system	
	OUT	Remove data block Before removing an ACD agent telephone, first remove the associated AGT key on the supervisor's telephone. Select OUT and then NEW when switching resources between virtual and actual ACD DN's, to avoid unwanted information on ACD-D reports.	
		Note: Tthis load is linked with LDs 10, 20 and 32. You may enter one of the responses listed below to the REQ: prompt. Then go to that Load and follow its Prompts and Responses sequence. See "Overlay Linking" on page 116 for further information.	

LD 11

Prompt	Response	Comment	Pack/Rel
		LD 32: CDSP CMIN CONV CPWD DISC DISI DISL DISN DISS DISU DSCT DSPS DSXP ENCT ENLC ENLG ENLL ENLN ENLS ENLU ENPS ENXP IDC IDCS IDU LBSY LDIS LIDL LMNT PBXT SDLC STAT SUPL TRK XNTT XPCT XPEC	
		LD 20: LTN LUC LUDU LUU LUVU PRT	
		LD 10: CHG CPY MOV NEW OUT	
RNPG	(0)-4095	Ringin Number Pickup Group To remove a telephone from a group, enter 0 in response to the RNPG prompt.	grp-1
RTS	(ON) OFF	Request To Send applies only to asynchronous mode.	mca-18
SCI	(0)-7	Station Category Indication priority level The station category number 1 to 7 must be defined as attendant console Incoming Call Indicator. LD 15 prompt ICI = CA1-CA7.	sci-7
SCPW	xxxx	Station Control Password Must equal Station Control Password Length (SCPL) as defined in LD 15. Not prompted if SCPL = 0. Precede with X to delete.	ffc-15
SECOND_DN	x...x	Second DN sharing the Voice Mailbox Second Directory Number. This DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	vmba-19
SFDN	X xxxx	Deletes the second directory number Secretarial Forwarding DN of secretary set This prompt appears if response to SFLT = BOSS.	ftcsf-15
SFLT	(NO) BOSS SEC	Secretarial Filtering Assign no designation to telephone set Designate telephone set as a Boss set Designate telephone set as a Secretary set SEC (NO) and <cr> takes you to the next prompt. This prompt appears with Boss Secretary Filtering (FTCSF) package 198.	ftcsf-15

Prompt	Response	Comment	Pack/Rel
SFMT		Select one of the following formats for the copy command. The DN may be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	basic-1
	TNDN	Manual selection of TNs and DNs or ACD position IDs for ACD telephones. The TN and DN or POS for ACD set prompts repeat n times as specified under the CPY n command. TN I s c u TN of new set DN xxxx DN of new set POS xxxx ACD position ID of new set	
	TN	The new DNs or ACD position IDs for ACD telephones are provided by the system. You are prompted for the starting TN and DN or ACD position ID for ACD telephones and each TN. The TN prompt repeats n times as specified under the CPY n command. TN I s c u TN of new set DN xxxx DN of new set POS xxxx ACD position ID of new set	
	DN	The new TNs are provided by the system. You are prompted for the starting TN and each DN or ACD position ID for ACD telephones. The DN or POS for ACD sets prompt repeats n times as specified under the CPY n command. TN I s c u TN of new set DN xxxx DN of new set POS xxxx ACD position ID of new set	
	AUTO	The new TNs and DNs or ACD position IDs for ACD telephones are provided by the system. You are prompted for the starting TN and DN or ACD position ID for ACD telephones. TN I s c u TN of new set DN xxxx DN of new set POS xxxx ACD position ID of new set	

LD 11

Prompt	Response	Comment	Pack/Rel
SGRP	(0)-999	Scheduled Access Restriction group number This prompt appears with Scheduled Access Restrictions (SAR) package 162. Must have group defined in LD 88.	sar-20
SPID	x...x	Supervisor Position ID DN SPID is prompted for ACD packages B, C, and D when CLS = AGN. SPID can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	bacd-1
SPWD	xxxx	Secure Data Password This prompt appears only if the password is defined in LD 15. If the password is not entered, the security codes will not print when PRT is requested.	ssau-19
SSU	0-4095	System Speed Call List number Precede with X to delete.	ssc-2
TEN	1-511	Tenant number This prompt appears if Multi-tenant is configured for the customer.	tens-7
TGAR	0-(1)-31	Trunk Group Access Restriction. The default of (1) automatically blocks direct access.	basic-1
THIRD_DN	x...x	Third DN sharing the Voice Mailbox Third Directory Number. This DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	vmba-19
	X	Deletes the third directory number	

Prompt	Response	Comment	Pack/Rel
TN		Terminal Number. The TN defines the location of the telephone set. TN appears when REQ = NEW, CHG, MOV, MOV PAIR or OUT.	basic-1
	l s c u	General TN format: l s c u = loop, shelf, card, unit Where l = <ul style="list-style-type: none"> • 0-159: loops, superloops must be multiples of four, starting with superloop 0 • 0-255: loops, Option 81C Where s = <ul style="list-style-type: none"> • 0-3: PE shelves on loops defined TERM in LD 17 • 0-1: PE shelves on loops defined TERD in LD 17 and superloops • 0: PE shelf on loops defined TERQ in LD 17 Where c = <ul style="list-style-type: none"> • 1-10: PE cards of dual and enhanced loops. • 0-15: IPE cards of superloops. Where u = <ul style="list-style-type: none"> • 0-3: single density units • 0-7: double density units and SL-1 line cards • 0-15: integrated services digital line (ISDLC) cards • 0-31: digital line cards or DLC For a static voice or data TN, u = 0-31. To assign VCE to TNs (where u = 16-31), CLS must be FLXA. To assign DTA to TNs (where u = 0-15), CLS must be FLXA. See text regarding FLXA on page 140.	fnf-25
	c u	Option 11C format: c u = card, unit <ul style="list-style-type: none"> • c = 1-50 • u = 0-31 	basic-16

LD 11

Prompt	Response	Comment	Pack/Rel
TOTN	l s c u	To Terminal Number General TN format: l s c u = loop, shelf, card, unit	basic-20
	c u	Option 11C TN format This prompt appears when REQ = MOV and is not prompted for Option 11C model sets.	
TOV	(0) 1 2 3	Timeout Value for the Data port, for M2006, M2008, M2216 and M2616 data port only No Timeout 15 minutes 30 minutes 60 minutes	mcu/arie-19
TRAN	(ASYN) SYN	Port transmission type for the data port on M2006, M2008, M2216, M2616 telephones Asynchronous data transmission Synchronous data transmission Asynchronous data modules cannot be set as synchronous. An MMPO with DTAO, MPDA, or MMPO supports SYN.	mcu/arie-19
TYPE:		Type of data block Acolon following a prompt indicates Enhanced Processing. Enhanced Processing allows a user to either view a list of possible responses or input an abbreviated response.	basic-1
		Note: LD 11 is linked with LDs 10, 20 and 32. You may enter any of the response options listed for the TYPE prompt in LDs 10 and 20 or any of the commands listed in LD 32. See "Overlay Linking" on page 116 for further information.	
	?	To get a list of possible responses	
	2006 2006 M	M2006 Digital telephone.1 DN per set. Option 11C Model set	
	2008 2008 M	M2008 Digital telephone. Option 11C Model set	
	2009 2009 M	M2009 Digital telephone. Option 11C Model set	
	2016	M2009 Digital telephone	

Prompt	Response	Comment	Pack/Rel
	2018 2018 M	M2018 Digital telephone. Option 11C Model set	
	2112 2112 M	M2112 Digital telephone. Option 11C Model set	
	2216 2216 M	M2216 Digital ACD telephone. Option 11C Model set	
	2317 2317 M	M2317 Digital telephone. Option 11C Model set	
	2616 2616 M	M2616 Digital telephone. Option 11C Model set	
	3000 3000 M	M3000 Digital Touchphone. Option 11C Model set	
	3901	M3901 Digital telephone.	
	3902	M3902 Digital telephone.	
	3903	M3903 Digital telephone.	
	3903V 3903H	M3903 Virtual Terminal Set. M3903 Host Terminal Set	arie-25
	3904	M3904 Digital telephone.	
	3904V 3904H	M3904 Virtual Terminal Set M3904 Host Terminal Set	arie-25
	3905 CARD	M3905 Digital telephone. Unused line card data block, used for Automatic Telephone Relocation.	
	CARDMLT	Multi-line Telephone Line Card.	
	i2004	i2004 digital telephone	mit-25
	MCA	Meridian Communications Adapter.	
	MCU	Meridian Communications Unit.	
	MPORTBL	Mobility Portable	

LD 11

Page 186 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	OOSMLT	Out of Service Multi-Line Terminal Unit. Entering OOSMLT allows the administrator to mark any unit, regardless of card density or type, "Out of Service".	xpe-20
	R232	NT7D16 Data Access Card (DAC) port in RS-232 Data mode.	
	R232 M	Option 11C Model set	
	R422	NT7D16 Data Access Card (DAC) port in RS-422 mode	
	R422 M	Option 11C Model set	
	SL1	SL-1 or M1000 series telephone data block Not supported on Option 11C The M2006, M2008, M2216, and M2616 require ISDLCLine card Version C or greater. The data port requires specific key assignments.	
V25	(NO) YES	V.25 bis option, synchronous mode only.	arie-18
VISI	(NO) YES	Visiting TN is not for visiting portables TN is for visiting portables	mmsn-22
VLL	(OFF) ON	Virtual Leased Line	arie-14
VMB	NEW CHG OUT	Voice Mailbox Add Voice Mailbox Change Voice Mailbox Remove Voice Mailbox This prompt appears with Voice Mailbox Administration (VMBA) package 246.	vmba-19
VMB_COS	0-127	Voice Mailbox Class of Service Valid range	vmba-19
WIRE	(OFF) ON	Wire test. Prompted if TYPE = R232 or R422. Wire test disabled System automatically tests wiring/cabling when DAC installed.	dac-16
XLST	(0)-254	Pretranslation group associated with this station.	pre-8

Prompt	Response	Comment	Pack/Rel
XPLN	xx	Expected name length	cpnd-19
ZONE	0-255	Zone Number which i2004 set belongs The zone prompt applies only when the type is i2004. Zone number is not checked against Overlay 117.	mit-25

LD 11

LD 12: Attendant Consoles

This program allows data blocks for attendant consoles to be created or modified.

When the Overlay is loaded the available system memory, disk records and system configuration limits are output in a header as follows:

```
>ld 12
ATT000
MEM AVAIL: (U/P): xxxxxx USED: xxxxx TOT: xxxxxxxx
TNS AVAIL: xxxxxx USED: xxxxx TOT: xxxxxx
ATTENDANT CONSOLES AVAIL: xxxx USED: xx TOT: xxxx
```

If an Incremental Software Management (ISM) limit is set to the maximum value 32767, then the information for that ISM will not be printed. This does not apply for the TNs ISM.

Fiber Network Fabric

The Fiber Network Fabric extends and enhances the 5-group network architecture to 8 non-blocking (inter-group) Network groups, with a resulting expansion in network capacity to 8k timeslots available for Intergroup traffic. This is achieved by using OC-12 SONET rings, and adding additional network and PE shelves, packs and cables and software changes to allow using the expanded network capacity. This expansion increases the number of available loops from 160 to 256. This applies to the Option 81C only.

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, MOV)
TYPE	a...a	Type of data block (a...a = 1250, 2250, ATT, or PWR)
TN	l s c u	Terminal Number (l s c u ranges are defined on page 197)
CDEN	aa	Card Density (aa = SD or DD)
SETN	l s c u	Second Terminal Number (l s c u ranges are defined on page 197)
CDEN	aa	Card Density of Second Terminal Number (aa = SD or DD)
TOTN	l s c u	To Terminal Number (l s c u ranges are defined on page 197)
CUST	xx	Customer number associated with this set
ANUM	1-63	Attendant Number
IADN	xxxx	Individual Attendant DN for this console.
ALPD	(NO) YES	Alphanumeric Display
DLEN	xx	Display Length (aa = (8) or 16)
SSU	yyyy	System Speed Call User list number
ICDR	(ICDD) ICDA	Internal Call Detail Recording (Denied) Allowed
- ABAN	(ABDD) ABDA	Abandoned call record and time to answer (Denied) Allowed
CPND	(CNDD) CNDA	Call Party Name Display feature (Denied) Allowed
- DNDI	(DNDD) DNDA	Dialed Name Display (Denied) Allowed
LANG	(00)-15	Language to download to M2250 on Sysload
EBLF	(BLFD) BLFA	Enhanced Busy Lamp Field (Denied) Allowed
SGRP	(0)-999	Scheduled Access Restriction Group number
PRES	0-19	ICI keys to have Presentation Status
QTHM	(NO) YES	Queue Thermometer equipped
- QDIS	0-3 0-19	Queue Thermometer Display position, and ICI key number
ICP	(NO) YES	Intercept Computer available
- ICT	0-<NIPN>	Intercept Computer Terminal or printer number
AADN	xxxx	Attendant Alternate Answering DN
DNAN	(DNAA) DNAD	(ANI DN used for 3WT ANI messages)or Outgoing CDT12/CSDT12 route ANDN will be used as DN in ANI messages
DAPC	(DAPA) DAPD	Dial Access Prefix on Console
KEY	xx aaa yyyy	Key (KEY responses begin on page 193)

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
AADN	x...x	Attendant Alternate Answering DN This DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. The DN must be a valid station DN or ACD DN. This prompt appears with Attendant Alternative Answering (AAA) package 174.	aaa-15
ABAN	(ABDD) ABDA	Abandoned call record and time to answer Denied Abandoned call record and time to answer Allowed ABDA generates a B-Record in CDR reports. Refer to the <i>Call Detail Reporting NTP</i> for more information. ABAN appears with New Format Call Detail Recording (FCDR) package 234.	fcd-18
ALPD	(NO) YES	Alphanumeric Display QCW3 Attendant Console QCW4 Attendant Console This prompt appears when TYPE = ATT.	basic-12
ANUM	1-63	Attendant Number	basic-1
CDEN	SD DD	Single Card Density Double Card Density If the loop is a single density loop, the default is single density. If the loop is a double density, the default is double density. If the loop is a quad density, there is no default. This prompt appears when TYPE = ATT or 1250 and the loop is a single or double density.	basic-7
CPND	(CNDD) CNDA	Call Party Name Display feature Denied Call Party Name Display feature Allowed Prompted when TYPE = 1250/2250 and has Calling Party Name Display (CPND) package 95 and OPT = IDP in LD 15.	cpnd-12
CUST	xx	Customer number associated with this set Customer number is defined in LD 15.	basic-1
DAPC		Dial Access Prefix on Console	isdn-24

LD 12

Prompt	Response	Comment	Pack/Rel
	(DAPA) DAPD	Display Access Prefix Allowed Display Access Prefix Denied	
DLEN	(8) 16	Display Length QCW2 Attendant Console QCW3 or QCW4 Attendant Console Prompted when TYPE = ATT. DLEN applies for only a QCW type console.	basic-1
DNAN	(DNAA) DNAD	ANI DN will be used as the Customer Listed Directory Number 0 (as defined in LD 15). Outgoing CDT12/CSDT12 route ANDN will be used as DN in ANI messages. Prompted with Commonwealth of Independent States (CIST) package 221.	cist-21
DNDI	(DNDD) DNDA	Dialed Name Display Denied Dialed Name Display Allowed Prompted if TYPE is 1250/2250 and CPND = CNDA.	cpnd-13
EBLF	(BLFD) BLFA	Enhanced Busy Lamp Field Denied Enhanced Busy Lamp Field Allowed Prompted when TYPE = 1250/2250 and OPT = IBL or ILF in LD 15.	basic-15
IADN	xxxx	Individual Attendant DN for this console. The Individual Attendant DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with 'X' to delete an existing IADN.	basic- 23
ICDR	(ICDD) ICDA	Internal Call Detail Recording Denied Internal Call Detail Recording Allowed ICDA generates an L-Record in CDR reports. Refer to the <i>Call Detail Reporting NTP</i> for more information. ICDR is prompted with Internal Call Detail Recording (ICDR) package 108.	icdr-10

Prompt	Response	Comment	Pack/Rel
ICP	(NO) YES	Intercept Computer available Prompted when: <ol style="list-style-type: none"> Intercept Computer Interface (ICP) package 143 is equipped LD 17 ADAN USER is set for ICP LD 15 prompt ICP = YES 	icp-16
ICT	0-<NIPN>	Intercept Computer Terminal or printer number Number of Intercept Positions (NIPN) is defined in LD 15.	icp-16
KEY	xx aaa yyyy	Console Key. Where: <ul style="list-style-type: none"> xx = key number 0-9 for QCW consoles, 0-19 for M1250 and M2250 consoles aaa = key name or function yyyy = additional information required for the key 	basic-1
	xx ADL yy z...z	Autodia key. Where: <ul style="list-style-type: none"> xx = key number yy = ADL DN, maximum length is 31 digits. z...z = actual Autodial DN is optional 	basic-1
	xx AUTO yyy...y	Direct Autoline DN, where: xx = Key number (0 - 19) yyy...y = Autoline DN. The Autoline DN can be 1 - 31 digits.	basic- 23
	xx AWU	Automatic Wake Up key (cannot be key 0 or 1)	awu-10
	01 BIN	Allow Barge-In on key 01. Allow both Barge-In and Attendant Monitor on key 01 if China Attendant Monitor Package (CHINA) package 285 is equipped. Must have OPT = AMA in LD15.	basic-1 china-21
	xx BKI	Break-In key	bki-1

LD 12

Prompt	Response	Comment	Pack/Rel
	00 BVR	Allow Busy Verify on key 0.	basic-1
		Allow both Busy Verify and Attendant Monitor on key 00 if China Attendant Monitor Package (CHINA) package 285 is equipped. Must have OPT = AMA in LD15.	china-21
	xx CHG	Charge account key	fca-1
	xx COS	Controlled Class of Service key	eccs-15
	xx CPN	Calling Party Number key	cab-1
	xx DCW	Display Call Waiting key	basic-1
	xx DDL	Do Not Disturb Individual key	dndi-1
	xx DDT	Display Date key	basic-1
	xx DPD	Display Destination key	basic-1
	xx DPS	Display Source key	basic-1
	xx DRC	DID Route Control key	basic-1
	xx DTM	Display Time key	basic-1
	xx EES	End-to-End Signaling key (cannot be key 0 or 1)	basic-1
	xx GND yy	Group Do Not Disturb key Where: yy = group number = 0-99	dngd-1
	xx LTA	Low Tape Alarm key for mini CDR	cdr-8
	xx MCK	Message Cancellation Key. Turns off indication at a telephone.	mwc-1
	xx MDT	Maintain Change/Display Date key	tad-1
	xx MIK	Message Indication Key Turns on indication at a telephone.	mwc-1
	xx MTM	Maintain Change/Display Time key	tad-1
	xx MTR	Meter key	mr-10

Prompt	Response	Comment	Pack/Rel
xx NAS		Network Attendant Service key	nas-20
xx NUL		Remove feature or function from key	basic-1
xx PAG yyyy		Paging key Where: yyyy = Route Access Code. This number can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. The route must be defined in LD 16.	basic-1
xx PRG		Attendant Administration Program key	aa-1
xx PRK		Call Park key	cprk-2
xx RDL		Redial stored number	basic-1
xx RFW		Attendant Remote Call Forward key	arfw-20
xx RPAG yyyy		Radio Paging key Where: yyyy = Route Access Code Coordinated Dialing Plan (CDP), Trunk Steering Codes (TSC) and Distant Steering Codes (DSC) can be entered against yyyy.	rpa-15
xx RTC		Routing Controls key This key will activate the NCOS map defined in LD 86. Must have Network Class of Service (NCOS) package 32.	bars-1
xx SACP		Semi-Automatic Camp-On key Must have Semi-Automatic Camp-On (SACP) package 181.	sacp-20
xx SCC yyyy		Speed Call Controller key Where: yyyy = list number, 0-8190	optf-1
xx SECL		Series Call key Must have Series Call (SECL) package 191	secl-15
xx SSC yyyy		System Speed Call controller key Where: yyyy = list number, 0-4095	ssc-2

LD 12

Prompt	Response	Comment	Pack/Rel
	xxTHF	Trunk Switch Hook Flash key	thf-20
	xx TRC	Malicious Call Trace key Must have Malicious Call Trace (MCT) package 107.	mct-10
LANG	(00)-15	Language to download to M2250 on Sysload Language choices: <ul style="list-style-type: none">• (00) - English• 01 - French• 02 - Spanish• 03 - German• 04 - Italian• 05 - Norwegian• 06 - Galic• 07 - Turkish• 08 - Katakana• 09 - People's Republic of China• 10 - Taiwan• 11 - Korean• 12 - Polish• 13 - Czech/Slovak• 14 - Hungarian• 15 - No language assigned	basic-1
PRES	0-19	ICI keys to have Presentation Status Up to 20 fields may be input, fields must be separated by a space.	coop-14
QDIS	0-3 0-19	Queue Thermometer Display position, and ICI key number	coop-14
	0-3 REST	Queue Thermometer Display position, all ICI keys that are not displayed on any other displays for the Queue Thermometer	
	0-3 NUL	Queue Thermometer Display position, no ICI key assigned	
	<cr>	Stop the repetition of this prompt	
QTHM	(NO) YES	Queue Thermometer equipped Prompted with Console Operations (COOP) package 169.	coop-14

Prompt	Response	Comment	Pack/Rel
REQ	CHG END MOV	Request Change existing data Exit overlay program Move from one TN to another. CAUTION: There is a possibility of data corruption when consoles are moved using this response.	basic-1
	NEW	Add new data to the system	
SETN	I s c u	Second Terminal Number General TN format	basic-1
	c u	For Meridian: I s c u = loop, shelf, card, unit Option 11C format SETN must have same loop, shelf and card as the primary TN if TYPE = 2250. This cannot be a phantom loop.	
SGRP	(0)-999	Scheduled Access Restriction (SAR) Group number Prompted with SAR package 162. Must have group defined in LD 88.	sar-20
SSU	yyyy	System Speed Call User list number Where: yyyy = 0-4095.	ssc-2
TN	I s c u	Terminal Number. The TN defines the location of the console. For Meridian: I s c u = loop, shelf, card, unit The range values are as follows: Where I =	basic-1
		<ul style="list-style-type: none"> • 0 - 159: loops, superloops must be multiples of 4, starting with superloop 0 • 0 - 255: loops, Option 81C 	fnf-25
		Where s =	
		<ul style="list-style-type: none"> • 0 - 3: PE shelves on loops defined as TERM in LD 17 • 0 - 1: PE shelves on loops defined as TERD in LD 17 and superloops • 0: PE shelf on loops defined as TERQ in LD 17 	

LD 12

Prompt	Response	Comment	Pack/Rel
		Where c = <ul style="list-style-type: none">• 1 - 10: PE cards of dual and enhanced loops• 0 - 15: IPE cards of superloops Where u = <ul style="list-style-type: none">• 0 - 3: single density units• 0 - 7: double density units and SL-1 line cards• 0 - 7: integrated services digital line(ISDLC) cards• 0 - 15: digital line cards (DLC)	
	c u	For Option 11C: c u = card, unit <ul style="list-style-type: none">• c = 1 - 50• u = 0 - 15	basic-16
TOTN	l s c u	To Terminal Number General TN format	basic-1
	c u	For Meridian: l s c u = loop, shelf, card, unit Option 11C format TOTN is prompted when REQ = MOV. TOTN cannot be a phantom loop.	
TYPE		Type of data block	basic-1
	1250	M1250 Console data block QCW3, QCW4 and M1250 require an SL-1 Line Card.	
	2250	M2250 Console data block M2250 requires an ISDLC Card or a Digital Line Card.	
	ATT	QCW3 or QCW4 Attendant Console data block	
	PWR	Power data block TN used for power or Attendant Supervisory Module (ASM). Third and fourth TNs used for power, or third TN for ASM and fourth and fifth TNs used for power.	

LD 13: Digitone Receivers, Tone Detectors, Multifrequency Senders and Receivers

This program enables the administrator to create or modify data blocks for the following:

- Digitone Receivers (DTR)
- SL-1 Tone Detectors (TDET)
- Multifrequency Receivers (MFR)
- Dial Tone Detectors (DTD)
- Multifrequency Signaling for Socotel (MFE) Senders/Receivers
- 2/5 Spanish KD3 MF Signalling (MFK5)
- 2/6 Spanish KD3 MF Signaling (MFK6)
- Extended Dial Tone Detector/Digitone Receivers (XTD)
- Multifrequency Compelled (MFC) Senders/Receivers

These cards are used by 2500-type telephones and trunks that send DTMF tones to the system, and by MF trunks to send MF tones to the system. All 2500 sets and some trunks must have Class of Service (CLS) defined as Digitone (DTN). MF reception is available to QPC916 cards only.

When the Overlay is loaded the available system memory, disk records and system configuration limits are output in a header as follows:

```
DTR000
MEM AVAIL: (U/P): xxxxxx USED: xxxxx TOT: xxxxxxxx
DISK RECS AVAIL: xxx
TNS AVAIL: xxxxxx USED: xxxxxx TOT: xxxxxx
```

If an Incremental Software Management (ISM) limit is set to the maximum value 32767, then the information for that ISM will not be printed. This does not apply for the TNs ISM.

Fiber Network Fabric

The Fiber Network Fabric extends and enhances the 5-group network architecture to 8 non-blocking (inter-group) Network groups, with a resulting expansion in network capacity to 8k timeslots available for Intergroup traffic. This is achieved by using OC-12 SONET rings, and adding additional network and PE shelves, packs and cables and software changes to allow using the expanded network capacity. This expansion increases the number of available loops from 160 to 256. This applies to the Option 81C only.

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, MOV, NEW, or OUT)
TYPE	a...a	Type of data block (a...a = DTD, DTR, MFC, MFE, MFK5, MFK6, MFR, TDET, CMOD or XTD)
TN	l s c u	Terminal Number (l s c u ranges are defined on page 202)
POLR	a...a	Polarity of LED messages for DTD (a...a = (NORM) or REV)
XTDT	(0)-7	Extended Tone Detector Table number
- DTO	(NO) YES	Dial Tone Detection Only
CDEN	aa	Card Density (aa = SD, DD, or 4D)
TOTN	l s c u	To Terminal Number (l s c u ranges are defined on page 202)

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
CDEN		Card Density	basic-1
	SD	Enter SD if this unit is on a single density circuit pack. The card density cannot be changed from DD to SD if more than one unit is assigned.	
	DD	Enter DD if this unit is on a double density circuit pack. DD is not allowed if the network loop is not configured for double density	
	4D	Enter 4D if this unit is on a quadruple density circuit pack. 4D is not allowed if the network loop is not configured for quadruple density	
	<cr>	If REQ = NEW and TYPE = DTR then CDEN is set to the default density as specified in the configuration record.	
DTO	(NO) YES	Dial Tone Detection Only Do not disable DTR Detection Disable DTR detection, only perform dial tone detection. Prompted when TYPE = XTD	dtd-10
POLR	(NORM) REV	Polarity of LED messages Normal Reversed	dtd-10
REQ	CHG END MOV	Request Change existing data Exit overlay program Move from one TN to another CAUTION: There is a possibility of data corruption when Digitone Receivers are moved using this response.	basic-1
	NEW OUT	Add new data to the system Remove information from data block	

LD 13

Prompt	Response	Comment	Pack/Rel
TN	l s c u	<p>Terminal Number</p> <p>For Meridian: l s c u = loop, shelf, card, unit</p> <p>The range values are as follows:</p> <p>Where l =</p> <ul style="list-style-type: none">• 0 - 159: loops, superloops must be multiples of 4, starting with superloop 0• 0 - 255: loops, Option 81C with Fiber Network Fabric fnf-25 <p>Where s =</p> <ul style="list-style-type: none">• 0 - 3: PE shelves on loops defined as TERM in LD 17• 0 - 1: PE shelves on loops defined as TERD in LD 17 and superloops• 0: PE shelf on loops defined as TERQ in LD 17 <p>Where c =</p> <ul style="list-style-type: none">• 1 - 10: PE cards of dual and enhanced loops• 0 - 15: IPE cards of superloops <p>Where u =</p> <ul style="list-style-type: none">• 0: single density or one unit	basic-1
	c u	<p>For Option 11C: c u = card, unit</p> <p>The range values are:</p> <ul style="list-style-type: none">• c = 1-50• u = 0-7• u = 8-11 when TYPE = MFR, MFC, MFE, MFK5, MFK6 for Card 0 <p>Note that units 0-7 must be of one type. Units 8-15 must also be of one type. The new MFC/MFE/MFK5/MFK6 units on Card 0 must be enabled using the ENLX 0 command in LD 34.</p>	
TOTN	l s c u c u	<p>To Terminal Number</p> <p>General TN format</p> <p>Option 11C format</p>	basic-1
TYPE		Type of data block	basic-1

Prompt	Response	Comment	Pack/Rel
	CMOD	CLASS modem unit. A CLASS modem unit is configured on the XCMC card. A maximum of 32 units can be configured on the XCMC card.	cname-23 cnumb-23
	DTD	Dial Tone Detector data block	
	DTR	Digitone Receiver data block	
	MFC	Multifrequency Compelled sender/receiver data block Multifrequency Compelled Signaling (MFC) package 128 is required.	
	MFE	Multifrequency Signaling for Socotel sender/receiver data block. Multifrequency Signaling for Socotel (MFE) package 135 is required.	mfe-10
	MFK5	2/5 Spanish KD3 MF Signaling	kd3-20
	MFK6	2/6 Spanish KD3 MF Signaling	kd3-20
	MFR	Multifrequency Receiver data block MFR applies to Feature Group D. Up to 255 MF Receivers can be defined. Only units 0 and 1 can be used. Feature Group D (FGD) package 158 is required.	
	TDET	Tone Detector data block (Not supported on Option 11C)	
	XTD	Extended Dial Tone Detector and Digitone Receiver data block	
XTDT	(0)-7	Extended Tone Detector Table number If a table other than 0 is entered, it must exist in LD 97. This prompt appears when TYPE = XTD.	tdet-7

LD 13

LD 14: Trunk Data Block

This program allows data blocks for trunks to be created or modified.

When the Overlay is loaded the available system memory, disk records and system configuration limits are output in a header as follows:

```
>ld 14
```

```
TRK000
```

```
MEM AVAIL: (U/P): xxxxxx USE D: xxxxx TOT: xxxxxxxx
```

```
DISK RECS AVAIL: xxx
```

```
TNS AVAIL: (U/P): xxxxxx USE D: xxxxx TOT: xxxxxxxx
```

```
RAN CON AVAIL: (U/P): xxxxxx USE D: xxxxx TOT: xxxxxxxx
```

```
MUS CON AVAIL: (U/P): xxxxxx USE D: xxxxx TOT: xxxxxxxx
```

```
AST SET AVAIL: xxxxx USED: xxxxx TOT: xxxxx
```

```
ITG ISDN TRUNKS AVAIL: xxxxx USED: xxxxx TOT: xxxxx
```

```
TRADITIONAL TRUNKS AVAIL: xxxxx USED: xx TOT: xxxxx
```

If an Incremental Software Management (ISM) limit is set to the maximum value 32767, then the information for that ISM will not be printed. This does not apply for the TNs ISM. The header includes Recorded Announcement Broadcast, Music Broadcast connections and Associated trunk ISM information.

After making any changes to the trunk data block, IPE trunk cards must be downloaded with **ENLC I s c** command in LD 32.

The Group Hunt/DN Access to SCL package or PLDN package 120 allows an asterisk (*) or double asterisk (**) as a valid input to a number of prompts, usually the asterisk will be part of a dialed number. Without this package, for example, inputting one asterisk will cause the system to reissue the last prompt, and two asterisks will cause a restart of the Overlay at REQ.

Fiber Network Fabric

The Fiber Network Fabric extends and enhances the 5-group network architecture to 8 non-blocking (inter-group) Network groups, with a resulting expansion in network capacity to 8k timeslots available for Intergroup traffic. This is achieved by using OC-12 SONET rings, and adding additional network and PE shelves, packs and cables and software changes to allow using the expanded network capacity. This expansion increases the number of available loops from 160 to 256. This applies to the Option 81C only.

Prompts and responses

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, MOV, LCHG, NEW x, or OUT x)
TYPE	a...a	Type of data block (TYPE responses begin on page 229)
T_TN	l ch	Loop number and channel for tandem PRI connection
- IPRI	l ch	Loop number and channel for incoming PRI channel
- OPRI	l ch	Loop number and channel for outgoing PRI channel
MODL	1-127	Option 11C Model number
TN	l s c u	Terminal Number (l s c u ranges are defined on page 228)
DES	x...x	Designator field for trunk (0-16 character alphanumeric)
CDEN	aa	Card Density (aa = SD, DD, 4D, or 8D)
XTRK	a...a	Extended Trunk (a...a = EXUT, ITG1, ITG2, XCOT, XDID, XEM, XFEM, or XUT)
MAXU	1 - 32	Maximum number of IP units supported (ITG card version dependant)
IPTN	(NO) YES	ITG card Physical TN.
ZONE	0-255	Zone number
FWTM	(NO) YES	Firmware Timing for trunk hook flash
SXS	(NO) YES	Step-by-step CO trunk
SICA	(1)-16	Signaling Category table number
PDCA	(1)-16	Pad Category table number for PRI2,DTI2,JDM,PRI,DTI trunks
PCML	aa	Pulse Code Modulation Law (aa = MU or A)
TOTN	l s c u	TO Terminal Number

DDSL	0-15	Digital DASS2/DPNSS Signaling Link (NT hardware)
DTSL	0-159	Digital Trunk Signaling Link (GPT hardware)
SIGL	aaa	Level 3 Signaling
CUST	xx	Customer number associated with this trunk
SFEX	(NO) YES	Special digital FEX trunk
AST	(NO) YES	Associated trunk for CTI trunk Monitoring and Control
IAPG	(0)-15	Event Group for USM message
NCOS	xx	Network Class of Service group
RTMB	xxx xxx	Route number, Member number
CONN	(4)-48	Maximum number of broadcast connections allowed for this trunk.
INC	(YES) NO	Increasing channel numbers and decreasing member numbers
PRI0	aaa	Priority designation (aaa = (XHP) or YLP)
CHID	1-382	Channel ID for this trunk.
SREF	1-9999999	ISDN Semi Permanent Connection (ISPC) Reference Number
SDCH	(NO) YES	Is the ISPC link used by a D-channel?
SMAS	(NO) YES	Is this ISPC acting as a MASTER when connecting data interfaces to the ISPC link?
MTN	I s c u	Modem Terminal Number
PRDN	xxxx	Private Line Directory Number
CMF	(NO) YES	Call Modification Features restriction
RLDN	xxxx	Release Link Trunk Directory Number
NGRP	(0)-9	Night Service Group number
NITE	xxxx	Night Service directory number
ATDN	xxxx	Auto Terminate DN
MNDN	xxxx	Manual Directory Number
TGAR	xx	Trunk Group Access Restriction
SIGL	aaa	Trunk Signaling (SIGL responses begin on page 222)
XDIC	aaa	Outpulsing for DIC trunks (aaa = (MUT) or NOR)
EMTY	aaa	E & M Type (aaa = (TY2), TY1, or BPO)
CPAD	a...a	Carrier Pad out or Carrier Pad in for 4-wire E & M duplex trunks (a...a = (COU) or CIN)
LDOP	a...a	Loop Dial Outpulsing (a...a = (LOOP) or BOP)

LD 14

TIMP	x...x	Termination Impedance
BIMP	a...a	Balance Impedance (a...a = (3COM), 600, 900, or 3CM2)
AUTO_BIMP		
	(NO) YES	Automatic Balance Impedance Option
STRI	a...a	Start arrangement Incoming (a...a = DDL, IMM, MWNK, OWK, PTSD, SACK, RT, or WNK)
STRO	a...a	Start arrangement Outgoing (a...a = DDL, IMM, MWNK, OWK, PTSD, SACK, RT, or WNK)
SUPN	(NO) YES	Answer and disconnect Supervision required
- STYP	a...a	Supervision Type (a...a = ARF, BAT, BST, BTS, JDID, JCO, LBS, PIP, and PSP)
SEIZ	(NO) YES	Automatic Guard Detection for outgoing trunk
PPID	(0)-15	Periodic Pulse Metering country ID
BTID	(0)-15	Busy Tone country ID
CLS	a...a	Class of Service (CLS responses begin on page 211)
MFL	(0)-15	Multifrequency digit level
MFLI	(0) 1	Multifrequency transmit level identifier
MFPD	(NO) YES	Multifrequency PAD
BTDT	(0)-7	Busy Tone Detection Table
FCAR	(NO) YES	Forced Charge Account
ADID	xxxx	AIOD four-digit Trunk Identifier
TKID	nnnnnnn	Trunk Identifier
DTCR	(NO) YES	Digit Collection Ready
CFLP	0-159	Music Conference Loop

LD 14

Prompt	Response	Comment	Pack/Rel
		The Terminating and Balance Impedance options are listed below.	
		<u>TIMPBIMP</u>	
		600 600	
		600 3COM	
		900 3COM	
		900 900	
		900 3CM2	
		600 3CM2	
BTDT	(0)-7	Busy Tone Detection Table The BTDT table must be defined in LD 97. BTDT is mutually exclusive with BTID.	btd-21
BTID	xxxx	Busy Tone country ID This must be configured for a BTS supervised XCOT trunk. One BTID type per card. Trunks must be removed from card to change BTID. BTDT is mutually exclusive with BTDT.	btd-21
		<u>Busy Tone IDRecommended Country</u>	
		0-2Reserved for future use	
		3Germany, Ireland	
		4Switzerland	
		5Denmark	
		6Norway, Kuwait, Chile, Venezuela,	
		Indonesia, Thailand, Korea	
		7Holland	
		8Australia, Mexico	
		9Ireland	
		10Taiwan, Brazil, Tortola, Mexico	
		11Singapore	
		12Argentina, Italy	
		13Lebanon, Italy	
		14Turkey	
		15Reserved for future use	

Prompt	Response	Comment	Pack/Rel
CDEN	SD DD 4D 8D	Card Density Single Density Double Density Quad Density for XCOT only Octal Density for XCOT only and there is no default. Not prompted for superloops or Option 11C models.	basic-7
CFLP	0-159	Music Conference Loop	mus-1
CHID	1-382	Channel ID for this trunk Prompted when the Route specified has ISL enabled in LD 16. The number of ISL trunks allowed for the D-channel is specified in LD 17. A different channel ID is requested for each Phantom TN which is used for ISPC links. The same channel ID must be configured for the same ISPC reference number on both PBXs linked by the connection.	isl-12
CIST	(NO) YES	Incoming CIS three wire trunk is not a toll trunk Incoming CIS three wire trunk is a toll trunk CIST appears for trunks when SIGL = CIS. Only prompted for incoming route.	cist-21
CLS		Class of Service options for trunks. Defaults are shown in parentheses. Enter each non-default option required, followed by a space.	basic-1
	(APN) APY	ACD Priority not required ACD Priority required Applies only to COT, WAT, DID and FEX trunks.	bacd-1
	(BARD) BARA	Barring Denied Barring Allowed	basic-7
	(CLID) CLIA	Calling Line Identification Denied Calling Line Identification Allowed	acli-24
	CMFS	CMFS trunk register signaling means that the CIS MF Shuttle protocol is supported by the trunk. CMFS may be defined only for trunks on CDTI2/CSDTI2 with "CISFW=MFS" and only if both the MFS and CIST Packages are equipped.	cismfs-23

LD 14

Prompt	Response	Comment	Pack/Rel
(CND) CNA	Calling party Denied Calling party Allowed	Allowed for L1 Multifrequency Compelled Signaling and R2 MFC trunks. Automatic Number Identification is denied for an Outgoing Loop Start (LOP) Central Office Trunk (COT). Must have Commonwealth of Independent States (CIST) package 221 or Multifrequency Compelled Signaling (MFC) package 128.	mfc-21
(CORX) CORP	Central Office Ringback not provided by SL-1 Central Office Ringback provided by SL-1		supp-14
(DIP) DPDT	Dial Pulse Dial Pulse Digitone (incoming dial pulse - outgoing digitone)		basic-21 basic-24
DTDP	Digitone Dial Pulse (incoming digitone - outgoing dial pulse)		basic-24
DIPF	DIPF trunk register signaling requires that DP digit collection be performed by firmware. Applies to CDTI2 or CSDTI2.		
DTN	Digitone		
MFC	R2 Multifrequency Compelled Signaling. MFC can be configured on 1.5 DTI routes.		
MFE	Multifrequency Signaling for Socotel		
MFK	Multifrequency Signaling for KD3		basic-20
MFR	Multifrequency Receiver for Feature Group D		
MFX	Mixed Signaling (MFC/DTMF)		
(DRPD) DRPA	DTR PAD value Denied DTR PAD value Allowed Can only be configured for 2.0 Mb/s DID with DTI2 enabled.		dti2-10
(ECD) ECA	Echo Canceling Denied Echo Canceling Allowed ECA indicates Echo suppression equipment is connected to trunk.		basic-1
(HKD) HKA	Hong Kong DTI Denied Hong Kong DTI Allowed May only be used with DTI TNs with DTN CLS on DID or TIE routes.		basic-6

Prompt	Response	Comment	Pack/Rel
(LNT) JDID JCO		<p>Loop Start Non-supervisory Trunk</p> <p>Japan DID (JDID not valid for XCOT trunks)</p> <p>Japan CO capabilities allowed. JCO should only be accepted with SIGL = LOP. Japan PSTN trunks, (QPC686), not allowed for XUT/XEM.</p> <p>Answer NO to prompt SUPN for an unsupervised trunk, instead of using LNT. For supervised trunks answer YES to SUPN then enter the appropriate supervision type at prompt STYP.</p>	xutj-16
(LPR) HPR		<p>Low Priority</p> <p>High Priority</p> <p>DID and TIE trunks should use HPR and be installed in card slot 1. Superloops do not require any trunks assigned as high priority.</p>	basic-1
(MID) MIA		<p>Manual Incoming Denied</p> <p>Manual Incoming Allowed</p>	basic-1
(P10) P12 P20		<p>Make-break ratio for dial pulse dialing</p> <p>10 pulses per second</p> <p>(see explanation below)</p> <p>20 pulses per second</p> <p>P12 option:</p> <ul style="list-style-type: none"> • P10 = primary 10 pps make-break ratio of 50% • P12 = secondary 10 pps make-break ratio of 50% <p>All three make-break ratios can be set for XUT, XUTJ and XEM trunks. See prompts P10R, P12R and P20R in LD 97.</p> <p>Use P10 for PPS1 and P12 for PPS2 XUT/XEM trunks.</p> <p>For Option 11C, P10 and P12 is also used for DTI/DTI2 trunks. P12 applies only to XUT, XUTJ and XEM trunks.</p>	basic-21
(PIP) PSP		<p>Polarity Insensitive Pack. (PIP is used for QPC330 and QPC331 packs)</p> <p>Polarity Sensitive Pack (use PSP for QPC218, QPC219 and QPC295 packs). When using PSP in North America, the trunk route should have message registration set to reverse battery; the LD 16 prompt MR should be set to RVB.</p>	basic-10

LD 14

Prompt	Response	Comment	Pack/Rel
	BST	Battery Supervised pack (SIGL = LOP is required) For loop start trunks with Answer Supervision in U.S., the NT8D14 Universal Trunk does not provide Message Registration, PPM or PIP operation. This can be used for Answer Supervision on Ground Start trunks. Not valid for XCOT trunks.	basic-4
	SHL LOL	Short line Class of Service Long line Class of Service SHL replaces NTC and LOL replaces TRC and VNL for XDID and XCOT trunks.	basic-20
	(SPCD) SPCA MIA	Analog Semi-Permanent Connections Denied Analog Semi-Permanent Connections Allowed Manual Incoming Allowed	basic-24
	(THFD) THFA	Centrex Switchhook Flash Denied Centrex Switchhook Flash Allowed	basic-14
	(TRC) NTC VNL	Transmission Class of Service Transmission Compensated Non-Transmission Compensated Via Net Loss The default depends on the signaling type (SIGL) <ul style="list-style-type: none">• DX2 = VNL• DX4 = VNL• EAM = VNL• EM4 = VNL• GRD = NTC• LDR = NTC• LOP = NTC• OAD = NTC VNL Class of Service is allowed with Universal Trunk Tie trunks. For XDID and XCOT cards: <ul style="list-style-type: none">• NTC is replaced by SHL• TRC and VNL are replaced by LOL Existing databases will be converted automatically. For EM4 and WR4, AC15 = 2280 Hz. on XFEM trunks:	tip-19

Prompt	Response	Comment	Pack/Rel
		<ul style="list-style-type: none"> • NTC and VNL are equivalent to TIE designation • TRC is equivalent to LINK designation • TIE = PBX-PBX connections via leased line • LINK = PBX-PBX connections on-premises 	
(CTD)		Conditionally Toll Denied. CTD is the default for trunk types: TIE, CSA, ATVN, FGD, and IDA	
CUN		Conditionally Unrestricted	
FR1		Fully Restricted class 1	
FR2		Fully Restricted class 2	
FRE		Fully Restricted	
SRE		Semi-Restricted	
TLD		Toll Denied	
UNR		Unrestricted. Only UNR is allowed for CO, FX and WATS trunks. UNR is the default for all trunk types <i>except</i> : TIE, CSA, ATVN, FGD, and IDA	
(WTA)		Warning Tone Allowed	basic-7
WTD		Warning Tone Denied	
(XARF)		ARF Supervised COT denied	basic-7
ARF		ARF Supervised COT allowed Must have TYPE = COT, XTRK = XCOT and SIGL = LOP. Answer YES to prompt SUPN then enter the appropriate supervision type at prompt STYP.	
(XBAT)		Battery Supervised COT denied	basic-7
BAT		Battery Supervised COT allowed Answer YES to prompt SUPN then enter the appropriate Supervision Type at prompt STYP. Must have TYPE = COT, XTRK = XCOT and SIGL = LOP.	
(XBTS)		Busy Tone Supervised COT denied	basic-7
BTS		Busy Tone Supervised COT allowed Answer YES to prompt SUPN and then enter the appropriate supervision type at prompt STYP.	
(XLBS)		Loop Break Supervised COT denied	basic-7
LBS		Loop Break Supervised COT allowed Answer YES to prompt SUPN and then enter the appropriate Supervision Type at prompt STYP. Must have TYPE = COT, XTRK = XCOT and SIGL = LOP.	

LD 14

Page 216 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	(XREP) RVEP	Reversed Ear Piece denied Reversed Ear Piece allowed The E-lead is reversed for a radio paging trunk	rpa-15
CMF	(NO) YES	Call Modification restriction Call Modifications allowed Call Modifications not allowed	basic-1
CONN	(4)-48	Define the maximum number of broadcast connections allowed for this trunk.	ranbrd-23 ran-23
CPAD	(COUT) CIN	Carrier Pad Out for 4-wire E & M duplex trunks Carrier Pad In for 4-wire E & M duplex trunks With CPAD = CIN, a 7 dB pad attenuates the trunk input and a 16 dB pad attenuates the trunk output.	xpe-15
CUST	xx	Customer number (defined in LD 15 and prompted when REQ = NEW)	basic-1
DDSL	0-15	Digital DASS2/DPNSS Signaling Link DASS2/DPNSS D-channel	basic-7
DES	x...x	Designator field for trunk groups of 0-16 alphanumeric characters (DES is an optional entry)	basic-22
DTCR	(NO) YES	Digit Collection Ready Send acknowledge when digit collection resources such as DTR, MFC, and S/R are ready and attached. Prompted when TYPE = DID and CLS = DTN. Prompted with International Supplementary Features (SUPP) package 131. Prompted when the incoming trunk is analog, answer supervision is on, and EOS is set to BSY.	basic-7
DTSL	0-159	Digital Trunk Signaling Link DASS2/DPNSS Signaling Link Not supported on Option 11C	basic-7
EMTY	(TY2) TY1 BPO X	E & M Type 4-wire E&M Type 2 4-wire E&M Type 1 4 wire E&M British Post Office. (BPO is allowed if TYPE = XFEM and SIGL = EAM or EM4) Precede with X to delete	xpe-15

Prompt	Response	Comment	Pack/Rel
FCAR	(NO) YES	Forced Charge Account	chg-1
FWTM	(NO) YES	Firmware Timing for Trunk Hook Flash is not used by the card Firmware timing for Trunk Hook Flash is used by the card This prompt appears if Collect Call Blocking (CCB) package 290, Malicious Call Trace (MCT) package 107 or Trunk Hook Flash (THF) package 157 are enabled.	ccb-21
IAPG INC	(0)-15 (YES) NO	Event Group for USM message Increasing channel numbers and member numbers Increasing channel numbers and decreasing member numbers	basic-23 basic-7
IPRI	l ch	Incoming PRI channel This is the PRI channel through which the Meridian 1 gains access to the PSPDN. Where: <ul style="list-style-type: none"> • Loop = PRI loop number • Channel = PRI channel that holds the incoming nailed up connection (between 1-23) 	mph-19
IPTN	(NO) YES	ITG card Physical TN. The Terminal Number is a trunk unit on ITG card. The Terminal Number is used for concentration purpose. IPTN is output only if XTRK is ITG1 or ITG2.	mit-25
LDOP	(LOOP) BOP	Loop Dial Outpulsing Loop outpulsing for Loop Dial Repeating signalling Battery Outpulsing for Loop Dial Repeating signalling	xpe-15
MAXU	1-32 1-24	Maximum number of Internet Protocol (IP) units supported Meridian Integrated IP Telephony Gateway (dual slot) Meridian Integrated IP Telephony Gateway (single slot)	itg- 25
MFL	(0)-15	Multifrequency digit level. MFL is not prompted for Option 11C. Expanded from 0-7 to 0-15 for Meridian 1 for superloop only. Enter the MFC digit level required for signals to the Public Switched Telephone Network (PSTN).	basic-2

LD 14

Prompt	Response	Comment	Pack/Rel
		Non-superloop codes and values: <u>CodesLevel Values</u> (0)- 5 dBm 1- 8 dBm 2- 9 dBm 3- 10 dBm 4- 11 dBm 5- 12 dBm 6- 13 dBm 7- 32 dBm	
		Superloop codes and values: <u>CodesLevel Values</u> (0)- 8 dBm 1- 11 dBm 2- 12 dBm 3- 13 dBm 4- 14 dBm 5- 15 dBm 6- 16 dBm 7- 31 dBm 8- 4 dBm 9- 5 dBm 10- 6 dBm 11- 7 dBm 12- 9 dBm 13- 10 dBm 14Spare 15Spare	
MFLI	(0) 1	Multifrequency transmit level identifier. MFLI is prompted exclusively for the Option 11C. MFLI is prompted when CLS = MFC, MFE, or MFK. Use multifrequency transmit level as defined for MFTL0 in LD 97. Use multifrequency transmit levels defined for MFTL1 in LD 97.	opt11c-22
MFPD	(NO) YES	Multifrequency PAD MFPD is prompted if CLS = TLD, CUN or CTD, and if the trunk type is CSA or TIE. TLD is recommended. MFPD is not prompted if the route is 1.5 DTI and CLS= MFC.	basic-3

Prompt	Response	Comment	Pack/Rel
MNDN	x...x	Manual Directory Number This DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. A Group Hunt pilot DN can be entered. CLS should be MIA.	basic-1
MODL	1-127	Option 11C Model number	basic-14
MTN	l s c u	Modem Terminal Number (l s c u ranges are defined on page 228)	amp-5
	c u	For Option 11C	basic-7
NCOS	(0)-99	Network Class of Service group	ncos-1
NGRP	(0)-9	Night Service Group number	basic-2
		NGRP appears when ENS = YES in LD15. This prompt replaces the NITE prompt. If ENS is changed from NO to YES while Night Service is in effect, the system verifies that the NITE number defined is a group number or a DN. If a night DN or 0000 is defined, the existing NITE number is used.	
NITE	x...x	Night Service directory number	basic-1
		This DN can be up to 4 digits, up to seven digits with Directory Number Expansion (DNXP) package 150. A Group Hunt pilot DN can be entered.	
		Night Service applies to trunks terminating at the attendant. This prompt takes precedence over the NITE and NIT1-NIT4 prompts in LD 15. If a DN is defined here, the call goes to this DN. If there is no DN here, the call goes to the defined LD 15 NITE prompts. Precede with X to remove.	
OPRI	l ch	Outgoing PRI channel (the PRI channel through which the Meridian 1 gains access to the PSPDN) Where: Loop = PRI loop number and Channel = PRI channel that holds the outgoing nailed up connection (between 1-23).	mph-19

LD 14

Prompt	Response	Comment	Pack/Rel
PCML	MU A	Pulse Code Modulation Law Mu-law A-law PCML is not prompted for JDML loops. Prompted if loop is PRI2, DTI2, or if loop is PRI/DTI and is equipped with International 1.5/2.0 Mb/s Gateway (GPRI) package 167.	dti 2-15
PDCA	(1)-16	Pad Category table number The PAD table must be defined in LD 73 first.	dti 2-15
PPID	xx	Periodic Pulse Metering (PPM) country ID Must be configured if PPM is enabled. One PPID type per card. Trunks must be removed from card to change PPID. <u>PPMIDfrequencyRecommended Country</u> (0)50 HzUK 112 kHzFrance 250 HzFrance 316 kHzGermany, Turkey, Egypt, Venezuela, Indonesia, Finland 412 kHzSwitzerland, Ireland, Portugal, Italy, Spain, Lebanon, Turkey 512 kHzDenmark 616 kHzNorway, Belgium 750 HzHolland 812 kHz/50 HzAustralia (two different packs) 9-15-----Reserved for future use	basic-7
PRDN	x...x	Private Line Directory Number PRDN must be defined in LD 11. This DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	basic-1
PRI0	(XHP) YLP	Priority designation. Prompted if SIGL = DPN. X High Priority Y Low Priority Used to determine which end has priority in a glare condition, where both sides seize the trunk at same time. XHP always has priority over YLP.	basic-7

Prompt	Response	Comment	Pack/Rel
REQ		Request	basic-1
	CHG	Change existing data block	
	END	Exit overlay program	
	LCHG	Print date and time that a trunk data block was last changed. The change can be the result of a NEW, OUT, or CHG command.	
	MOV	Move data block from one TN to another. Not valid for Option 11C models. MOV cannot be used to move a Phantom TN.	
	NEW x	Add new data block to the system. Follow NEW with a value of 1-255 to create that number of consecutive trunks. You are not allowed to create more than one Phantom TN at a time. When a value different than 1 is entered for the creation of a Phantom TN, it is simply ignored and only one TN is created.	
	OUT x	Remove data block. Follow OUT with a value of 1-255 to remove that number of consecutive trunks.	
RLDN	x...x	Release Link trunk Directory Number This DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	cas-1
RTMB		Route number and Member number	basic-1
	0-511 1-510	Options 51C-81C	basic-24
	0-127 1-510	Option 11C	basic-24
		B-Channel Signaling is output if CHTY = BCH in LD 16. A/B Bit Signaling is output if CHTY = ABCH in LD 16. To use the ISDN Semi Permanent Connection (ISPC) link, this entry must be an ISL TIE route.	
SDCH	(NO) YES	The ISPC link is not used by a D-channel The ISPC link is used by a D-channel	ispc-22
SEIZ	(NO) YES	Automatic Guard Detection for outgoing trunk	basic-2
SFEX	(NO) YES	Special digital FEX trunk This is used on Digital Trunk Interface (DTI).	dti-5
SICA	(1)-16	Signaling Category table number The Digital Signaling Category table must be defined first. See FEAT = ABCD in LD 73. Default is 16 if loop type = JDMI.	dti 2-15

LD 14

Prompt	Response	Comment	Pack/Rel
SIGL		Level 3 signaling	tip-21
ALS		ALS signaling on COT trunk with ground start	
APNS		Alternate Private Network Signaling System	
CIS		CIS three wire trunk signaling for IPE. Commonwealth of Independent States (CIST) package 221 is required.	
DAS		Digital Access Signaling System Number 2. This is allowed if DASS2 package 124 is equipped and PRIV = NO in DTSL data block in LD 74.	
DPN		Digital Private Network Signaling System Number 1, allowed for DPNSS package 123.	
DX2		2-wire duplex	
DX4		4-wire duplex. The Enhanced Universal Trunk card uses DX4 signaling.	
EAM		E&M 2-wire	
EM4		E&M 4-wire	
GRD		Ground start	
LDC		Loop calling, Disconnect Clear. Accepted when TYPE = COT and UK package is equipped.	
LDR		Loop Dial Repeating	
LGR		Loop calling, Guarded Release. Accepted when TYPE = COT and UK package is equipped.	
LOP		Loop start	
OAD		Outgoing Automatic, incoming dial	
WR4		AC15 = 2280 Hz, 4-wire	

Prompt	Response	Comment	Pack/Rel
SMAS	(NO)	This ISPC is not acting as a MASTER when connecting data interfaces to the ISPC link	ispc-22
	YES	This ISPC is acting as a MASTER when connecting data interfaces to the ISPC link SMAS is prompted when SDCH =YES. When the ISPC link is used to convey D-channel signaling, it is mandatory to have one side of the ISPC link configured with SMAS=YES and the other side with SMAS=NO. SMAS must be YES on the side of the ISPC link where the data interface is configured with the auto dialing capability.	
SREF	1-9999999	ISDN Semi Permanent Connection (ISPC) Reference Number The ISPC reference number is defined by Telecom administration at the time of subscription. The response is limited to seven digits. When REQ=NEW, the number given must be different than all the other ISPC reference numbers already associated to other Phantom trunk TNs.	ispc-22
STRI		Start arrangement Incoming Your response to STRI determines which type of signaling will be used by the trunk to initiate digit sending or collection. Your STRI response should reflect the type of operation in use at the near end.	basic-5
	DDL	Delayed Dial The terminating trunk returns an off-hook to the originating trunk, which is interpreted as an instruction not to send digits immediately. This delay allows the terminating end to find and attach digit collections equipment. When the equipment is attached, the terminating end returns on-hook which is interpreted as a signal to start sending digits. For this application on incoming calls, the Meridian SL-1 sends a non-programmable 256-384 ms pulse. For outgoing calls, the Meridian SL-1 expects a delay-dial pulse from the far end to terminate before sending digits. Some types of delay-dial operation can also be accommodated by the IMM option.	

LD 14

Page 224 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
IMM	Immediate	<p>The terminating trunk is not expected to return a pulse telling the originating end to begin sending digits. In this application for incoming calls, the Meridian 1 returns a 256-384 ms off-hook/on-hook wink to the far end. This wink accommodates certain types of delay-dial operation.</p> <p>For outgoing calls, the Meridian 1 starts a 300 ms timer when the outgoing trunk is seized. Digits are sent out when an off-hook/on-hook wink returned from the far end ends, or when the 300 ms timer expires (whichever occurs first).</p>	
MWNK	Modified Wink (MWNK)	is printed automatically for Taiwan R1 trunks.	twr1-24
OWK	Off-Hook Wink for RLR trunks equipped with signaling converter	<p>This mode of operation is similar to wink except that the Meridian 1 waits one second after seizure before sending a wink start pulse. This arrangement applies only to release link remote trunks.</p>	
PTSD	Proceed to Send for CEPT L1 signaling	Allowed only for Tie trunk using WR4 signaling.	basic-20
RT	RON/TRON start arrangement to be sent by the near end PABX upon reception of an Incoming Seize		basic-20
WNK	Wink or Fast Flash	<p>The terminating trunk sends an off-hook/on-hook wink as in DDL operation. However, in WNK operation the pulse is interpreted as a signal that digit collection equipment has been attached. The pulse is expected to be of 140-290 ms duration.</p> <p>For this application, the Meridian 1 first waits 128-256 ms after seizure and then returns a 256 ms pulse to the far end. After this , the Meridian 1 is ready to collect digits. On outgoing calls, the Meridian 1 waits until the wink pulse is finished before sending digits.</p>	
SACK	Seize Acknowledge for CEPT L1 signaling	Allowed only for Tie trunk using WR4 signaling.	basic-20

Prompt	Response	Comment	Pack/Rel
STRO		Start arrangement Outgoing Your response to STRO determines which type of signaling will be used by the trunk to initiate digit sending or collection. Your STRO response should reflect the type of operation in use at the far end.	basic-5
	DDL	Delayed Dial	
	IMM	Immediate	
	MWNK	Modified Wink (MWNK) is printed automatically for Taiwan R1 trunks.	twr1-24
	OWK	Off-Hook Wink for RLR trunks equipped with signaling converter	
	PTSD	Proceed to Send for CEPT L1 signaling Allowed only for Tie trunk using WR4 signaling.	xpe-20
	RT	RON/TRON start arrangement to be received by the near end PABX after an outgoing seize has been sent	xpe-20
	SACK	Seize Acknowledge for CEPT L1 signaling Allowed only for Tie trunk using WR4 signaling.	xpe-20
	WNK	Wink or Fast Flash	
STYP		Supervision Type. STYP is prompted when SUPN = YES. For EPE equipment, only one response of PSP, PIP or BST will be accepted. For IPE equipment or with XUT/EXUT, only one of BST, PIP, JDID, or JCO will be accepted. For XCOT, STYP will accept up to two responses. The responses BAT, ARF and LBS are mutually exclusive. However, BTS can be used with any one of the aforementioned three responses. When BTJ and Japan packages are equipped, BTS can be assigned to an XUT card. For Japan, TYPE = COT, SIGL = LOP, SUPN = YES, STYP = JCO BTS or TYPE = DID, SIGL = LOP, SUPN = YES, STYP = JDID BTS.	basic-20

LD 14

Prompt	Response	Comment	Pack/Rel
	ARF	ARF supervised trunks. Must have XCOT LOP trunks.	
	BAT	Battery Supervised COT. Must have XCOT LOP trunks.	
	BST	Both Supervised Trunk Incoming and Outgoing supervised LOP CO/FEX/WATS trunk (QPC330/XUT/EXUT). BST and PIP are mutually exclusive.	
(BTS)		Busy Tone Supervision. BTS is the default when XTRK = XCOT. Must have XCOT LOP trunks. BTB package must be equipped. BTS can be configured with any one of PIP, BST, JCO or JDID.	
(PSP)		Polarity Sensitive Pack. PSP is the default when SIGL = GRD. Outgoing supervised LOP or GRD start CO/FEX/WATS trunk (QPC218/XUT/EXUT)	
JCO		Japan CO trunk. Must have Japan Central Office Trunks (JPN) package 97 with LOP trunks (XUTJ). JCO and BTS are no longer mutually exclusive.	
(JDID)		Japan DID trunk. JDID is the default when the trunk is a LOP DID trunk. Must have Japan Central Office Trunks (JPN) package 97. JDID is not automatically displayed.	
LBS		Loop Break Supervision. Must have XCOT LOP trunks.	
(PIP)		Polarity Insensitive Pack. PIP is the default when SIGL = LOP. Outgoing supervised Loop start CO/FEX/WATS trunk (QPC330/XUT/EXUT). PIP and BST are mutually exclusive.	

Prompt	Response	Comment	Pack/Rel
SUPN	(NO) YES	<p>Answer and disconnect supervision required</p> <p>SUPN must = YES for a COT with Virtual Network Service. For ground start trunks disconnect supervision is detected even if SUPN = NO.</p> <p>The operation of answer supervision is affected if Federal Communications Commission Compliance for DID Answer Supervision (FC68) package 223 is equipped.</p> <p>SUPN will automatically be prompted YES for DID LOP.</p>	basic-1
SXS	(NO) YES	<p>Step-by-step CO trunk</p> <p>Only prompted for Universal Trunks XTRK or XUT when TYPE = CO. The central office reverses polarity on outgoing calls.</p>	xpe-15
T_TN	l ch	<p>Tandem PRI connection. Where:</p> <ul style="list-style-type: none"> • Loop = PRI loop number • Channel = PRI channel that holds the outgoing nailed up connection (between 1-23) <p>If the connection exists, both channels are displayed. Prompted if TYPE = TCON.</p>	mph-19
TGAR	0-(1)-31	<p>Trunk Group Access Restriction. The default of (1) automatically blocks direct access.</p>	basic-1
TIMP	(600) 900 1200	<p>Termination Impedance. Prompted if XTRK = XEM or XUT.</p> <p>600 ohms 900 ohms 1200 ohms</p> <p>Use 1200 ohms for RAN trunks and (600) or 900 for all others.</p> <p>When using the Enhanced Universal Trunk card only 600 or 900 $\frac{3}{4}$ terminating impedance is allowed. However, more Terminating and Balance impedance (BIMP) combinations are available.</p>	tip/xpe-19

LD 14

Prompt	Response	Comment	Pack/Rel
		The terminating and balance impedance options are: <u>TIMPBIMP</u> 600 600 600 3COM 900 3COM 900 900 900 3CM2 600 3CM2	
		For XUT trunks, the Termination Impedance or TIMP must be compatible with the Balance Impedance or BIMP. The following combination of BIMP/TIMP are allowed: <u>Timp ImpedanceBimp Impedance</u> 600 ohms3-component or 3com 900 ohms3-component or 3com 600 ohms600 ohms 1200 ohms600 ohms	
		For XEM trunks, TIMP must be set to 600. When CLS = JDID, TIMP must be set to 600.	
TKID	nnnnnn	Trunk Identifier Does not have to be unique. Default is no trunk identifier assigned.	basic-6
TN	l s c u	Terminal Number TN cannot be a phantom loop. TYPE must be TIE if this TN is on a Phantom loop.	basic-1
	c u	Terminal Number format for Option 11C	basic-14
	l ch	Loop and channel for digital trunks, where: <ul style="list-style-type: none">• l = 0 - 159 or 1-9 for Option 11C• l = 0 - 255: loops, Option 81C with Fiber network Fabric• ch = channel 1-24 for 1.5 Mb/s DTI/PRI or 1-30 for 2.0 Mb/s DTI/PRI.	fnf-25
		Loop and channel when TYPE = RDC or VDC: <ul style="list-style-type: none">• l = 0 - 159, or 1-9, Option 11C• l = 0 - 255: loops, Option 81C with Fiber Network Fabric• ch = channel 1-15, 17-31. TN is not prompted for Option 11C models.	fnf-25

Prompt	Response	Comment	Pack/Rel
TOTN		To Terminal Number. TOTN is prompted when REQ = MOV. TOTN cannot be a phantom loop. Meridian TN format: loop, shelf, card, unit	basic-1
	I s c u c u	Option 11C TN format: card unit	basic-7
	I ch	Loop and channel for digital trunks, where: <ul style="list-style-type: none"> • I = 0 - 159 or 1-9 for Option 11C • I = 0 - 255: loops, Option 81C with Fiber Network Fabric • ch = channel 1-24 for 1.5 Mb/s DTI/PRI or 1-30 for 2.0 Mb/s DTI/PRI. 	fnf-25
		Loop and channel when TYPE = RDC or VDC: <ul style="list-style-type: none"> • I = 0-159, or 1-9, Option 11C • 0 - 255: loops, Option 81C with Fiber Network Fabric • ch = channel 1-15, 17-31. 	fnf-25
		TOTN is not prompted for Option 11C models.	
TYPE	ADM	Add-on Data Module data block	basic-1
	ADM M	Data port interfacing with a data line card Option 11C Model	
	AWR AWR M	Automatic Wake Up RAN/Music trunk data block. Option 11C Model	
	CAA	Common Control Switching Arrangement (CCSA)	
	CAA M	Automatic Number Identification (ANI) trunk data block Option 11C Model	
	CAM CAM M	CAMA trunk data block Option 11C Model	
	CBCT	NI-2 CBC trunk	
	COT COT M	Central Office Trunk data block Option 11C Model	
	CSA	Common Control Switching Arrangement access line data block	
	CSA M	Option 11C Model	
	DIC DIC M	Dictation trunk data block Option 11C Model	

LD 14

Prompt	Response	Comment	Pack/Rel
	DID	Direct Inward Dial trunk data block. Per FCC regulations, DID trunks used in the U.S. must be properly designated for answer supervision. Refer to FCC Compliance for DID Answer Supervision in X11 features and services. For an ISPC link when SDCH = YES, TYPE = DID.	
	DID M	Option 11C Model	
	FEX FEX M	Foreign Exchange trunk data block Option 11C Model	
	FGDT	Feature Group D Trunk data block	
	ISA	Integrated Services Access trunk data block. Also called Call-By-Call service trunk type. There is no provision against the use of non-QPC237 trunk types for the analog ISA service route. Only TIE and ISA trunks are applicable for directly connecting SL-1 PBX to SL-1 PBX.	
	MCA MCA M	Meridian Communications Adapter. Option 11C Model	
	MCU	Meridian Communications Unit.	
	MDM MDM M	Modem/Data Module data block. Data port interfacing with QPC60 500/2500 type card. Option 11C Model	
	MUS MUS M	Music trunk data block Option 11C Model	
	PAG PAG M	Paging trunk data block Option 11C Model	
	R232 R232 M	NT7D16 Data Access Card (DAC) port in RS-232 Data mode data block Option 11C Model	
	R422 R422 M RAC	NT7D16 Data Access Card (DAC) port in RS-422 Data mode data block Option 11C Model Real Analog Channel data block	

Prompt	Response	Comment	Pack/Rel
	RAN RAN M	Recorded Announcement trunk data block Option 11C Model	
	RCD	Recorder trunk data block	
	RDC	Real Digital Channel data block	
	RLM RLM M	Release Link Main trunk data block Option 11C Model	
	RLR RLR M TCON	Release Link Remote trunk data block Option 11C Model Tandem Connection for MPH and PRI connections	
	TIE TIE M	TIE trunk data block For an ISPC link when SDCH = NO, TYPE must be TIE. Option 11C Model	
	VAC VDC	Virtual Analog Channel data block Virtual Digital Channel data block	
	WAT WAT M	Wide Area Telephone Service trunk data block Option 11C Model	
XDIC	(MUT) NOR	Mute outpulsing for DIC trunks Normal outpulsing for DIC trunks	xpe-15
XTRK	EXUT ITG1 ITG2	Extended trunk. Prompted for superloops when defining the first unit. Packages 97 and 294 must be equipped. Enhanced Extended Universal Trunk ITG card (1 cardslot circuit card) ITG card (2 cardslot circuit card)	tip/xpe-19 itg- 25 itg- 25

LD 14

Prompt	Response	Comment	Pack/Rel
	XCOT	Extended CO trunk card. Type must be COT or DID. If one or more units are to be used on a PPM route, then unit 0 must be defined as a PPM route member. If not, PPM will not function for any other unit on the card.	
	XDID	Extended DID trunk card	
	XEM	Extended E & M trunk card	
	XFEM	Extended Flexible E & M trunk card	
	XUT	Extended Universal Trunk card	
ZONE	0-255	Zone Number which the physical unit of the ITG card belongs. ZONE number is not checked against Overlay 117. If xtrk is ITG1 or ITG2 and if IPTN is YES, the data block is saved and Overlay 14 returns to the REQ prompt after ZONE prompt	mit-25

LD 15: Customer Data Block

This program allows data blocks for customers to be created or modified. When the Overlay is loaded, the available system memory and disk records are output in a header as follows:

```
CDB000  
MEM AVAIL: (U/P): xxxxxx  USED: xxxxx  TOT: xxxxxxx  
DISK RECS AVAIL: xxx
```

Overlay program 15 is structured to allow changes to be made by entering the desired gate opener mnemonic at the TYPE: prompt. The prompt sequence associated with that gate opener is then prompted in the usual manner. Once the end of the sub prompts has been reached, the Customer Data Block is updated and saved.

Enhanced input processing has also been applied to the REQ: and TYPE: prompts in LD 15. Thus, if the prompt ends with a colon a list of possible responses may be obtained by entering ? followed by a carriage return. The REQ: and TYPE: prompts also accept abbreviated responses, thus allowing the user to only enter the first three unique characters of the gateway name.

Prompts and responses

Table of Contents

Section	Page
Prompts and responses	
Customer data block	page 235
Default Customer Data Block	page 236
Data Block: AML (Application Module Link)	page 238
Data Block: ANI (Automatic Number Identification)	page 238
Data Block: ATT (Attendant Consoles)	page 241
Data Block: AWU (Automatic Wake Up Data)	page 243
Data Block: CAS (Centralized Attendant Service Data)	page 244
Data Block: CCS (Controlled Class of Service)	page 244
Data Block: CDR (Call Detail Recording)	page 245
Data Block: FCR (Flexible Code Restriction)	page 246
Data Block: FFC (Flexible Feature Codes)	page 246
Data Block: FTR (Features and options)	page 247
Data Block: HSP (Hospitality Management)	page 249
Data Block: ICP (Intercept Computer Update)	page 250
Data Block: IMS (Integrated Message Service)	page 250
Data Block: INT (Intercept Treatments)	page 251
Data Block: LDN (Listed Directory Numbers)	page 253
Data Block: MPO (Multi-Party Operations)	page 254
Data Block: NET (Networking)	page 255
Data Block: NIT (Night Service)	page 258
Data Block: OAS (Off Hook Alarm Security)	page 259
Data Block: PPM (Periodic Pulse Metering)	page 260
Data Block: PWD (Password)	page 260
Data Block: RDR (Call Redirection)	page 261
Data Block: ROA (Recorded Overflow Announcement)	page 262
Data Block: TIM (Timers)	page 263
Data Block: TST (Test lines)	page 264

Prompts and responses

Customer data block

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	CDB	Customer Data Block
CUST	0-99	Customer number
AML_DATA	(NO) YES	Change Application Module Link options (see page 238)
ANI_DATA	(NO) YES	Change Automatic Number Identification numbers (see page 238)
ATT_DATA	(NO) YES	Change Attendant Console options (see page 241)
AWU_DATA	(NO) YES	Change Automatic Wake Up options (see page 243)
CAS_DATA	(NO) YES	Change Centralized Attendant Service options (see page 244)
CCS_DATA	(NO) YES	Change Controlled Class of Service options (see page 244)
CDR_DATA	(NO) YES	Change CDR and Charge Account options (see page 245)
FCR_DATA	(NO) YES	Change New Flexible Code Restriction options (see page 246)
FFC_DATA	(NO) YES	Change Flexible Feature Code options (see page 246)
FTR_DATA	(NO) YES	Change Features and options (see page 247)
HSP_DATA	(NO) YES	Change Hospitality Management options (see page 249)
ICP_DATA	(NO) YES	Change Intercept Computer update (see page 250)
IMS_DATA	(NO) YES	Change Integrated Message Service options (see page 250)
INT_DATA	(NO) YES	Change Intercept treatment options (see page 251)
LDN_DATA	(NO) YES	Change Listed Directory Numbers (see page 253)
MPO_DATA	(NO) YES	Change Multi-Party Options (see page 254)
NET_DATA	(NO) YES	Change ISDN and ESN Networking options (see page 255)
NIT_DATA	(NO) YES	Change Night Service options (see page 258)
OAS_DATA	(NO) YES	Change Off-Hook Alarm Security options (see page 259)
PPM_DATA	(NO) YES	Change Periodic Pulse Metering options (see page 260)
PWD_DATA	(NO) YES	Change Customer related Passwords (see page 260)
RDR_DATA	(NO) YES	Change Call Redirection (see page 261)
ROA_DATA	(NO) YES	Change Recorded Overflow Announcement (see page 262)
TIM_DATA	(NO) YES	Change Timers (see page 263)
TST_DATA	(NO) YES	Change Test lines (see page 264)

Note: This *Prompts and responses* table does not list prompts which appear under each gate opener. To find prompts which appear under a given gate opener, refer to the page listed in the *Comment* section of this table.

Default Customer Data Block

Prompt	Response	Comment
REQ:	NEW	Request = NEW
TYPE:	DEFAULT	Type = DEFAULT (Default Customer Data Block)
CUST	0-99	Customer number
ANI_DATA		Automatic Number Identification prompts are automatically output when adding a new customer
ANAT	x...x	ANI billing number for attendants making ANI calls
ANLD	x...x	ANI Listed DN
PANI	(NO) YES	M911 Pseudo ANI display
CIS_ANI	(NO) YES	ANI option to allow the configuration of ANI entries for CIS ANI message composing.
- S_SIZE	(0)-2000	Maximum number of ANI entries that can be configured for sets.
-- S_ENTRY	1-2000	Entry of ANI table applying to a set
-- DNLG	0-(4)-15	DN Length
-- LEC	0-99..99	Local Exchange Code, 1 to 15 digits.
-- ADDG	0-(8)-99..9	Additional digits, 1 to 15 digits. They will be used to complete ANDN if LEC+ANDN is less than ANSZ digits (defined in OVL 16).
-- ANDN	0-99..99	Used as ANI DN if Calling number not available or DNLG=0. Up to 15 digits may be entered.
- R_SIZE	(1)-512	Maximum number of ANI entries that can be configured for incoming routes.
- R_ENTRY	(0)-aa	ANI entry for an incoming route to be created or modified
-- DNLG	0-(4)-15	DN Length
-- LEC	0-99..99	Local Exchange Code, 1 to 15 digits.
-- ADDG	0-(8)-99..9	Additional digits, 1 to 15 digits. They will be used to complete ANDN if LEC+ANDN is less than ANSZ digits (defined in OVL 16).
-- ANDN	0-99..99	Used as ANI DN if Calling number not available or DNLG=0. Up to 15 digits may be entered.
CACC	(NO) YES	CAC Conversion table option
- MFC_ENT	(0)-31	CAC conversion table to convert MFC CAC into CIS CAC

-- CAC0	0-(3)-9	CIS value corresponding to MFC DGT 0
-- CAC1	0-(3)-9	CIS value corresponding to MFC DGT 1
-- CAC2	0-(3)-9	CIS value corresponding to MFC DGT 2
-- CAC3	0-(3)-9	CIS value corresponding to MFC DGT 3
-- CAC4	0-(3)-9	CIS value corresponding to MFC DGT 4
-- CAC5	0-(3)-9	CIS value corresponding to MFC DGT 5
-- CAC6	0-(3)-9	CIS value corresponding to MFC DGT 6
-- CAC7	0-(3)-9	CIS value corresponding to MFC DGT 7
-- CAC8	0-(3)-9	CIS value corresponding to MFC DGT 8
-- CAC9	0-(3)-9	CIS value corresponding to MFC DGT 9
-- DFLT	0-(3)-9	CIS value used when MFC CAC has not been received, or MFC CAC received is not in the MFC CAC list of this table
- CIS_ENT	(0)-31	CAC conversion table to convert CIS CAC into MFC CAC
-- CAC0	0-(6)-10	MFC value corresponding to CIS 0
-- CAC1	0-(6)-10	MFC value corresponding to CIS 1
-- CAC2	0-(6)-10	MFC value corresponding to CIS 2
-- CAC3	0-(6)-10	MFC value corresponding to CIS 3
-- CAC4	0-(6)-10	MFC value corresponding to CIS 4
-- CAC5	0-(6)-10	MFC value corresponding to CIS 5
-- CAC6	0-(6)-10	MFC value corresponding to CIS 6
-- CAC7	0-(6)-10	MFC value corresponding to CIS 7
-- CAC8	0-(6)-10	MFC value corresponding to CIS 8
-- CAC9	0-(6)-10	MFC value corresponding to CIS 9
- DFLT	0-(6)-10	CIS value used when CIS CAC has not been received, or CIS CAC received is not in the CIS CAC list of this table

Data Block: AML (Application Module Link)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	AML_DATA	Application Module Link
CUST	0-99	Customer number
OPT	a..a	Options (OPT responses begin on page 310)
VSID	0-15	Value-Added Server Identifier
GP02	n n n n n n	Group 2 status events 1, 2, 3, 4, 5 or 6 assigned
GP03	n n n n n n	Group 3 status events 1, 2, 3, 4, 5 or 6 assigned
GP04	n n n n n n	Group 4 status events 1, 2, 3, 4, 5 or 6 assigned
GP05	n n n n n n	Group 5 status events 1, 2, 3, 4, 5 or 6 assigned
GP06	n n n n n n	Group 6 status events 1, 2, 3, 4, 5 or 6 assigned
GP07	n n n n n n	Group 7 status events 1, 2, 3, 4, 5 or 6 assigned
GP08	n n n n n n	Group 8 status events 1, 2, 3, 4, 5 or 6 assigned
GP09	n n n n n n	Group 9 status events 1, 2, 3, 4, 5 or 6 assigned
GP10	n n n n n n	Group 10 status events 1, 2, 3, 4, 5 or 6 assigned
GP11	n n n n n n	Group 11 status events 1, 2, 3, 4, 5 or 6 assigned
GP12	n n n n n n	Group 12 status events 1, 2, 3, 4, 5 or 6 assigned
GP13	n n n n n n	Group 13 status events 1, 2, 3, 4, 5 or 6 assigned
GP14	n n n n n n	Group 14 status events 1, 2, 3, 4, 5 or 6 assigned
GP15	n n n n n n	Group 15 status events 1, 2, 3, 4, 5 or 6 assigned

Data Block: ANI (Automatic Number Identification)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	ANI_DATA	Automatic Number Identification
CUST	0-99	Customer number
ANAT	x...x	ANI Attendant Billing number
ANLD	x...x	ANI Listed Directory Number
CIS_ANI	(NO) YES	ANI option to allow the configuration of ANI entries for CIS ANI message composing.
- S_SIZE	(0)-2000	Maximum number of ANI entries that can be configured for sets.

-- S_ENTRY	1-2000	Entry of ANI table applying to a set
-- DNLG	0-(4)-15	DN Length
-- LEC	0-99..99	Local Exchange Code, 1 to 15 digits.
-- ADDG	0-(8)-99..9	Additional digits, 1 to 15 digits. They will be used to complete ANDN if LEC+ANDN is less than ANSZ digits (defined in OVL 16).
-- ANDN	0-99..99	Used as ANI DN if Calling number not available or DNLG=0. Up to 15 digits may be entered.
- R_SIZE	(1)-512	Maximum number of ANI entries that can be configured for incoming routes.
- R_ENTRY	(0)-aa	ANI entry for an incoming route to be created or modified
-- DNLG	0-(4)-15	DN Length
-- LEC	0-99..99	Local Exchange Code, 1 to 15 digits.
-- ADDG	0-(8)-99..9	Additional digits, 1 to 15 digits. They will be used to complete ANDN if LEC+ANDN is less than ANSZ digits (defined in OVL 16).
-- ANDN	0-99..99	Used as ANI DN if Calling number not available or DNLG=0. Up to 15 digits may be entered.
CACC	(NO) YES	CAC Conversion table option
- MFC_ENT	(0)-31	CAC conversion table to convert MFC CAC into CIS CAC
-- CAC0	0-(3)-9	CIS value corresponding to MFC DGT 0
-- CAC1	0-(3)-9	CIS value corresponding to MFC DGT 1
-- CAC2	0-(3)-9	CIS value corresponding to MFC DGT 2
-- CAC3	0-(3)-9	CIS value corresponding to MFC DGT 3
-- CAC4	0-(3)-9	CIS value corresponding to MFC DGT 4
-- CAC5	0-(3)-9	CIS value corresponding to MFC DGT 5
-- CAC6	0-(3)-9	CIS value corresponding to MFC DGT 6
-- CAC7	0-(3)-9	CIS value corresponding to MFC DGT 7
-- CAC8	0-(3)-9	CIS value corresponding to MFC DGT 8
-- CAC9	0-(3)-9	CIS value corresponding to MFC DGT 9
-- DFLT	0-(3)-9	CIS value used when MFC CAC has not been received, or MFC CAC received is not in the MFC CAC list of this table
- CIS_ENT	(0)-31	CAC conversion table to convert CIS CAC into MFC CAC
-- CAC0	0-(6)-10	MFC value corresponding to CIS 0
-- CAC1	0-(6)-10	MFC value corresponding to CIS 1
-- CAC2	0-(6)-10	MFC value corresponding to CIS 2
-- CAC3	0-(6)-10	MFC value corresponding to CIS 3
-- CAC4	0-(6)-10	MFC value corresponding to CIS 4

LD 15

-- CAC5	0-(6)-10	MFC value corresponding to CIS 5
-- CAC6	0-(6)-10	MFC value corresponding to CIS 6
-- CAC7	0-(6)-10	MFC value corresponding to CIS 7
-- CAC8	0-(6)-10	MFC value corresponding to CIS 8
-- CAC9	0-(6)-10	MFC value corresponding to CIS 9
- DFLT	0-(6)-10	CIS value used when CIS CAC has not been received, or CIS CAC received is not in the CIS CAC list of this table

Data Block: ATT (Attendant Consoles)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	ATT_DATA	Attendant Consoles
CUST	0-99	Customer number
OPT	a...a	Options (OPT responses begin on page 310)
ATDN	(0)-x...x	Attendant Directory Number
NCOS	(0)-99	Network Class of Service for all attendant consoles for this customer
ATAC	xxxxx	Attendant Administration Access Code
- PWD2	x...x	Second level administration Password
CWUP	(NO) YES	Call Waiting queue Update
CWCL	(0)-255 (0)-255	Call Waiting Call Limit
CWTM	(0)-511 (0)-511	Call Waiting Time
CWBZ	(NO) YES (NO) YES	Call Waiting Buzz
EFL	(0)-8064	Efficiency Factor Loading Level
MATT	(NO) YES	Consoles used as Message Center
LFTN	l s c u	Lamp Field array Terminal Number (Opt 11 format is cu) (l s c u ranges are defined on page 301)
LFTN	l s c u	Second Lamp Field array Terminal Number (Opt 11 format is cu) (l s c u ranges are defined on page 301)
LFFD	x00...x00	First Directory Number of lamp field array
RTIM	xxx yyy zzz	Recall Timers for Slow-Answer, Camp-On and Call Waiting
ATIM	(0)-126	Attendant Alternative Answering Timer
AQTT	1-(30)-255	Attendant Queue Timing Threshold in seconds
AODN	x...x	Attendant Overflow DN
SPVC	(0)-63	Supervisory Console
- SBLF	(NO) YES	Standard Busy Lamp Field
- ITH1	1-255	Visual Indication Threshold 1
- ITH2	1-255	Visual Indication Threshold 2
- ITH3	1-255	Visual Indication Threshold 3
RTSA	aaaa	Recall To Same Attendant (aaaa = (RSAD), RSAA, or RSAX)
SACP	aaaa	Semi-Automatic Camp-On (aaaa = (NO), ALL, or SNGL)
ABDN	(NO) YES	Activation of the Attendant Blocking of DN feature

LD 15

IRFR	(NO) YES	Internal Attendant Remote Call Forward Password
- IRFP	x...x	Internal Attendant Remote Call Forward Password
XRFR	(NO) YES	External Attendant Remote Call Forward Password
- XRFP	x...x	External Attendant Remote Call Forward Password
ADHT	(0)-14	Attendant Delay On-Hold Timer in seconds
AFNT	(0)-126	Attendant Forward No Answer Timer (must be an even number)
AFBT	(0)- <i>AFNT</i>	Attendant Forward Buzz Tone (Entry can be equal to or less than response to AFNT prompt and must be an even number)
IDBZ	(NO) YES	Trunk Buzzing IADN calls in the attendant queue.
PBUZ	xx yy	Flexible Priority Buzz cadence for IADN and Code Blue calls.
ICI	0-19 aaaa	Attendant Incoming Call Indicators
RICI	xx xx...	ICI key numbers that may receive Recorded Overflow Announcement

Data Block: AWU (Automatic Wake Up Data)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	AWU_DATA	Automatic Wake Up Data
CUST	0-99	Customer number
AWU	(NO) YES	Automatic Wake Up
ATRC	(NO) YES	Attendant Recall allowed
RANF	0-511	Music route TYPE must be AWR in LD 16
RAN1	0-511	Primary Ran route TYPE must be AWR in LD 16
RAN2	0-511	Secondary RAN route TYPE must be AWR in LD 16
LA11	0-511	Primary RAN route for Language1
LA12	0-511	Secondary RAN route for Language1
LA21	0-511	Primary RAN route for Language 2
LA22	0-511	Secondary RAN route for Language 2
LA31	0-511	Primary RAN route for Language 3
LA32	0-511	Secondary RAN route for Language 3
LA41	0-511	Primary RAN route for Language 4
LA42	0-511	Secondary RAN route for Language 4
LA51	0-511	Primary RAN route for Language 5
LA52	0-511	Secondary RAN route for Language 5
R2BN	0-23 0-59	RAN2 Begin time; hour, minute
R2ED	0-23 0-59	RAN2 End time; hour, minute
NRWU	2-(5)	Number of Rings for Wake Up before recall to attendant
TAWU	1-(3)	Number of Tries for an unanswered AWU call
- WUD	(NO) YES	Is Wake-up Delimiter required
-- STE	(NO) YES	Is Standard Time Entry allowed?

LD 15

Data Block: CAS (Centralized Attendant Service Data)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	CAS_DATA	Centralized Attendant Service Data
CUST	0-99	Customer number
CAS	(NO) YES	Centralized Attendant Service main
- MAIN	(NO) YES	CAS Main
- - CHDN	x...x	CAS silent Hold DN
- - HRCL	0-512	Hold Recall timer in units of 2 seconds
- - ICI	0-19 aaaa	Attendant Incoming Call Indicators
- DFLT	(NO) YES	Default
- LDNT	(NO) YES	Listed Directory Number Tone
- LADN	x...x	Local Attendant Directory Number
- RLA	0-511	Release Link route number

Data Block: CCS (Controlled Class of Service)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	CCS_DATA	Controlled Class of Service
CUST	0-99	Customer number
CCRS	aaa	Controlled Class of Service (CCOS) Restricted Service (aaa = (UNR), CTD, FR1, FR2, FRE, SRE, or TLD)
ECC1	aaa	Enhanced Controlled Class of Service level 1 (aaa = (UNR), CTD, FR1, FR2, FRE, SRE, or TLD)
ECC2	aaa	Enhanced Controlled Class of Service level 2 (aaa = (UNR), CTD, FR1, FR2, FRE, SRE, or TLD)
CNCS	0-99	Network Controlled Class of Service for Electronic Lock
PELK	(NO) YES	Electronic Lock on Private Lines

Data Block: CDR (Call Detail Recording)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	CDR_DATA	Call Detail Recording
CUST	0-99	Customer number
CDR	(NO) YES	Change Call Detail Recording data
- IMPH	(NO) YES	CDR for Incoming Packet data call
- OMPH	(NO) YES	CDR for Outgoing Packet data call
- AXID	(NO) YES	Auxiliary Identification output in CDR record
- TRCR	(NO) YES	Carriage Return sent after each CDR message
- CDPR	(NO) YES	Coordinated Dialing Plan Record option
- ECDR	(NO) YES	End-to-End Signaling digits in CDR record
- BDI	(YES) NO	Buffer Data Interface for CDR
- OTCR	(NO) YES	CDR provided, based on Originally dialed Trunk Route
- PORT	0-15	CDR port
- - CNI	a...a	Calling Number Identification (a...a = (DGTS), CLID, or NONE)
- BCAP	(NO) YES	Bearer Capability in CDR
CHLN	(0)-23	Charge account number Length
FCAF	(NO) YES	Forced Charge Account active
- CHMN	(1)- <i>CHLN</i>	Minimum number of digits for FCA code (Entry can be equal to or less than response to prompt CHLN)
- FCNC	0-99	FCA Network Class of Service

LD 15

Data Block: FCR (Flexible Code Restriction)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	FCR_DATA	New Flexible Code Restriction
CUST	0-99	Customer number
NFCR	(NO) YES	Enable New Flexible Code Restriction
- MAXT	1-255	Maximum number of NFCR translation tables
- OCB1	(0)-(MAXT-1), 255	NFCR tree number to be used for OCB level. Your entry can be either your response to the MAXT prompt minus one or 255. 255 is a special entry which disallows this level.
- OCB2	(0)-(MAXT-1), 255	NFCR tree number to be used for OCB level 2. Your entry can be either your response to the MAXT prompt minus one or 255. 255 is a special entry which disallows this level.
- OCB3	(0)-(MAXT-1), 255	NFCR tree number to be used for OCB level 3. Your entry can be either your response to the MAXT prompt minus one or 255. 255 is a special entry which disallows this level.
IDCA	(NO) YES	Incoming DID Digit Conversion allowed
- DCMX	1-255	Maximum number of IDC conversion tables

Data Block: FFC (Flexible Feature Codes)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	FFC_DATA	Flexible Feature Code
CUST	0-99	Customer number
CCRS	aaa	Controlled Class of Service (CCOS) Restricted Service
SCPL	0-8	Station Control Password Length
SBUP	(YES) NO	Enable use of station control passwords for set based administration user level access
- PWD2	xxxx	PWD2 password for confirmation
FFCS	(NO) YES	Change Flexible Feature Code end-of-dialing indicator
- STRL	1-3	String Length of end-of-dial indicator
- STRG	xxx	String to indicate end-of-dialing (Enterable characters are digits 0-9, *, and #.)
ADLD	(0)-20	Auto Dial Delay in seconds

Data Block: FTR (Features and options)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	FTR_DATA	Customer Features and options
CUST	0-99	Customer number
OPT	a...a	Options (OPT responses begin on page 310)
DGRP	(0)-2046	Maximum number of Dial Intercom Groups
IRNG	(NO) YES	Intercom Ring
PKND	(1)-4	Number of digits Dialed for Group Pickup
DNDL	(NO) YES	Do Not Disturb Lamp on 500/2500 telephones
SPRE	xxxx	Special Prefix number (1-4 digits)
LINK	(NO) YES	ACD DNIS Link option
- APL	0-15	Auxiliary Processor Link number
PREO	(0) 1	Pretranslation Option
BPSS	(NO) YES	Block Pretranslation on System Speed Call lists.
SRCD	xxxx	Set Relocation Security Code
EEST	(NO) YES	End-to-End Signaling Tone to originating party
- DTMF	(YES) NO	DTMF feedback tone
EESD	(NO) YES	End-to-End Signalling Digit Display
TTBL	(0)-31	Tone Table number
ADCP	xxxx	All-Digital Connection Prefix
MUS	(NO) YES	Music for sets
- MUSR	0-511	Music Route for sets
HCC	aaaa	Held Call Clearing (aaa = (NO), YES, or XFER)
ALDN	x...x	Alarm Directory Number
ALRM	(NO) YES	Malicious Call Trace Alarm for internal or external calls
TIME	0-(15)	Time for the alarm in minutes
INT	NO YES	Internal
RECD	(NO) YES	Recorder
- MCRT	0-511	Malicious Call Trace Recording Route number as defined in LD 16
TMON	(NO) YES	Traffic Monitoring
PORT	0-15	Serial Data Interface Port Monitor
STCB	(NO) YES	Station Camp-On Busy allowed
NSCP	(NO) YES	Network Station Camp-On to sets on this node allowed

LD 15

TFDR	(NO) YES	Trunk Failure Display Required
RPA	(NO) YES	Radio Paging Allowed
MCDC	(NO) YES	Malicious Call DN/CLID printing allowed
NAUT	(NO) YES	Network Authorization Code
IDEF	(NO) YES	Internal/external definition
MTAR	(NO) YES	Meridian Mail Trunk Access Restriction
LEND	(NO) YES	List Entry Number Delimiter
MSCD	(NO) YES	Mandatory Speed Call Delimiter
CPCI	(NO) YES	Called Party Control on Internal Call (is not) is allowed for the customer
CONF_DSP	(NO) YES	Change Conference Display configurations
- CNFFIELD	(NO) YES	Enable Conference Count Display Field
- -CNF_NAME	(CONF) aaaa	Change Conferees Count Display Field Name
- INTFIELD	(NO) YES	Enable Internal Conferees Count display field
- -INT_NAME	(I) aaaa	Change Internal Conferees Count display field
- EXTFIELD	(NO) YES	Enable Total External Conferees Count display field
- -EXT_NAME	(E) aaaa	Change Total External Conferees Count field name
DAPC	(NO) YES	Dial Access Prefix on CLID table entry option
- TBL	1-15	Table Number
- NPI	aaa	Numbering Plan
- - TON	aaaa	Type of Number
- - - PREF	0-9999	Access Prefix for a unique NPI/TON combination in the table.
BSFE	(NO) YES	Boss Secretary Filtering Enhancement
- ACT_IDLE	aaaa	Lamp status when boss's set has BSFE active and is idle, where aaaa = (WINK), FLSH, LIT or DARK
- ACT_BUSY	aaaa	Lamp status when boss's set has BSFE active and is idle, where aaaa = (FLSH), WINK, LIT or DARK
- DACT_IDLE	aaaa	Lamp status when boss's set doesn't have BSFE active and is idle, where aaaa = (DARK), WINK, LIT or FLASH
- DACT_BUSY	aaaa	Lamp status when boss's set doesn't have BSFE active and is busy, where aaaa = (LIT), WINK, FLASH or DARK
ARDL_ATTEMPT		
	1-(30)-60	Automatic Redial number of attempts
ASPCT	(10)-180	Analog Semi-Permanent Connection re-connection Timer
FXS	YES (NO)	Flexible Services
- FXSDN1	x...x	MADN of MIMS pack 1

Data Block: HSP (Hospitality Management)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	HSP_DATA	Hospitality Management
CUST	0-99	Customer number
FRAN	0-511	First RAN number for first PCR threshold
SRAN	0-511	Second RAN number for second PCR threshold
IDR	0-511	Identification Error RAN number
AUTR	0-511	Authcode Error RAN number
RLCR	0-511	Relocation FFC Error RAN number
FRAN	0-511	First RAN number for first PCR threshold
CLS1	aaa	Class of Service 1 (aaa = (UNR), CTD, CUN, FR1, FR2, FRE, SPE, or TLD)
NCS1	(0)-99	Network Class of Service
TGR1	(0)-31	Trunk Group Access Restriction
CLS2	aaa	Class of Service 2 (aaa = (UNR), CTD, CUN, FR1, FR2, FRE, SPE, or TLD)
NCS2	(0)-99	Network Class of Service
TGR2	(0)-31	Trunk Group Access Restriction

LD 15

Data Block: ICP (Intercept Computer Update)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	ICP_DATA	Intercept Computer
CUST	0-99	Customer number
ICP	(NO) YES	Change Intercept Computer
- APL	0-15	Auxiliary Processor Link number used for ICP
- NIPN	0-(99)	Number of Intercept Positions that can be configured
- ICCR	(NO) YES	Intercept Position Canceling Reply is sent if transfer is canceled from Intercept computer
- ICMM	0-9	Message number shown when the transfer is caused by a maintenance program
- ICDN	x...x	Internal Call DN
- ECDN	x...x	External Call DN
- ICWN	(0)-511	Intercept Computer Owner
- ICPS	aaa	ICP Printer Search (aaa = (CIR) or COM)
- ICPR	0-<NIPN>	ICP Printer number
- ICDL	3-(4)-7	CP DN Length
- ICPD	(0)-9	ICP Padding Digit
- ICTD	(NO) YES	Intercept Computer Terminal Dial from directory

Data Block: IMS (Integrated Message Service)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	IMS_DATA	Change Integrated Messaging System features
CUST	0-99	Customer number
IMS	(NO) YES	Change Integrated Message System
- SAMM	(NO) YES	Standalone Meridian Mail
- IMA	(NO) YES	Integrated Messaging System enabled
- - APL	0-15	Auxiliary Processor Link number for IMS
- UST	(NO) YES	User Status Update enabled
- - APL	0-15	Auxiliary Processor Link number for UST
- UMG	(NO) YES	User-to-User Messaging enabled
- - APL	0-15	Auxiliary Processor Link number for UMG

Data Block: INT (Intercept Treatments)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	INT_DATA	Change Intercept Treatment
CUST	0-99	Customer number
ACCD	(OVF OVF OVF ATN)	Access Denied
- RANR	0-511	Intercept Recorded Announcement Route number
CTVN	(OVF OVF OVF ATN)	Call To Vacant Number
- RANR	0-511	Intercept Recorded Announcement Route number
MBNR	(OVF OVF OVF ATN)	Maintenance Busy Numbers
- RANR	0-511	Intercept Recorded Announcement Route number
CTRC	(OVF NAP OVF NAP)	Restricted Call
- RANR	0-511	Intercept Recorded Announcement Route number
CLDN	(NAP OVF NAP NAP)	Calls to Listed Directory Number
- RANR	0-511	Intercept Recorded Announcement Route number
NINV	(OVF OVF OVF ATN)	Invalid NARS/BARS call
- RANR	0-511	Intercept Recorded Announcement Route number
NITR	(OVF OVF OVF ATN)	NARS/BARS Invalid Translation
- RANR	0-511	Intercept Recorded Announcement Route number
NRES	(OVF OVF OVF ATN)	NARS/BARS Restricted calls
- RANR	0-511	Intercept Recorded Announcement Route number
NBLK	(OVF OVF OVF ATN)	NARS/BARS Blocked calls
- RANR	0-511	Intercept Recorded Announcement Route number
MFVO	(OVF OVF OVF ATN)	MFC Call to Vacant Office
- RANR	0-511	Intercept Recorded Announcement Route number
MFVN	(OVF OVF OVF ATN)	MFC Call to Vacant Number
- RANR	0-511	Intercept Recorded Announcement Route number
MFCG	(OVF OVF OVF ATN)	MFC Congestion
- RANR	0-511	Intercept Recorded Announcement Route number
LCKT	(BSY BSY BSY BSY)	Call to a Lockout set
- RANR	0-511	Intercept Recorded Announcement Route number
UBRI	(OVF NAP NAP NAP)	Universal BRI
- RANR	0-511	Intercept Recorded Announcement Route number

LD 15

RCLE	(ATN OVF ATN ATN)	Redirection Count Limit Exceeded as defined by TRCL
- RANR	0-511	Intercept Recorded Announcement Route number
CONG	aaa	Congestion tone for all trunks busy condition (aaa = (OVF) or BSY)
DLT	aaa	Direct Inward System Access Lockout treatment (aaa = (OVF), ATN, or OFA)
LLT	aaa	Flexible Line Lockout treatment (aaa = (OVF), ATN, or OFA)
DNDT	aaa	Do Not Disturb intercept Treatment (aaa = (BST), ATT, or RAN)
- RRT	0-511	Intercept Recorded Announcement Route number
PINT	(NO) YES	Change Precedence Intercept treatment
- PHIP	(ATN) RAN CPAS OVF	Precedence dialed is higher than allowed
- RANR	0-511	Intercept Recorded Announcement Route number
PBLK	(ATN) RAN CPAS OVF	Call presented has higher precedence
- RANR	0-511	Intercept Recorded Announcement Route number
PFAN	(ATN) RAN CPAS	Intercept if dialed DN fails to answer (Call Waiting)
- RANR	0-511	Intercept Recorded Announcement Route number
PFNA	(ATN) RAN CPAS	Intercept if dialed DN fails to answer
- RANR	0-511	Intercept Recorded Announcement Route number
PICP	(ATN) RAN CPAS OVF	Intercept treatment if called party cannot be preempted
- RANR	0-511	Intercept Recorded Announcement Route number
CPAS	xxxx	Central Precedence answering station listed DN

Data Block: LDN (Listed Directory Numbers)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	LDN_DATA	Listed Directory Numbers
CUST	0-99	Customer number
OPT	a...a	Options (OPT responses begin on page 310)
DLDN	(NO) YES	Departmental Listed Directory Numbers
LDN0	xxxx	Listed Directory Number 0
LDA0	1-63 ALL	Attendant consoles associated with LDN0
LDN1	x...x	Listed DN 1
LDA1	a...a	Attendant consoles associated with LDN1 (a...a = 1-63 or ALL)
LDN2	x...x	Listed DN 2
LDA2	a...a	Attendant consoles associated with LDN2 (a...a = 1-63 or ALL)
LDN3	x...x	Listed DN 3
LDA3	a...a	Attendant consoles associated with LDN3 (a...a = 1-63 or ALL)
LDN4	x...x	Listed DN 4
LDA4	a...a	Attendant consoles associated with LDN4 (a...a = 1-63 or ALL)
LDN5	x...x	Listed DN 5
LDA5	a...a	Attendant console associated with LDN5 (a...a = 1-63 or ALL)
LDBZ	n n n n n n	Listed Directory Number Buzzing assigned groups (n = 0-5)
ICI	0-19 aaaa	Attendant Incoming Indicators

LD 15

Data Block: MPO (Multi-Party Operations)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	MPO_DATA	Multi-Party Operations
CUST	0-99	Customer number
FMOP	(NO) YES	Flexible Misoperation Options
- RGNA	xxx yyy	Ringing No Answer treatment
- AOCS	xxx yyy	All Other Cases
- RCY1	1-(6)-15	Number of Cycles of Re-ringing before forwarding or disconnecting
- RCY2	1-(4)-15	Number of Cycles of Ringing before forwarding to transferring station
- RALL	(NO) YES	Mandatory recall is required prior to dialing control digits
- CDTO	2-(14)	Control digit timeout; in multiples of two seconds
IFLS	(NO) YES	Ignore Switchhook Flash signal from 500/2500 sets
MHLD	(NO) YES	Manual Hold after inquiry enabled
PCDS	(NO) YES	Programming of Control Digits required
- CNFD	0-(1)-9, *, #	Control Digit for Conference
- TGLD	0-(2)-9, *, #	Control Digit for Toggle
- DISD	0-(3)-9, *, #	Control Digit for Disconnect
CCDO	(NO) YES	Consultation Connection Disconnect Option alternative treatment
AFCO	(YES) NO	(Automatic)/Manual Forced Camp-On
- ACNS	aaa	Attendant Clearing during Night Service (aaa = (NO), EXT, or ALL)

Data Block: NET (Networking)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	NET_DATA	Networking
CUST	0-99	Customer number
OPT	a...a	Options (OPT responses begin on page 310)
AC2	aaaa	Access Code 2 as defined in LD 86 (aaaa = NPA, NXX, INTL, SPN, or LOC)
FNP	(YES) NO	Enable Flexible Numbering Plan for customer
ISDN	(NO) YES	Integrated Services Digital Network
- PNI	(0)-32700	Private Network Identifier
- CLID	(NO) YES	(Do not allow) Allow Calling Line Identification option
- - SIZE	0-(256)-4000	CLID entry size
- - INTL	0-9999	Country code (1-4 digits)
- - ENTRY	xx	CLID entry to be configured
- - - HNTN	0-999999	National code for home national number (1-6 digits)
- - - HLCL	0-99 ... 99	Local code for home local number or Listed DN (1-12 digits)
- - - DIDN	a...a	Use DN as DID (a...a = YES, NO or SRCH)
- - - HLOC	0-x...x	Home location code (ESN) (1-7 digits)
- - - LSC	0-x...x	Local steering code (1-7 digits)
- ESA_APDN	(YES) NO	Append the originating Directory Number after the Home Local Number for Emergency Services Access calls
- ESA_HLCL	x..x	Home Local Number for Emergency Services Access calls
- ESA_INHN	(NO) YES	Home National Number in front of Home Local Number for Emergency Services Access calls
- CLASS_FMT	aaa	Send information to a CLASS set as the calling number
- PINX_DN	xx...x	Node DN
- MMSN	(NO) YES	(Do not allow) Allow Mobility Multi-Site Networking node
- APPL_DN	x...x	Originating node which communicates with Mobility User Database (MUD) server
- DIAL_PLAN	aaa	Dialing plan used by customer to communicate with MUD server (aaa = (UDP) or CDP)
-- MUD_SRVR	(NO) YES	(Do not allow) Allow MUD Server
--- MUD_DN	x...x	MUD server DN

LD 15

--- SRVR_LOC	x...x	Home location code of MUD Server
---SRVR_DN	x...x	MUD Server DN
- MBG	(0)-65535	Multi-location Business Group
- BSGC	0-(65535)	Business Sub Group Consult-only
- PFX1	xxxx	Prefix 1
- PFX2	xxxx	Prefix 2
- HNPA	200-999	Home Number Plan Area code defined in LD 90
- HNX	100-9999	Prefix for Central Office defined in LD 90
- CNTP	aaa	Calling Number Type (aaa = (PDN) or LDN)
- RCNT	0-(5)	Redirection Count for ISDN calls
- PSTN	(NO) YES	Public Service Telephone Networks
- - TNDM	0-(15)-31	Tandem Threshold/Loop Avoidance Limit value permitted in a network connection
- - PCMC	0-(15)-31	Pulse Code Modulation Conversions permitted, μ -Law to A-Law or A-Law to μ -Law, in a network connection
- SATD	0-(1)-5	Satellite Delays
OCLI	aaa	CLID information for incoming/outgoing calls
TIDM	(NO) YES	Trunk Identity Meaningful
DASC	xxxx	Display Access Code
ROPT	aaa	Route Optimization (aaa = (NRO), RAX, ROA, or ROX)
DITI	(NO) YES	DID to TIE connections allowed
TRNX	(NO) YES	(Prevent) Allow transfer on ringing of supervised external trunks across the network
EXTT	(NO) YES	(Prevent) Allow connection of supervised external trunks via either call transfer or conference
FTOP	(FRES) TBFT FTTB FTLY	Flexible Trunk to Trunk Connection Option
APAD	x y	Alternative Pad
DMWM	(NO) YES	Enable the output of DPNSSI Message Waiting Indication error messages
MWNS	(NO) YES	Message Waiting Indication Non Specified Information string to recognize.
- REQ	aaa	Message Waiting Indication Non Specified Information table
- MFID	a	Manufacturer Identifier
- - NOTI	(NO) YES	Non Specified Information string for Message Waiting Notification
- - MSSC	a	a = any alphanumeric character

-- PRMT	aaa	Subsequent Non Specified Information string for Message Waiting notification
-- CANC	YES NO	Non Specified Information string for Message Waitin Cancellation
VNR	(NO) YES	Vacant Number Routing
- RLI	0-999	Route List Index as defined in LD 86
- FLEN	1-(16)	Flexible length of digits expected
- CDPL	1-(10)	Flexible length of VNR CDP
- LOCL	1-(10)	Flexible length of VNR LOC
NIT	2-(8)	Network Alternate Route Selection (NARS) Interdigit Timer
NAS_ATCL	(YES) NO	Network Attendant Service Attendant Control allowed
NAS_ACTV	(YES) NO	Network Attendant Service routing Activated
FOPT	0-(14)-30	Flexible Orbiting Prevention Timer
ARDL_ACCEPT		
	0-(20)-60	Automatic Redial Acceptance Timer in seconds
ARDL_RETRY		
	10-(30)-60	Automatic Redial Retry Timer in seconds
CNDN	0-x...x	Customer Calling Number Identification DN on outgoing MFC calls
- CNIP	(YES) NO	Calling Number Identification Presentation
CNAT	0-x...x	CNI Attendant DN on outgoing MFC calls
HMDN	xxxx	Home DN

LD 15

Data Block: NIT (Night Service)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	NIT_DATA	Night Service
CUST	0-99	Customer number
NIT1	x...x	First Night Service DN by Time of Day
TIM1	hh mm	Hour and Minute for First Night Service DN
NIT2	x...x	Second Night Service DN by Time of Day
TIM2	hh mm	Hour and Minute for Second Night Service DN
NIT3	x...x	Third Night Service DN by Time of Day
TIM3	hh mm	Hour and Minute for Third Night Service DN
NIT4	x...x	Fourth Night Service DN by Time of Day
TIM4	hh mm	Hour and Minute for Fourth Night Service DN
RPNS	(NO) YES	Recall With Priority During Night Service
ENS	(NO) YES	Enhanced Night Service enabled
- NWT	(NO) YES	Night Call Waiting Tone enabled
- NNT	0-253	Night Number Table
- NSO	(NO) YES	Enhanced Night Service enabled

Data Block: OAS (Off Hook Alarm Security)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	OAS_DATA	Change Off-Hook Alarm Security options
CUST	0-99	Customer number
ODN0	xxxx	OHAS Security DN for zone 0
ODN1	xxxx	OHAS Security DN for zone 1
ODN2	xxxx	OHAS Security DN for zone 2
ODN3	xxxx	OHAS Security DN for zone 3
ODN4	xxxx	OHAS Security DN for zone 4
ODN5	xxxx	OHAS Security DN for zone 5
ODN6	xxxx	OHAS Security DN for zone 6
ODN7	xxxx	OHAS Security DN for zone 7
ODN8	xxxx	OHAS Security DN for zone 8
ODN9	xxxx	OHAS Security DN for zone 9
ASTM	1-(30)-63	OHAS off-hook or interdigit timeout timer in seconds
HDOPT	(0)-10 CONT	OHAS Half Disconnect Treatment Options
HDTM	1-(30)-600	OHAS Half Disconnect Timer in seconds

LD 15

Data Block: PPM (Periodic Pulse Metering)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	PPM_DATA	Periodic Pulse Metering
CUST	0-99	Customer number
HMTL	(YES) NO	Hotel/Motel environment
PCDL	(NO) YES	PPM output on CDR Link
UCST	(0)-9999	Unit Cost for Periodic Pulse Metering
ATCH	(NO) YES	Attendant display of call Charge
SCDL	(0)-3	Schedule for printing Message Registration and PPM data
- WKDY	1-7	Week Day for weekly printout; 1 = Sunday
- DAY	0-28	Day of month for printout; 0 = last day of month
- HOUR	hh	Hour of day for printout
	hh hh	Two printouts per day allowed when SCDL = 1
- MCLR	(NO) YES	Meter Clear after printing
- PTTY	(0)-15	PPM TTY number for printing meters (one per switch)

Data Block: PWD (Password)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	PWD_DATA	Password
CUST	0-99	Customer number
SPWD	xxxx	Secure data password for LD 88 authcodes and LD 24 DISA
- PWD2	xxxx	Second level administration Password
ATAC	xxxx	Attendant Administration Access code
- PWD2	xxxx	Second level administration Password

Data Block: RDR (Call Redirection)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	RDR_DATA	Call Redirection
CUST	0-99	Customer number
OPT	a...a	Options (OPT responses begin on page 310)
FNAD	aaa	Call Forward No Answer treatment for DID calls (aaa = (HNT), ATT, NO, or FDN)
FNAT	aaa	Call Forward No Answer treatment for external Trunk non-DID calls (aaa = (HNT), ATT, NO, or FDN)
FNAL	aaa	Call Forward No Answer treatment for All other calls including trunk calls marked as internal (aaa = (HNT), ATT, NO, or FDN)
CFTA	(NO) YES	Call Forward to Trunk Access code allowed
CCFWDN	x...x	Customer Call Forward DN (maximum: 23 digits)
CFNA	1-(4)-15	Number of normal ringing cycles for Call Forward No Answer (CFNA)
CFN0	1-(4)-15	Number of normal ringing cycles for CFNA, Option 0
CFN1	1-(4)-15	Number of normal ringing cycles for CFNA, Option 1
CFN2	1-(4)-15	Number of normal ringing cycles for CFNA, Option 2
CRTOD	(NO) YES	Change Call Redirection by Time Of Day alternate time options
- CRT0	SH SM EH EM	Alternate time option 0, denotes time when Alternate Redirection DN will be used. (SH SM = Start time, EH EM = End time)
- CRT1	SH SM EH EM	Alternate time option 1 (SH SM = Start time; EH EM = End time)
- CRT2	SH SM EH EM	Alternate time option 2 (SH SM = Start time; EH EM = End time)
- CRT3	SH SM EH EM	Alternate time option 3 (SH SM = Start time; EH EM = End time)
CRDAY	(NO) YES	Call Redirection by Day
- DAY0	n n n n n n n	Days for day option 0 for which alternate treatment is given
- DAY1	n n n n n n n	Days for day option 1 for which alternate treatment is given
- DAY2	n n n n n n n	Days for day option 2 for which alternate treatment is given
- DAY3	n n n n n n n	Days for day option 3 for which alternate treatment is given
CRHOL	aaa	Redirection Holiday(s)
- DATE	dd mm yyyy	Date of the holiday
- - HOL_OPT	0-3	Holiday redirection option for which the date applies
NMDR	(0)-4	Number of normal ring cycles for DNDR

LD 15

DFN0	1-(4)-15	Number of distinctive ringing cycles for CFNA, Option 0
DFN1	1-(4)-15	Number of distinctive ringing cycles for CFNA, Option 1
DFN2	1-(4)-15	Number of distinctive ringing cycles for CFNA, Option 2
DMDR	(0)-14	Number of distinctive ringing cycles for DNDR
DNDH	(NO) YES	Do Not Disturb Hunting allowed
MDID	(NO) YES	No Answer DID calls routed to Message Center
NDID	(NO) YES	No Answer non-DID calls routed to Message Center
MWFB	(NO) YES	DID calls to busy telephones routed to Message Center
TRCL	(0)-7	Total Redirection Count Limit
DFNR	(0)-15	DID Forward No Answer Ring cycles
FCWD	(0)-126	Number of seconds a DID call should wait on a set before being forwarded to the attendant

Data Block: ROA (Recorded Overflow Announcement)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	ROA_DATA	Recorded Overflow Announcement
CUST	0-99	Customer number
OPT	a...a	Options (OPT responses begin on page 310)
FRRT	0-511	First RAN route
- FRT	0-(20)-2044	Time delay in seconds for the first RAN route
SRRT	0-511	Second RAN route number for ROA
- SRT	2-(40)-2044	Time delay in seconds for the second RAN route
WAIT	aaa	Treatment during Waiting time for ROA (aaa = (RGB), MUS, or SIL)
- MURT	0-511	Music Route
RICI	0-19	ICI key numbers that may receive ROA

Data Block: TIM (Timers)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	TIM_DATA	Timers
CUST	0-99	Customer number
FLSH	20-(45)-768	Switchhook Flash timing
SDFL	384-(1024)-2048	Signal Destination Flash timing
PHDT	1-(30)-63	Permanent Hold Timer
DIND	2-(30)-60	Dial tone and Interdigit timeout for non-DTMF sets
DIDT	2-(14)-60	Dial tone and Interdigit timeout for DTMF sets
LDTT	2-(6)-30	Line disconnect tone timer for 500/2500 telephones in seconds
DLAT	(0)-120	Delayed Answer Timer
BOTO	2-(14)-60	Busy tone/Overflow tone Timeout
DBRC	2-(60)-120	Duration Between Reminder Cadences for Audible Reminder of Held Call
RTIM	xxx yyy zzz	Recall Timers for Slow Answer, Camp-On and Call Waiting
ATIM	(0)-126	Attendant Alternative Answering Timer
AQTT	(0)-255	Attendant Queue Timing Threshold in seconds
ADLD	(0)-20	Auto Dial Delay in seconds
AFNT	(0)-126	Attendant Forward No Answer Timer (must be an even number)
AFBT	(0)- <i>AFNT</i>	Attendant Forward Buzz Tone (Your entry can be equal to or less than your response to the AFNT prompt and must be an even number)
NFNA	(0)-63	Night Forward No Answer or ring cycles
NFNS	(0)-504	Night Forward No Answer in seconds
ADHT	(0)-14	Attendant Delay on Hold Timer in seconds
HWTT	0-(300)-600	Length of Howler Tone in seconds
NIT	2-(8)	Network Alternate Route Selection Interdigit Timer
FOPT	0-(14)-30	Flexible Orbiting Prevention Timer

LD 15

Data Block: TST (Test lines)

Prompt	Response	Comment
REQ:	CHG	Change existing data block
TYPE:	TST_DATA	Test lines for transmission testing
CUST	0-99	Customer number
T100	xxxx	DN for Type-100 test line
REF0	xxxx	DN for Reference trunk 0
TST0	xxxx	DN for Test trunk 0
REF1	xxxx	DN for Reference trunk1
TST1	xxxx	DN for Test trunk 1
REF2	xxxx	DN for Reference trunk 2
TST2	xxxx	DN for Test trunk 2
REF3	xxxx	DN for Reference trunk 3
TST3	xxxx	DN for Test trunk 3

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
AATT	xxxx	Automatic Identification of Outward Dial Attendant Identifier Precede with X to remove.	aiod-1
ABDN	(NO) YES	Activation of the Attendant Blocking of DN Prompted with Semi-Automatic Camp-On (SACP) package 181.	abdn-20
AC2	NPA NXX INTL SPN LOC	Access Code 2 E.164 National E.164 Subscriber International Special Number Location Code For DPNSS1, only SPN and LOC values apply. Enter call types that use Access Code 2 (AC2) Multiple responses are permitted. If a numbering plan is not entered here, it is automatically defaulted to Access Code1 (AC1). This prompt applies to both ISDN and non-ISDN calls if you have Network Message Services (NMS) package175.	pri-15
ACCD	(OVF OVF OVF ATN)	Access Denied	basic-1
ACNS	(NO) EXT ALL	Attendant Clearing during Night Service No automatic treatment External calls only All calls This prompt appears when the Multi-Party Operations (MPO) package is equipped, MPOP = YES and FMOP = YES.	mpo-20
ACT_BUSY	(FLSH) WINK LIT DARK	LCD Lamp flash rate is 30 impulses per minute. LCD Lamp flash rate is 60 impulses per minute. LCD Lamp is on. LCD Lamp is off.	bfs-24

LD 15

Prompt	Response	Comment	Pack/Rel
ACT_IDLE	(WINK) FLSH LIT DARK	LCD Lamp flash rate is 60 impulses per minute. LCD Lamp flash rate is 30 impulses per minute. LCD Lamp is on. LCD Lamp is off.	bfs-24
ADCP	x...x	All-Digital Connection Prefix Entry may be 1-4 digits; null input accepted. Prompted with 1.5 Mbit Digital Trunk Interface (PBXI) package 75 and AMP package.	basic-5
ADDG	0-(8)-99..99	Additional digits, 1 to 15 digits. They will be used to complete ANDN if LEC+ANDN is less than ANSZ digits (defined in OVL 16).	
ANDN	0-99..99 X	Used as ANI DN if Calling number not available or DNLG=0. Up to 15 digits may be entered. remove ANDN	
ADHT	(0)-14	Attendant Delay on Hold Timer Prompted with International Supplementary Features (SUPP) package 131.	supp-9
ADLD	(0)-120	Auto Dial Delay Time in two-second interval. Prompted with the Flexible Feature Codes (FFC) package 139. 0 = Auto Dial does not take place.	ffc-20
AFBT	(0)-2-AFNT	Attendant Forward Buzz Tone The number of seconds in 2 second intervals that the attendant is buzzed at full volume. Odd entries are rounded down to the next valid entry. If entry is 0, the original volume is in effect.	afna-14
AFCO	(YES) NO	(Automatic)/Manual Forced Camp-On Prompted with Priority Override (POVR) package 186.	povr-20

Prompt	Response	Comment	Pack/Rel
AFNT	(0)-2-126	Attendant Forward No Answer Timer The number of seconds in 2 second intervals that the call is presented to the attendant before Attendant Forward No Answer (AFNA) is attempted. Odd entries are rounded down to the next valid entry. If entry is 0, the call is not forwarded. Prompted with Attendant Forward No Answer (AFNA) package 134.	afna-14
ALDN	x...x	Alarm Directory Number Must be a Single-Appearance 500-set DN. Precede with X to remove.	emct-20
ALRM	(NO) YES	Malicious Call Trace Alarm for internal or external calls ALRM has to set to YES if the alarm is to be rung for any call (external or internal) when MCT is activated.	emct-20
AML_DATA	(NO) YES	Change Application Module Link options	basic-21
ANAT	x...x	ANI Attendant Billing Number Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. In either case, together with ANLD (ANI listed DN), the total number of digits must be seven. Prompted with Automatic Number Identification (ANI) package 12.	ani-1
ANI_DATA	(NO) YES	Change Automatic Number Identification options	basic-21
ANLD	xxxxx	Automatic Number Identification (ANI) Listed Directory Number May be 0-5 digits, depending on the length of ANAT. The combined number of digits for ANAT and ANLD must be 7. Prompted with Automatic Number Identification (ANI) package 12.	ani-1
	X	Enter the letter X to clear the field	

LD 15

Prompt	Response	Comment	Pack/Rel
AOCS	xxx yyy	All Other Cases Where: xxx is for internal calls and yyy or ATN is for external calls Valid entries for xxx and yyy are: <ul style="list-style-type: none">• AAR - forward to attendant or Night Service after re-ringing for RCY1 cycles• ATN - forward to attendant or Night Service (ATN is the default for yyy or external calls)• DAR - disconnect after re-ringing for RCY1 cycles• DIS - disconnect default for xxx or internal calls• OVF - provide overflow tone• STD - standard operation.	mpo-20
AODN	x...x	Attendant Overflow DN Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove an entry. Prompted with Attendant Overflow Position (AOP) package 56.	aop-1
APAD	x y	Alternative Pad. Where: x = trunk pad selection and y = conference pad selection Valid inputs for x are: <ul style="list-style-type: none">• (0) = default North America• 1 = Australia• 2 = New Zealand• 3 = Italy• 4 = China EPE or EPE/IPE systems• 5 = China pure IPE system• 6-7 = future usage currently set to default Valid inputs for y are: <ul style="list-style-type: none">• (0) = default North America• 1 = Alternative Conference pads selected The default = 0 when REQ = NEW. The default is the existing value when REQ = CHG. Alternative Conference pads are only provided on specific Conference cards.	
APL	0 - 15	Auxiliary Processor Link number	apl-10

Prompt	Response	Comment	Pack/Rel
APPL_DN	x...x	Application DN Originating node that communicates with the Mobility User Database (MUD) server. This DN can be up to 7 digits long.	mmsn-22
APRF	xx	Automatic Identification of Outward Dial Prefix	aiod-1
AQTT	(0)-255	Attendant Queue Timing Threshold in seconds	basic-1
ARDL_ACCEPT	0-(20)-60	Automatic Redial Acceptance Timer in seconds. An odd-numbered entry is rounded up to the next even number, and the following message is printed: "ARDL_ACCEPT ROUNDED TO <u>XX</u> ." (where: xx = the even number). This is the maximum allotted time for the originator response on a successful automatic redial call. Prompted if Automatic Redial (ARDL) package 304 is equipped.	ardl-22
ARDL_ATTEMPT	1-(30)-60	Automatic Redial number of attempts Any single ARDL call is automatically redialed up to the number of retries entered at this prompt. Prompted if Automatic Redial (ARDL) package 304 is equipped.	ardl-22
ARDL_RETRY	10-(30)-60	Automatic Redial Retry Timer in seconds. An odd-numbered entry is rounded up to the next even number, and the following message is printed: "ARDL_ACCEPT ROUNDED TO <u>XX</u> ." (where: xx = the even number). This timer controls successive automatic redial retry dialing. Prompted if Automatic Redial (ARDL) package 304 is equipped.	ardl-22
ASPCT	10 180	Analog Semi-Permanent Connections re-connection Timer minimum value in seconds maximum value in seconds	basic-24

LD 15

Prompt	Response	Comment	Pack/Rel
ASTM	1-(30)-63	<p>OHAS Off-Hook or interdigit timeout timer</p> <p>This timer is applied to telephones with Alarm Security Allowed (ASA) Class of Service. When the timer expires, the telephone is intercepted to the OHAS DN.</p> <p>ASTM applies to all OHAS DNs. If the telephone has Alarm Security Denied (ASD) Class of Service, the normal dial tone and interdigit timers are used. See LD 15 prompts DIND and DIDT.</p>	basic-18
ATAC	xxxx	<p>Attendant Administration Access Code</p> <p>The entered code is not actually accepted until the correct password is entered in the next prompt. Prompted with Attendant Administration (AA) package 54.</p>	aa-1
ATCH	(NO) YES	<p>Attendant display of call Charge</p>	supp-15
ATDN	(0)-x...x	<p>Attendant Directory Number</p> <p>Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Calls timed for recall by the DPNSS1 redirection feature are redirected to this number when the timer expires.</p>	basic-1
ATIM	(0)-126	<p>Attendant Alternative Answering Timer</p> <p>This timer is in increments of two seconds, odd numbers are rounded down to the next valid input. Use ATIM = 0 to disable AAA. Prompted with Attendant Alternative Answering (AAA) package 174.</p>	aaa-15
ATRC	(NO) YES	<p>Attendant Recall allowed</p> <p>A YES response enables Attendant Recall for unanswered Automatic Wake Up (AWU) call attempts.</p> <p>The number of Wake Up tries is defined at the TAWU prompt. The number of rings for a Wake Up call is defined at the NRWU prompt.</p>	awu-10
ATT_DATA	(NO) YES	<p>Change Attendant Console options</p>	basic-21
AUTR	0-511 X	<p>Authcode Error RAN number</p> <p>To disable the RAN</p>	disa-16

Prompt	Response	Comment	Pack/Rel
AWU	(NO) YES X	Enable Automatic Wake-Up All AWU related data is removed from CDB. Prompted with Automatic Wake-Up (AWU) package 102.	awu-10
AWU_DATA	(NO) YES	Change Automatic Wake Up options	basic-21
AXID	(NO) YES	Auxiliary Identification output in CDR record Auxiliary Identification provides the TN when the call involves a multiple appearance DN.	cdr-1
BCAP	(NO) YES	Bearer Capability in CDR	cdr-24
BDI	(YES) NO	Buffer Data Interface for CDR	dba-24
BOTO	2-(14)-60	Busy tone/Overflow tone Timeout Odd entries are rounded down to a valid multiple of two seconds.	basic-10
BPSS	(NO) YES	Block Pretranslation on System Speed Call lists when dial accessed.	pxlt- 23 ssc- 23
BSFE	(NO) YES	Boss Secretary Filtering Enhancement	ffcsf-24
BSGC	0-(65535)	Business Sub Group Consult-only. Where: <ul style="list-style-type: none"> • 0 = no indication • 1 - 65535 = Subgroup identifier <p>This value is sent as the Multi-location Business Group Subgroup (MBSG) identifier or tenant number when an existing call has more than two different MBSGs. In this case a consultation connection will be allowed, but completion of a call modification, conference or transfer, will be disallowed.</p> <p>If BSGC = 0 then Call Transfer and Call Modifications may be restricted under certain circumstances. Ensure BSGC is not 0 if Call Transfer and Call Modifications to be allowed.</p>	tens-16
CAC0	0-(6)-10	MFC value corresponding to CIS 0. Reserved.	cist-24
	0-(3)-9	CIS value corresponding to MFC DGT 0.	

LD 15

Prompt	Response	Comment	Pack/Rel
CAC1	0-(6)-10	MFC value corresponding to CIS 1. Residential or business subset with the access to automatic regional, toll and international network”.	cist-24
	0-(3)-9	CIS value corresponding to MFC DGT 1.	
CAC2	0-(6)-10	MFC value corresponding to CIS 2. Hotel subset with the access to automatic regional, toll international network.	cist-24
	0-(3)-9	CIS value corresponding to MFC DGT 2.	
CAC3	0-(6)-10	MFC value corresponding to CIS 3. Residential, business or Hotel subset with the access to local network only.	cist-24
	0-(3)-9	CIS value corresponding to MFC DGT 3.	
CAC4	0-(6)-10	MFC value corresponding to CIS 4. Business subset with the access to regional, toll, international network and to special service numbers; preferential access to regional and toll network.	cist-24
	0-(3)-9	CIS value corresponding to MFC DGT 4.	
CAC5	0-(6)-10	MFC value corresponding to CIS 5. Business subset of telecommunications administration with the access to automatic regional, toll, international network and to special service numbers free of charge.	cist-24
	0-(3)-9	CIS value corresponding to MFC DGT 5.	
CAC6	0-(6)-10	MFC value corresponding to CIS 6. Toll Coin box and public call paystation with the access to automatic regional and toll network also the general purpose coin box with the access to local and toll network (paying in cash) and the coin box with access to special services only.	cist-24
	0-(3)-9	CIS value corresponding to MFC DGT 6.	
CAC7	0-(6)-10	MFC value corresponding to CIS 7. Business or residential subset with automatic access to regional, toll and international network plus to chargeable service numbers.	cist-24
	0-(3)-9	CIS value corresponding to MFC DGT 7.	

Prompt	Response	Comment	Pack/Rel
CAC8	0-(6)-10	MFC value corresponding to CIS 8. Business subset for data, facsimile and electronic mail with automatic access to regional, toll and international network.	cist-24
	0-(3)-9	CIS value corresponding to MFC DGT 8.	
CAC9	0-(6)-10	MFC value corresponding to CIS 9. Local call coin box.	cist-24
	0-(3)-9	CIS value corresponding to MFC DGT 9.	
CACC	(NO) YES	CAC Conversion table option	
CANC	YES NO	Non Specified Information string for Message Waiting Cancellation.	dmwi- 23
CAS	(NO) YES	Centralized Attendant Service Prompted with Centralized Attendant Services (Main) (CASM) package 26 or Centralized Attendant Services (Remote) (CASR) package 27.	cas-1
CAS_DATA	(NO) YES	Change Centralized Attendant Service options	basic-21
CCDO	(NO)	Consultation Connection Disconnect Option alternative treatment is not required	mpo-20
	YES	Consultation Connection Disconnect Option alternative treatment is required	
CCFWDN	x...x	Customer Call Forward DN. Maximum of 23 digits allowed (0-23) CCFWDN allows subscribers to forward their phones to a central answering service by dialing a FFC. CCFWDN activates the regular Call Forward All Calls function, but without having to specify the DN to which calls will be forwarded. Customer Call Forward is only applicable to 500-type sets.	basic-21

LD 15

Prompt	Response	Comment	Pack/Rel
CCRS		Controlled Class of Service (CCOS) Restricted Service. This applies when CCRS is active. If CCRS is inactive, the set defaults to the TN class of service access restriction. Allowed access restrictions are:	ccos-7
	(UNR)	Unrestricted	
	CTD	Conditionally Toll Denied	
	CUN	Conditional Unrestricted	
	FR1	Fully Restricted class 1	
	FR2	Fully Restricted class 2	
	FRE	Fully Restricted	
	SRE	Semi-Restricted	
	TLD	Toll Denied	
		Prompted with Controlled Class of Service (CCOS) package 81.	
CCS_DATA	(NO) YES	Change Controlled Class of Service options	basic-21
CDPL	1-(10)	Flexible length of Vacant Number Routing (VNR) Coordinated Dialing Plan (CDP)	cdp-10
CDPR		Coordinated Dialing Plan Record option. CDPR appears with Coordinated Dialing Plan (CDP) package 59. Applies only to trunk routes with OPD = NO.	cdp-10
	(NO)	Replace the Distant Steering Code (DSC) or Trunk Steering Code (TSC) with the Access Code (ACOD). The format is: ACOD + concluding digits	
	YES	Insert ACOD ahead of DSC or TSC. The format is : ACOD + DSC or TSC + concluding digits	
CDR	(NO) YES	Change Call Detail Recording record Prompted with Call Detail Recording (CDR) package 4.	cdr-1
CDR_DATA	(NO) YES	Change CDR and Charge Account options	basic-21
CDTO	2-(14)	Control digit timeout in multiples of 2 seconds.	mpo-20

Prompt	Response	Comment	Pack/Rel
CFNA	1-(4)-15	Number of normal ringing cycles for Call Forward No Answer If the Flexible Tones and Cadences (FTC) package 125 is equipped, this interval is tied to the number of cycles of NCAD ringing. Refer to 553-2711-180 Flexible Tone and Digit Switches.	basic-1
CFN0	1-(4)-15	Number of normal ringing cycles for CFNA, Option 0 CFNA has three ringing cycle options. This assigns the normal ringing cycles for Option 0. Refer to X11 features and services for details concerning this feature.	uscr-19
CFN1	1-(4)-15	Number of normal ringing cycles for CFNA	uscr-19
CFN2	1-(4)-15	Number of normal ringing cycles for CFNA	uscr-19
CFTA	(NO) YES	Call Forward to Trunk Access code not allowed Call Forward to Trunk Access code allowed	optf-12
CHDN	x...x	CAS silent Hold DN Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	casm-1
CHLN	(0)-23	Charge Account Number Length Prompted with Charge Account (CHG) package 23	fca-1
CHMN	(1)-CHLN	Minimum number of digits for FCA code The range is from 1 to CHLN, where CHLN = Charge account Number Length.	fca-1
CIS_ANI	(NO) YES	ANI option to allow the configuration of ANI entries for CIS ANI message.	cist-24

LD 15

Prompt	Response	Comment	Pack/Rel
CIS_ENT		CAC conversion table to convert CIS CAC into MFC CAC	cist-24
	(0)-31	CAC conversion table entry to be created or modified	
	Xaa	CAC conversion table entry to be deleted	
	Xaa Xbb	CAC conversion table entries between aa and bb to be deleted. For REQ=NEW, only default table 0 is configurable. An ENTRY can be deleted even if still configured on an incoming route. For all subprompts, if 0 is configured, the value configured for non-tie trunks in the outgoing R2MFC table (LD 94) is used.	
CLASS_FMT	(DN)	Send internal Directory Number to a CLASS set as the calling number.	cnumb- 23
	LCL	Send Local Number to a CLASS set as the calling number.	
	NTN	Send National Number to a CLASS set as the calling number.	
CLDN	(NAP OVF NAP NAP)	Calls to LDN	basic 1
CLID	(NO)	Do not allow Calling Line Identification option	isdn-22
	YES	Allow Calling Line Identification option Calling Line Identification does not require ISDN.	
CLS1	(UNR)	Class of Service Unrestricted	basic-1
	CTD	Conditionally Toll Denied	
	CUN	Conditional Unrestricted	
	FR1	Fully Restricted class 1	
	FR2	Fully Restricted class 2	
	FRE	Fully Restricted	
	SRE	Semi-Restricted	
TLD	Toll Denied		
CLS2	(UNR)	Class of Service Unrestricted	supp-16
	CTD	Conditionally Toll Denied	
	CUN	Conditional Unrestricted	
	FR1	Fully Restricted class 1	

Prompt	Response	Comment	Pack/Rel
	FR2	Fully Restricted class 2	
	FRE	Fully Restricted	
	SRE	Semi-Restricted	
	TLD	Toll Denied	
CNAT	0-9999	CNI Attendant DN on outgoing Multifrequency Compelled Signaling (MFC) calls.	mfc-9
	X	To remove Prompted with Multifrequency Compelled Signaling (MFC) package 128	
CNCS	0-99	Controlled NCOS CNCS allows the user to select a controlled NCOS to be used when the set is locked. When a set is locked, the NCOS defined at this prompt is used as the set NCOS when a trunk call is made. Precede entry with X to remove.	ffc -21
CNDN		Customer Calling Number Identification on outgoing MFC calls. Prompted with Multifrequency Compelled Signaling (MFC) package 128	mfc-9
	0-9999	Customer CNI sent	
	0-999999999	Customer CNI not sent	
	X	Precede with X to remove	
CNFD	0-(1)-9, *, #	Control Digit for Conference	mpo-20
CNFFIELD	(NO) YES	Enable Conference Count Display Field.	basic- 23
CNF_NAME	(CONF) aaaa	Change Conferees Count Display Field Name. aaaa = 1 to 4 alphanumeric characters.	basic- 23
CNI		Calling Number Identification (R2MFC) Your CNI response will determine which field of the CDR record will contain the Calling Number Identification for this customer.	basic-22
	(DGTS)	CNI is recorded in the digits field	
	CLID	CNI of R2MFC is recorded in CLID field	
	NONE	CNI will not be recorded in CDR	

LD 15

Prompt	Response	Comment	Pack/Rel
		CNI is prompted if : <ul style="list-style-type: none">• CDR = YES• FCDR, CLID, and MFC packages are equipped• FCDR = NEW in LD 17• CLID = YES in LD 17	
CNIP	(YES) NO	Calling Number Identification Presentation Send Customer Calling Number Identification (CNDN) + Trunk ID (TKID) if Calling Line ID (CLID) = NO in LD 17 Respond to Calling Number Identification (CNI) request with End-of-CNI R2MFC level 1 forward signal (ECNI)	basic-22
CNTP	(PDN) LDN	Calling Number Type The Calling Line ID (CLID) feature displays the set's Prime DN The CLID feature displays the customer's Listed Directory Number (LDN)	pri-12
		This determines the default Calling Line ID (CLID) Class of Service (CLS) for all sets except those configured differently in LD 10 and LD 11. Attendant consoles only have a Listed Directory Number (LDN).	
CONF	loop	Conference loop number	awu-10
CONF_DSP	(NO) YES	Change Conference Display configurations.	basic-23
CONG	(OVFL) BUSY	Congestion tone for all trunks busy condition Overflow tone for all trunks busy condition Busy tone	basic-1
CPAS	xxxx	Central Precedence answering station listed DN	basic-21
CPCI	(NO) YES	Called Party Control on Internal Call is not allowed for the customer Called Party Control on Internal Call is allowed for the customer CPCI package 310 is required.	cpci-22
CRDAY	(NO) YES	Call Redirection by Day	basic-24
CRHOL	NEW CHG OUT	Add holiday(s) Change holiday(s) Remove holiday(s)	basic-24

Prompt	Response	Comment	Pack/Rel
	OUT ALL	Deletes all holidays in the list	
CRT0	SH SM EH EM	<p>Alternate time option 0, denoting a time when the Alternate Redirection DN will be used. Where:</p> <ul style="list-style-type: none"> • SH SM = Start time • EH EM = End time <p>Both entries are in international time format and are entered as HH MM (hour = 00-23; minute = 00-59). The default value is 00 00 00 00. The default disables CRTOD for that alternate time option.</p>	basic-22
CRT1	SH SM EH EM	<p>Alternate time option 1, denoting a time when the Alternate Redirection DN will be used. See the prompt CRT0 for an explanation of the response format.</p>	basic-22
CRT2	SH SM EH EM	<p>Alternate time option 2, denoting a time when the Alternate Redirection DN will be used. See the prompt CRT0 for an explanation of the response format.</p>	basic-22
CRT3	SH SM EH EM	<p>Alternate time option 3, denoting a time when the Alternate Redirection DN will be used. See the prompt CRT0 for an explanation of the response format.</p>	basic-22
CRTOD	(NO) YES	<p>Call Redirection by Time Of Day</p> <p>Do not change CRTOD alternate time options</p> <p>Change CRTOD alternate time options</p>	basic-22
CTRC	(OVF NAP OVF NAP)	Restricted Call	basic-1
CTVN	(OVF OVF OVF ATN)	Call to Vacant Number	basic-1
CUST	0-99	<p>Customer number</p> <p>For systems 11C, 51C, 61C, and 81C.</p>	basic-1

LD 15

Prompt	Response	Comment	Pack/Rel
CWZB	(NO) YES	Call Waiting Buzz First field-Provide two second buzz on exceeding upper CWCL or CWTM threshold.	basic-1
	(NO) YES	Second field-Buzz on first call entering queue.	
CWCL	(0)-255 (0)-255	Call Waiting Call Limit Lower and upper thresholds. The Call Waiting lamp starts flashing when number of calls in the queue exceeds the upper threshold. The lamp continues to flash until the number of calls in queue is less than the lower threshold. Enter 0 to disable this feature.	basic-1
	(0)-1000 (0)-1000	Lower and upper thresholds defined as a percentage of the active consoles when OPT = FACA. When the FACA/FACD option is changed, a new value for CWCL must be set or the default values are used. The CWCL values for the tenant-level are set equal to the customer-level values. CWCL is also prompted in LD 93.	
CWTM	(0)-511 (0)-511	Lower and upper thresholds for Call Waiting Time. The Call Waiting lamp starts flashing when the call in the queue exceeds the upper threshold. The lamp continues to flash until the wait time is less than the lower threshold. Enter 0 to disable this feature.	basic-1
CWUP	(NO) YES	Call Waiting queue Update Prompted with M2250 Attendant Console (DCON) package 140. The M2250 type consoles can be notified every time there is a change to the Call Waiting queue.	dcon-15
DACT_BUSY		Boss's Lamp status when BSFE is disabled and set is busy.	ffcsf-24
	(LIT)	LCD Lamp is on.	
	WINK	LCD Lamp flash rate is 60 impulses per minute.	
	FLSH	LCD Lamp flash rate is 30 impulses per minute.	
	DARK	LCD Lamp is off.	

Prompt	Response	Comment	Pack/Rel
DACT_IDLE	(DARK) WINK LIT FLSH	Boss's Lamp status when BSFE is disabled and set is idle. LCD Lamp is off. LCD Lamp flash rate is 60 impulses per minute. LCD Lamp is on. LCD Lamp flash rate is 30 impulses per minute.	ffcsf-24
DAPC	(NO) YES	Dial Access Prefix on CLID table entry option	isdn-24
DASC	xxxx	Display Access Code Enter the access code which is to be placed on displays before Originating Line Identities (OLI) and Terminating Line Identities (TLI) are received from the ISDN. The default is no code, when creating a new data block. Prompted with Multi Language Wake Up (MLWU) package 206 and Integrated Digital Access (IDA) package 122.	mlwu-16
DATE	dd mm yyyy	Date of the holiday Where: dd = day mm = month yyyy = year (optional, if no year is entered the holiday is repeated every year.	basic-24
DAY	0-28	Day of month for printout. Where 0 = last day of month	supp-15
DAY0	n n n n n n n ALL Xn Xn Xn Xn	Days for day option 0 for which alternate treatment is given. Where: n = 1 (Sunday) n = 2 (Monday) n = 3 (Tuesday) n = 4 (Wednesday) n = 5 (Thursday) n = 6 (Friday) n = 7 (Saturday) Alternate treatment is to be given throughout the week Precede the day number with X to remove Multiple days may be removed by preceding each day number with X and separating with a space.	basic-24

LD 15

Prompt	Response	Comment	Pack/Rel
DAY1	n n n n n n n ALL Xn Xn Xn Xn	Days for day option 1 for which alternate treatment is given Where: n = 1 (Sunday) n = 2 (Monday) n = 3 (Tuesday) n = 4 (Wednesday) n = 5 (Thursday) n = 6 (Friday) n = 7 (Saturday) Alternate treatment is to be given throughout the week Precede the day number with X to remove Multiple days may be removed by preceding each day number with X and separating with a space.	basic-24
DAY2	n n n n n n n ALL Xn Xn Xn Xn	Days for day option 2 for which alternate treatment is given Where: n = 1 (Sunday) n = 2 (Monday) n = 3 (Tuesday) n = 4 (Wednesday) n = 5 (Thursday) n = 6 (Friday) n = 7 (Saturday) Alternate treatment is to be given throughout the week Precede the day number with X to remove Multiple days may be removed by preceding each day number with X and separating with a space.	basic-24
DAY3	n n n n n n n ALL Xn	Days for day option 3 for which alternate treatment is given Where: n = 1 (Sunday) n = 2 (Monday) n = 3 (Tuesday) n = 4 (Wednesday) n = 5 (Thursday) n = 6 (Friday) n = 7 (Saturday) Alternate treatment is to be given throughout the week Precede the day number with X to remove	basic-24

Prompt	Response	Comment	Pack/Rel
	Xn Xn Xn	Multiple days may be removed by preceding each day number with X and separating with a space.	
DBRC	2-(60)-120	Duration Between Reminder Cadences for audible reminder of held call Odd entries are rounded up to a valid multiple of two seconds.	basic-14
DCMX	1-255	Digit Conversion Maximum number of tables The sum of the values for MAXT and DCMX cannot exceed 255 or MAXT + DCMX = 255.	idc-12
DFLT	(NO) YES	Default CAS will not be activated after a SYSLOAD. CAS will be activated after a SYSLOAD.	casr-1
DFLT	0-(3)-9	CIS value used when MFC CAC has not been received, or MFC CAC received is not in the MFC CAC list of this table.	cist-24
	0-(6)-10	CIS value used when CIC CAC has not been received, or MFC CAC received is not in the CIC CAC list of this table.	
DFNA	1-(4)-15	Number of Distinctive Ringing Forward No Answer cycles Prompted with Distinctive Ringing (DRNG) package 74.	drng-4
DFN0	1-(4)-15	Number of Distinctive Ringing cycles for CFNA, Option 0 CFNA has three ringing cycle options. This assigns the Distinctive Ringing cycles for Option 0. Refer to X11 features and services for details concerning this feature	uscr-19
DFN1	1-(4)-15	Number of Distinctive Ringing cycles for CFNA, Option 1	uscr-19
DFN2	1-(4)-15	Number of Distinctive Ringing cycles for CFNA, Option 2	uscr-19

LD 15

Prompt	Response	Comment	Pack/Rel
DFNR	(0)-15	DID Forward No Answer Ring cycles Defines the Number of ringing cycles before a DID call is Slow Answer Recalled to the attendant console after the last stage of CFNA or hunt treatment has been completed (the maximum number of CFNA or hunt steps is two). If DFNR = 0, then DID CFNA enhancement is disabled. DID Call Forward No Answer is the Master Timer. Prompted if the FNAD prompt is not ATT or NO.	ffc-16
DGRP	(0)-2046	Maximum number of Dial Intercom Groups (DIG) Prompted with Dial Intercom (DI) package 21	di-1
DIAL_PLAN	(UDP) CDP	Dialing Plan used by the customer to communicate with the Mobility User Database (MUD) server Uniform Dialing Plan Coordinated Dialing Plan Be sure that the dialing plan is consistent on all Meridian 1 nodes on the network.	mmsn-22
DIDN	(YES) NO SRCH	Precede the DN of the active DN key with the digits in HLCL Use digits in HLCL Find a DN key of the set from key 0 which has DIDN of a CLID entry set to YES	isdn-22
DIDT	0-(14)-60 2-(14)-60	0-(14)-60 0-(14)-60 0-(14)-60 Dial tone and Interdigit timeout for DTMF sets when International Supplementary Features (SUPP) package 131 is equipped. The 1st parameter is the time before first digit or the dial tone time. The 2nd parameter is the time between the first and second digits. The 3rd parameter is the time between digits after the second digit. Odd entries are rounded down to a valid multiple of two seconds. Dial tone and Interdigit timeout for DTMF sets when International Supplementary Features (SUPP) package 131 is not equipped. Odd entries are rounded down to a valid multiple of two seconds.	supp-9

Prompt	Response	Comment	Pack/Rel
DIND	0-(30)-60	0-(30)-60 0-(30)-60 Dial tone and Interdigit timeout for non-DTMF sets when International Supplementary Features (SUPP) package 131 is equipped. The 1st parameter is the time before first digit or the dial tone time. The 2nd parameter is the time between the first and second digits. The 3rd parameter is the time between digits after the second digit. Odd entries are rounded down to a valid multiple of two seconds.	basic-10
	2-(30)-60	Dial tone and Interdigit timeout for non-DTMF sets when International Supplementary Features (SUPP) package 131 is not equipped.	
DISD	0-(1)-9, *, #	Control digit for Disconnect	mpo-20
DITI	(NO) YES	DID to TIE connections allowed To connect external DID and internal network TIE trunks for the customer (which allows an external trunk to be transferred across an internal network TIE trunk), set DITI = YES.	supp-10
DLAT	(0)-120	Delayed Answer Timer. Where 0 = no time limit. In seconds for internal calls. Call disconnected if not answered. Prompted with Operator Call Back (OPCB) package 126.	opcb-14
DLDN	(NO) YES	Departmental Listed Directory Numbers. Prompted with Departmental Listed Directory Number (DLDN) package 76.	dldn-5
DLT	(OVF) ATN OFA	Direct Inward System Access (DISA) Lockout treatment Overflow tone Attendant Overflow then attendant	disa-1
DMWM	(NO) YES	Enable the output of DPNSSI Message Waiting Indication Non Specified Information error messages (ERR0001, ERR0002, ERR0003).	dmwi- 23
DNDH	(NO) YES	Do Not Disturb Hunting allowed	hvs-16

LD 15

Prompt	Response	Comment	Pack/Rel
		Prompted with Meridian Hospitality Voice Services (MHVS) package 179.	
DNDL	(NO) YES	Do Not Disturb Lamp on 500/2500 telephones Prompted with Do Not Disturb Individual (DNDI) package 9.	nddi-10
DNDT	(BST) ATT RAN	Do Not Disturb intercept Treatment Busy Tone Attendant RAN trunk Prompted with Do Not Disturb Individual (DNDI) package 9	nddi-1
DNLG	0-(4)-15	DN Length	
DTMF	(NO) YES	End-to-End Signaling feedback tone Use the improved EES for single tone feedback Use the current EES for DTMF feedback tone	ees-19
ECC1		Enhanced Controlled Class of Service level 1 ECC1 is prompted with Enhanced Control Class of Service (ECCS) package 173. This access restriction applies when CCRS is active. When CCRS is inactive, the set reverts to the Access Restrictions defined in LD 10 or LD 11. Allowed access restrictions are:	eccs-15
	(CTD) CUN FR1 FR2 FRE SRE TLD UNR	Conditionally Toll Denied Conditional Unrestricted Fully Restricted class 1 Fully Restricted class 2 Fully Restricted Semi-Restricted Toll Denied Unrestricted	

Prompt	Response	Comment	Pack/Rel
ECC2		Enhanced Controlled Class of Service level 2 ECC2 is prompted with Enhanced Control Class of Service (ECCS) package 173. This access restriction applies when CCRS is active. When CCRS is inactive, the set reverts to the Access Restrictions defined in LD 10 or LD 11. Allowed access restrictions are:	eccs-15
	(CTD)	Conditionally Toll Denied	
	CUN	Conditional Unrestricted	
	FR1	Fully Restricted class 1	
	FR2	Fully Restricted class 2	
	FRE	Fully Restricted	
	SRE	Semi-Restricted	
	TLD	Toll Denied	
	UNR	Unrestricted	
ECDN	x...x	External Call DN DN used for intercept transfer when the FDN and Multi-Tenant are not on intercept position. The DN is used for intercept treatment for external calls. Up to 13 digits allowed.	icp-16
ECDR	(NO) YES	Print End-to-End Signaling digits in CDR record	ees-19
EESD		End-to-End Signalling Digit Display	ees-24
	(NO)	No End-to-End Signalling Digit Display	
	YES	Display End-to-End Signalling Digits	
EEST		End-to-End Signaling Tone to originating party	ees-19
	(NO)	No feedback tone to the originator	
	YES	Send feedback tone to originator When EEST = NO or when EEST = YES and DTMF = NO, <i>Improved</i> End-to-End Signaling is used. When EEST = YES and DTMF = YES, <i>Enhanced</i> End-to-End Signaling is used. EEST is prompted with End-to-End Signaling (EES) package 10.	
EFLF	(0)-8064	Efficiency Factor Loading Level Prompted with Network Attendant Services (NAS) package 159	nas-14

LD 15

Page 288 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ELPL	1-15	Electronic Lock Password Length (number of digits)	basic-12
ENS	(NO) YES	Enhanced Night Service enabled Prompted with Enhanced Night Service (ENS) package 133.	ens-20
ENTRY	xx	CLID entry to be configured. CLID entries must be between 0 and the value entered at the SIZE prompt - 1. Precede entry or entries with X to delete. ENTRY is repeated until a <cr> is entered.	isdn-22
ESA_APDN	(YES) NO	Append the originating Directory Number after the Home Local Number for Emergency Services Access calls.	esa- 23 esa_clmp -23
ESA_HLCL	x..x	Home Local Number for Emergency Services Access calls. If the system is Flexible Numbering Plan (FNP) packaged, then up to 12 digits are accepted. If the system is not FNP packaged, then up to 7 digits are accepted. 'X' deletes the data.	esa- 23
ESA_INHN	(NO) YES	Insert Home National Number in front of Home Local Number for Emergency Services Access calls.	esa- 23
EXTFIELD	(NO) YES	Enable Total External Conferees Count display field.	basic- 23
EXT_NAME	(E) aaaa	Change Total External Conferees Count field name. aaaa = 1 to 4 alphanumeric characters.	basic- 23
EXTT	(NO) YES	Prevent connection of supervised external trunks via either call transfer or conference Allow connection of supervised external trunks via either call transfer or conference	basic-22
FCAF	(NO) YES	Forced Charge Account active Prompted with Forced Charge Account (FCA) package 52	fca-1
FCNC	0-99	FCA Network Class of Service	fca-1
FCR_DATA	(NO) YES	Change New Flexible Code Restriction options	basic-21

Prompt	Response	Comment	Pack/Rel
FCWD	(0)-126	Forwarded No Answer Call Waiting DID feature. FCWD determines the number of seconds a DID call should wait on a set before being forwarded to the attendant If (0) is chosen, the call is not forwarded to attendant. Valid entries are even numbers between 0-126, odd numbers are rounded down. Prompted with French Type Approval (FRTA) package 197	frta-15
FFC_DATA	(NO) YES	Change Flexible Feature Code options	basic-21
FFCS	(NO) YES	Change Flexible Feature Code end-of-dialing indicator	ffc-15
FLEN	1-(16)	Flexible length of digits expected	
FLSH	xxx	Switchhook Flash timing. (format when International Supplementary Features (SUPP) package 131 is not equipped)	basic-1
	xxx yyy	Minimum and maximum switchhook flash time in milliseconds (format when International Supplementary Features (SUPP) package 131 is equipped) Where: xxx = 20-(45)-768; yyy = xxx-(896)-1500 The timing specified will be used for EPE equipment only. XPE equipment will use the FLSH specified in LD 97.	
FMOP	(NO) YES	Flexible Misoperation options are not required Flexible Misoperation options are required	mpo-20
FNAD	(HNT) ATT FDN NO	Call Forward No Answer treatment for DID calls Hunt DN, defined in telephone data block CFNA to attendant Flexible CFNA DN, defined in telephone data block CFNA not allowed	basic-2

LD 15

Prompt	Response	Comment	Pack/Rel
FNAL		Call Forward No Answer treatment for all other calls including trunk calls marked as internal. An internal trunk call is a trunk call in which LD 16 prompt RCLS = INT. If FNAL = HNT, no answer calls are forwarded to the Hunt DN.	basic-10
	(HNT) ATT FDN NO	Hunt DN (defined in telephone data block) CFNA to attendant Flexible CFNA DN (defined in telephone data block) CFNA not allowed	
FNAT		Call Forward No Answer treatment for external Trunk non-DID calls. An external call is defined as a trunk call in which LD 16 prompt RCLS = EXT. If FNAT = FDN or HNT, then Call Forward by Call Type (CFCT) handles the call.	basic-10
	(HNT) ATT FDN NO	Hunt DN, defined in telephone data block CFNA to attendant Flexible CFNA DN, defined in telephone data block CFNA not allowed	
FNP	(YES) NO	Enable Flexible Numbering Plan for customer.	fnp-23
FOPT	0-(14)-30	Flexible Orbiting Prevention Timer The number of seconds in two second intervals that CFW should be suspended on a set that has just forwarded a call off-node. Odd entries are rounded up to the next valid entry. A response of 0 disables FOPT.	nas-20
FRAN	0-511 X	First RAN number for first PCR threshold To disable the RAN	supp-16
FRRT	0-511	First Recorded Announcement or RAN Route for Recorded Overflow Announcement (ROA). Prompted with Recorded Overflow Announcement (ROA) package 36 and OPT = ROI. Enter X to remove	roa-14
FRT	0-(20)-2044	First RAN Time seconds before first RAN given.	frt-1
FTR_DATA	(NO) YES	Change Features and options	basic-21
FTOP		Flexible Trunk to Trunk Options.	basic-23

Prompt	Response	Comment	Pack/Rel
	(FRES)	Flexible Trunk to Trunk Connections Restricted. FTT feature is inactive.	
	TBFT	Trunk Barring Flexible Trunk to Trunk Connections. FTT adds new restrictions on connections not barred by TBAR	
	FTTB	Flexible Trunk to Trunk connections Trunk Barring. FTT lifts TBAR restrictions for routes barred by TBAR. FTT cannot add any new restrictions for non-barred routes.	
	FTLY	Flexible Trunk to Trunk Connections Only. All set based trunk to trunk connections for Transfer and Conference are controlled by FTT only.	
GPXX	x	Unsolicited status events 1, 2, 3, 4, 5 or 6 Unsolicited status events are used with Meridian Link applications. Enter the message to be sent to the host computer for telephones in the group, where: <ul style="list-style-type: none"> • 0 = No status messages monitored • 1 = On-Hook • 2 = Off-Hook • 3 = Ringing • 4 = Active • 5 = Disconnect • 6 = Unringing <p>Precede the value with an X to remove a status from the Group report.</p> <p>The prompts GP02 through GP15 appear when Meridian Link package is equipped. Default values are in Group 0 and Group 1:</p> <ul style="list-style-type: none"> • Group 0 = sends no messages • Group 1 = sends all messages <p>Groups 0 and 1 cannot be entered or changed here, but can be entered in response to the IAPG prompt in LD 10 and LD 11.</p>	mlm-19

LD 15

Prompt	Response	Comment	Pack/Rel
GP02	n n n n n	<p>Group 2 status events</p> <p>The following comment applies to prompts GP03 through GP15:</p> <p>Unsolicited status events are used with Meridian Link applications. Enter the message to be sent to the host computer for telephones in the group, where:</p> <ul style="list-style-type: none">• 0 = No status messages monitored• 1 = On-Hook• 2 = Off-Hook• 3 = Ringing• 4 = Active• 5 = Disconnect• 6 = Unringing <p>Precede the value with an X to remove a status from the Group report.</p> <p>Default values are in Group 0 and Group 1:</p> <ul style="list-style-type: none">• Group 0 sends no messages• Group 1 sends all messages <p>Groups 0 and 1 cannot be entered or changed here, but can be entered in response to the IAPG prompt in LD 10 and LD 11.</p> <p>The prompt GP02 through GP15 are presented only with Integrated Services Digital Network Application Module Link for 3rd Party Vendors (IAP3P) package 153 equipped.</p>	iap3p-13
GP03	n n n n n	Group 3 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13
GP04	n n n n n	Group 4 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13
GP05	n n n n n	Group 5 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13
GP06	n n n n n	Group 6 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13
GP07	n n n n n	Group 7 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13
GP08	n n n n n	Group 8 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13
GP09	n n n n n	Group 9 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13

Prompt	Response	Comment	Pack/Rel
GP10	n n n n n	Group 10 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13
GP11	n n n n n	Group 11 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13
GP12	n n n n n	Group 12 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13
GP13	n n n n n	Group 13 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13
GP14	n n n n n	Group 14 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13
GP15	n n n n n	Group 15 status events 1, 2, 3, 4, 5 or 6 assigned	iap3p-13
HCC	(NO) YES XFER	Held Call Clearing, prompted with International Supplementary Features (SUPP) package 131. feature not activated feature activated feature activated and set to transfer	supp-9
HDOPT	(0) 1-10 CONT	Off-Hook Alarm Security Half Disconnect Options No Off-Hook Alarm Security Half Disconnect treatment Number of Off-Hook Alarm Security Half Disconnect treatments Continuous Off-Hook Alarm Security Half Disconnect treatment	basic-24
HDTM	1-(30)-600	Off-Hook Alarm Security Half Disconnect Timer in seconds	basic-24
HLCL	0-99 ... 99	Local code for home local number or Listed directory number (1-12 digits). Precede with X to remove.	isdn-22
HLOC	100-99999999	Home Location Code (ESN) as defined in LD 90 Up to 7 digits with extended code. Prompted when ISDN=YES, or with Digital Private Network Signaling System 1 (DPNSS) package 123.	pri-12
HMDN	xxxx	Home DN	basic-21
HMTL	(YES) NO	Hotel/Motel environment	hosp-21

LD 15

Page 294 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
HNPA	200-999	Home Number Plan Area code defined in LD 90 Prompted with Multi Language Wake Up (MLWU) package 206. Not prompted with International Primary Rate Access (IPRA) package 202.	nanp-19
HNTN	0-999999	National code for home national number (1-6 digits). Precede with X to remove.	isdn-22
HNXX	100-9999	Prefix for Central Office defined in LD 90. Prompted with Multi Language Wake Up (MLWU) package 206. Not prompted with International Primary Rate Access (IPRA) package 202. Allow for digit insertion between HNXX and the DN. If HNXX is 4 digits long, only the last 3 digits of the DN are displayed in the Calling Line ID CLID.	mlwu-12
HOL_OPT	0-3 ALL X0-3	Holiday redirection option for which the date applies Date applies to all holiday options Precede the option number with X to remove the date from that option list	basic-24
HOSP	(NO) YES	Hospitality Management or Hospitality allowed Prompted with HOSP package 166.	hosp-21
HOUR	hh hh hh	Hour of day for printout Two printouts per day allowed when SCDL = 1	
HRCL	0-512	Hold Recall timer	casm-1
HSP_DATA	(NO) YES	Change Hospitality Management options	basic-21
HWTT	0-(300)-600	Length of Howler Tone in seconds. Prompted with Multi Language Wake Up (MLWU) package 206, and Operator Callback (OPCB) package 126. Where: 0 = continuous tone	mlwu-12
ICCR	(NO) YES	Intercept position Canceling Reply is sent if transfer is canceled from Intercept computer	icp-10

Prompt	Response	Comment	Pack/Rel
ICDN	xxxx	Internal Call DN DN used for intercept transfer when the FDN and Multi-Tenant are not on intercept position. The DN is used for intercept treatment for internal calls. Up to 13 digits allowed.	icp-16
ICDL	3-(4)-7	ICP DN Length Length of DN to and from the ICP computer.	icp-10
ICI	x aaa	Attendant Incoming Call Indicators Where: x = 0-9 if OPT = IC1, or x = 0-19 if OPT = IC2. Where: aaa = ICI function name. Multiple responses can be entered for the same key.	basic-20
	x CAy	ICI number, Station Category Indication priority level, (where y = 1-7)	
	x CFB	ICI number, Call Forward Busy	
	x CFN	ICI number, Call Forward No Answer	
	x DF0	ICI number, dial 0 fully restricted	
	x DL0	ICI number, dial 0	
	xx IADN	xx = ICI key number (0 - 19) ICI key for individual attendant DN.	basic- 23
	x IAT	ICI number, Inter-Attendant call	
	x IEN	ICI number, Idle Extension Notification	
	x INT	ICI number, Intercept	
	x LCT	ICI number, lockout intercept	
	x LD0	ICI number, listed DN0	
	x LD1	ICI number, listed DN1	
	x LD2	ICI number, listed DN2	
	x LD3	ICI number, listed DN3	
	x LD4	ICI number, listed DN4	
	x LD5	ICI number, listed DN5	
	x MTR	ICI number, Meter Recall	
	x MWC	ICI number, Message Waiting Calls	
	x NCO	ICI number, Network CO trunk	
	x NDID	ICI number, Network DID trunk	
	x NFEX	ICI number, Network FEX trunk	
	x NTIE	ICI number, Network TIE trunk	
	x NUL	ICI number, remove ICI appearances	
	x NWAT	ICI number, Network WAT trunk	

LD 15

Prompt	Response	Comment	Pack/Rel
	x RDI x RLL x Ryyy Ryyy	ICI number, RDI intercept ICI number, Recall ICI number, one or more Route numbers	
	x TRK	ICI number, Trunk types and local route numbers	
ICMM	0-9	Message number shown when the transfer is caused by a maintenance program	icp-14
ICP	(NO) YES	Intercept Computer available Prompted with Intercept Computer Interface (ICP) package 143. Must be defined in LD 17.	icp-10
ICP_DATA	(NO) YES	Change Intercept Treatment options	basic-21
ICPD	(0)-9	ICP Padding Digit Padding digit for DN's shorter than specified in ICDL.	icp-10
ICPR	0-<nipn>	ICP Printer number. Prompted if ICPS = COM.	icp-10
ICPS	(CIR) COM	ICP Printer Search Circular search Common printer for all consoles Type of Intercept Computer printer search, done when more than one console is used.	icp-10
ICTD	(NO) YES	Intercept Computer Terminal Dial from directory This prompt allows an intercept position of attendant type to dial an extension DN from the Intercept Computer Terminal.	icp-10
ICWN	(0)-511	Intercept Computer Owner Prompted with Multi-Tenant Service (TENS) package 86. Tenant that owns the intercept computer.	tens-9
IDBZ	(NO) YES	Enable Individual Attendant DN Buzing.	basic- 23
IDCA	(NO) YES	Incoming DID Digit Conversion Allowed NFCR must = YES before IDCA can = YES. Prompted with Incoming Digit Conversion (IDC) package 113	idc-12

Prompt	Response	Comment	Pack/Rel
IDEF		Internal/external definition Network wide INY/EXT definition for Call Forward/Hunt by Call Type, Internal Call Forward, and Break In Indication Prevention.	basic-22
	(NO)	A call will not be treated as internal or external according to the network wide definition of internal and external calls. When IDEF = NO, information that could have been entered previously at the IDEF prompt in LD 16 will not influence call treatment.	
	YES	A call will be treated as internal or external according to the network wide definition of internal and external calls. Changing IDEF to NO and then back to YES will not reset the data entered in LD 16.	
IDR	0-511 X	Identification Error RAN number To disable the RAN	supp-16
IFLS	(NO) YES	Allow switchhook flash signal from 500/2500 sets Ignore switchhook flash signal from 500/2500 sets If YES then sets require ground buttons.	mpo-20
IMA	(NO) YES	Integrated Messaging System enabled Prompted when OPT=MCI	ims-1
IMPH	(NO) YES	CDR for Incoming Packet data call	mph-19
IMS	(NO) YES	Change Integrated Messaging System features Prompted with Integrated Message System (IMS) package 35.	ims-1
IMS_DATA	(NO) YES	Change Integrated Message Service options	basic-21
INT	(NO) YES	Internal Malicious Call Trace Alarm If the alarm is to be rung when MCT is activated against internal calls ALRM = YES and INT = YES.	emct-20
INTFIELD	(NO) YES	Enable Internal Conferees Count display field.	basic- 23
INTL	0-9999	Country code (1-4 digits). Precede with X to remove.	isdn-22
INT_DATA	(NO) YES	Change Intercept Treatment options	basic-21

LD 15

Prompt	Response	Comment	Pack/Rel
INT_NAME	(I) aaaa	Change Internal Conferees Count display field name. aaaa = 1 to 4 alphanumeric characters.	basic- 23
INTR	(NO) YES	Change Intercept Treatment Intercept treatments determine the action performed when a user makes an invalid call. Each intercept prompt requires four entries representing the type call: <ul style="list-style-type: none">• first entry = station/DISA• second entry = attendant extended• third entry = TIE trunk• fourth entry = CCSA/DID trunk One of the following responses is required for each entry: <ul style="list-style-type: none">• ATN = Intercept to Attendant• BSY = Busy Tone• NAP = Not Applicable• OVF = Overflow Tone• RAN = Intercept to Recorded Announcement• SRC1-SRC8 = Announcement Source Channel The defaults are shown for each Intercept prompt. If RAN is specified, you are prompted for the RAN route number.	basic-1
IRFP	x....x	Internal Attendant Remote Call Forward Password The password length is 1-8 digits. The password is numeric only.	arfw-20
IRFR	(NO) YES	Internal Attendant Remote Call Forward Password Required	arfw-20
IRNG	(NO) YES	Intercom Ring Distinctive Ringing for Dial Intercom	drng-4
ISDN	(NO) YES	Integrated Services Digital Network allowed for customer Prompted when ISDN signaling package 145 is equipped and either the Integrated Service Digital Network BRI Trunk Access (BRIT) package 233 is equipped or at least one PRA link is configured.	isdn-12
ITH1	1-255	Visual Indication Threshold 1 TH1 ð calls in queue ð ITH2	bacd-8

Prompt	Response	Comment	Pack/Rel
ITH2	1-255	Visual Indication Threshold 2 ITH2 ð calls in queue ð ITH3	bacd-8
ITH3	1-255	Visual Indication Threshold 3 calls in queue > ITH3	bacd-8
LA11	0-511	Primary RAN route for Language 1 Prompted with Multi-Language Wake Up (MLWU) package 206.	mlwu-16
LA12	0-511	Secondary RAN route for Language 1	mlwu-16
LA21	0-511	Primary RAN route for Language 2	mlwu-16
LA22	0-511	Secondary RAN route for Language 2	mlwu-16
LA31	0-511	Primary RAN route for Language 3	mlwu-16
LA32	0-511	Secondary RAN route for Language 3	mlwu-16
LA41	0-511	Primary RAN route for Language 4	mlwu-16
LA42	0-511	Secondary RAN route for Language 4	mlwu-16
LA51	0-511	Primary RAN route for Language 5	mlwu-16
LA52	0-511	Secondary RAN route for Language 5	mlwu-16
LADN	x...x	Local Attendant Directory Number This must be different from the DN entered for ATDN. Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	casr-1
LCKT	(BSY BSY BSY BSY)	Call to a lockout set	isdn-15
LDA0	1-63 ALL	Attendant consoles associated with LDN0 Allow LDN0 on all attendants. Precede X to remove.	basic-5
LDA1	1-63 ALL	Attendant consoles associated with LDN1 Allow LDN1 on all attendants. Precede with X to remove.	basic-5
7LDA2	1-63 ALL	Attendant consoles associated with LDN2 Allow LDN2 on all attendants. Precede X to remove.	basic-5

LD 15

Prompt	Response	Comment	Pack/Rel
LDA3	1-63 ALL	Attendant consoles associated with LDN3 Allow LDN3 on all attendants. Precede X to remove.	basic-5
LDA4	1-63 ALL	Attendant consoles associated with LDN4 Attendant consoles associated with LDN4	nldn-20
LDA5	1-63 ALL	Attendant console associated with LDN5 Attendant console associated with LDN5	nldn-20
LDBZ	n n n n n n ALL	Listed Directory Number Buzzing groups 0,1,2,3,4, or 5. The Departmental Listed Directory Number groups which should be buzzed when a Listed Directory Number/Code Blue call is in the attendant queue. Precede with 'X' to remove.	basic-23
LDN_DATA	(NO) YES	Change Departmental Listed Directory Numbers	basic-21
LDN0	x...x	Listed Directory Number 0 Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove an entry. LDN0 must be defined for ISDN PRI DID service. The length of LDN0 determines the number of trailing digits translated as the dialed DN on PRI DID routes.	basic-1
LDN1	x...x	Listed DN 1 Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove an entry.	basic-1
LDN2	x...x	Listed DN 2 Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove an entry.	basic-1
LDN3	x...x	Listed DN 3 Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove an entry.	basic-1
LDN4	x...x	Listed DN 4	nldn-20

Prompt	Response	Comment	Pack/Rel
		Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove an entry.	
LDN5	x...x	Listed DN 5 Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove an entry.	nldn-20
LDNT	(NO) YES	Listed Directory Number Tone Special tone to CAS main attendant when presented with LDN calls.	casr-12
LDTT	2-(6)-30	Line disconnect tone timer for 500/2500 telephones in seconds	basic-17
LEC	0-99..99	Local Exchange Code, 1 to 15 digits.	
	X	Remove LEC	
LEND	(NO)	List Entry Number Delimiter A delimiter (*) is neither required nor allowed between the list entry number and telephone number	ssc-22
	YES	A delimiter (*) is required between the list entry number and telephone number. LEND is prompted with packages scc-1 or ssc-34	
LFFD	x00..x00	First DN of lamp field array for ILF. The system shows the status of the next 150 consecutive DNs. Last two digits of first DN must be 00. First DN must start on even 100 (e. g., 3400 is acceptable, but 3450 is not). Precede with X to remove. Prompted when OPT = ILF.	basic-1
LFTN	l s c u	Lamp Field array Terminal Number LFTN is prompted again for a second lamp field array. For Supervisory Console, when assigning lamp field array to show Attendant status, enter the secondary TN of the console. To remove the second LFTN, enter "0". To remove both LFTNs, enter XLF in response to prompt OPT. Prompted when OPT = ILF. Not allowed for 2000/3000 series telephones.	basic-1

LD 15

Prompt	Response	Comment	Pack/Rel
	c u	For Option 11C	
LINK	(NO) YES	ACD DNIS Link option. Prompted if OPT = DNI.	dnis-10
LLT	(OVF) ATN OFA	Flexible Line Lockout Treatment Overflow tone Attendant Overflow, then Attendant	basic-4
LOCL	1-(10)	Flexible length of Vacant Number Routing (VNR) Location digits (LOC). Enter the maximum number of LOC digits expected by VNR.	fnp-14
LSC	1-9999999	Local Steering Code. LSC can be one to seven digits. LSCs are required if the CDP DNs are longer than the local PDNs. The CLID sent for a CDP call is composed of the LSC defined in LD 15 plus the PDN of the calling set. Various ISDN network features depend on the CLID as the return address for sending feature control messages. Multiple LSCs may be defined in LD 87 for CDP but only one LSC can be defined here for the CLID. The LSC prompt appears only if the user has a five or six digit dialing plan, or if the DPNSS software package is equipped. LSC is prompted here if ISDN = NO, otherwise LSC is a sub-prompt of ISDN. Precede with X to remove	cdp-12
MAIN	(NO) YES	CAS Main	casm-1
MATT	(NO) YES	Consoles used as Message Center Prompted with Message Waiting Center (MWC) package 46 and OPT = MCI.	mwc-1
MAXT	1-255	Maximum number of NFCR translation tables Once defined a lower value cannot be entered for MAXT. The sum of the values for MAXT and DCMX cannot exceed 255 or MAXT + DCMX ≤ 255 per customer.	nfcrc-2

Prompt	Response	Comment	Pack/Rel
MBG	(0)-65535	Multi-location Business Group. Where: <ul style="list-style-type: none"> • 0 = no indication • 1 = reserved for public network • 2-65535 = Business Group Identifiers This parameter is used to define the Multi-location Business Group. It is not currently used by the MSL-1, but is added for interfacing with systems that require it.	tens-16
MBNR	(OVF OVF OVF ATN)	Maintenance Busy Numbers	basic-1
MCDC	(NO) YES	Malicious Call DN/CLID printing allowed	mct-10
MCLR	(NO) YES	Meter Clear after printing	supp-15
MCR	(NO) YES	Mini-CDR Equipped	mcdr-20
MCRT	xxxx	Malicious Call Trace Recorder route number as defined in LD 16.	emct-20
MDID	(NO) YES	No Answer DID calls routed to Message Center Prompted with Message Waiting Center (MWC) package 46 and OPT = MCI.	mwc-1
MFC_ENT		CAC conversion table to convert MFC CAC into CIS CAC	
	(0)-31	CAC conversion table entry to be created or modified	
	Xaa	CAC conversion table entry to be deleted	
	Xaa Xbb	CAC conversion table entries between aa and bb to be deleted.	
	<CR>	Exit MFC CAC conversion table, gives CIS_ENT prompt. This prompt is repeated until <CR> is entered as response. For REQ=NEW, only default table 0 is configurable. An ENTRY can be deleted even if still configured on an incoming route.	
MFCG	(OVF OVF OVF ATN)		opcb-14

LD 15

Prompt	Response	Comment	Pack/Rel
		MFC Congestion	
MFID	a	Manufacturer Identifier. a = any alpha character 'X' followed by the Manufacturer Identifier of the Message Waiting Indication Non Specified Information table to delete. 'XALL' to remove all the existing Message Waiting Indication Non Specified Information tables.	dmwi- 23
MFVN	(OVF OVF OVF ATN)	MFC Call to Vacant Number	opcb-14
MFVO	(OVF OVF OVF ATN)	MFC Call to Vacant Office	opcb-14
MHLD	(NO) YES	Manual Hold after inquiry is not required Manual Hold after inquiry is required	mpo-20
MMSN	(NO) YES	Mobility Multi-Site Networking Node Do not allow Mobility Multi-Site Networking node Allow Mobility Multi-Site Networking node MMSN is prompted if MMSN package 314 is equipped.	mmsn-22
MPH	(NO) YES	CDR for Meridian Packet Handler This is the Call Detail Records for an incoming packet data call from the Public Switched Packet Data Network to the Meridian Packet Handler	mph-19
MPO_DATA	(NO) YES	Change Multi Party Options	basic-21
MPOP	(NO) YES	Multi-Party Operations Do not define certain multi-party options Define certain multi-party options Prompted with Multi-Party Operations (MPO) package 141.	mpo-20
MSCD	(NO) YES	Mandatory Speed Call Delimiter End of dial speed call delimiter is optional A delimiter is required to store the number. A confirmation tone is given if this option is configured. MSCD is prompted with package scc-1.	ssc-22

Prompt	Response	Comment	Pack/Rel
MSSC	a	a = any alphanumeric character Manufacturer-specific service character for Message Waiting Notification.	dmwi- 23
MTAR	(NO) YES	Disable Meridian Mail Trunk Access Restriction Enable Meridian Mail Trunk Access Restriction MTAR is prompted if OPT = MCI and Message Center (MWC) package 46 is equipped.	mwc-22
MUD_DN	x...x	Mobility User Database (MUD) Server DN This entry can be up to 7 digits. Er the MUD Server DN if this Meridian 1 node runs the MUD server. MUD_DN is prompted if MUD_SRVR = YES.	mmsn-22
MUD_SRVR	(NO) YES	Mobility User Database (MUD) Server Do not allow MUD Server Allow MUD Server MUD_SRVR is prompted is MMSN = YES.	mmsn-22
MURT	0-511 X	Music Route Prompted if WAIT = MUS. To remove.	mus-1
MUS	(NO) YES	Music for Sets Prompted with Enhanced Music (EMUS) package 119.	emus-12
MUSR	(0)-511	Music Route for Sets The default is route "0" which is not normally a music route. Enter X to remove. Prompted if MUS = YES.	emus-12
MWFB	(NO) YES	DID calls to busy telephones routed to Message Center Prompted with Message Waiting Center (MWC) package 46 and when OPT = MCI.	mwc-1
MWNS	(NO) YES	Message Waiting Indication DPNSSI Non Specified Information string to recognize.	dmwi- 23
NAS_ACTV	(YES) NO	Network Attendant Service routing Activated	nas-20
NAS_ATCL	(YES) NO	Network Attendant Service Attendant Control allowed	nas-20

LD 15

Prompt	Response	Comment	Pack/Rel
NAUT	YES	Network Authorization Code prompt is given for every leg of a conference.	naut-1
	(NO)	Network Authorization Code prompt is given for first leg of a conference.	
NBLK	(OVF OVF OVF ATN)	NARS/BARS blocked calls	esn-1
NCOS	(0)-99	Network Class of Service for all Attendant consoles in this customer. Prompted with Network Class of Service (NCOS) package 32.	ncos-1
NCS1	(0)-99	Network Class of Service	ncos-1
NCS2	(0)-99	Network Class of Service	ncos-1
NDID	(NO) YES	No Answer non-DID calls routed to Message Center Prompted with Message Waiting Center (MWC) package 46 and when OPT = MCI.	mwc-1
NET_DATA	(NO) YES	Change ISDN and ESN networking options	basic-21
NFCR	(NO)	New Flexible Code Restriction	nfc-1
	YES	Do not enable New Flexible Code Restriction Enable New Flexible Code Restriction To build an IDC table in LD 49, NFCR and IDCA must be set to YES. NFCR is prompted with New Flexible Code Restriction (NFCR) package 49.	
NFNA	(0)-63	Night Forward No Answer ring cycles The number of times a DID/DOD and CO trunk call will ring a set before being disconnected during Night Service. Prompted if OPT = DNCA.	afna-14
NFNS	(0)-504	Night Forward No Answer Seconds If a value is entered for this prompt all outgoing CO/DOD trunk calls in a waiting state, and all incoming CO/DID trunk calls in the answered state will be disconnected after the time in seconds expires as entered in this prompt. The entered value must be a multiple of 8. Prompted if OPT = DNCS.	afna-14

Prompt	Response	Comment	Pack/Rel
NINV	(OVF OVF OVF ATN)	Invalid NARS/BARS call	esn-1
NIPN	2-(8)	Number of Intercept Positions that can be configured	icp-14
NIT	2-(8)	Network Alternate Route Selection (NARS) Interdigit Timer	
NIT_DATA	(NO) YES	Change Night Service options	basic-21
NIT1	x...x	First Night Service DN by time of day Up to four night service DNs can be defined. The time of day is specified by the prompts TIM1 to TIM4. A Group Hunt pilot DN can be entered. Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	basic-12
NIT2	x...x	Second Night Service DN by time of day	basic-12
NIT3	x...x	Third Night Service DN by time of day	basic-12
NIT4	x...x	Fourth Night Service DN by time of day	basic-12
NIT5	x...x	Network Alternate Route Selection Interdigit Timer	fnp-20
NITR	(OVF OVF OVF ATN)	NARS/BARS invalid translation	esn-1
NNT	0-253	Night Number Table Speed Call List number designated to be used as the Night Number Table	ens-20
NOTI	(NO) YES	Non Specified Information string for Message Waiting Notification.	dmwi- 23
NPI	E163 E164 NATL PRIV TELX UNKN X121	Numbering Plan based on E163 Numbering Plan based on E164 National Private Telex Unknown Data X121	isdn-24
NRES	(OVF OVF OVF ATN)		esn-1

LD 15

Prompt	Response	Comment	Pack/Rel
		NARS/BARS calls which are restricted by Supplemental Digit Restriction (SDRR) intercept treatment. See prompt INTR for details.	
NRWU	2-(5)	Number of Rings for Wake Up before recall to attendant	awu-10
NSCP	(NO) YES	Network Station Camp-On to sets on this node allowed	sco-20
NSO	0-9	Night Service Option number	ens-20
NWT	(NO) YES	Night Call Waiting Tone enabled	ens-20
OAS_DATA	(NO) YES	Change Off-Hook Alarm Security options	basic-21
OCB1		Outgoing Call Barring level 1	basic-21
	(0)-[MAXT-1]	NFCR tree number to be used for OCB level 1. You may enter any digit between zero and your response to the MAXT prompt minus one. The default entry to OCB1 is zero (0).	
	255	255 is a special entry which disallows this level.	
OCB2		Outgoing Call Barring level 2	basic-21
	(0)-[MAXT-1]	NFCR tree number to be used for OCB level 2. You may enter any digit between zero and your response to the MAXT prompt minus one. The default entry to OCB2 is zero (0).	
	255	255 is a special entry which disallows this level.	
OCB3		Outgoing Call Barring level 3	basic-21
	(0)-[MAXT-1]	NFCR tree number to be used for OCB level 3. You may enter any digit between zero and your response to the MAXT prompt minus one. The default entry to OCB3 is zero (0).	
	255	255 is a special entry which disallows this level.	
OCLI	(NO)	NO manipulation is done on outgoing CLID for calls forwarded to EuroISDN link.	basic-23
	EXT	Last forwarding DN is sent as CLID information for incoming UIPE DID or CO calls landing on G/W node and forwarded back to this link.	

Prompt	Response	Comment	Pack/Rel
	ALL	The scenario described above still applies. Moreover, last forwarding DN is sent as CLID for internal calls on ISDN tie except DPNSS (MCDN/QSIG.) or local calls (Sets) redirected from G/W node to UIPE DID or CO link. If the redirection does not occur on G/W node, redirecting information number is sent as CLID if present in the incoming SETUP message received on G/W node from private network.	
ODN0	xxxx	OHAS Security DN for zone 0	basic-18
ODN1	xxxx	OHAS Security DN for zone 1	basic-18
ODN2	xxxx	OHAS Security DN for zone 2	basic-18
ODN3	xxxx	OHAS Security DN for zone 3	basic-18
ODN4	xxxx	OHAS Security DN for zone 4	basic-18
ODN5	xxxx	OHAS Security DN for zone 5	basic-18
ODN6	xxxx	OHAS Security DN for zone 6	basic-18
ODN7	xxxx	OHAS Security DN for zone 7	basic-18
ODN8	xxxx	OHAS Security DN for zone 8	basic-18
ODN9	xxxx	OHAS Security DN for zone 9	basic-18
OHAS	(NO) YES	Off-Hook Alarm Security Enter X to remove the OHAS DNs for the following zones.	basic-18
OMPH	(NO) YES	CDR for outgoing packet data call This is the Call Detail Records for an outgoing packet data call from the Meridian Packet Handler to the Public Switched Packet Data Network	mph-19

LD 15

Prompt	Response	Comment	Pack/Rel
OPT	aaa	Options Multiple options separated by spaces are allowed in response to the OPT prompt. The last option must be followed by a carriage return <cr>. The <cr> inputs the options selected and is followed by either the next prompt or a system message.	basic-1
	(ABDD) ABDA	Attendant Busy Display Denied Attendant Busy Display Allowed Only with International Supplementary Features (SUPP) package 131.	supp-6
	(AHD) AHA	Autohold on Loop Key Denied Autohold on Loop Key Allowed Only with International Supplementary Features (SUPP) package 131.	misop-20
	(AMD) AMA	Attendant Monitor Denied Attendant Monitor Allowed Only with China Attendant Monitor (CHINA) package 285.	china-21
	(ATDA) ATDD	Attendant Through Dialling Allowed. Attendant Through Dialling Denied.	basic- 23
	(BIND) BBIN EBIN	Break-In Indication Denied Basic Break-In Indication Extended Break-In Indication Only with Attendant Break-In (BKI) package 127.	bki-9
	(BIXA) BIXD	Break-In to external call Allowed Break-In to external call Denied Only with Attendant Break-In (BKI) package 127.	bki-9
	(BLA) BLD	Break-In to Line Lockout Set Allowed Break-In to Line Lockout Set Denied Only with Attendant Break-In (BKI) package 127.	bki-9
	(BOHD) BOHA	Position Busy with Calls on Hold Denied Position Busy with Calls on Hold Allowed Only with International Supplementary Features (SUPP) package 131.	supp-6

Prompt	Response	Comment	Pack/Rel
	(CCBD) CCBA	Collect Call Blocking Denied Collect Call Blocking Allowed	ccb-21
	(CFO) CFF	Call Forward Originating Call Forward Forwarding Either the Originating or Forwarding party's Class of Service is used to determine access to services or features on Call Forward.	basic-1
	(CFRD) CFRA	Call Forward Reminder tone for 500/2500 telephone Call Forward Reminder tone for 500/2500 telephone	cfrrt-19
	(CHDD) CHDA	Charge Display Denied at end of call Charge Display Allowed at end of call	supp-16
	(COX) COP	Central Office call No Priority for Ringing Central Office call Priority for Ringing Number Pickup or RNPU and Group Call Pickup GPU A	dcp-12
	(CPD) CPA	Call Park Denied Call Park Allowed. Call Park (CPRK) package 33 must be equipped.	cpk-2
	CPN	CPN enables the Call Park Network wide (CPRKNET) option. CPRKNET package 306 must be equipped.	
	(CTD) CTA	Camp-On Tone Denied Camp-On Tone Allowed	basic-1
	(CUI) MTI	CI lamps show Attendant Console Group (ACG) information for incoming calls CI lamps show Multi-Tenant Service (MTS) information for incoming calls Only with Console Operations (COOP) package 169	coop-14
	(CWRD) CWRA	CFNA treatment for Call Waiting calls on a DN Denied CFNA treatment for Call Waiting calls on a DN Allowed	basic-21
	(CXOD) CXOA	No Override of Call Forward External Overrides Call Forward External Denied (CFXD) to allow call forward to a CDP Distant Steering Code (DSC)	
	(DBD) DBA	Flexible Incoming Tones Denied on digital sets Flexible Incoming Tones Allowed on digital sets	basic-14

LD 15

Prompt	Response	Comment	Pack/Rel
	(DNCA)	If DNCA is entered, all DID/CO or DOD calls are disconnected after the number of ring cycles defined by the response to the NFNA prompt while the system is in Night Service.	afna-14
	DNCS	If DNCS is entered, outgoing CO/DOD calls or incoming CO/DID calls in the answered state, and waiting on a set are disconnected after the number of seconds defined in response to the NFNS prompt expires. Only with Attendant Forward No Answer (AFNA) package 134.	
	(DNX)	ACD Dialed Number Identification Service feature excluded	dnis-10
	DNI	ACD Dialed Number Identification Service feature Included Only with Dialed Number Identification Service (DNIS) package 98	
	(DRE)	Queue thermometer REST Excludes Inter-Attendant calls, Recalls and Metered calls	coop- 5
	DRT	Queue thermometer REST Includes Inter-Attendant calls, Recalls and Metered calls Only with Console Operations (COOP) package 169	
	(DSX)	Data Services or server IS Excluded	bkil-8
	DSI	Data Services or server IS Included Only with Attendant Break-In (BKI) package 127.	
	(DSTD)	DID call to Second degree busy Treatment Denied	supp-6
	DSTA	DID call to Second degree busy Treatment Allowed If Allowed DID calls forwarded to a busy set are disconnected. If Denied DID calls forwarded to a busy set follow the set's CLS (FBA/FBD) treatment. Only with International Supplementary Features (SUPP) package 131.	
	(FACD)	Flexible Attendant Call Waiting (ACW) thresholds Denied	supp-15
	FACA	Flexible Attendant Call Waiting (ACW) thresholds Allowed If allowed, the Call Waiting thresholds are expressed as a percentage of the active consoles.	

Prompt	Response	Comment	Pack/Rel
	(FKA) FKD	Forward Key Allowed Forward Key Denied	basic-6
	(HLPD) HLPA	Individual Hold Lamp Option Denied. Individual Hold Lamp Option Allowed.	dhld- 23
	(HRLD) HRLA	Individual Hold Release Option Denied. Individual Hold Release Option Allowed.	dhld- 23
	(HTU) HTR	Hot Line access Unrestricted Hot Line access Restricted If Restricted only Hot Line calls may terminate on Hot Line DN's. Only with Enhanced Hot Line (HOT) package 70.	hot-10
	(HVD) HVA	Handsfree Voice call Denied Handsfree Voice call Allowed	hva-19
	(IC1) IC2	Incoming Call Indicator key/lamp strips One key/lamp strip = 10 ICIs Two key/lamp strips = 20 ICIs	basic-1
	(IHD) IHA	Individual Hold Denied Individual Hold Allowed	basic-1
	(LLCD) LLCA	Line Load Control commands in LD 2 Denied Line Load Control commands in LD 2 Allowed	llc-10
	(LOD) LOA	Lockout Denied Lockout Allowed LOA locks an attendant out of re-entering an established call on the console Hold key. The attendant can override with the Barge-In feature.	basic-1
	(LRD) LRA	Last Number Redial Denied Last Number Redial Allowed Only with Last Number Redial (LNR) package 90.	lnr-8
	(MCTD) MCTA	Malicious Call Trace signal Denied Malicious Call Trace signal Allowed Only with Malicious Call Trace (MCT) package 107	mct-10
	(MCX) MCI	Message Center Excluded Message Center Included	mwc-1

LD 15

Page 314 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	(MWUD) MWUA	Message Waiting Unconditional Denied Message Waiting Unconditional Allowed	ffc-14
	(NCD) NCA	When an Attendant Console Group (ACG) is in Night Service, redirection of attendant calls is denied. When an Attendant Console Group (ACG) is in Night Service, redirection of attendant calls is allowed. Only with Console Operations (COOP) package 169.	coop-5
	(PCMD) PCMA	Periodic Clearing with Meridian Mail Denied Periodic Clearing with Meridian Mail Allowed Must have PCMA to output PCMM prompt in LD 23. Requires International Supplementary Features (SUPP) package 131 and Network Attendant Services (NAS) package 157.	nas-14
	(PSD) PSA	Presentation Status selection Denied on attendant consoles Presentation Status selection Allowed on attendant consoles Only with Console Operations (COOP) package 169	coop- 5
	(PVCA) PVCD	Prevention of reciprocal Call Forward Allowed Prevention of reciprocal Call Forward Denied	arfw-20
	(RECA) RECO	Attendant calls will be redirected when all but one console is busy. Attendant calls will be redirected when all consoles are busy. Note: Attendant calls will also be redirected when there is no presentation status to other consoles in the console group. Console Operations (COOP) package 169 is required.	coop-5
	(REA) RED	Release on Exclusion Allowed Release on Exclusion Denied	misop-20
	(RND) RNA	Ring Again No Answer Denied Ring Again No Answer Allowed	misop-20
	(ROX) ROI	Recorded Overflow Announcement Excluded Recorded Overflow Announcement Included This treatment applies exclusively to congested consoles with Recorded Overflow Announcement (ROA) package 36.	roa-2

Prompt	Response	Comment	Pack/Rel
(RTD) RTA	Coordinated Dialing Plan routing feature Denied Coordinated Dialing Plan routing feature Allowed	RTA allows DID routing with Distant Steering Codes over CO and WATS trunks. Only with Call Detail Recording (CDP) package 59.	cdp-15
(RTR) ROR	Terminating side of call determines ringing or buzzing cadence used Originating side of call determines ringing or buzzing cadence used	Only with Flexible Tones and Cadences (FTC) package 125.	ftc-14
(SBD) SBA	Flexible Incoming Tones Denied for SL-1 telephones Flexible Incoming Tones Allowed for SL-1 telephones	Only with Flexible Tones and Cadences (FTC) package 125.	ftc-14
(SDDE) SDAL	Single Digit Access to Hotel Services (Denied) Allowed Single Digit Access to Hotel Services (Denied) Allowed	Only with International Supplementary Features (SUPP) package 131.	supp-6
(SIAD) SIAA	Source Included when Attendant dials Denied Source Included when Attendant dials Allowed		supp-18
(SLD) SLA	Slow Answer Recall Enhancement Denied Slow Answer Recall Enhancement Allowed	Only with International Supplementary Features (SUPP) package 131.	supp-6
(SYD) SYA EHS	Secrecy Denied Secrecy Allowed Enhanced Secrecy Allowed		basic-1
(THPD) THPA	ACD Threshold Percentage Denied ACD Threshold Percentage Allowed	Only with International Supplementary Features (SUPP) package 131.	supp-5
(TOA) TOD	Attendant Monitor Tone Allowed Attendant Monitor Tone Denied	Only with China Attendant Monitor Package (CHINA) package 285.	china-21

LD 15

Prompt	Response	Comment	Pack/Rel
	(TTAD) TTAA	Time To Answer and Abandoned call records Denied Time To Answer and Abandoned call records Allowed Only with New Format CDR (FCDR) package 234.	fcdr-8
	(VOBD) VOBA	Make Set Busy and Voice Call Override Enhancement Denied Make Set Busy and Voice Call Override Enhancement Allowed	basic-20
	(XBL) IBL	Exclude Enhanced Busy Lamp Field Include Enhanced Busy Lamp Field IBL and ILF cannot be used together. Only with M2250 Attendant Console (DCON) package 140.	dcon-15
	(XDP) IDP	Exclude Digit Display Include Digit Display	ddsp-1
	(XLDN) NLDN	Network-wide LDN denied Network-wide LDN allowed	nldn-20
	(XLF) ILF	Exclude Busy Lamp Field array Include Busy Lamp Field array Busy Lamp Field Array is only used on QCW type consoles. IBL and ILF cannot be used together. Cannot be used with Option 11C.	basic-1
	(XTG) ITG	Exclude key/lamp expansion module Include key/lamp expansion module Used as Trunk Group Busy field or supervisory lamp field	basic-1
OTCR	(NO) YES	CDR provided, based on Originally Dialed Trunk Route	supp-14
PANI	(NO) YES	M911 Pseudo ANI display where: <ul style="list-style-type: none">• No = no display pseudo ANI• Yes = display pseudo ANI	basic-25
PBLK	(ATN) RAN CPAS OVF	Call presented has higher precedence. Attendant Ran trunk Central Precedence answering station Overflow tone	basic-21

Prompt	Response	Comment	Pack/Rel
PBUZ	xx yy	Priority Buzzing cadence for IADN and Code Blue calls. xx - priority buzz-on phase yy - priority buzz off phase Range is from 2 to 16 seconds. If the value entered is an odd number between 2 and 16, it is truncated to the next lowest even integer.	basic- 23
PCDL	(NO) YES	PPM output on CDR Link. An additional three words will be added to tape record.	supp-15
PCDS	(NO) YES	Programming of Control Digits is not required Programming of Control Digits is required	mpo-20
PCMC	0-(15)-31	Pulse Code Modulation Conversions permitted in a network connection, μ -Law to A- Law or A- Law to μ -Law, in a network connection	esn-14
PELK	(NO) YES	Do not enable Electronic Lock on Private Lines Enable Electronic Lock on Private Lines	ffc-21
PFAN	(ATN) RAN CPAS	Intercept if dialed DN fails to answer (Call waiting) Attendant Ran trunk Central Precedence answering station	basic-21
PFNA	(ATN) RAN CPAS	Intercept if dialed DN fails to answer Attendant Ran trunk Central Precedence answering station	basic-21
PFX1	x...x	Prefix 1. Prefix or area code for International PRA. First element of Calling Party Number. PFX1 + PFX2 + DN cannot exceed 8 numbers for AXE-10. Prompted with International Primary Rate Access (IPRA) package 202.	pri2-15
PFX2	x...x	Prefix 2. Central Office Prefix for International PRA. Second element of Calling Part Number. PFX1 + PFX2 + DN cannot exceed 8 numbers for AXE-10. Prompted with International Primary Rate Access (IPRA) package 202.	pri2-15

LD 15

Prompt	Response	Comment	Pack/Rel
PHDT	1-(30)-63	Permanent Hold Timer Number of two second intervals between reminders, for example: 30 = 60 seconds. If Audible Reminder of Held Calls (ARHC) is enabled then DBRC takes precedence over PHDT. Prompted with 2500 Set Features (SS25) package 18.	ss25-4
PHIP	(ATN) RAN CPAS OVF	Precedence dialed is higher than allowed. Attendant Ran trunk Central Precedence answering station Overflow tone	basic-21
PICP	(ATN) RAN CPAS OVF	Intercept treatment if called party cannot be preempted. Attendant Ran trunk Central Precedence answering station Overflow tone	basic-21
PINT	(NO) YES	Change precedence Intercept treatment.	basic-21
PINX_DN	xx...x	Node DN	basic-21
PKND	(1)-3 (1)-4	Number of digits Dialed for Group Pickup Prompted with Directed Call Pickup (DCP) package 115. To determine the number of digits, count the number of digits of the highest number RNPG group.	dcp-12
PNI	1-32700	Private Network Identifier Each customer data block must have a unique PNI when multi-customer option is equipped. The PNI in the CDB functions as a logical customer number for routing incoming non-call-associated Transaction Capability Application Part (TCAP) facility messages to the appropriate ESN translations. PNI = 1 is typical for customer 0. It must be matched by the PNI in the far end RDB. Default PNI = 0 prevents the operation of features such as NRAG, NACD and NMS. Within one network, use the same value for PNI in both LD 15 and LD 16. When inter-working with different networks, the LD 15 PNI is for the local system and the LD 16 PNI is for the target or remote switch.	

Prompt	Response	Comment	Pack/Rel
PORT	0-15 <cr>	CDR port Stop PORT prompt To remove a CDR port, change CDR = NO. Exit and re-enter LD 15, select CDR = YES, then add only the desired CDR port numbers. Precede with X to remove.	cdr-1
	(0)-15	Serial Data Interface Port Monitor (Features and Options Data Block) One Serial Data Interface Port Monitor per customer is recommended.	
PPMD	(YES) NO	Periodic Pulse Metering Prompted with Message Registration (MR) package 101.	mr-10
PPM_DATA	(NO) YES	Change Periodic Pulse Metering options	basic-21
PREF	0-9999 # X	Up to 4 digit Access Prefix for a unique NPI/TON combination in the table. Wild character for replacement of any digit. The entry of # for wild card character will be stored as *. Reset the access prefix value to nil	isdn-24
PREO	(0) 1	Pretranslation Option Disabled Enabled To enable the Pretranslation feature, the Pretranslation data block or Calling Group to Speed Call correlation must be configured in LD 18. Prompted with Pretranslation (PXLT) package 92.	pxlt-8
PRMT	aaa	aaa = sequence of any alphanumeric character. max of 126 characters. Subsequent Non Specified Information parameters for Message Waiting notification. 'PRMT' is re-prompted until <CR> is entered, then the next prompt 'CANC' is prompted.	dmwi- 23
PSTN	(NO) YES	Public Service Telephone Networks Limit the number of PSTNs allowed in a network connection to one PSTN. The default (NO) puts no limit on the number of PSTN connections.	isdn-14

LD 15

Prompt	Response	Comment	Pack/Rel
PTTY	(0)-15	PPM TTY number for printing meters (one per switch) Precede with X to remove. Prompted with Multi Language Wake Up (MLWU) package 206. TTY must be defined with USER = BGD in LD 17.	mlwu-16
PWD_DATA	(NO) YES	Customer related passwords	basic-21
PWD2	x...x	Second level administration Password Password length is 4-16 characters and is defined in LD 17. The SPWD password is not updated unless the PWD2 password is entered correctly. PWD2 must be entered before new ATAC is accepted.	basic-1
R2BN	0-23 0-59	RAN2 Begin time	awu-10
R2ED	0-23 0-59	RAN2 End time	awu-10
RALL	(NO) YES	Mandatory Recall is not required prior to dialing control digits Mandatory Recall is required prior to dialing control digits	mpo-20
RAN1	0-511	Primary Ran route. Use RAN1 as the Primary route for Language 0 in a Multi Language AWU application. The route must be unique. TYPE must = AWR in LD 16.	mpo-20
RAN2	0-511	Secondary RAN route. Use RAN2 as the Secondary route for Language 0 in a Multi Language AWU application. The route must be unique. TYPE must = AWR in LD 16.	mpo-20
RANF	0-511	Music route. TYPE must = AWR in LD 16.	awu-10
RANR	0-511	RAN Route number	ran-1
RCLE	(ATN OVF ATN ATN)	Redirection Count Limit Exceeded as defined by TRCL ATN is not allowed for attendant calls. NAP is not allowed for any field for RCLE.	isdn-15

Prompt	Response	Comment	Pack/Rel
RCNT	0-(1)-5	Redirection Count for ISDN calls Maximum number of inter-node hops allowed in a network redirection call, only enforced when ISDN = YES. This field must be set to greater than 0 for a network redirection to take place.	esn-14
RCY1	1-(6)-15	Number of Cycles of Re-ringing before forwarding to attendant or disconnecting. Applies only if RGNA = DAR or AAR.	mpo-20
RCY2	1-(4)-15	Number of Cycles of Ringing before forwarding to transferring station Valid only for the RGNA option.	mpo-20
RDR_DATA	(NO) YES	Change Call Redirection	basic-21
RECD	(NO) YES	Malicious Call Trace Recorder is not activated Malicious Call Trace Recorder is activated Not prompted when defining a new customer.	emct-20
REF0	xxxx	DN for Reference trunk 0	basic-1
REF1	xxxx	DN for Reference trunk 1	basic-1
REF2	xxxx	DN for Reference trunk 2	basic-1
REF3	xxxx	DN for Reference trunk 3	basic-1
R_ENTRY	aa Xaa Xaa Xbb <CR>	ANI entry for an incoming route to be created or modified ANI entry for an incoming route to be deleted ANI entries for an incoming between aa and bb to be deleted. Exit This prompt is repeated until <CR> is entered as response. ANI entries must be between 0 and (R_SIZE-1). For REQ=NEW, only default table 0 is configurable. An R-ENTRY can be deleted even if still configured on an incoming route.	cist-24

LD 15

Prompt	Response	Comment	Pack/Rel
REQ:		Request	basic-1
		A colon following a prompt indicates enhanced processing. Enhanced processing allows a user to either view a list of possible responses or input an abbreviated response.	
	?	Get a list of possible responses	
	CHG	Change existing data block	
	END	Exit overlay program	
	NEW	Add new data block to the system	
	OUT	Remove data block	
		The REQ prompt will appear under the NET: Networking gate opener and the following responses will be valid with respect to the DPNSSI Message Waiting Indication feature.	dmwi- 23
	(NEW)	Create a new Message Waiting Indication Non Specified Information table.	
	CHG	Change a Message Waiting Indication Non Specified Information table.	
	OUT	Delete a Message Waiting Indication Non Specified Information table.	
RGNA	xxx yyy	Ringing No Answer treatment	mpo-20
		Where xxx is for internal calls and yyy is for external calls. Valid entries for xxx and yyy are:	
		<ul style="list-style-type: none">• AAR - Forward to Attendant or Night Service after re-ringing for RCY1 cycles• ATN - Forward to Attendant or Night Service• DAR - Disconnect After Re-ringing for RCY1 cycles• DIS - Disconnect• OVF - provide Overflow Tone• (STD) - Standard Operation (this is the default)	
RICI	xx	ICI key numbers that may receive ROA Where: x = 0-9 if OPT = IC1 or 0-19 if OPT = IC2 Precede with X to remove.	roa-2
RLA	0-511	Release Link route number. Route 31 can be designated an exclusively private route in LD 16.	casr-1

Prompt	Response	Comment	Pack/Rel
RLCR	0-511 X	Relocation FFC Error RAN number To disable the RAN	supp-16
RLI	0-999	Route List Index	fnp-20
ROA_DATA	(NO) YES	Change Recorded Overflow Announcement	basic-21
ROPT	(NRO) RAX ROA ROX	No Route Optimization This option may be used to suppress Route Optimization on switches which already have high traffic. Route optimization is performed on calls which have experienced alternative routing, been transferred or have been extended by an attendant. Route Optimization after Alternative routing Route Optimization after Transfer and extension by an attendant	dnwk-16
RPA	(NO) YES	Radio Paging Allowed	rpa-20
RPNS	(NO) YES	Recall with Priority during Night Service	supp-15
RR	0-511	RAN route number.	ran-1
R_SIZE	1-512	Maximum number of ANI entries that can be configured for incoming routes. If <CR> is entered when REQ=NEW (new customer, it defaults to 1. After conversion it defaults to the number of ANI entries for incoming route created during conversion. The R_SIZE can't be decreased if the entries are not empty	cist-24
RTIM	xxx yyy zzz	Recall. Where: <ul style="list-style-type: none"> • xxx = 0-(30)-378 (for Slow-Answer) • yyy = 0-(30)-510 (for Camp-On) • zzz = 0-(30)-510 (for Call waiting) <p>These timers indicate in seconds the elapsed time before attendant recall. Slow Answer must be a multiple of six seconds while Camp-On and Call Waiting must be a multiple of two seconds, with odd numbers are rounded down.</p>	basic-1

LD 15

Prompt	Response	Comment	Pack/Rel
		To change one timer all three fields must be input. For recalls timed at the local node using the redirection feature developed for DPNSS, no distinction can be made between Call Waiting calls and Slow-Answer recalls. The Slow-Answer value is used in both cases.	
RTSA	(RSAD) RSAA RSAX	Recall To Same Attendant Denied Recall To Same Attendant Allowed Recall to Same Attendant allowed, with queuing on busy attendant	rpa-20
SACP	(NO) SNGL ALL	Semi-Automatic Camp-On not allowed Semi-Automatic Camp-On on a per-call basis Semi-Automatic Camp-On for all occurrences Prompted with Semi-Automatic Camp-On (SACP) package 181.	sacp-20
SAMM	(NO) YES	Standalone Meridian Mail. Prompted with Standalone Meridian Mail (SAMM) package 262.	samm-20
SATD	0-(1)-5	Satellite Delays. Number of satellite delays allowed in a network connection	isdn-14
SBLF	(NO) YES	Standard Busy Lamp Field Prompted when response to SPVC is in the range 1-63.	bacd-8
SBUP	(YES) NO	Enable use of station control passwords for set based administration user level access. If SBUP = YES, a user needs to dial the User FFC followed by the Station Control Password to access User Level changes. If SBUP = NO, a user needs to dial only the User FFC.	adminset-21
SCDL	(0) 1 2 3	Schedule for printing Message Registration and PPM data No scheduled printing Daily printout Weekly printout Monthly printout	supp-15

Prompt	Response	Comment	Pack/Rel
SCPL	0-8	Station Control Password Length Must match network wide. SCPL replaces ELPL prompt. Enter "0" to disable the Electronic Lock (ELK) and Remote Call Forward (RCFW) features. A data dump and SYSLOAD are required to implement a change in the password length.	ffc-15
SDFL	384-(1024)-2048	Signal Destination Flash Timing	basic-21
S_ENTRY	(1)-2000	Entry of ANI table applying to a set	
SIZE	0-(256)-4000	Specify maximum number of CLID entries needed. Recommended Maximum Ranges settings for machine types: <ul style="list-style-type: none"> Option 11C - 125 entries Options 51C and 61C - 1000 entries Option 81C - 4000 	isdn-22
SPRE	xxxx	Special Prefix number (1-4 digits) Precede with X to remove. The prefix must not conflict with the numbering plan.	basic-1
SPVC	(0) 1-63	Supervisory console No Supervisor console Attendant number of Supervisory console Prompted with Supervisory Attendant Console (SPVC) package 93.	bacd-8
SPWD	xxxx	Secure Data Password Precede with X to remove. This password is entered when using LD 88 for authorization codes and LD 24 for Direct Inward System Access (DISA) block.	disa-1
SRAN	0-511 X	Second RAN number for second PCR threshold To disable the RAN	supp-16
SRCD	(0000)-9999	Set Relocation Security Code Prompted with Set Relocation (SR) package 53. Precede with X to remove.	sr-1

LD 15

Prompt	Response	Comment	Pack/Rel
SRRT	0-511 X	Second RAN Route for ROA. Enter X to remove.	roa-2
SRT	2-(40)-2044	Second RAN Time, in seconds before second RAN given	ran-1
SRVR_DN	x...x	Mobility User Database (MUD) Server DN. This entry can be up to 7 digits. SRVR_DN is prompted if MUD_SRVR = NO.	mmsn-22
SRVR_LOC	x...x	Home location code of Mobility User Database (MUD) Server. This entry can be up to 7 digits long. SRVR_LOC is prompted if DIAL_PLAN = UDP.	mmsn-22
S_SIZE	0-2000	Maximum number of ANI entries that can be configured for sets. The SIZE can't be decreased if the entries are not empty.	
STCB	(NO) YES	Station Camp-On Busy allowed	sco-20
STE	(NO) YES	Standard Time Entry not allowed Standard Time Entry allowed. The entry may be 3 or 4 digits long. STE is prompted if WUD = YES.	awu-22
STRG	(#), xxx	String to indicate end-of-dialing Up to three characters are allowed as defined by STRL. Valid entries are: digits 0 through 9, asterisk or *, and octothorpe or #. Default is (#). The default (#) cannot be used with the Outpulsing, Asterisk, and Octothorpe (OPAO) feature package 104.	ffc-15
STRL	1-3	String Length of end-of-dial indicator	ffc-15
T100	xxx...x	DN for Type-100 test line	basic-1
TAWU	1-(3)	Number of Tries for an unanswered AWU call This defines the number of times an unanswered AWU call is presented before recall to the attendant for manual Wake Up calls.	awu-16
TBL	1-15	Table Number	isdn-24

Prompt	Response	Comment	Pack/Rel
TFDR	(NO) YES	Trunk Failure Display Required Requires QCW3, QCW, M1250 or M2250 console. Prompted with Trunk Failure Monitor (TFM) package 182.	tfm-15
TGLD	0-(1)-9, *, #	Control digit for Toggle	mpo-20
TGR1	(0)-31	Trunk Group Access Restriction	supp-16
TGR2	(0)-31	Trunk Group Access Restriction	supp-16
TIDM	(NO) YES	Trunk Identity Meaningful PBX Reference Number is to be displayed without the Trunk Group Reference Number Trunk Group Reference Number of a Trunk Identity (TIDY) in LD 16, is meaningful Prompted with Multi Language Wake Up (MLWU) package 206 and Digital Private Network Signaling System 1 (DPNSS) package 123.	supp-16
TIM_DATA	(NO) YES	Change Timers	basic-21
TIM1	hh mm	Hour and Minute for First Night Service DN. Enter the hour and minute for First Night Service DN. Where: hh = 0-23, mm = 0-59 Enter X to remove the time. TIM1 should be set earlier than TIM2, 3 and 4. If no time is entered here, the system assumes a 24-hour clock.	basic-12
TIM2	hh mm	Time for Second Night Service DN	basic-12
TIM3	hh mm	Time for Third Night Service DN	basic-12
TIM4	hh mm	Hour and Minute for Fourth Night Service DN For all of the entries in the Night Service Time of Day (NSTOD) feature, entering X for the DN deletes the existing value for that entry. Entering <cr> allows the user to select an existing entry, or skip to another entry.	basic-12
TIME	0-(15)	Malicious Call Trace Alarm Time	emct-20
TMON	(NO) YES	Traffic Monitoring	mlwu-14

LD 15

Prompt	Response	Comment	Pack/Rel
		Prompted with Multi Language Wake Up (MLWU) package 206 and Traffic Monitoring (TMON) package 168.	
TNDM	0-(15)-31	Tandem threshold/loop avoidance limit This is the value permitted in a network connection. If the value entered is greater than 25, then 25 will be used for DPNSS calls. Prompted when Integrated Services Digital Network (ISDN) package 245 and ISDN Supplementary Features (ISDN INTL SUP) package 161, or Digital Private Signaling System Network Services (DNWK) package 231 is equipped.	isdn-14
TON	ECDP ELOC ESPN INTL LOCL NATL UNKN	ESN_CDP ESN_LOC ESN_SPN International Local National Unknown	isdn-24
TRCL	(0)-7	Total Redirection Count Limit Number of times that a call can be redirected before being intercepted. (0) means that redirection is not limited by this feature, but is limited by various configurations.	isdn-15
TRCR	(NO) YES	Carriage Return sent after each CDR message	cdr-1
TRNX	(NO) YES	Prevent transfer on ringing of supervised external trunks across a private network Allow transfer on ringing of supervised external trunks across a private network	basic-22
TST_DATA	(NO) YES	Change Test lines	basic-21
TST0	xxxx	DN for Test Trunk 0	basic-1
TST1	xxxx	DN for Test Trunk 1	basic-1
TST2	xxxx	DN for Test Trunk 2	basic-1

Prompt	Response	Comment	Pack/Rel
TST3	xxxx	DN for Test Trunk 3	basic-1
TSTL	(NO) YES	Test Lines for this customer Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. The following prompts are used for transmission testing. Refer to NTP 553-2001-325 Transmission Capabilities.	basic-1
TTBL	(0)-31	Tone Table number Table 0, North American default values, is created when the first customer is created. Refer to the <i>Flexible Tone and Digit Switches</i> NTP for other tables. Prompted with Flexible Tones and Cadences (FTC) package 125.	ftc-13
TYPE:	CDB DEFAULT ?	Type of data block Customer Data Block Default Customer Data Block (when REQ = NEW) Get list of possible responses You may directly access a given data block by entering the first three or all the letters of one of the responses listed below. A colon following a prompt indicates enhanced processing. Enhanced processing allows a user to either view a list of possible responses or input an abbreviated response. You may view the revised <i>Prompts and responses</i> sequence for LD 15 on page 235. Gate openers: AML_DATA Application Module Link options ANI_DATA Automatic Number Identification numbers ATT_DATA Attendant Console options AWU_DATA Automatic Wake Up options CAS_DATA Centralized Attendant Service options CCS_DATA Controlled Class of Service options CDR_DATA CDR and Charge Account options FCR_DATA New Flexible Code Restriction options FFC_DATA Flexible Feature Code options FTR_DATA Features and options	basic-1

LD 15

Prompt	Response	Comment	Pack/Rel
	HSP_DATA	Hospitality Management options	
	ICP_DATA	Intercept Computer update	
	IMS_DATA	Integrated Message Service options	
	INT_DATA	Intercept treatment options	
	LDN_DATA	Departmental Listed Directory Numbers	
	MPO_DATA	Multi-Party Options	
	NET_DATA	ISDN and ESN Networking options	
	NIT_DATA	Night Service options	
	OAS_DATA	Off-Hook Alarm Security options	
	PPM_DATA	Periodic Pulse Metering options	
	PWD_DATA	Customer related Passwords	
	RDR_DATA	Call Redirection	
	ROA_DATA	Recorded Overflow Announcement options	
	TIM_DATA	Timers	
	TST_DATA	Test lines	
UBRI	(OVF NAP NAP NAP)	Universal BRI	basic-20
UCST	(0)-9999	Unit Cost for periodic pulse metering	supp-15
UMG	(NO) YES	User to User Messaging enabled	ims-4
UST	(NO) YES	User Status Update enabled	ims-4
VNR	(NO) YES	Vacant Number Routing Prompted with Flexible Tones and Cadences (FTC) package 160.	fnp-20
VSID	0-15	Value added Server Identifier Enter the identifier number of the Value-Added Server or VAS providing the services such as Voice Messaging. Enter X to remove the VSID.	usm-7
WAIT	(RGB) MUS SIL	Treatment during waiting time for ROA Ringback Music Silence	roa-2
WKDY	1-7	Week Day for weekly printout. Where 1 = Sunday.	supp-15

Prompt	Response	Comment	Pack/Rel
WUD	(NO) YES	Wake-up Delimiter is not required Wake-up Delimiter is required A time entered during use of the Automatic Wake Up FFC Delimiter feature is valid only if the user enters “#” at the end of the time digits.	awu-22
XRFP	x...x	External Attendant Remote Call Forward Password The password length is 1-8 digits. The password is numeric only.	arfw-20
XRFR	(NO) YES	External Attendant Remote Call Forward Password Required	arfw-20

LD 15

LD 16: Route Data Block, Automatic Trunk Maintenance

This Overlay program allows data for trunk routes, ATM schedule hours, or ATM routes to be created or modified.

When the Overlay is loaded the available system memory and disk records are output in a header as follows:

```
RDB000
MEM AVAIL: (U/P): xxxxxx USED: xxxxx TOT: xxxxxxx
DISK RECS AVAIL: xxx
RAN RTE AVAIL: (U/P): xxx USED: xxx TOT: xxx
```

The range for route numbers are system dependent.

- 0-511 for system options 51C, 61C, and 81C
- 0-127 for system option 11C

After making any changes to the route data block, IPE trunk cards must be downloaded with **ENLC I s c** command in LD 32.

The Incremental Software Management header includes Recorded Announcement Broadcast (RAN RTE) information. This information is updated each time a new RAN route is configured.

Prompts and responses Table of Contents

Section	Page
<i>Prompts and responses by data block :</i>	
RDB: Route data block	page 334
ATM: Automatic Trunk Maintenance data block	page 346
SCH: ATM Schedules data block	page 347
Meridian 911 Route data block	page 347
NPID: Numbering Plan Digit or Information Digit (NPID) Table	page 348
<i>Other Information:</i>	
Table 3 Release Mechanism Options	page 349

RDB: Route data block

Prompt	Response	Comment
REQ	aaaa	Request (aaaa = CHG, END, LCHG, NEW, or OUT)
TYPE	RDB	Type of data block = RDB (Route data block)
CUST	xx	Customer number associated with this route
DMOD	1-127	Default Model number for this route (Option 11C)
ROUT	0-511	Route Number
DES	x...x	Designator field for trunk (0-16 character alphanumeric)
TKTP	a...a	Trunk Type (TKTP responses begin on page 414)
TW_ROUTE	(NO) YES	Taiwan R1 route
- NACC	aaaa	Network access control (aaaa = (PGNR), PGNC, or PGNU)
M911_ANI	(NO) YES	Receive ANI digits for Meridian 911 routes
- M911_TRK_TYPE	aaaa	Meridian 911 ANI trunk types (aaaa = (911T) or 911E)

- M911_FORM	(1) 2	Automatic Number Identification Format
- M911_ABAN	(NO) YES	Optional call abandon treatment
- M911_TONE	(YES) NO	Optional call abandon tone
- NPID_TBL_NUM		
	0-7	Meridian 911 route table index
PRIV	(NO) YES	Private Line Route
RPA	(NO) YES	Radio Paging Route
ESN	(NO) YES	Electronic Switched Network or ESN pad control
SIGL	a...a	Layer 3 Signaling (a...a = APNS, BEL, DAS, DPN, NT4, or NTS)
CNVT	(NO) YES	Conventional (applies only to Tie trunks)
- DDMI	(0)-255	Digit Manipulation Index
- ATDN	(0)-x...x	Attendant DN
SAT	(NO) YES	Satellite used for trunk route via earth orbiting satellite
RCLS	aaa	Route Class (aaa = (EXT) or INT)
IDEF	(NET) LOC	Internal/external definition
DTRK	(NO) YES	Digital Trunk Route
- BRIP	(NO) YES	ISDN BRI Packet handler route
- DGTP	a...a	Digital Trunk Type (a...a = BRI, DTI, DTI2, JDMI, PRI, or PRI2)
- IFC	a...a	Interface type for route (IFC responses are listed on page 373)
- - CNTY	a...a	Country (CNTY responses can be found on page 360)
- CBCR	(NO) YES	Service route indicator
- CLID	OPTx	Calling Line Identification (x = 0, 1, 2, 3, 4, or 5)
- PROG	a...a	Progress signal (a...a = NCHG, MALE, or MCON)
- SBN	(NO) YES	Send Billing Number
- SIDE	aaa	Meridian SL-1 Node Type (aaa = (NET) or USR)
- CNEG	(NO) YES	Channel Negotiation
- OVLR	(NO) YES	Overlap Receiving
- DIDD	(0)-15	Digits ignored for DID call during Overlap Receiving
- OVLS	(NO) YES	Overlap Sending
- OVLT	(0)-8	Inter-INFO Timer during Overlap Sending
- NASA	(NO) YES	Network Attendant Service Allowed
- MBGA	(NO) YES	MBG Interface on the D-channel
- PGPN	0-15	Protocol Set Group Number
- RCAP	a...a	Remote Capabilities (RCAP responses can be found on page 396)

LD 16

- -MQC_FEAT	aaaa	MCDN QSIG Feature type, where aaaa = NAS, NACD or NMS
BCOT	(0) - 4000	B-Channel Overload Control timer
INTC	(NO) YES	Speech calls to data sets are (NO = rejected; YES = intercepted) by the an attendant
ISDN	(NO) YES	Integrated Services Digital Network option
- MODE	a...a	Mode of operation (a...a = APN, ISLD, or PRA)
- DCH	0-159	D channel number
- DCHI	1-15	DCHI port number
- IFC	a...a	Interface type for route (IFC responses are listed on page 373)
- - CNTY	a...a	Country (CNTY responses can be found on page 360)
- SBN	(NO) YES	Send Billing Number
- SRVC	a...a	Service type for AT&T ESS connections (SRVC responses can be found on page 404)
	(0) - 31	Service provisioned for National ISDN PRI (Rel 23 and later)
- - SRPM	0-(15)-255	Service Parameter
- - PNI	(0)-32700	Private Network Identifier
- PR_TRIGS	aaa xx	Path Replacement Triggers
- PR_RTN	(NO) YES	Retain option for far end PINX
- NCNA	(YES) NO	Network Calling Name Allowed
- NCRD	(NO) YES	Network Call Redirection
- - TRO	(NO) YES	Trunk Route Optimization
- INAC	(NO) YES	Insert ESN Access Code to incoming private network call
- - SPN	(NO) YES	SPN's AC is inserted first to search for a valid UDP number
INC_T306	0-(2)- T306	Incoming T306 timer value in 2 second increments
OUT_T306	0-(30)- T306	Outgoing T306 timer value in 2 second increments
- FALT	(NO) YES	Recognition of DTI2 ABCD FALT signal for ISL
- NSF	(NO) YES	Network Service Facility
- COTR	0-511	DID/CO Trunk Reference route number
- TIER	0-511	Tie Reference route number
- WATR	0-511	Wide Area Telephone Service or WATS Reference route
- CHTY	a...a	Channel Type (a...a = (BCH) or ABCH)
- CTYP	a...a	Call Type for outgoing direct dialed TIE route (a...a = (UNKN), CDP, INTL, LOC, NPA, NXX, or SPN)
- INAC	(NO) YES	Insert ESN Access Code
- ISAR	(NO) YES	Integrated Service Access Route
- - RTN	0-511	Route Number

-- FACY	(NO) YES	Facility indicator
-- SID	0-511	Service Identification
-- MIN	0-510	Minimum number of channels
-- MAX	1-510	Maximum number of channels
-- PTUT	0-510	Preference Trunk Usage Threshold
-- PRIM	(YES) NO	Primary
-- NCOS	(0)-99	Network Class of Service group number
-- CLS	a...a	Class of Service (a...a = (CTD), CUN, FR1, FR2, FRE, SRE, TLD, or UNR)
-- TGAR	xx	Trunk Group Access Restrictions
- IEC	001-999	Inter-Exchange Carrier ID
DAPC	(NO) YES	Display of Access Prefix on CLID
- TBL	(0)-15	Prefix table number to be associated with this route
CPFXS	(YES) NO	Customer-defined Prefixes
HNTN	0-9999	Home National Number
HLCL	0-9999	Home Local Number
ADDP	(NO) YES	Add Public Prefixes
- DSEL	aaa	Data Selection (aaa = (VOD), DTA, TDN, 3DTA, 7DTA, 7VOD or 3VCE)
PTYP	a...a	Port Type at far end (PTYP responses begin on page 394)
AUTO	(NO) YES	Auto terminate
- ACMP	(NO) YES	Automatic Camp-On Calls to Busy Auto Terminate Line
- DNIS	(NO) YES	ACD DNIS route
-- NDGT	xx	Number of DNIS Digits
-- WDGT	a	First or last 4 DNIS digits to be sent on APL and HSL (a = (L) or F)
-- DCDR	(NO) YES	Include DNIS number in CDR records
IANI	(NO) YES	In-Band Automatic Number Identification route
RTYP	aaa	Recording device for RAN trunks (aaa = AUD, CAP, CK2, CKM, CON, DGT, LVL, or PUL)
- LGTH	4-(60)- 7200	Maximum message length in seconds
- GRD	aaaa	Ground Start Arrangement (aaaa = (IDLE) or PLAY)
REP	1-15	Repetitions of recorded announcements
POST	aaa	RAN Post announcement treatment (aaa = DIS or ATT)
STRT	aaa	Start arrangement (aaa = IMM or DDL)
WAIT	(RGB) MUS	Ringback for calls queueing for RAN trunk

LD 16

- MRT	0 - 511	Music route for RAN queueing
BDCT	(NO) YES	Broadcast capability for this route
- TITH	(0) - 300	Waiting Time Threshold (seconds)
- NCTH	(0) - 100	Number of Calls Waiting Threshold
ASUP	aaa	Answer Supervision returned by RAN to originator (aaa = (NO), YES, or CO)
SIGL	aaa	Signaling interface for CAMA trunks (aaa = BEL, NT4, or NT5)
FORM	aaa	Format for CAMA trunk signaling (aaa = M1A, M2B, or M3C)
AUDN	xxxx	Auto termination DN for ISA service routes
ICOG	aaa	Incoming and Outgoing trunk (aaa = IAO, ICT, or OGT)
TW_INC_CLID	(NO) YES	CLID Option on an incoming TWR1 route
RANX	(NO) YES	RAN for calls diverted to external trunks
- RANR	x...x	0-511 RAN Route number for the desired RAN route 0-127 Option 11C
SRCH	aaa	Search method for outgoing trunk member (aaa = (LIN) or RRB)
TRMB	(YES) NO	Tromboning
STEP	0-511	Alternate trunk route for outgoing trunks
FACN	(0) - 99999	Tie or FX facility number
BAND	(0) - 99	OUTWATS band number
ACOD	x...x	Access Code for the trunk route
CLEN	0 - (1)- 3999	CLID entry number
CPP	(NO) YES	Calling Party Privacy/Calling Party Privacy Override Flag
- TCPP	(NO) YES	CPP/CPPO flag for incoming non-ISDN trunk call tandemed to this trunk route
- DTPI	(*67) nnnn	Privacy indicator for a digitone trunk
- DPPI	(1167) nnnn	Privacy indicator for a dial-pulse trunk
- PII	(NO) YES	Privacy Indicator Ignored
- DTPO	(*82) nnnn	Privacy Override Indicator for a digitone trunk
- DPPO	(1182) nnnn	Privacy Override Indicator for a dial-pulse trunk
TARG	0-(1)-31	Trunk Access Restriction Group
BILN	(NO) YES	Billing Number Required
- BLEN	1-(10)-16	Billing Number Length
- BNUM	0-x...x	Billing number (1 to 16 digits depending on BLEN)
- BDSF	(NO) YES	Billing Number Displayed
ATGT	(0)-60	ADM Trunk Guard Timer

ASTP	1-(2)-15	ADM Step-Forward ring cycles
SGRP	(0)-999	Scheduled Access Restriction Group
OABS	0-9	Actual outgoing toll digits to be ignored for Code Restriction
IABS	(0)-3	Number of incoming digits to be absorbed
CAT	00-99	CAMA trunk route category digits
ID	(0)-9	Identification digit for CAMA trunk routes
STRK	(NO) YES	Super Trunk group feature
SPTO	(NO) YES	Super Trunk Option
ANKP	(NO) YES	KP signal suppressed
INST	(0)-99999999	Insert
JDGT	1-(4)	Japan central office Digits
IDC	(NO) YES	Incoming DID Digit Conversion on this route
- DCNO	(0)-254	Day IDC tree number
- NDNO	0-254	Night IDC tree number
- DEXT	(NO) YES	Display External dialed digits
- - DNAM	(NO) YES	Display IDC Name
LID	(0)-2	Line Identities option
- LCNO	0-255	Line identities Conversion tree number
AIOD	(NO) YES	Identification of outgoing calls
- ACNO	0-99	AIOD Customer number
- ARNO	0-511	AIOD Route number
- ATTK	xxxx	AIOD identifier number
ANTK	x...x	ANI identifier number
SIGO	a...a	Signaling arrangement (a...a = (STD), ESN2, ESN3, ESN5, ETN, or EN19)
- STYP	aaaa	Standard Signaling Type (aaaa = (SDAT) or STDN)
MFC	(NO) YES	Multifrequency Compelled or MFC Signaling
MFSS	(B1) B2 B3	First MFS digit request backward signal
TCRS	(YES) NO	Toll Category Request Supported
INDMF	(NO) YES	Indian R2MFC Operations
- CLEN	1 - (10) - 16	Maximum number of CNI digits requested for India Phase 2 feature
MFEI	(0)-127	MFE table number for Incoming calls
AUTM	(NO) YES	MFE Automatic Mode
- DIGS	(4)-5	Number of Digits expected
SGL	(NO) YES	Signal

LD 16

MFE0	(0)-127	MFE table number for Outgoing calls
MFEA	(YES) NO	Access code signals are used in the signaling
M FED	0-(1)-9	First digit of special service call
MFKI	1-127	MFK table number for Incoming calls
AUTM	(NO) YES	MFK Automatic Mode
DIGS	4-(5)	Number of Digits expected
MFKO	1-127	MFK table number for Outgoing calls
LOCD	x	Number of digits used in a local call by the far end Central Office (aaa = (6) or 7)
CHRG	aaaa	Charge DOD calls by line of by Block (aaaa = (BLOK) or LINE)
MFCI	1-127	MFC Incoming table number
R2MD	(NO) YES	R2 modification
- DIG#	1-(4)-9	Number of digits
SGL	(NO) YES	Signal
BSSU	(NO) YES	Backward Signal Suppression for undefined signal
MFCO	1-127	MFC Outgoing table number
EMGY	(NO) YES	Emergency Route
OPP	aaa	Operator originated calls receive normal treatment for busy and intercept situations (aaa = (OPP) or ATT)
SWP	a...a	Subscriber with Priority (a...a = (NORM) or ATT)
ICIS	(YES) NO	Incoming Identifier Send
ICDN	x...x a...a	Incoming route DN (x...x = 1-7 digit CLID DN; a...a = (NO) or CLID entry of 0-125 for trunk DN)
ICNP	a...a	Incoming Numbering Plan (a...a = (UKWN), PUB, or PRV)
ICNT	a...a	Incoming Numbering Type (a...a = (UKWN), INTL, NTN, LCL, LOC, CDP or SPN)
ICPS	(YES) NO	Incoming Presentation Status
OGIS	(YES) NO	Outgoing Identifier Send
OGDN	x...x a...a	Outgoing route DN (x...x = 1-7 digit CLID DN; a...a = (NO) or CLID entry of 0-125 for trunk DN)
OGNP	a...a	Outgoing Numbering Plan (a...a = (UKWN), PUB, or PRV)
OGNT	a...a	Outgoing Numbering Type (a...a = (UKWN), INTL, NTN, LCL, LOC, CDP or SPN)
OGPS	(YES) NO	Outgoing Presentation Status
CCNI	(NO) YES	Call Number Indicator or CNI enabled on route
CNTL	(NO) YES	Changes to Controls or timers
- TIMR	aaa xxx	Trunk Timers (TIMR range definitions begin on page 408)

- SST	xx y	Seizure Supervision Timer in seconds
- DTD	(NO) YES	Dial Tone Detection
-- TABL	0-31	Flexible dial tone detection table number
-- XTDT	0-7	Extended Tone Detector Table Number
-- MDTD	1-(5)-31	Minimum Dial Tone Detection delay in seconds
-- DTDF	x y	Dial Tone Detector Fail threshold
-- SCDT	(NO) YES	Secondary Dial Tone detection will be used on route
-- 2 DT	(NO) YES	Secondary Dial Tone
NEDC	aaa	Near End Disconnect Control (aaa = ORG or ETH)
FEDC	aaa	Far End Disconnect Control (aaa = (ORG), ETH, JNT, or FEC)
CPDC	(NO) YES	SL-1 is the only Controlling Party on incoming calls
SPCT	aaa	Speech Path Cut-Through (aaa = (IMM) or DLY)
DLTN	(NO) YES	Dial Tone on originating calls
- TOV	(0)-3	Data Time-out Value
- PSEL	aaaa	Protocol Selection (aaaa = (DMDM) or TLNK)
- OPE	(NO) YES	Change data port Operating parameters
-- PSDS	(NO) YES	Public Switched Data Service option
-- TRAN	a...a	Transmission mode (a...a = (ASYN) or SYN)
-- PAR	a...a	Parity for data port (a...a = (SPAC), EVEN, MARK, or ODD)
-- DTR	(OFF) ON	Data Terminal Ready
-- DUP	aaaa	Duplex for data port (aaaa = (FULL) or HALF)
-- DCD	(ON) OFF	Data Carrier Detect
-- MOD	(NO) YES	Mode for synchronous operation
-- INT	(OFF) ON	Interworking
-- CLK	(OFF) ON	Clock source for synchronous operation
-- V25	(NO) YES	V.25 bis option for synchronous operation
-- HDLC	(NO) YES	High Level Data Link Control
-- DEM	aaa	Data Equipment Mode (aaa = (DCE) or DTE)
-- PBDO	(OFF) ON	Port Busy upon DTR Off
ANDT	(NO) YES	Automatic Number Identification Dial Tone
HOLD	ic dc ht	Hold failure threshold
SEIZ	ic dc	Seize failure threshold
RGFL	ic dc	Ring Failure threshold
RVSD	ic dc	Reversed wired CO trunk threshold
ILLR	ic dc	Illegal Ring threshold

LD 16

SVFL	ic dc	Supervision Failure
OPCB	(NO) YES	Operator Call Back
- IMBI	(NO) YES	Perform Immediate Break-In on this route
- IMCB	(NO) YES	Perform Immediate Call Back on this route
- TOBO	(NO) YES	Toll Operator Break-Out
- BTCG	(NO) YES	Busy Tone to Calling Party disabled
- IHT	2-(30)-62	Number of seconds in increments of two
- OHT	0-(30)-126	Off-Hook Timer (2 second increments)
- OHTT	0-(30)-62	Toll Outgoing Calling Party Control call disconnect
- SRT	1-(30)-1023	Number of minutes on an outgoing CDPC call that a set is kept on-hold to a trunk (in increments of two)
- CGPC	(NO) YES	Calling Party Control
- CDCT	(NO) YES	Called Party Control
DDO	(NO) YES	Delay Digits Outpulsing for DOD and CO trunks
DRNG	(NO) YES	North American Distinctive Ringing for incoming calls
NDR1	(0)-4	Network Distinctive Ringing Index
BTUA	(NO) YES	Block Transfer of Unanswered Call
CDR	(NO) YES	Call Detail Recording
- INC	(NO) YES	CDR records generated on incoming calls
- LAST	(NO) YES	CDR record printing content option for redirected calls
- TTA	(NO) YES	Time To Answer output in CDR
- ABAN	(NO) YES	Abandoned call records output for this route
- QREC	(NO) YES	CDR ACD Q initial connection records to be generated
- OAL	(NO) YES	CDR on outgoing calls
- - OTL	(NO) YES	CDR on Outgoing Toll calls
- - AIA	(NO) YES	Answered call Identification Allowed
- - OAN	(YES) NO	CDR timing starts On Answer supervision of outgoing calls
- - OPD	(NO) YES	Outpulsed Digits in CDR
- CDRX	(NO) YES	Print CDRX records on multiple call transfer for non-PPM outgoing calls
- NDP	aaa 0-32	Number of Digits Printed (aaa = INC or EXC)
- CDRY	(NO) YES	CDR Public Network Feature Invoke records will be generated
CDRB	(NO) YES	Abandoned call on busy tone records
OPA	(NO) YES	Will generate CDR or CDAS record for PPM pulses
CCO	(NO) YES	Printing of CDR records for no PPM or AOC count
NATL	(YES) NO	North American Toll scheme

- TDG	x...x	Toll Digits
SSL	1-15	Special Service List number
CFWR	(NO) YES	Call Forward Restriction
- IDOP	(NO) YES	Identify Originating Party
VRAT	(NO) YES	Answer an Attendant Extended Call over VNS immediately on the incoming bearer trunk
MUS	(NO) YES	Music On-Hold
- MRT	0-511	Music Route number
MR	aaa	Message Registration (aaa = (NO), DURC, ENDC, PPM, RVB, STAC, or XLD)
DSPD	(NO) YES	Real Time AOC Display
PANS	(YES) NO	Pseudo Answer
RACD	(NO) YES	Route traffic information in ACD Reports
RUCS	0-9999	Route Unit Cost
RURC	x y	Route Unit Reference Cost
RUCF	x y	Route Unit Conversion Factor
MULT	(NO) YES	Multiplier for Charge Information
DSPT	0-(10)-60	Charge Display Timer
RPPM	xxx	Real-time Periodic Pulse Metering polling time in seconds
A1MR	(NO) YES	Answer is First Meter pulse
MANO	(NO) YES	Manual Outgoing trunk route
EQAR	(NO) YES	Enable Equal Access Restrictions
- GCR	(NO) YES	General Carrier Restriction to restrict Equal Access calls
- - NTOL	(DENY) ALLOW	North American Toll calls (i.e., 1+calls)
- - ITOL	(DENY) ALLOW	International Toll calls (i.e., 011+calls)
- SCR	(NO) YES	Selective Carrier Restriction to restrict Equal Access calls
DTOS	(NO) YES	Dial Tone on Outgoing Seizure
FRL	0-7 0-254	Facility Restriction Level
OHQ	(NO) YES	Off-Hook Queuing
OHQT	(0)-63	Off-Hook Queue Threshold
CBQ	(NO) YES	Call Back Queuing
NDIG	(2)-7	Number of Digits
AUTH	(NO) YES	Authcode
TDET	(NO) YES	Tone Detector required
TTBL	(0)-31	Tone Table number
PNNC	(NO) YES	Process Notification Networked Calls

LD 16

- PNDL	2-(6)-10	Process Notification Delay Timer in seconds
- SLCT	TONE MSG	Select Tone or Message
- NRT	0-511	Notification Route number
- NMSG	(0)-30	Number of times Message is repeated
- PNPS	(0)-30	Interval between messages (2 seconds increments)
ACNI	(NO) YES	Accept Call Number Identification
OHT	0-(30)-126	Off-Hook Timer (2 seconds increments)
OHTD	(NO) YES	Off-Hook Timer Delay
PLEV	0-(2)-7	Priority Level
OPR	(NO) YES	Outpulsing Route
OPDL	(0)-8064	Outpulsing Delay in milliseconds
PRDL	(NO) YES	Partial Dial timing
EOS	(NO) YES	End-of-Selection Signal
DNSZ	(0)-7	Number of digits expected on DID routes
RCAL	aaa	Recall (aaa = (NO), ATT, or DRA)
MCTS	(NO) YES	Malicious Call Trace Signal
- MCCD	0-8	Malicious Call Trace request string
- MCDT	(0)-4	Malicious Call Trace Delay Time in seconds
- MCTM	(0)-30	Malicious Call Trace request Timer id
- MTND	(NO) YES	Malicious Call Trace Tandem Disconnect delay
FGNO	(0)-127	Feature Group D block number
CDPC	(NO) YES	Called Party Control
ALRM	(NO) YES	Malicious Call Trace Alarm is allowed for external calls
NCNI	(0)-7	Request CNI after the defined number of digits are received
CNIE	(NO) YES	Request CNI after an ESN code is dialed
CNIT	(NO) YES	Call Number Identification Trace
BTT	2-(30)-254	Busy Tone Time
ACKW	(NO) YES	Acknowledgment seizure signal
PECL	(NO) YES	Periodic Clearing Signal
DCTI	(0)-511	Time (in seconds) that an extension is allowed to ring or be On-hold or Call Park before the trunk is disconnected
NADT	(0)-255	No Answer Disconnect Timer in seconds
MON	(NO) YES	Monitoring for route
TIDY	xxxx yyyy	Trunk Identity
ATRR	(NO) YES	AC15 Timed Reminder Recall

TRRL	(NO) YES	Recall signal (may not) may be received and transmitted on this route
- FRIN	(NO) YES	Forward Release Indefinitely
-- FRRC	0-(4)-15	Forward Release Repetition Count
-- FRRS	(NO) YES	Forward Release Repetition Seize
--- FRRD	128-(384)	Forward Release Repetition Delay in milliseconds
--- RRBS	(NO) YES	Repeat Release Before Seize
- RLSM	(0)-15	Release Mechanism
CCB	(NO) YES	Collect Call Blocking enabled
- CCB1	512-(1536)-4992	Collect Call Blocking delay timer 1 in milliseconds
- CCB2	500-(1520)-2550	Collect Call Blocking delay timer 2 in milliseconds
CCBA	(NO) YES	Collect Call Blocking Allowed
ANIE	(0)-x	ANI table Entry for Route (configured in LD 15)
CISR	(NO) YES	CIS Route
- ANSZ	(7)-15	Size of the ANI information
- ANIC	(NO) YES	ANI Composing
- LEC	0-9999999	Local Exchange Code (used for building ANI messages)
- ADDG	0-(8)-9	Additional Digit to be used in ANI sequences
- ANDN	0-9999999	ANI DN
- DTOC	(NO) YES	Direct Toll Connection
- CTOC	aaaa	CIS Toll Outpulsing Criteria
- COAT	(NO) YES	Continue Outpulsing After ATO Timer expires
- CACD	(NO) BEF AFT	Defines how the CAC is displayed on the display of the set/console.
- CACC	(NO) BEF AFT	Defines how the CAC is stored in the CDR.
- AANI	(NO) YES	Defines if the Automatic ANI request should be sent to the CIS CO when the incoming calls are originated from the CIS CO to the trunks within this route.
- ANFT	(CONT) FAIL ITDN	Defines the ANI Failure Treatment option.
-- ITDN	xxxx	Intercept DN (up to 8 digits) defines the DN to transfer the incoming calls which failed to provide ANI.
- CAC_CONV	(0)-31	CAC conversion table number for CIS gateway, configured against MFC_ENT in LD 15 Prompted only for non-outgoing R2MFC route

LD 16

CAC	0-(3)-9	Specifies ANI category for an incoming trunk
CAC_CIS	0-(3)-9	CIS ANI Category Code
RDNL	0-(4)-7	Route DN length for ANI

ATM: Automatic Trunk Maintenance data block

Prompt	Response	Comment
REQ	aaaa	Request (aaaa = CHG, END, LCHG, NEW, or OUT)
TYPE	ATM	Type of data block = ATM (Automatic Trunk Maintenance)
CUST	xx	Customer number associated with this route
ROUT	0-511	Route number
DES	x...x	Designator field for trunk (0-16 character alphanumeric)
T100	n...n	T100 test line DN (2 to 10 digits)
PADT	0-63	Pad factor for T100 test line in dB
STND	(YES) NO	Standard T100 test line
NMNL	27-90	Noise Maintenance Limit
NOUT	27-90	Noise out-of-service limit
NTOF	(YES) NO	Near To Far measurement
- REF	n...n	Reference loop around DN (2 to 10 digits)
- TST	n...n	Test loop around DN
- PADL	0-63	Pad factor for loop around
EML	0-15	Expected Measured Loss
LMNL	0-15	Loss deviation Maintenance Limit
LOUT	0-15	Loss out-of-service deviation limit
DSBL	(0)-100	Percentage of trunks to be Disabled
MXTI	0-(5)-15	Maximum Time

SCH: ATM Schedules data block

Prompt	Response	Comment
REQ	aaaa	Request (aaaa = CHG, END, LCHG, NEW, or OUT)
TYPE	SCH	Type of data block = SCH (ATM Schedules)
CUST	xx	Customer number associated with this route
HOUR	0-23	Hour to start Automatic Trunk Maintenance test
ROUT	0-511	Route number
DES	x...x	Designator field for trunk (0-16 character alphanumeric)
MDMP	(NO) YES	Modem Data Module Pair
- MRAT	5-30	Modem Ring Again Timer
DTYP	aaa	Inbound/Outbound Data Port (aaa = (IOP), IDP, or ODP)
ADCP	(NO) YES	All-Digital Connection Prefix
OAMP	0-127	Outbound Modem Pool route number
IAMP	0-127	Inbound Modem Pool route number

Meridian 911 Route data block

Prompt	Response	Comment
REQ	aaaa	Request (aaaa = CHG, END, LCHG, NEW, or OUT)
TYPE	RDB	Type of data block = RDB (Route data block)
CUST	0-99	Customer number associated with this route
ROUT	0-511	Route number
DES	x...x	Designator field for trunk (0-16 character alphanumeric)
TKTP	DID	DID trunk types must be used for M911 route
M911_ANI	YES	Receive ANI digits for M911 route
M911_TRK_TYPE	aaaa	Meridian 911 ANI trunk type (aaaa = (911T) or 911E)
M911_FORM	(1) 2	Automatic Number Identification Format
M911_ABAN	(NO) YES	Optional call abandon treatment

LD 16

M911_TONE	(YES) NO	Optional call abandon tone
NPID_TBL_NUM	0-7	Meridian 911 route table index

NPID: Numbering Plan Digit or Information Digit (NPID) Table

Prompt	Response	Comment
REQ	aaaa	Request (aaaa = CHG, END, LCHG, NEW, or OUT)
TYPE	NPID	Type of data block = NPID
IDTB	0-7	ID table index
NPID	0-9	Numbering Plan Digit or Information Digit
TRMT	a...a	NPID Treatment (a...a = (NONE), FAIL, TEST, or NPA)
-NPA	nnn	Numbering Plan Area

Release Mechanism Options

The following table indicates whether a release signal is acknowledged or not. YES indicates the release signal is acknowledged, NO indicates the release signal is not acknowledged.

Table 3
Release Mechanism Options

RLSM Option	Incoming Calls		Outgoing Calls	
	Originator On-Hooks first	Terminator On-Hooks first	Originator On-Hooks first	Terminator On-Hooks first
0	NO	NO	NO	NO
1	NO	NO	NO	YES
2	NO	NO	YES	NO
3	NO	NO	YES	YES
4	NO	YES	NO	NO
5	NO	YES	NO	YES
6	NO	YES	YES	NO
7	NO	YES	YES	YES
8	YES	NO	NO	NO
9	YES	NO	NO	YES
10	YES	NO	YES	NO
11	YES	NO	YES	YES
12	YES	YES	NO	NO
13	YES	YES	NO	YES
14	YES	YES	YES	NO
15	YES	YES	YES	YES

LD 16

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
2DT	(NO) YES	Secondary Dial Tone	xpe-16
AANI	(NO) YES	Defines if the Automatic ANI request should be sent to the CIS CO when the incoming calls are originated from the CIS CO to the trunks within this route.	cist-24
A1MR		Answer is First Meter pulse	pemd-18
	(NO)	Meter pulses are counted from the moment of seizure of the outgoing trunk. When the trunk answers, the PPM count is left unchanged.	
	YES	Meter pulses received before Answer are invalid. Answer is taken as the start of the first charging period (i.e., when an answer signal is received the PPM count is incremented). Meter pulses mark the start of the subsequent charging periods. A1MR is prompted when DTRK = YES, DGTP = DTI2, and MR = PPM.	
ABAN	(NO) YES	Abandoned call records output for this route	fcdr-18
ACKW	(NO) YES	Acknowledgment seizure signal is expected after seizure of a DID/DOD trunk	xpe-16
ACMP	(NO) YES	Automatic Camp-On calls to busy auto terminate Line	
ACNI	(NO) YES	Accept Call Number Identification This DPNSS route (does not allow) allows R2MFC CNI sent as an OLI string in the initial message (ISRM). Prompted when: <ul style="list-style-type: none">• IDA package equipped• MFC package equipped• TKTP = IDA• SIGL = DPN/APNS	dpnss-20
ACNO	0-99	AIOD Customer Number Refer to the CUST prompt in LD 15 for details.	aiod-1

Prompt	Response	Comment	Pack/Rel
ACOD	x...x	Access Code for the trunk route The ACOD must not conflict with the numbering plan. Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	basic-1
ADDG	0-(8)-9	Additional digit(s) to be used in ANI sequences. If LEC and the DN to be transmitted consist of less than seven digits, ADDG is used as the last digit(s) of the ANI sequence. Prompted if: <ol style="list-style-type: none"> 1. Commonwealth of Independent States (CIST) package 221 is equipped 2. ICOG = OGT 3. TKTP = COT (for analog trunks, TKTP must = DID) 4. DGTP = DTI2 	cist-21
		If ANIC is NO or if ANIC=YES but the ANI entry associated with the originator of the call is not configured. It is used to complete ANI DN if LEC+ANI DN consists of less than ANSZ digits. Prompted for outgoing CIS route. May be from 1 up to the ANSZ length.	cist-24
ADDP		Add Public Prefixes	euroisdn-2 2
	(NO)	The prefixes 0 (National) or 00 (International) <i>are not</i> added to the Calling Party Number if the Type of Number (TON) is Public on the set/attendant displays	
	YES	The prefixes 0 (National) or 00 (International) <i>are</i> added to the Calling Party Number if the Type of Number (TON) is Public on the set/attendant displays	
ADCP	(NO) YES	All-Digital Connection Prefix assigned to customer	basic-5
AIA	(NO) YES	Answered call Identification Allowed Enter YES to output an "A" in the CDR TerID field to indicate answered calls. Prompted when OAL = YES or OTL = YES.	cdr-13
AIOD	(NO) YES	Identification of outgoing calls	aiod-1
ALRM	(NO) YES	Malicious Call Trace Alarm is allowed for external calls	mct-10

LD 16

Prompt	Response	Comment	Pack/Rel
ANDN	0 - 9999999	<p>ANI DN</p> <p>ANDN is used for building ANI messages. ANDN is prompted if Commonwealth of Independent States (CIST) package 221 is equipped.</p> <p>ANDN is not prompted if the route is outgoing only (ICOG = OGT) and TKTP is not COT (for analog trunks, not DID).</p> <p><u>Incoming route:</u></p> <p>If ANDN is defined, it will be used as ANI DN in CDTI2/ CSDTI2 ANI messages when this incoming trunk is the originator of an outgoing CDTI2/ CSDTI2 call. If ANDN is not defined, the the ANDN of the outgoing CDTI2/ CSDTI2 trunk is used.</p> <p><u>Outgoing route:</u></p> <p>Default ANI DN in CDTI2/ CSDTI2 ANI messages. If the ANI DN of the call originator cannot be used, then ANDN for the outgoing CDTI2/ CSDTI2 route is used. This will happen for sets with CLS DNAD and for incoming routes if ANDN is not defined.</p>	cist-21
		<p>May be from 0 up to the ANSZ length. Prompted for outgoing CIS route.</p> <p>Used for building ANI message if ANIC=NO and DN of set is not allowed to be sent (CLS DNAD). Also used if ANIC=YES but the ANI entry associated with the originator of the call is not configured, and DN of set is not allowed to be sent (CLS DNAD).</p>	cist-24
	X	Remove ANDN	
ANDT	(NO) YES	Automatic Number Identification Dial Tone	ani-1
ANFT		Defines the ANI Failure Treatment option.	cist-24
	(CONT)	Provide call to the required destination	
	FAIL	Drop the call	
	ITDN	Transfer call to the intercept DN defined by the ITDN prompt	

Prompt	Response	Comment	Pack/Rel
ANIC	(NO) YES	<p>ANI Composing Prompted for outgoing CIS route.</p> <p>If ANIC=NO, old ANI composing is used: if the originator of the call is a set, ANI message will consist of the CAC of the originator + the LEC of the outgoing route + the DN of the originator or the ANDN of the outgoing CIS route, depending on the class of service (DNAA/DNAD) of the set. If the originator of the call is an incoming route, the components of the ANI message are retrieved from default ANI entries and/or from the data block of the outgoing CIS route.</p> <p>If ANIC=YES, the following is done:</p> <p>If no entry is associated to the calling set (ANIE=0), then old ANI composing is used.</p> <p>If an ANI entry is associated to the calling set (ANIE has a non-zero value), but the associated ANI entry is not configured, then old ANI composing is used.</p> <p>If an ANI entry is associated to the calling set (ANIE has a non-zero value), and the associated ANI entry is</p>	cist-24
ANIE	(0)-x	<p>ANI table Entry for Route (configured under prompt R_ENTRY, LD 15)</p> <p>x= R_SIZE-1</p> <p>R_Size is the maximum table entry number that can be configured. (R-SIZE is defined in LD 15)</p>	cist-24
ANKP	(NO) YES	<p>KP signal suppressed</p>	cam-1
ANSZ	(7)-15	<p>Size of the ANI information This is the length of LEC+ANI DN For analog routes, the only valid response is 7</p>	cist-24
ANTK	x...x	<p>ANI identifier number</p> <p>Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. In either case, together with ANLD and ANI Listed DN in LD 15, the total number of digits must be no less than 7.</p>	ani-1
ARNO	0-511	<p>AIOD route number</p>	aiod-1
ASTP	1-(2)-15	<p>ADM Step-forward ring cycles</p>	adm-12

LD 16

Prompt	Response	Comment	Pack/Rel
ASUP	(NO) YES CO	Do not return Answer Supervision by RAN to originator Return Answer Supervision by RAN to originator Return Answer supervision only if the originator is a CO trunk The operation of answer supervision is affected with FCC Compliance for DID Answer Supervision (FC68) package 223. Refer to FCC Compliance for DID Answer Supervision, in X11 features and services.	ran-1
ATDN	(0)-x...x	Attendant DN of conventional main, ESN main, ESN node or ETN node. Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	casm-5
ATGT	(0)-60	Add on Data Module (ADM) Trunk Guard Timer Two-second increments up to one minute, odd entries are rounded down to the next valid number.	adm-12
ATTR	(NO) YES	AC15 Timed Reminder Recall. Prompted with AC15 Recall (ACRL) package 236.	arcl-20
ATTK	xxxx	AIOD identifier number	aiod-1
AUDN	xxxx	Auto termination DN for ISA service routes Prompted when ISAR = YES and AUTO = YES. This must be an existing DN, and cannot be deleted. When DNIS = YES, it must be an ACD DN.	
AUTH	(NO) YES	Authcode to be prompted for incoming NARS/BARS calls	baut-1
AUTM	(NO)YES	Automatic Mode for MFE, MFK5 or MFK6	mfc-9
AUTO	YES (NO)	Auto-Terminate The route members terminate on DN defined by response to ATDN prompt in LD 14. The route members terminate normally at the console. Only ACD DNs or DISA DNs support Auto-Terminate trunks. In order to set AUTO = YES for TIE, DID and CCSA trunks, all members of the route must have STRI = IMM in LD 14.	basic-1

Prompt	Response	Comment	Pack/Rel
BAND	(0) - 99	OUTWATS band number.	cbc_pkg-23
BCOT	(0) - 4000	B-Channel Overload Control timer value indicates the delay the M1 PBX will introduce (in milli seconds) before starting the actual disconnect sequence.	isdn- 23
BDCT	(NO) YES	Enable broadcast capability for this route.	ranbrd- 23 ran- 23
BDSP	(NO) YES	Billing Number is not displayed at the CO Billing Number is displayed at the CO	basic-21
BILN	(NO) YES	Billing Number is not required Billing Number is required	basic-21
BLEN	1-(10)-16	Billing Number Length	basic-21
BNUM	0-9999	Billing Number Depending on your response to BLEN, BNUM can be from 1 to 16 digits. If BLEN is changed, a new BNUM must be entered. If the BNUM entered is less than the BLEN specified, the BNUM will be padded with leading zeros.	basic-21
BRIP	(NO) YES	ISDN BRI Packet handler route	bri-18
BSSU	(NO) YES	Backward Signal Suppression for undefined signal	mfc-9
BTCG	(NO) YES	Busy Tone to Calling Party disabled	opcb-14
BTT	2-(30)-254	Busy Tone Time Length of busy/overflow to be returned on DTI routes in seconds.	xct1-16
BTUA	(NO) YES	Block Transfer of Unanswered call	pra-14

LD 16

Prompt	Response	Comment	Pack/Rel
CAC	0-(3)-9	Specifies ANI category for an incoming trunk. CAC is used to build ANI messages on an outgoing trunk connected to this trunk. CAC is prompted if Commonwealth of Independent States (CIST) package 221 is equipped. However, CAC is not prompted if the route is outgoing only (ICOG = OGT) and TKTP is not COT (for analog trunks, not DID).	cist-21
CACC		Defines how the CAC is stored in the CDR. The options are	cist-24
	(NO)	Do not store CAC	
	BEF	Store CAC before the ANI	
	AFT	Store CAC after the ANI	
CAC_CIS	0-(3)-9	CIS ANI Category Code range and default values	cist-24
CAC_CONV	(0)-31	CAC conversion table number for CIS gateway, configured against CIS_ENT in LD 15 Prompted only for non-outgoing CIS DTI2 route	cist-24
CACD		Defines how the CAC is displayed on the display of the set/console. The option also controls presentation of the CAC in the messages to the auxiliary processors	cist-24
	(NO)	Do not display CAC	
	BEF	Display CAC before the ANI	
	AFT	Display CAC after the ANI	
CAT	00-99	CAMA Trunk route category digits Prompted if SIGL = NT4 or NT5	cama-1
CBQ	(NO) YES	Call Back Queuing Use only for incoming TIE calls.	bque-1
CBCR	(NO) YES	Service route indicator	cbc_pkg-23

Prompt	Response	Comment	Pack/Rel
CCB	(NO) YES	Collect Call Blocking disabled on incoming route Collect Call Blocking enabled on incoming route The route must be: <ol style="list-style-type: none"> 1. either incoming or incoming and outgoing 2. COT, DID, FEX, or WAT 3. neither ISDN nor M911 This prompt appears with Collect Call Blocking (CCB) package 290.	ccb-21
CCB1	512-(1536)-4992	Collect Call Blocking delay timer 1 (ms). The input is rounded to the next multiple of 128 ms.	ccb-21
CCB2	500-(1520)-2550	Collect Call Blocking delay timer 2 (ms). The input is rounded to the next multiple of 10 ms. If any CCB route members (trunks) are using firmware timing (FWTM = YES in LD 14), the CCB2 timer will not change until the new timer value is downloaded to the card. This can be done by either enabling the card or initializing the switch. CCB2 is prompted when CCB = YES.	ccb-21
CCBA	(NO) YES	Collect Call Blocking denied (regular answer signal transmits) Collect Call Blocking Allowed (CCB answer signal transmits) CCBA is used for outgoing routes when a call tandems out on this route. For example, collect calls will not be accepted on a RAN or TIE route when CCBA = YES. When CCBA = NO, these routes can accept collect calls. This prompt appears with Collect Call Blocking (CCB) package 290.	ccb-21
CCNI	(NO) YES	Call Number Indicator enabled on route	mfc-15
CCO	(NO) YES	Printing of CDR records for no PPM or AOC count Prompted when OAL = YES or OTL = YES	cdr-10
CDCT	(NO)	Called Party Control is not enabled on incoming calls when MFC IDCT signal is sent	opcb-14

LD 16

Prompt	Response	Comment	Pack/Rel
	YES	Called Party Control is enabled on incoming calls when MFC IDCT signal is sent	
CDPC	(NO)	Called Party Control is not enabled when MCT feature is activated.	supp-14
	YES	Called Party Control is enabled when MCT feature is activated. Prompted when OPCB = YES	
CDR	(NO) YES	Call Detail Recording Set and change CDR options for this route.	cdr-1
CDRB	(NO) YES	Abandoned call on busy tone records.	cdr- 23
CDRX	(NO) YES	Print CDRX records on multiple call transfer for non-PPM outgoing calls. This prompt appears if CDRX package is equipped and MR is not equal to PPM. Also CDR = YES, TKTP = COT or DID for International DID/DOD and ICOG cannot be ICT.	cdrx-20
CDRY	(NO) YES	CDR Public Network Feature Invoke records will be generated	ddsp-20
CFWR	(NO) YES	Call Forward Restriction	supp-10
CGPC	(NO)	Calling Party Control on incoming calls on this route is not enabled	opcb-14
	YES	Calling Party Control on incoming calls on this route is enabled	
CHRG	(BLOK)	A DOD Call over this MFK route must signal the CO that it wishes to be charged by block.	kd3-20
	LINE	A DOD Call over this MFK route must signal the CO that it wishes to be charged by line.	
CHTY	(BCH) ABCH	Channel Type B-channel A/B bit signaling Prompted when DTRK = YES, ISDN = YES and Mode = PRA.	pra-12

Prompt	Response	Comment	Pack/Rel
CISR CLEN	(NO) YES 0 - (1)- 3999	CIS Route. CLID entry number. This prompt is given only for non-ISDN routes (i.e. ISDN = NO and ISAR = NO).	cist-24 esa- 23
	1 - (10) - 16	Maximum number of Calling Number Identification digits to request for India Phase 2 feature.	
CLK	(OFF) ON	External Clock source Internal Clock source Prompted if TKTP = MCU and TRAN = SYN	basic-18
CLS	(CTD) CUN FR1 FR2 FRE SRE TLD UNR	Class of Service access restriction. Prompted if TKTP = TIE. Conditionally Toll Denied Conditionally Unrestricted Fully restricted class 1 Fully restricted class 2 Fully restricted Semi-Restricted Toll Denied Unrestricted	isa-12
CLID		Calling Line Identification. CLID is prompted only for UIPE-based protocols.	euroisdn-22
	OPT0	Prefix = 0 for North American dialing plan. OPT0 is the default for ESIG and ISIG interfaces.	
	OPT1	Prefix = 1 for international PFXs in CLID. Any numbering type is supported. OPT1 is the default for all EuroISDN interfaces.	
	OPT2	Prefix = 2, for international PFXs in CLID. CCITT numbering types supported are: UKWN, INTL, NPA, and NXX. OP2 is the default for CO/DID routes for the Telecom New Zealand interface.	
	OPT3	Prefix = 3 for international PFXs in CLID. Only the NXX number type is supported. OPT3 is the default for TIE routes for the Telecom New Zealand interface.	

LD 16

Prompt	Response	Comment	Pack/Rel
	OPT4	For international COs, if the call originates from a CO trunk type, add nothing. Otherwise, add PFX1 and PFX2. OPT4 is the default for all Asia Pacific interfaces.	
	OPT5	This is the same as OPT4, except it supports a maximum of 10 digits in the CLID. OPT5 is the default for the Austrian interface.	
CNEG	(NO) YES	Channel Negotiation Channel Negotiation not allowed Channel Negotiation allowed CNEG is prompted if IFC = 1TR6, Numeris, APAC or D70.	bri-20
CNIE	(NO) YES	Request CNI after an ESN code is dialed. The ESN code could be a Distant Steering Code (DSC), Trunk Steering Code (TSC), NARS Access Code 1 (AC1) or NARS Access Code 2 (AC2). If NCNI > 0 and CNIE = YES, CNI is requested when either one of the conditions is first met. CNIE is prompted when the following occur: <ul style="list-style-type: none">• MFC package is equipped• TKTP = DID or TIE• MFC Table = R2MF• MFC signaling table is defined for the route	dpnss-20
CNIT	(NO) YES	Call Number Identification Trace Request MFC Call Number Identification digits only if dialed station has MCTA Class of Service. Prompted when the following occur: <ol style="list-style-type: none">1. MCT and MFC packages are equipped2. TKTP = DID or TIE3. MFC = R2MF4. MFC signaling table is defined on the route	supp-15
CNTL	(NO) YES	Changes to controls or timers	basic-1
CNTY	(ESTI) AUS AUST BEL CHNA	Country ETS 300-102 basic protocol Austria Australian UIPE PRI Belgium China	supp-9 basic-23

Prompt	Response	Comment	Pack/Rel
	CIS	Commonwealth of Independent States	euro- 23
	DEN	Denmark	
	DUT	Holland	
	EAUS	Australia	ipra-24
	EIR	Ireland	
	ESP	Spain	
	FIN	Finland	
	FRA	France	euro- 23
	GER	Germany	
	HKNG	Hong Kong	
	INDI	India	isdn-24
	INDO	Indonesia	basic-23
	ITA	Italy	
	JAPN	Japan ISDN UIPE connectivity	basic- 23
	MSIA	Malaysia connectivity	basic-23
	NET	ETSI network side protocol	
	NOR	Norway	
	PHLP	Philippines	isdn-24
	POR	Portugal	
	SING	Singapore	
	SWE	Sweden	
	SWI	Switzerland (BRI only)	
	TAIW	Taiwan	isdn-24
	TCNZ	New Zealand BRI	
	THAI	Thailand	
	UK	United Kingdom	
CNVT	(NO) YES	Conventional switch route Prompted with Network Signaling (NSIG) package 37.	nars-5
COAT	(NO) YES	Continue Outpulsing After ATO Timer expires	cist-24
COTR	0-511	DID/CO Trunk Reference route number Determines how incoming public call types are handled for the associated Integrated Service Access route or ISA. Prompted when TKTP = ISA and IFC = D100 or SL-1 and NSF = NO or YES. Precede with X to delete.	pra-12
CPDC	(NO) YES	SL-1 is the only controlling party on incoming calls. If CPDC = YES, the connection stays up until it is disconnected by SL-1. This is used for 911 emergency services.	basic-1

LD 16

Prompt	Response	Comment	Pack/Rel
CPFXS	(YES)	Customer-defined Prefixes option. When constructing the Calling or Connected Line Identification, the prefixes are retrieved from the Customer Data Block via the PFX1 and PFX2 prompts in LD 15, as is currently done.	euroisdn-22
	NO	When constructing the Calling or Connected Line Identification, the prefixes are retrieved from the Route Data Block via the HNTN and HLCL prompts in LD 16.	
CPP	(NO) YES	Calling Party Privacy/Calling Party Privacy Override Flag A response of YES indicates that the CPP feature is recognized in this trunk route. CPP is prompted only if: <ol style="list-style-type: none">1. CPP package 301 is equipped2. trunk is either OGT or IAO3. non-ISDN option4. trunk route type = COT, DID, FEX or WAT	cpp-24
CTOC	(DTDO)	CIS Toll Outpulsing Criteria	cis-24
	AADT	Dial Tone Detection only	
	ANIO	Automatic Number Identification And Dial Tone Connection	
	AODT	Automatic Number Identification Only	
CTYP		Automatic Number Identification Or Dial Tone Connection	
	(UKWN)	Call Type for outgoing direct dialed TIE route	pra-15
	CDP	Unknown Call type	
	INTL	Coordinated Dialing Plan	
	LOC	International number	
	NPA	Location code	
	NXX	National number	
	SPN	Subscriber number	
	Special Number for other than international number format		
	The CTYP is used by the receiving switch so that it can associate a call with a call type and perform ESN access code insertion. This option only applies to direct dialing using trunk access codes. NARS and BARS dialing do not apply here.		

Prompt	Response	Comment	Pack/Rel
		If you intend to respond YES to prompt ISAR, use the default <cr> for this prompt. If ISAR = YES, then CTYP prints UNWN and does not permit you to enter a response.	
CUST	xx	Customer number associated with this route as defined in LD 15	basic-1
DAPC	(NO) YES	Display of Access Prefix on CLID	isdn-24
DCD	(ON) OFF	Data Carrier Detect Data Carrier Detect lead follows state of lead on device to which it is connected. Data Carrier Detect lead forced active. Prompted if TKTP = R232 or MCU.	
DCDR	(NO) YES	Include DNIS number in CDR records This prompt appears for ISDN routes to support Network ACD.	dnis-19
DCH	0-159	D Channel number	isdn-16
DCHI	1-15	DCHI Port Number. Prompted when MODE = ISLD. DCHI Port number must be defined in LD 17	pra-12
DCNO	(0)-254	Day IDC tree number	idc-12
DCTI	(0)-511	Time, in seconds, that an extension is allowed to ring or be On-Hold or Call Park before the trunk is disconnected. Respond with a value equal to the number of seconds a set is to ring after recall, plus the value of the Call Park Recall Timer. The Call Park Recall Timer is defined in LD 50 in response to the CPTM prompt. Default or <cr> means that the condition goes on indefinitely. The value stored - which will be the closest lower multiple of four - is echoed back upon entry.	
DDMI	(0)-127 (0)-255	Digit Manipulation Index Basic Alternate Route Selection Network Alternate Route Selection Prompted with either Basic Alternate Route Selection (BARS) package 57 or Network Alternate Route Selection (NARS) package 58.	nars-5

LD 16

Prompt	Response	Comment	Pack/Rel
DDO	(NO) YES	Delay Digits Outpulsing for DOD and CO trunks Prompted with International Supplementary Features (SUPP) package 131 and ICOG = OGT or IAO.	supp-15
DEM	(DCE) DTE	Data Equipment Mode. Prompted if TKTP = R232. Data Carrier Equipment Data Terminal Equipment	basic-18
DES	x...x	Designator field for trunk groups of 0-16 alphanumeric characters (this is an optional entry)	basic-22
DEXT	(NO) YES	Display External dialed digits Do not display original digits Display original digits pre converted Prompted if AUTO = NO, DNIS = NO and IDC = YES.	icd-12
DGTP	BRI DTI DTI2 JDMI PRI PRI2	Digital Trunk Type for route. ISL routes that use Phantom Trunk TNs must be configured as DTI2 routes. Basic Rate Interface (Allowed if TKTP = TIE, COT or DID and BRIP = NO) 1.5 Mb/s DTI (If BRIP = NO, then default is DTI) 2.0 Mb/s DTI Japan Digital Multiplex Interface. This response is allowed if either 2 Mbit Digital Trunk Interface package 129 or 2 Mbit Primary Rate Interface package 154 is equipped. ISDN 23B + D (If BRIP = YES, then default is PRI) ISDN 30B + D	pra-14
DIDD	(0)-15	Number of leading digits ignored for DID call during Overlap Receiving	brit-18
DIG#	1-(4)-9	Number of Digits	mfc-9
DIGS	4-(5)	Number of Digits	mfc-9
DLTN	(NO) YES	Dial Tone on originating calls Provide dial tone to the far end when the trunk has been accessed from the far end.	basic-1
DMOD	1-127	Default Model number for this route (Option 11C)	basic-16

Prompt	Response	Comment	Pack/Rel
DNAM	(NO) YES	Display IDC name Prompted with Calling Party Name Display (CPND) package 95. Prompted following NDNO if DNIS = YES.	dnis-17
DNIS	(NO) YES	ACD DNIS route Prompted with Automatic Call Distribution Package D (ACDD) package 50, and the RTYP = TIE or DID.	dnis-10
DNSZ	(0)-7	Number of digits expected on DID routes 0 indicates no fixed number	supp-10
DAPC	(NO) YES	Display of Access Prefix on CLID	isdn-24
DPPI	(1167) nnnn	Privacy indicator for a dial-pulse trunk. Any arbitrary digit (0-9) sequence up to 4 digits may be entered. If CPP prompt is changed from NO to YES and <cr> is entered, DPPI defaults to 1167.	cpp-21
DPPO	(1182) nnnn	Privacy Override Indicator for a dial pulse trunk. nnnn = any arbitrary digit (0-9) sequence up to 4 digits in length. DPPO is defaulted to 1182 if CPP is changed from NO to YES and <CR> is entered	cpp-23
DRNG	(NO) YES	North American Distinctive Ringing for incoming calls For TIE trunks to provide normal ringing (i.e., make/ break/ make/ break, 0.25 sec./ 0.25 sec./ 2.25 sec. to incoming calls terminating on stations) For CO trunks to provide distinctive ringing (i.e., make/break, one second/two seconds to incoming calls terminating on stations). Distinctive Ringing only applies to CAM, COT, DID, FEX, TIE and WAT trunks. These trunks cannot be configured as outgoing only for prompt ICOG.	drng-8
DRNG	(NO) YES	Japan Distinctive Ringing	drng-9
DSBL	(0)-100	Percentage of trunks to be disabled if loss or noise reaches the out-of-service limit	atm-7

LD 16

Prompt	Response	Comment	Pack/Rel
DSEL	(VOD) DTA TDN VCE 3DTA 3VCE 7VOD 7DTA	Data Selection Voice or Data route Data-only route Transparent Data Network Voice-only route Data route and 3.1 kHz Voice route and 3.1 kHz Route supports voice or data calls and the telephony 7 khz/Video telephony teleservices Route supports data calls and the telephony 7 khz/Video telephony teleservices Prompted if DGTP = DTI, DTI2 or JDMI.	basic-19 euro-24
DSPD	(NO) YES	Real Time Advice Of Charge Display Do not display charge information during call Display charge information during call DSPD applies to Aries sets (M2006, M2008, M2016, M2216, and M2616) on a per route basis. To activate this feature, the prompt MR must be set to either DURC or ENDC.	isdn-22
DSPT	0-(10)-60	Charge Display Timer in seconds DSPT determines how long charge information is display at the end of the call.	isdn-22
DTD	(NO) YES	Dial Tone Detection	dtd-10
DTDF	x y	Dial Tone Detector Fail threshold. Where: <ul style="list-style-type: none">• x = increment threshold = 1-(2)-15• y = decrement threshold = 1-(2)-15	dtd-10
DTOC	(NO) YES	Direct Toll Connection	
DTOS	(NO) YES	Dial Tone on Outgoing Seizure Prompted if SIGL = DAS.	class2-16
DTPI	(*67) nnnn	Privacy indicator for a digitone trunk Any arbitrary digit (0-9) sequence up to 4 digits can be specified. Only the first digit may be an asterisk (*). If CPP prompt is changed from NO to YES and <cr> is entered, DTPI defaults to *67.	cpp-21

Prompt	Response	Comment	Pack/Rel
DTPO	(*82) nnnn	Privacy Override indicator for a digitone trunk. nnnn = Any arbitrary digit (0-9) sequence up to 4 digits in length. The Asterisk (*) can only be entered as the first digit. DTPO is defaulted to *82 if CPP is changed from NO to YES and <CR> is entered	cpp-23
DTR	(OFF) ON	Data Terminal Ready. Prompted if TKTP = R232 or MCU. DTR lead follows state of the lead on the device to which it is connected DTR lead always forced active	basic-18
DTRK	(NO) YES	Digital Trunk Route. Prompted with PBX Interface for: <ul style="list-style-type: none"> • DTI/CPI (PBXI) pkg 75 • 2 Mbit Digital Trunk Interface (DTI2) pkg 129 • Japan Digital Multiplex Interface (JDMI) pkg 136 • ISDN Primary Rate Access (PRA) pkg 146, or • 2 Mbit Primary Rate Interface (PRI2) pkg 154 	dti-5
DTYP	(IOP) IDP ODP	Inbound/Outbound Data Port Inbound Data Port Outbound Data Port	amp-5
DUP	(FULL) HALF	Duplex for data port Full duplex Half duplex Prompted if TKTP = MCU.	basic-18
EMGY	(NO) YES	Emergency Route	basic-24
EML	0-15	Expected Measured Loss (in dB)	atm-7
EOS	(NO) YES BSY	No End-of-Selection signal on DID routes End-of-Selection signal is enabled EOS and busy signals are enabled	supp-10
EQAR	(NO) YES	Enable Equal Access Restrictions Prompted when TKTP = CO, FEX, WAT, or ISA, and ICOG = OGT, or IAO.	eqa-17

LD 16

Prompt	Response	Comment	Pack/Rel
ESN	(NO) YES	Electronic Switched Network pad control for NT8D15 XEM card. This only applies to trunk routes whose members may use 4-wire E&M or DX signaling on an Electronic Switched Network. This prompt is the replacement for the ESN switch setting on the QPC237 circuit card. When YES is selected, a 1 dB improvement in loss levels is provided on trunk to trunk calls using the NT8D15 units. Prompted with Network Alternate Route Selection (NARS) package 58 and Meridian 1 Extended Peripheral Equipment (XPE) package 203.	xpe-15
FACN	(0) - 99999	Tie or FX facility number.	cbc_pkg-23
FACY	(NO) YES	Facility indicator for Private or TIE connection. Tie connection in the NSF IE Private connection in the NSF IE Trunk routes to a DMS-250 automatically have FACY set to YES. All others default to NO. FACY is prompted when TKTP = TIE, ISAR = YES, and IFC = D100, D250 or S100.	isa-17
FALT	(NO) YES	Recognition of DTI2 ABCD FALT signal for ISL Prompted for DTI2 ISL routes.	pedm-18
FEDC		Far End Disconnect Control This entry should correspond to the type of disconnect control used by the far end apparatus of this trunk route. Loop start trunks may be assigned either ORG or ETH.	basic-1
	(ORG)	Originating end control The apparatus recognizes conditions on the near end only for calls originated by the Meridian SL-1. This does not allow trunk to trunk connections.	
	ETH	Either end control Conditions at the near end are recognized for both incoming and outgoing calls. This allows trunk to trunk connections subject to normal access restrictions. (e.g., TGAR)	

Prompt	Response	Comment	Pack/Rel
	FEC	<p>Far end control</p> <p>FEC allows trunk to trunk connections. FEC involves the following sequences for disconnect at the near end:</p> <p>When the near end goes on-hook first, the DSI (half disconnect) timer starts. If the far end of the trunk goes on-hook before the DSI timer runs out, then the trunk is idled immediately and the DSI timer is cancelled. If the DSI timer expires, the trunk is locked out until an on-hook is received from the far-end, at which time the SL-1 idles the trunk.</p>	
	JNT	<p>Joint control</p> <p>JNT disallows trunk to trunk connections.</p>	
FGNO	(0)-127	Feature Group D block number	fgd-17
FORM	M1A M2B M3C	<p>Format 1 for CAMA trunk signaling</p> <p>Format 2 for CAMA trunk signaling</p> <p>Format 3 for CAMA trunk signaling</p>	cama-1
FRIN	(NO) YES	<p>Forward Release Indefinitely</p> <p>Forward Release is not resent.</p> <p>Forward Release is resent every time the Disconnect Supervision timer expires and the Disconnect Supervision timer is restarted.</p>	pedm-18
FRL	0-7 0-254	<p>Prompted if DTRK = YES and DGTP = DTI2.</p> <p>Facility Restriction Level (FRL) and New Flexible Code Restriction (NFCR) tree number for this route</p>	basic-1
FRRC	0-(4)-15	<p>Forward Release Repetition Count</p> <p>This represent the number of times a Forward Release signal is resent before an error message is printed, if an acknowledgment is expected but not received.</p> <p>The length of time the software waits for acknowledgment before re-sending the signal is given by the Disconnect Supervision timer.</p> <p>Prompted if FRIN = YES.</p>	pedm-18

LD 16

Prompt	Response	Comment	Pack/Rel
FRRD	128-(384)-1920	Forward Release Repetition Delay in milliseconds This is the delay between sending the seize message and the Forward Release. The accuracy of this timer is governed by the accuracy of the 128 millisecond timing queue. Prompted if FRIN = YES and FRRS = YES.	pedm-18
FRRS	(NO) YES	Forward Release Repetition Seize Do not re-seize the trunk before re-sending the Forward Release. Re-seize the trunk before re-sending the Forward Release. Prompted if FRIN = YES.	pedm-18
GCR	(NO) YES	General Carrier Restriction to restrict Equal Access calls.	eqa-19
GRD	(IDLE) PLAY	Ground Start Arrangement RAN machine send ground signal when idle. RAN machine send ground signal when playing.	ranbrd-23 ran-23
HDLC	(NO) YES	High level Data Link Control Prompted if TKTP = MCU and V25 = YES.	basic-18
HLCL	0-9999	Home Location Number This number is similar to PFX2 number prompted in LD 15. It is added to this overlay so that this prefix can be configured on a route basis as required in some countries (e.g., Italy). As is the case with PFX2, the HLCL prefix can be from one-to-four digits long. This prompt is displayed only if CPFXS = NO. If only a <CR> is entered, this prompt keeps its previous configuration. If no value was configured previously, no value will be configured. Enter X to delete the digits.	euroids-22

Prompt	Response	Comment	Pack/Rel
HNTN	0-9999	<p>Home National Number</p> <p>This number is similar to the PFX1 number prompted in LD 15. It is added to this overlay so that this prefix can be configured on a route basis as required in some countries (e.g., Italy).</p> <p>As is the case with PFX1, the HNTN prefix can be from one-to-four digits long. This prompt is displayed only if CPFXS = NO.</p> <p>If only a <CR> is entered, this prompt keeps its previous configuration. If no value was configured previously, no value will be configured.</p> <p>Enter X to delete the digits.</p>	euroids-22
HOLD	ic dc ht	<p>Hold failure threshold. Where:</p> <ul style="list-style-type: none"> • ic = increment counter = 1-(2)-31 • dc = decrement count = 1-(2)-31 • ht = minimum hold time = 1-(40)-127 seconds <p>The failure to hold applies to trunks which are not properly seized but disconnected sooner than the minimum hold or ht.</p> <p>See prompt ILLR for a description of increment count (ic) and decrement count (dc) values. The default for AID trunks is 2 1 40.</p>	basic-1
HOUR	0-23	<p>Hour to start Automatic Trunk Maintenance test</p> <p>The system outputs xx:15 indicating the test start times are performed 15 minutes after the hour to avoid interactions with traffic reports.</p>	atm-7
IABS	(0)-3	<p>Number of Incoming digits to be Absorbed For CCSA trunks only.</p>	ccsa-1
IAMP	0-127	<p>Inbound Modem Pool route number Prompted if TKTP = ADM and DTYP = IOP or IDP.</p>	amp-5
IANI	(NO) YES	<p>In-band Automatic Number Identification route ISDN must be (NO) for this feature to be enabled. Prompted if AUTO = YES.</p>	ani-15
ICDN	xxxx xxx	<p>CLID DN for incoming route (1-7 digits) and CLID entry (0-125) for trunk DN</p>	mfc/isdn-22

LD 16

Page 372 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	xxxx (NO)	CLID DN for incoming route (1-7 digits) and CLID is not generated for trunk DN ICDN is prompted if ICIS = NO or if the trunk route is not ISDN.	
ICIS		Incoming Identifier Send	mfc/isdn-2 2
	(YES) NO	Use CLID/CNI from incoming ISDN/R2MFC trunk Do not use CLID/CNI from incoming ISDN/R2MFC trunk ICIS is prompted for incoming routes when ISDN = YES or if the table type of MFCI = R2MF.	
ICNP	(UKWN) PRV PUB	Incoming Numbering Plan Unknown Private Public ICNP is prompted if table type of MFCI = R2MF and ICIS = YES. ICNP is prompted only if the CLID entry for ICDN = 0-125.	mfc-22
ICNT	(UKWN) INTL NTN LCL LOC CDP SPN	Incoming Numbering Type Unknown International National Local Location Coordinated Dialing Plan Special number ICNT is prompted if table type of MFCI = R2MF and ICIS = YES. ICNT is prompted if CLID entry for ICDN = 0-125.	mfc-22
ICOG	IAO ICT OGT	Incoming and/or Outgoing trunk Incoming and Outgoing Incoming only Trunk Outgoing only Trunk	basic-1
ICPS	(YES) NO	Incoming Presentation Status Provide Trunk DN Do not provide Trunk DN ICPS is prompted if table type of MFCI = R2MF and ICIS = YES. ICPS is prompted if the CLID entry for ICDN = 0-125.	mfc-22

Prompt	Response	Comment	Pack/Rel
ID	(0)-9	Identification digit for CAMA trunk routes	cama-1
IDC	(NO) YES	Incoming DID Digit Conversion on this route	idc-12
IDEF	(NET)	Internal/external definition Use network information to define a call as internal or external. Calls over the selected route will receive a network treatment as defined by available network information.	basic-22
	LOC	Use local data to define a call as internal or external. Internal calls will receive an internal treatment if RCLS = INT. External calls will receive an external treatment if RCLS = EXT. IDEF is prompted in LD 16 if IDEF = YES in LD 15.	
IDOP	(NO) YES	Identify Originating Party Call Detail Recording for Internal calls to identify forwarding station originating party. Prompted when CFWR = NO	supp-10
IDTB	0-7	ID table index to be used by this Meridian 911 route	m911-19
IEC	001-999	Inter-Exchange Carrier ID Precede with X to remove entry. If no value is entered "???" is printed in the route data block. Prompted when TKTP = COT, FEX or WAT.	pra-12
	(0) - xxx (0) - xxxxx	This value is used for information purposes only. Inter-Exchange carrier providing the service. Prompted if IFC = NI2 and SRVC is 0 - 16, 18, 21 - 31.	
IFC		Interface type for this PRI route. The IFC of an ISA route and its service route must match.	pra-12
	(SL1)	Meridian SL-1	
	1TR6	1 TR 6 for Germany	
	APAC	Asia-Pacific ISDN interface for Australian BRI UIPE PRI, China, Hong Kong, Indonesia, Japan BRI UIPE PRI, Malaysia, Singapore & Thailand.	
	AXEA	Ericsson AXE-10 for Australia	
	AXES	Ericsson AXE-10 for Sweden	
	D70	Interface to Japan D70	
	D100	Meridian DMS-100	
	D250	Interface to Meridian DMS-250	

LD 16

Prompt	Response	Comment	Pack/Rel
	E403	EuroISDN interface for ETS 300 403	euro-24
	EGF4	Q Reference Signalling Point interface	qsig gf-24
	ESIG ESGF	ETSI Q reference signalling point (QSIG) Interface ID. ESIG interface with GF platform. ESGF can be entered if QSIG and QSIG GF packages are both equipped. If the Digital Route Type is BRI, then the associated DSLs must be removed before changing the interface type to ESGF.	
	ESS4 ESS5 EURO	Interface to AT&T ESS#4 Interface to AT&T ESS#5 EuroISDN interface	
	ISGF	ISIG interface with GF platform. ISGF can be entered if QSIG and QSIG GF packages are both equipped. If the Digital Route Type is BRI, then the associated DSLs must be removed before changing the interface type to ISGF.	
	ISIG	ISO Q reference signalling point (QSIG) Interface ID	
	JTTC	JAPAN TTC DCH interface ID	jttc- 23
	NI2 NUME	NI-2 TR-1268 interface type Numeris for France	
	S100 SS12 SWIS TCNZ	Meridian SL-100 SYS-12 for Norway SwissNet for PRI2 (SN2) Telecom New Zealand (NEAX-61)	
IHT	2-(30)-62	Outgoing Calling Party Control call disconnect after the far end disconnects. Number of seconds in increments of two after which an incoming Calling Party Control call will disconnect after the far end disconnects.	opcb-14

Prompt	Response	Comment	Pack/Rel
ILLR	ic dc	<p>Illegal Ring threshold. Where:</p> <ul style="list-style-type: none"> ic = increment count = 0-(2)-15 dc = decrement count = 0-(2)-15 <p>ILLR specifies illegal ringing on a seized trunk.</p> <p>ILLR is only prompted for COT, FEX and WAT trunks.</p> <p>The increment count (ic) and decrement count (dc) control the rate at which detected failures exceed the trunk error threshold. A counter (initially set to zero) records trunk successes and failures. The counter is incremented by the IC value each time a failure is detected, and by the DC value when a valid trunk condition is detected.</p> <p>When the counter value exceeds the trunk threshold value (30), the overflow indicator is set, and a TRKxxx message displays. A high IC value increases the counter more rapidly than a low IC value, thus causing the counter to exceed the threshold with fewer detected failures.</p> <p>The threshold counter only preserves positive values. If the counter contains a negative value, it automatically resets to zero. The next detected failure immediately increases the counter toward the threshold value, enabling quicker trunk failure detection.</p> <p>ic dc = threshold percentage</p> <ul style="list-style-type: none"> 41 = 20% 21 = 33% 32 = 40% 22 = 50% 24 = 67% 13 = 75% 14 = 80% 17 = 88% <p>The RSET command in LD 36 and LD 41 resets the threshold counters to zero.</p>	basic-1

LD 16

Page 376 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
IMBI	(NO) YES	Immediate Break-In Line signal is required before Break-In. Prompted when MFC = R2MF, MFCI = a valid MFC table.	opcb-14
IMCB	(NO) YES	Immediate Call Back Desired party will be re-rung if IMCB = YES. Prompted when MFC = R2MF, MFCI = a valid MFC table.	opcb-14
INAC	(NO) YES	Insert ESN Access Code to incoming private network call INAC permits an ESN access code to be automatically added to an incoming ESN call from a private network. If INAC = YES, then digit insertion (INST) for NARS or BARS calls is bypassed and Access Code 1 (AC1) is used for all call types. However, calls may be specifically defined to use Access Code 2 (AC2) in LD 15 at the AC2 prompt. INAC is prompted when the route type is either a TIE trunk or an IDA trunk with DPNSS1 signaling.	pra-21
INC	(NO) YES	CDR records generated on incoming calls	cdr-1
INC_T306	0-(2)-T306	Incoming T306 timer value T306 is the variable timer for received DISCONNECT messages on incoming calls. This T306 allows in-band tones sent by the network to be heard. This timer is stored in 2 second increments. Listed below are region-specific T306 values: <u>APAC regionT306 max value (in seconds)</u> Australia60 China30 Hong Kong 30 Indonesia30 Japan30 Malaysia30 New Zealand30 Singapore 30 Thailand30	bri-20
INDMF	(NO) YES	Indian R2MFC Operations Disabled. Indian R2MFC Operations Enabled.	mfc- 23

Prompt	Response	Comment	Pack/Rel
INST	0-99999999 <cr> X	Insert. Not prompted when DNIS = YES. Digits to be inserted before leading digit No digits are entered Precede with X to remove entry	basic-1
INT	(OFF) ON	Interworking Far end data unit is not a DMS-100 or SL-100 Data Unit Far end data unit is a DMS-100 or SL-100 Data Unit Prompted if TKTP = MCU.	basic-18
INTC	(NO) YES	Do not intercept voice calls which call data sets to an attendant Intercept voice calls which call data sets to an attendant	euroisdn-22
IPUB	0-511	Incoming Public Network call service route.	cbc_pkg-2 3
ISAR	(NO) YES	Integrated Service Access Route denied Integrated Service Access Route allowed This prompt indicates whether this route is to be used as a service or reference route for the Integrated Service Access or ISA feature. ISAR can only be YES when there are no trunk assignments in LD 14.	pra-12
ISDN	(NO) YES	Integrated Services Digital Network Defaults to YES when DGTP = PRI or PRI2 and REQ = NEW. Prompted for BRI routes when REQ = CHG. Prompted when ISDN = YES in LD 15 and with ISDN package 145.	pra-12
ITDN	xxxx	Intercept DN (up to 8 digits) The DN to which incoming calls which failed to provide ANI are tranfered.	cist-24
ITOL	(DENY) ALLOW	Deny International toll calls (i.e., 011+calls) Allow International toll calls	eqa-17
JDGT	1-(4)	Japan central office Digits This indicates the number of address digits sent from the CO to the Meridian 1. If the number of digits is not known, set the parameter to (4).	xutj-16

LD 16

Prompt	Response	Comment	Pack/Rel
LAST	(NO) YES	CDR record printing content option for redirected calls. The Terminating ID field in the CDR record will contain the one before the last party. The Terminating ID field in the CDR record will contain the last party.	cdr-1
LCNO	0-255	Line identities Conversion tree Number Enter tree number for DCNO tree in LD 49, to be used for converting Line Identities. Prompted if LID = 2.	dass2-16
LEC	0 - 9999999	Local Exchange Code LEC is used for building ANI messages. LEC is prompted if: <ol style="list-style-type: none">1. Commonwealth of Independent States (CIST) package 221 is equipped2. ICOG = OGT3. TKTP = COT (for analog trunks, TKTP must = DID)4. DGTP = DT12 May be from 0 up to the ANSZ length. Prompted for outgoing CIS route. Used for building ANI message if ANIC is NO or if ANIC=YES but the ANI entry associated with the originator of the call is not configured.	cist-21
LGTH	4-(60)- 7200	Maximum message length in seconds. For fault detection purpose. Applicable to MPUL, MLVL & MCON RAN machine types.	ranbrd- 23 ran- 23
LID	(0)-2	Line Identities option. Where: <ul style="list-style-type: none">• 0 = do not send ISDN Line Identities• 1 = send ISDN Line Identities• 2 = convert and send ISDN Line Identities Prompted with Integrated Digital Access (IDA) package 122 and SIGL = DAS	dass2-16
LMNL	0-15	Loss deviation Maintenance Limit (in dB)	atm-7
LOCD	(6) 7	Number of digits used in a local call by the far end Central Office	mfc-9
LOUT	0-15	Loss Out-of-Service deviation limit (in dB)	atm-7

Prompt	Response	Comment	Pack/Rel
MANO	(NO) YES	Manual Outgoing trunk route Define the manual DN in LD 14 at prompt MNDN.	basic-1
MAX	1-510	Maximum number of channels allowed on the ISA route, service dependent. The value entered is the maximum number of trunks limited by this service route. This value must match the one assigned at the CO. For example, if MAX = 8 for Tie routes, no more than 8 channels can be used simultaneously for Tie calls. Prompted when: <ol style="list-style-type: none"> 1. ISAR = YES and IFC = ESS4, or 2. NSF = YES and IFC = SL-1 or D100 for the selected ISA route defined by response to RTN prompt. 	isa-12
MBGA	(NO) YES	MBG Interface on the D-channel Prompted if Network Tenant Service feature active.	brit-18
MCCD	0- 8	The call trace request string can be 0-8 digits in length. Valid digits are 0-9, *, #.	emct-20
MCDT	(0)-4	Digit string delay time is in seconds. Granularity is 1 second.	emct-20
MCTM	(0)- 30	Malicious Call Trace request timer id (in seconds) This is the disconnection delay which is used when the far end goes on hook. Granularity is 1 second. Prompted if interface type for the D channel is AXE-10 Australia.	mct-10
MCTS	(NO) YES	Malicious Call Trace Signal	emct-20
MDMP	(NO) YES	Modem Data Module Pair ADM only route Modem Data Module Pair route	adm-5
MDTD	1-(5)-31	Minimum Dial Tone Detection delay	dtd-10

LD 16

Prompt	Response	Comment	Pack/Rel
MFC	(NO) YES CMFS	Multifrequency Compelled (MFC) Signaling No MFC Signaling Multifrequency Compelled or MFC Signaling CIS MFS route. This response is allowed only if both the CIST and CSMFS packages are equipped and only for the outgoing CO DTI2 routes and for the incoming DID DTI2 routes.	mfc-9 cismfs-23
	MFE MFK5 MFK6	Multifrequency Compelled Signaling for Socotel 2/5 Spanish KD3 MF Signaling 2/6 Spanish KD3 MF Signaling	mfe-10 kd3-20 kd3-20
MFCI	1-127	MFC Incoming table number Where 0 = Remove outgoing table	mfc-9
MFCO	1-127	MFC Outgoing table number Where 0 = Remove outgoing table	mfc-9
MFEA	(YES) NO	Access code signals are used in the signaling	mfe-10
MFED	0-(1)-9	First digit of special service call Precede with X to remove.	mfe-10
MFEI	(0)-127	MFE table number for Incoming calls Where 0 = Remove incoming table	mfe-10
MFEO	(0)-127	MFE table number for Outgoing calls Where 0 = Remove outgoing table	mfe-10
MFKI	1- 127	MFK table number for Incoming calls	kd3-20
MFKO	1- 127	MFK table number for Outgoing calls	kd3-20
MFSS	(B1) B2 B3	Specifies the first MFS digit request backward signal used by the incoming CDTI2-MFS trunk for the requesting the next digit from the outgoing CIS CO party. The MFSS is prompted only if the MFC is set to CMFS only for incoming routes.	cismfs-23

Prompt	Response	Comment	Pack/Rel
MIN	0-510	Minimum number of channels allowed on the ISA route, service dependent For example, if MIN = 2 for Tie routes, at least two channels will be available for Tie calls. Prompted when: <ul style="list-style-type: none"> ISAR = YES and IFC = ESS4 NSF = YES and IFC = SL1 or D100 for the selected ISA route defined by response to RTN prompt. 	isa-12
MOD	(NO) YES	Network Mode for synchronous operation Modem Mode for synchronous operation Prompted if TKTP = MCU and TRAN = SYN.	basic-18
MODE		Mode of operation	pra-12
	APN	Analog Private Network APN is allowed only with Integrated Services Digital Network Signaling Link (ISL) package 147 and Digital Private Signaling System 1 (DPNSS) package 123.	
	ISLD	Route uses ISDN Signaling Link (ISL) ISLD is allowed only if ISDN = YES, and the Integrated Services Digital Network Signaling Link (ISL) package 147 is equipped. ISLD is allowed only on ISA and TIE trunks.	
	PRA	ISDN/PRA route, DTRK must be YES PRA allowed only if ISDN = YES.	
	<cr>	Default is NULL for service/reference routes If you enter YES to prompt ISAR, then use the default <cr> for this prompt. If ISAR is YES, then MODE prints NULL and does not allow a response.	
MON	(NO) YES	Monitoring for route	basic-12
MQC_FEAT		MCDN QSIG Feature type Prompted if RECAP = MQC Precede MQC Feature type with X to remove	meet-24
	NAS NACD	MCDN NAS functionalities are supported over QSIG MCDN NACD functionalities are supported over QSIG	

LD 16

Page 382 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	NMS	MCDN NMS - MC functionalities are supported over QSIG	
MR		Message Registration	mr-10
		If a 1TR6 trunk route is created where TKTP = COT or DID, MR is automatic and is not prompted. However, if TKTP = TIE, then MR is not applicable to the route and is not prompted.	
	(NO)	The route is not metered. If MR is set to NO, the trunk should have a Polarity Insensitive Class of Service in LD 14. (CLS = PIP)	
	DURC	The AOC information is decoded during and at the end of the call. IFC must be set to NUME or SWIS.	
	ENDC PPM RVB	The AOC information is decoded at the end of the call Buffered PPM signals to be counted on this route Reverse Battery signal from PSTN for CO interrupted as supervisory signal and used as MR on this route.	
	STAC XLD	Activation of the AOC-S sub-service M & MM Lead non-buffered is used. This is the only metering type allowed for TKTP = IDA and SIGL = DAS. MR is not prompted for Danish and Swedish EuroISDN interfaces as AOC is not supported for those countries.	
MRAT	5-30	Modem Ring Again Timer, in minutes	amp-5
MRT	0-511	Music Route number Route 31 can be configured an exclusively private route in LD 16. MRT defines the Music Route number for Recorded Announcement queueing.	mus-1 ranbrd-23 ran-23 mus-23
MTND	(NO) YES	Malicious Call Trace Tandem Disconnect delay for AXE10 interface If set to YES the disconnect operation is delayed at the node closest to the CO for up to MCTM time when the call is a tandem call.	emct-20

Prompt	Response	Comment	Pack/Rel
MULT	(NO) YES	Multiplier for Charge Information Do not change calculation of charge information. Provide the exact cost of charge information if the RURC exponent is configured to the value of the multiplier. Your response to MULT should be YES when the Central Office sends charge information in one hundredth of currency and the currency multiplier is less than 1. The multiplier exponent should be equal to the RURC exponent. This is only used with functional protocol.	isdn-22
MUS	(NO) YES	Music on Hold	mus-1
MXTI	0-(5)-15	Maximum Time to wait for the far end to connect to test line (in seconds)	atm-7
M911_ABAN	(NO) YES	Meridian 911 Call Abandon Abandoned call treatment is not used on this route Abandoned call treatment is used on this route	m911-21
M911_ANI	(NO) YES	Receive ANI for Meridian 911 routes. The M911_ANI prompt acts as a gate opener for Meridian 911 prompts and should always be YES. Prompted with Meridian 911 (M911) package 224 and TKTP = DID.	m911-19
M911_FORM	(1) 2	Automatic Number Identification Format 1 = NPD (1 digit) +7-digit ANI 2 = II (2 digits) +10/20-digit ANI	m911-25
M911_TONE	(YES) NO	Meridian 911 Tone Tone given on answer Tone not given on answer	m911-21
M911_TRK_TYPE	(T911T) 911E	Meridian 911 ANI trunk types E911 tandem connections End office connection	m911-19
NACC	(PGNR) PGNC PGNU	Network access control Paging route is PAGENET restricted Paging route is PAGENET controlled Paging route is PAGENET uncontrolled NACC is prompted if TKTP = PAG and PAGENET package 307 is equipped.	pagenet-22

LD 16

Prompt	Response	Comment	Pack/Rel
NADT	(0)-255	No-Answer Disconnect Timer (in seconds) Only for 2.0 Mb/s DTI trunks.	isdn-10
NASA	(NO) YES	Network Attendant Service Allowed Only prompted if IFC is SL1	nas-20
NATL	(YES) NO	North American Toll scheme; a toll call has 0 or 1 as first or second digit. If NXX second digit is "1" set NATL to "NO" and answer "0" "1" to TDG. All toll digits for TDG prompt can be removed by a YES response if REQ = CHG. Repeat LD 16 with a NO response to add toll digits.	cdr-13
NCNA	(YES) NO	Network Calling Name Allowed Prompted if ISDN = Yes.	pra-13
NCNI	(0)-7	Request CNI after the defined number of digits are received. If NCNI = 0, CNI request does not depend on the number of digits received. If NCNI is defined to be greater than the number of digits required for routing the call, CNI will not be requested but the call is routed. Prompted when the following occur: <ul style="list-style-type: none">• Multifrequency Compelled Signaling (MFC) package is equipped• TKTP = DID or TIE• MFC Table = R2MF• MFC signaling table is defined for the route	dpnss-20
NCOS	(0)-99	Network Class of Service group number. Prompted if TKTP = TIE.	pra-13

Prompt	Response	Comment	Pack/Rel
NCRD	(NO)YES	<p>Network Call Redirection allowed</p> <p>YES allows Network Call Redirection messages to be sent or blocked if NCRD = (NO).</p> <p>Network Call Redirection can occur without having NCRD = YES. This prompt only controls the sending of Network Call Redirection messages, not the actual redirection of the call.</p> <p>When NCRD = YES, the message supplied provides information for the CLID display. When NCRD = (NO), the call is redirected without the CLID redirection information if CLID is enabled.</p>	pra-14
NCTH	(0) - 100	<p>Number of Calls Waiting Threshold.</p> <p>Prompted only if BDCT = YES and for Start/Stop RAN machine with STRT = DDL.</p> <p>Default value zero means no threshold applies.</p>	ranbrd- 23 ran- 23
NDGT	1-(4)-7 1-(4)-31	<p>Number of DNIS Digits expected</p> <p>Number of DNIS digits required on the route</p> <p>The extension to 31 digits is only available for DID, TIE or IDA routes.</p>	dnis-10 dnis-24
NDIG	(2)-10	<p>Number of Digits in numbering plan at conventional main switch</p> <p>Prompted if SIGO = STD and CBQ = YES.</p>	casm-1
NDNO	0-254	<p>Night IDC tree number</p> <p>When REQ = NEW default is the DCNO tree defined. Otherwise, there is no default value.</p>	idc-14
NDP		<p>Number of Digits Printed</p> <p>NDP affects dialed digits including EES digits with one exception. When both ECDR = YES in LD 15 and OPD = YES in LD 16, NDP affects only the outpulsed digits; the EES digits <i>are not</i> affected.</p>	isdn-15
	INC 0-32 EXC 0-32 <cr>	<p>Output the first 0-32 digits</p> <p>Suppress the last 0-32 digits</p> <p>If REQ = NEW, output all digits and suppress none.</p>	

LD 16

Prompt	Response	Comment	Pack/Rel
NDR1	(0)-4	Network Distinctive Ringing Index (0) = Default/undefined	edrg-16
NEDC		Near End Disconnect Control This entry determines the type of control exercised by the Meridian SL - 1 on trunk disconnections.	basic-1
	(ORG)	Originating end control The far-end on-hook condition is recognized only for incoming calls. Far end conditions are ignored for outgoing calls. ORG is default for TIE, DID and CCSA trunks.	
	ETH	Either end control If the far end goes on-hook for either incoming or outgoing calls, the on-hook condition is recognized and the call is disconnected. ETH is the default for all trunks except TIE, DID and CCSA trunks.	
NMNL	27-90	Noise Maintenance Limit (in dBrn)	atm-7
NMSG	(0)-30	Number of times Message is repeated	mfc-24
NOUT	27-90	Noise Out-of-Service limit (in dBrn)	atm-7
NPA	nnn	Numbering Plan Area	m911-19
NPID	0-9	Numbering Plan Digit or Information Digit If <CR> is entered, the NPID table is created.	m911-19
NPID_TBL_NUM	0-7	Meridian 911 route table index The ID table must be created before this prompt can be answered.	m911-19
NRT	0-511	Notification Route number	mfc-24
NSF	(NO) YES	Network Service Facility Prompted when TKTP = ISA and IFC = D100 or SL1. When NSF = YES, the ATB traffic counter is incremented when the MAX value is reached in the service route.	pra-12
NTOF	(YES) NO	Near To Far measurement See prompts REF, TST and PADL.	atm-7

Prompt	Response	Comment	Pack/Rel
NTOL	(DENY) ALLOW	Deny North American Toll calls (i.e., 1+ calls) Allow North American Toll calls	eqa-17
OABS	0-9	Actual outgoing toll digits to be ignored for Code Restriction OABS is frequently used with 1+calls. Precede with X to remove.	basic-1
OAL	(NO) YES	CDR on outgoing calls If answer supervision is defined for the trunk, CDR records will only be generated on call completion.	cdr-1
OAMP	0-127	Outbound Modem Pool route number Prompted if TKTP = ADM and DTYP = IOP or ODP.	amp-5
OAN	(YES) NO	CDR timing starts On Answer supervision of outgoing calls Prompted if OAL or OTL = YES. This prompt only applies to trunks with answer supervision CLS = PSP, or SUPN = YES. With International Supplementary Features (SUPP) package 131, the default is NO. Without SUPP package 131, the default is YES.	
OGDN	xxxx xxx xxxx (NO)	CLID DN for outgoing route (1-7 digits) and CLID entry (0-125) for trunk DN CLID DN for outgoing route (1-7 digits) and CLID is not generated for trunk DN OGDN is prompted if ICIS = NO or if the trunk route is not ISDN.	mfc/isdn-22
OGIS	(YES) NO	Outgoing Identifier Send Use CLID/CNI from incoming ISDN/R2MFC trunk or from the calling set. If OGIS = YES and the incoming trunk is R2MFC, the CNI from the incoming trunk CLID/CNI will be used in the CLID. Do not use CLID/CNI from incoming ISDN/R2MFC trunk or from the calling set. OGIS is prompted for outgoing routes when ISDN = YES or if table of MFCI = R2MF.	mfc/isdn-22
OGNP	(UKWN) PRV PUB	Outgoing Numbering Plan Unknown numbering plan Private Public OGNP is prompted only if the CLID entry for OGDN = 0-125.	mfc/isdn-22

LD 16

Page 388 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
OGNT	(UKWN) CDP INTL LCL LOC NTN SPN	Outgoing Numbering Type Unknown numbering type Coordinated dialing plan International number Local number Location number National number Special Number OGNT is prompted if CLID entry for OGDN = 0-125.	mfc/isdn-22
OGPS	(YES) NO	Outgoing Presentation Status Provide Trunk DN Do not provide Trunk DN OGPS is prompted if the CLID entry for OGDN = 0-125.	mfc/isdn-22
OHQ	(NO) YES	Off-Hook Queuing Used in NARS for incoming TIE callers.	ohq-1
OHQT	(0)-63	Off-Hook Queue Threshold BARS/NARS availability test. Compare with current P3 calls.	ohq-1
OHT	0-(30)-126	Off-Hook Timer Number of seconds in increments of two after which an outgoing Calling Party Control call will disconnect after the far end disconnects.	opcb-14 basic-24
OHTD	(NO) YES	Prompted when CNTL = YES and OPCB = YES. Off-Hook Timer Delay Masks the far end Off-Hook for up to 384 ms measured from the end of the interdigit pause of the digit send out. Masks the far end Off-Hook for up to 2 seconds.	basic-1
OHTT	0-(30)-62	Toll Off-Hook Timer Number of seconds in increments of two after which a toll outgoing Calling Party Control call will disconnect after the far end disconnects. Toll calls are identified by the responses to TDG and SSL. Prompted when CNTL = YES and OPCB = YES.	pemd-18
OPA	(NO) YES	Will generate CDR or CDAS record for PPM pulses.	isdn-10
OPCB	(NO) YES	Operator Call Back OPCB features to be assigned to this route.	opcb-14

Prompt	Response	Comment	Pack/Rel
		Prompted when: <ul style="list-style-type: none"> • TKTP = DID • NEDC = ETH • FEDC = ETH • CPDC = NO • CNTL = YES • Operator Callback (OPCB) package 126 is equipped. 	
OPD	(YES) NO	Outpulsed Digits in CDR Dialed digits in CDR System must be initialized for changes to the OPD settings to take effect. Prompted when OTL = YES, OAL = YES or OAN = YES.	cdr-12
OPDL	(0)-8064	Outpulsing Delay, in milliseconds If required for JDMI, OPDL = 3000 milliseconds. Prompted when DGTP = DTI2 or JDMI.	pra-14
OPE	(NO) YES	Change data port or operating parameters Prompted only if TKTP = R232, R422 or MCU.	basic-18
OPP	(NORM) ATT	Operator originated calls receive normal treatment for busy and intercept situations Operator originated calls routed to attendant for busy and intercept situations	mfc-15
OPR	(NO) YES	Outpulsing Route All trunk members for an OPR must have DTN CLS, unless they are on Route 31 or Private Line Routes. When RPA = YES, the default is YES. Prompted with Outpulsing of Asterisk "*" and Octothorpe "#" (OPAO) package 104, and prompted when TKTP = COT, DID, FEX, TIE, or WATS.	opao-10
OTL	(NO) YES	CDR on Outgoing Toll calls If answer supervision is defined for the trunk, CDR records will only be generated on call completion. Prompted when OAL = NO and Route = CAMA, CO, DID, FX, or WATS.	cdr-1

LD 16

Prompt	Response	Comment	Pack/Rel
OUT_T306	0-(30)-T306	<p>Outgoing T306 timer value</p> <p>T306 is the variable timer for received DISCONNECT messages on outgoing calls. This T306 allows in-band tones sent by the network to be heard.</p> <p>This timer is stored in 2 second increments. Listed below are region-specific T306 values:</p> <p><u>APAC region T306 max value (in seconds)</u></p> <p>Australia60 China30 Hong Kong 30 Indonesia30 Japan30 Malaysia30 New Zealand30 Singapore 30 Thailand30</p>	bri-20
OVLR	(NO) YES	<p>Overlap Receiving allowed</p> <p>Not prompted if IFC = Numeris.</p>	ovlp-15
OVLS	(NO) YES	<p>Overlap Sending allowed. This prompt appears for the following APISDN interfaces which support Overlap Sending: AUST, HKNG, SING, TCNZ, THAI. OVLS is not prompted if IFC = Numeris.</p>	ovlp-15
OVLТ	(0)-8	<p>Inter-INFO Timer during Overlap Sending. This prompt appears only for APISDN interfaces which support Overlap Receiving: THAI.</p>	ovlp-15
PADL	0-63	<p>Pad factor for loop around (in dB)</p> <p>This is the far end tone level, plus the total pad loss at both ends on two trunks.</p>	atm-7
PADT	0-63	<p>Pad factor for T100 test line (in dB)</p> <p>This is the near end tone level, plus the total pad loss at both ends.</p>	atm-7
PANS	(YES) NO	<p>Pseudo-Answer can be sent on some types of trunks as soon as end of dialing is detected.</p> <p>Pseudo-Answer is not sent on any type of trunk. SUPN in LD 14 should be YES, or PANS = YES has no meaning.</p>	supp-14
PAR	(SPAC)	<p>Data port Parity Space</p>	basic-18

Prompt	Response	Comment	Pack/Rel
	EVEN MARK ODD	Even Mark Odd Prompted if TKTP = R232, R422 or MCU.	
PBDO	(OFF) ON	Port Busy upon DTR Off Prompted if TKTP = R232, DEM = DCE and DTR = OFF.	basic-18
PECL	(NO) YES	Periodic Clearing Signal Not supported on XCOT.	supp-14
PGPN	0-15	Protocol Set Group. This entry must be consistent with Protocol Group Number (PGPN) entry in LD 27.	mph-18
PII	(NO) YES	Privacy Indicator Ignored Calling Party Privacy Indicator is honored and the existing functionality is maintained. The Calling Party Privacy Indicator is ignored. When PII is set to YES, the CLID Presentation Indicator field in the Calling Party Number IE is changed from restricted to allowed and the CPND Indicator field in the Display IE is changed from denied to allowed. Note: The PII prompt is shown for information purposes only. The PII prompt only applies to North American ISDN interfaces: DMS100, DMS250, ESS4, ESS5, and NI2.	cpp-23
PLEV	0-(2)-7	Priority Level Priority Level 2 sets can override sets of Level 1 and 2, and can be overridden by sets of Level 2-7. Prompted with Priority Override/Forced Camp-On (POVR) package 186 or Enhanced DPNSS1 Services (DPNSS_ES) package 288.	povr-20
PNDL	2-(6)-10	Process Notification Delay Timer in seconds	mfc-24

LD 16

Prompt	Response	Comment	Pack/Rel
PNI	(0)-32700	Private Network Identifier Each customer data block must have a unique PNI when equipped with the multi-customer option. PNI = 1 is typical for customer 0. It must match the PNI in the far end CDB in order to support such features as NRAG, NACD and NMS. The PNI in the RDB functions as a logical customer number for routing outgoing non-call-associated Transaction Capability Application Part or TCAP facility messages to the appropriate ESN translations within the far end PBX. Using the default value of PNI = 0 prevents operation of features such as NRAG, NACD and NMS.	pra-12
PNNC	(NO) YES	Process Notification Networked Calls	mfc-24
PNPS	(0)-30	Interval between messages (2 seconds increments)	mfc-24
POST	DIS ATT	RAN Post announcement treatment Disconnect after maximum repetitions Route to attendant after maximum repetitions	ran-1
PRDL	(NO) YES BSY	No Partial Dial timing on DID routes Partial Dial timing is equipped using EOD Busy signal is sent on time-out	supp-10
PRIV	(NO) YES	Route is not a Private line route Route is a Private line route Any COT route can be a private route. Prompted if TKTP = COT and REQ = NEW.	basic-14

Prompt	Response	Comment	Pack/Rel
PROG		Progress	euroisdn-22
	NCHG	Send a PROGRESS signal when a CALL PROCEEDING message which contains a progress Indicator Information Element is received at the Meridian 1 EuroISND gateway. NCHG is the default for all interfaces except Australian and Austrian. NCHG is not supported with Japan interface.	
	MALE	Send an ALERT signal when a CALL PROCEEDING message which contains a progress Indicator Information Element is received at the Meridian 1 EuroISND gateway. MALE is the default for Japan interface.	
	MCON	Send a CONNECT signal when a CALL PROCEEDING message which contains a progress Indicator Information Element is received at the Meridian 1 EuroISDN gateway. MCON the default for Australian and Austrian interface.	
PR_RTN	(NO) YES	Path Replacement Retain Option is supported by the far end Private Integrated Services Network Exchange.	qsig ss- 23
PR_TRIGS		Path Replacement Triggers are set to their default values: DIV 2 3 CNG 2 3 XCON 2 3 2 Path Replacement attempts with a delay of 3 minutes for Diversion and Congestion triggers but Connected number is not a trigger.	qsig ss-23
	DIV xx y CNG xx y	Diversion is used to trigger Path Replacement. Congestion is used to trigger Path Replacement. A Connected number different from a called number is used to trigger Path Replacement.	
	CON xx y	xx = 0 - 15, the number of Path Replacement attempts. y = 1 - 7, the delay between two Path Replacement attempts in minutes. Precede with X to remove.	

LD 16

Page 394 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
PSDS	(NO) YES	Public Switched Data Service Prompted if TKTP = MCU.	basic-18
PSEL	(DMDM) TLNK	DM-DM Protocol Selection T-link Protocol Selection TLNK protocol is used by SL-100 and DMS data devices, DM-DM is used by Meridian 1 data devices such as ASIM, AIM, ADM, SADM, Asynch Data Option or ADO, and MPDA. MCA uses both protocols. PSEL is prompted if TKTP = R232, R422, or MCU.	basic-18
PTUT	0-510	Preference Trunk Usage Threshold	mfc-24
PTYP		Port Type at far end The response to this prompt is used in determining the required transmission level. Refer to the <i>International Loss and Level Plan</i> NTP for more information.	basic-5

Analog TIE trunk routes:

(ATT)	Analog TIE trunks
AOT	Analog TIE trunk, used instead of ATT whenever the PBX has one or more digital satellite trunk routes or DST to any digital satellite PBX which includes OPX telephones.
AST	Satellite PBX TIE or ESN trunks if SAT = YES
<i>Digital TIE trunk routes:</i>	
(DTT)	Digital or combination TIE trunk
DCT	Combination satellite PBX TIE trunk
DST	Digital satellite PBX TIE trunk (allowed if SAT = YES or NO)

Analog CO trunk routes:

(ACO)	Analog CO trunk
ATO	Analog toll office trunk

Digital CO, FEX, DID, and WAT trunk routes:

(DCO)	Digital or combination CO port
DTO	Digital or combination Toll Office trunk

Prompt	Response	Comment	Pack/Rel
<i>1.5 Mb/s PRI TIE trunk routes:</i>			
	(PRI)	B-Channel port classification	
	DTT	Digital or combination TIE trunk	
	DCT	Combination satellite PBX TIE trunk	
	DST	Digital Satellite PBX TIE trunk	
<i>1.5 Mb/s PRI CO, FEX, DID, and WAT trunk routes:</i>			
	(PRI)	B-Channel port classification	
	DCO	Analog CO trunk	
	DTO	Analog toll office trunk	
QREC	(NO) YES	CDR ACD Q initial connection records to be generated	cdr-1
R2MD	(NO) YES	R2 modification	mfc-9
RACD	(NO) YES	Route traffic information in ACD Reports Enter YES only if the route is used as the Interflow DN of at least one ACD DN and the Interflow Trunk traffic is desired. Prompted for COT, TIE, DID, WAT, FEX and RAN trunk types. Actual ACD Report format output examples are included in the <i>ACD Management Reporting</i> NTP.	acd-12
RANR	0-511	RAN Route number for the desired RAN route.	ranx-20
RANX	(NO)	RAN for calls diverted to external trunks RAN not requested when a call is forwarded to this route.	ranx-20
	YES	RAN requested when a call is forwarded to this route. Prompted when: <ol style="list-style-type: none"> 1. TKTP = COT 2. RPA = NO 3. DSEL = VCE or VOD 4. ICOG = IAO or OGT 	
RCAL	(NO) ATT DRA	Deny Manual Service Recall Allow Manual Service Recall DID Recall to Attendant for DT12 trunks RCAL is prompted when TKTP = DID or COT	supp-10

LD 16

Prompt	Response	Comment	Pack/Rel
RCAP		Remote Capabilities. Precede with X to remove a configured capability. This prompt will be repeated until <cr> is entered.	supp-10
BRI		ISDN Line/Trunk interworking. Default for all Asia Pacific interfaces.	
CCBI		Call Completion to busy subscriber using integer value for operation coding CCBO/CCBI are mutually exclusive.	qsig ss-24
CCBO		Call Completion to busy subscriber using object identifier for operation coding CCBO/CCBI are mutually exclusive	qsig ss-24
CCBS		Call Completion to Busy Subscriber for QSIG and EuroISDN BRI interfaces. CCBS is allowed if QSIG supplementary services package 316 is equipped.	
CCNI		Call Completion on no response using integer value for operation coding CCNO/CCNI are mutually exclusive.	qsig ss-24
CCNO		Call Completion on no response using object identifier for operation coding CCNO/CCNI are mutually exclusive.	qsig ss-24
CCNR		Call Completion to No Reply for QSIG and EuroISDN BRI interfaces. CCNR is allowed if QSIG supplementary services package 316 is equipped.	
COLP		Connected Number IE Presentation is supported on far end. COLP is supported on Indonesian interfaces, not as a default because it can be configured. Default value for ESIG, ISIG, NI2 and EUROISDN interfaces except for AUS, EIR, DUT, BEL and FRA interfaces.	basic- 23
CTI		Call Transfer Integer CTI and CTO are mutually exclusive.	qsig ss-24
CTO		Call Transfer Object CTI and CTO are mutually exclusive.	qsig ss-24
		Add call transfer notification remote capability to the EuroISDN interface.	bne-25
XCOLP		Precede with 'X' to remove capability. Remove COLP	
		Default value for all APAC, AUS, EIR, DUT, BEL and FRA interfaces.	
CPK		This prompt is issued only for UIPE-based protocols. Network Call Park.CPK is allowed if IFC = SL1 and CPRKNET package 306 is equipped.	

Prompt	Response	Comment	Pack/Rel
		QSIG SS Call Diversion Notification remote capability. Configure sending of QSIG Diversion Notification Information, treatment of Rerouting request and coding of operations. If coded as Object Identifier, the remote capability ends with 'O', whereas for Integer Value, the remote capability ends with 'I'. Only one remote capability is allowed.	qsig ss- 23
	DV1I	Diversion information is sent to remote switch.	
	DV1O	Diversion information is sent to remote switch.	
	DV2I	Rerouting requests from remote switch are processed.	
	DV2O	Rerouting requests from remote switch are processed.	
	DV3I	Diversion information is sent to remote switch. Rerouting requests from remote switch are processed.	
		EuroI ISDN Call Diversion	bone-25
	DV3O	Diversion information is sent to remote switch. Rerouting requests from remote switch are processed.	
		Precede with 'X' to remove capability.	
	ECTO	Add call transfer notification and invocation remote capability to the EuroISDN Precede with 'X' to remove capability.	bone-25
	MCID	MCID = Add MCID as a new remote capability. Precede with 'X' to remove.	etsi ss- 23
	MQC	MCDN QSIG Conversion as a Remote capability	meet-24
	NAC	Network access data.NAC is allowed if IFC = SL1. Enter XNAC to remove NAC from Remote Capabilities.	
	NCT	Network Call Trace	
	ND1	Network Name Display 1	
	ND2	Network Name Display 2	
	ND3	Network Name Display 3. This ensures the same level of service between the MCDN and QSIG name display services.	
	NDI	Name Display - Integer ID Coding	qsig-24
	NDO	Name Display - Object ID Coding	qsig-24
	NDS	Name Display Services	
		Add Path Replacement as a remote capability. Only one capability can be configured per link.	qsig ss- 23
	PRI	The encoding method uses Integer Values.	
	PRO	The encoding method uses Object Identifier. Precede with 'x' to remove capability.	

LD 16

Prompt	Response	Comment	Pack/Rel
	RVQ	Remote Virtual Queuing	
	UUS1	User-to-User Service 1 Decode UUS IE sent by Central Office	bne-25
	XUUS	Send UUS IE to Central Office Remove User-to-User Service 1	bne-25
RCLS	(EXT) INT	Route Class marked as external Route Class marked as internal Applies only to CAA, COT, CSA, DID, FEX, TIE, FGDT, or WATS trunks.	basic-10
RDNL	0-(4)-7	Remote DN length used to extract the necessary number of DN digits from the MCDN or QSIG CLID or from the DPNSS OLI. Prompted if Commonwealth of Independent States - Three Wire Analog Trunk (CIST) package 221 is equipped for QSIG, MCDN, or DPNSS TIE routes.	cist-21
REF	n...n	Reference loop around DN, range is 2 to 10 digits	basic-1
REP	1-15	Repetitions of recorded announcements	ran-1
REQ	CHG END OUT LCHG	Request Change existing data block Exit overlay program Remove data block Print date and time that a trunk data block was last changed. The change can be the result of a NEW, OUT, or CHG command.	basic-1
RGFL	NEW ic dc	Add new data block to the system Ring Failure threshold. Where: <ul style="list-style-type: none">• ic = increment count = 1-(2)-31• dc = decrement count = 1-(2)-31 RGFL specifies the percentage threshold for trunks which fail to produce the expected ringing and ground changes. See prompt ILLR for a description of ic and dc values. RGFL is not prompted for AID, CAM, CSA, RLM, RLR and TIE trunks The default for RAN and MUS trunks is 12 6.	basic-1

Prompt	Response	Comment	Pack/Rel
RLSM	(0)-15	Release Mechanism. Refer to Table 3, "Release Mechanism Options," on page 349. RLSM is prompted if DTRK = YES and DGTP = DTI2.	pedm-18
ROUT	0-511	Route number	basic-1
RPA	(NO) YES	Radio Paging Route If this prompt is set to NO, the route is not allowed to be used for Radio Paging. Prompted with Radio Paging (RPA) package 187 and TKTP = TIE or COT.	rpa-20
RPPM	(0) 10-250 251	Real-time Periodic Pulse Metering polling time (in seconds) Real-time Periodic Pulse Metering will not operate 1-9 Rounded up to 10 Rounded down to 250	pedm-16
RRBS	(NO) YES	Repeat Release Before Seize Seize the trunk normally. A release signal will be sent followed by the seize signal. RRBS allows a FRLS signal to be sent immediately before a SEZ signal on a DTI2 trunk. RRBS is prompted if DTRK = YES, DGTP = DTI2 and FRRS is not set to YES.	pedm-18
RTN	0-511	Route Number for any configured ISA route RTN is the Route Number of the associated Call-By-Call master route. Prompted if TKTP = TIE.	pra-12
RTYP	AUD CAP CK2 CKM CON DGT LVL MCON MLSS	Audichron or Cook 212, required for XUT trunks Code-a-Phone Cook 201 or QAY1 Cook 201 Multichannel NT7M Digital Recorders 213300 and 213400 Digital Recorders Level start/stop (Enhanced Universal Trunk cards) Continuous mode, multichannel. Multi-channel Level Start/Stop. (Enhanced Universal Trunk cards) Maximum length of message = 608 seconds.	ran-1 ranbrd- 23

LD 16

Prompt	Response	Comment	Pack/Rel
	MLVL MPUL	Level start/stop, multichannel. Pulse start/stop, multichannel.	ran- 23
	PUL	These modes supports independent RAN trunks. Request the RAN broadcast package. Pulse start/stop (Enhanced Universal Trunk cards) The Enhanced Universal Trunk cards word with CAP, CK2, or AUD RAN interfaces. The Pulse and Level start/stop options are used in conjunction with the RAN interface selected. The maximum length of the message allowed by software: <ul style="list-style-type: none">• AUD = 64 seconds• CAP = 608 seconds• CK2 = 64 seconds• CON = 608 seconds• DGT = 256 seconds	
RUCF	x y	Route Unit Conversion Factor Formula for Route Unit Conversion Factor is: $X \cdot 10^{(-Y)}$ Where: <ul style="list-style-type: none">• x = 0-(1)-9999• y = (0)-3 This results in a range of .001 to 9999. If the Central Office sends the call charge in AOC units (instead of AOC currency), RUCF is used to convert this charge into PPM format. Call Charge scenarios: <ol style="list-style-type: none">1. When call charge in sent in currency: Displayed charge = (Received charge/RURC) * RUCS2. When call charge in sent in AOC units: Diplayed charge = (Received charge * RUCF) * RUCS units RUCF is not prompted for Danish and Swedish EuroISDN.	isdn-15

Prompt	Response	Comment	Pack/Rel
RUCS	0-9999	<p>Route Unit Cost</p> <p>RUCS may be used in Motel/Hotel type environments to calculate the margin the Meridian 1 administrator wants to make per unit.</p> <p>Call Charge scenarios:</p> <ol style="list-style-type: none"> 1. When call charge in sent in currency: Displayed charge = (Received charge/RUCR) * RUCS 2. When call charge in sent in AOC units: Diplayed charge = (Received charge * RUCF) * RUCS units <p>When REQ = NEW, RUCS defaults to the UCST value in CDB. RUCS is prompted when MR = PPM or XLD. Not prompted for Danish and Swedish EuroISDN.</p>	basic-10
RURC	x y	<p>Route Unit Reference Cost</p> <p>Formula for Route Unit reference Cost is: $X * 10^{(-Y)}$</p> <p>Where:</p> <ul style="list-style-type: none"> • x = 0 - 9999 • y = (0) - 3 <p>This gives a range from.001 to 9999.</p> <p>Call Charge scenarios:</p> <ol style="list-style-type: none"> 1. When call charge in sent in currency: Displayed charge = (Received charge/RURC) * RUCS 2. When call charge in sent in AOC units: Diplayed charge = (Received charge * RUCF) * RUCS units <p>The default value for x is identical to the previously entered RUCS value. Not prompted for Danish and Swedish EuroISDN.</p>	basic-20

LD 16

Prompt	Response	Comment	Pack/Rel
RVSD	ic dc	Reversed wired CO trunk threshold. Where: <ul style="list-style-type: none">• ic = increment count = 1-(8)-31• dc = decrement count = 1-(31) RVSD specifies the percentage threshold for CO trunks which have tip and ring or other trunk wiring problems. See prompt ILLR for a description of ic and dc values. Prompted for COT, FEX and WATS trunks.	basic-16
SAT	(NO) YES	Satellite used for trunk route via earth orbiting satellite This prompt has no relation to the trunk route function connecting a main PBX to a satellite PBX.	esn-1
SBN	(NO) YES	Do not send Billing Number on this route Send Billing Number on this route	basic-21
SCDT	(NO) YES	Secondary Dial Tone detection	dtd-10
SCR	(NO) YES	Selective Carrier Restriction to restrict Equal Access calls New Flexible Code Restriction is enabled. NTOL and ITOL must both be ALLOW.	eqa-19
SEIZ	ic dc	Seize failure threshold. Where: <ul style="list-style-type: none">• ic = increment count = 1-(2)-31• dc = decrement count = 1-(2)-31 SEIZ specifies the percentage threshold of trunks which request seizure but are not seized (either no response from the far end or response is too late). See prompt ILLR for a description of ic and dc values. The default for AID trunks is 2 1. The default for RAN and MUS trunks is 12 6.	basic-1
SGL	(NO) YES	Signal Return normal MFE signal Return MFE idle signal	mfe-10
SGRP	(0)-999	Scheduled access restriction group Prompted with Scheduled Access Restrictions (SAR) package 162. Must have group defined in LD 88.	sar-20 pra-15

Prompt	Response	Comment	Pack/Rel
SID	0-511	Service Identification for the route Used to poll switches for traffic, ACD or CDR reports. Allows NSF to be turned on or off. The service route ID must match the far end. Prompted if NSF = YES and TKTP = TIE/WAT/FX/COT.	
SIDE	(NET) USR	Meridian SL-1 Node Type Network User SIDE defaults to NET if IFC = SL1. SIDE defaults to USR if IFC = 1TR6, NUME, APAC, EUROISDN or D70. Prompted if IFC = SL-1.	basic-22
SIGL	BEL NT4 NT5 APNS DAS DPN	Signaling interface for CAMA trunks Bell method NT400 method NT500 method Layer 3 Signaling APNSS signaling DASS2 signaling, allowed with Digital Access Signaling System 2 (DASS2) package 124 DPNSS signaling, allowed with Digital Private Network Signaling System 1 (DPNSS) package 123	cama-1
SIGO	(STD) ESN2 ESN3 ESN5 ETN EN19	Signaling arrangement Standard signaling arrangement Supports NCOS, TCOS and CCBQ call types Supports network call transfer, Satellite Link Control and all ESN2 call types. It does not support DTI calls. Either ESN2 or ESN3 is recommended for ISA. Supports DTI data calls plus all other types. Electronic TIE Network signaling arrangement ESN Transparent Data Networking data call. Allowed when TKTP = TIE for PRI and DTI trunks.	esn-19
SLCT	TONE MSG	Select Tone Select Message	mfc-24
SPCT	(IMM) DLY	Speech Path Cut-Through Immediate cut-through Delayed cut-through	basic-1

LD 16

Prompt	Response	Comment	Pack/Rel
SPN	(NO) YES	If yes is entered, the SPN's AC is inserted first to search for a valid UDP number. SPN is prompted when the route type is an IDA trunk with DPNSS1 signaling and when INAC = YES.	pra-21
SPTO	(NO) YES	Super Trunk Option 7-10 digit outpulsing on ANI calls 3 digit outpulsing on ANI calls Response must be YES for outpulsing to begin after three digits.	cam-1
SRCH	(LIN)	Linear Hunting Search method for outgoing trunk member. Start with the highest trunk number, used for 2-way trunks.	basic-1
	RRB	Round Robin Hunting Search for outgoing trunk member. Start with next lower trunk than the one seized, used for outgoing trunks.	
SRPM	0-(15)-255	Service Parameter. Prompted if SRVC = WATB.	pra-16
SRT	1-(30)-1023	Number of minutes on an outgoing CDPC call a set is kept on hold to a trunk	opcb-14
SRVC		Service type provisioned for AT&T ESS connections (where IFC = ESS#4 or ESS#5) Prompted if ISDN = YES and IFC = ESS4 or ESS5. Prompted with Inter Exchange Carrier (IEC) pkg 149.	pra-12
	(NNSF)	No Network Specific Facility or NSF IE sent. NSF refers to the services provided on a Call-by-Call basis.	
	ACC	Accunet Data service	
	I800	International 800 service	
	IWAT	In-WATs service for AT&T interface	
	LDS	Long Distance Service	
	M800	MEGACOM 800 service	
	MEG	MEGACOM service	
	Q900	ATT&T Multiquest 900 service	
	SDN	Software Defined Network service	
	WATB	Wide Area Telephone Service Parameter Band for AT&T ESS#5	
	WATM	Wide Area Telephone Maximal service for AT&T ESS#5	

Prompt	Response	Comment	Pack/Rel
	(0) - 31	<p>Service provisioned for National ISDN PRI. Prompted if IFC is NI2. Decimal value of the service is entered here:</p> <p>0 - No NSF IE (public network call) One service route for incoming public network call and multiple service routes for outgoing public network call. The service route number for incoming public call has to be specified in IPUB prompt in the master route.</p> <p>17 - INWATS selection 18 - OUTWATS selection 19 - Foreign Exchange Selection 20 - Tie Trunk Selection</p> <p>AT&T defines services other than the one defined in the Bellecore CBC specification. These values (defined in the facility coding field in the NSF IE) can be entered here in order to allow M1 to recognize the AT&T proprietary service.</p>	cbc_pkg- 23
SSL	1-15	<p>Special Service List number Used to identify special service calls on this PSTN for CO route, list must be previously defined in LD 18.</p>	opcb-14
SST	xx y	<p>Seizure Supervision Timer</p> <p>Timer for trunks with delay dial or DDL, wink or WNK and ground or GRD start arrangements. Where:</p> <p>xx = minimum value. Therefore:</p> <ul style="list-style-type: none"> • xx = 1-(3)-15 seconds for GRD start • xx = 5 seconds for DDL and WNK <p>y = increment value of 0-7 seconds</p>	basic-18
STEP	0-511	<p>Alternate trunk route for outgoing trunks</p> <p>STEP cannot be defined for an ISA route. Route 31 is no longer an exclusively private route, unless configured as one in LD 16.</p> <p>For dataport, it is only possible to step to a similar ADM data route.</p> <p>Precede with X to delete.</p>	basic-1

LD 16

Prompt	Response	Comment	Pack/Rel
STND	(YES) NO	Standard T100 test line (STND is 5.5 seconds and is followed by silent termination at the far end)	atm-7
STRK	(NO) YES	Super Trunk group feature	cam-1
STRT	IMM DDL	Start arrangement Immediately connect call to recording Delay call connection until start of recording	ran-1
STYP	(SDAT) STDN	Standard Signaling Type Standard Data signaling for voice and data (DM-DM, non-tandem PSDS). Standard Transparent Data Networking for voice and data and TDN calls. STDN is applicable to calls on DTI trunks only. This prompt appears when SIGO = STD.	tdn-19
SVFL	ic dc	Supervision Failure. Where: <ul style="list-style-type: none">ic = increment count = 1-(2)-31dc = decrement count = 1-(2)-31 SVFL specifies the percentage threshold for trunks which fail to obtain supervision. See prompt ILLR for a description of ic and dc values. Prompted for only AID, CAM, CSA, RLM, RLR and TIE trunks. The default for AID trunks is 2 1.	basic-1
SWP	(NORM) ATT	Subscriber With Priority calls receives normal treatment for busy and intercept situations. Subscriber with priority calls routed to attendant for busy or intercept situations	mfc-15
T100	n...n	T100 test line Directory Number, 2 to 10 digits	basic-1
TABL	0-31	Flexible dial tone detection Table number	dtd-14
TARG	0-(1)-31	Trunk Access Restriction Group range Enter the list of all TGAR in LD 10, LD 11 and LD 14 which have restricted access to this route. Multiple groups may be defined or deleted. To delete entries, enter Xnn. List all entries to be deleted (Xnn, Xnn, ...). Entries must be separated by a space.	basic-1

Prompt	Response	Comment	Pack/Rel
TBL	(0)-15	Prefix table number to be associated with this route	isdn-24
TCPP		CPP flag for an incoming non-ISDN trunk call tandemed to this trunk route.	cpp-24
	(NO)	An incoming non-ISDN trunk call tandemed to this trunk route will carry the Privacy Override indicator. The call will be marked as a CPPO call.	
	YES	An incoming non-ISDN trunk call tandemed to this trunk route will carry the Privacy indicator	
TCRS		The call will be marked as a CPP call.	
	(YES) NO	The Toll Category Request Supported option is defined for the incoming TOLL CDTI2-MFS routes. Setting the TCRS to NO means that the CIS TOLL exchange does not support the TOLL Call Category Request MFS signal (B11). The TCRS is prompted only if the MFC is set to the CMFS only for the incoming routes.	cismfs- 23
TDET	(NO) YES	Tone Detector required	basic-1
TDG	x... x	Toll Digits. Where: x = 0-9	cdr-13
		Actual digits after the trunk access code which indicate toll calls. Precede with X to remove. If all digits are removed, the digits revert to the North American toll scheme.	
		Prompted when NATL = NO.	
TFD	(0) - 3600	Timed forced disconnect for paging trunks (30 second increments). TFD must be defined individually for each route.	basic-15
TGAR	0-(1)-31	Trunk Group Access Restrictions Prompted if TKTP = TIE, ISAR = YES, and ISDN = YES.	basic-12

LD 16

Page 408 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
TIDY	xxxx yyyy	Trunk Identity. Where: <ul style="list-style-type: none">• xxxx = PBX Reference Number The xxxx default is LSC as defined in LD 15, combined with route access code truncated to four digits.• yyyy = Trunk Group Reference Number The yyyy default is route number truncated to four digits. Each of the two numbers can be one to four digits. Prompted if Digital Private Network Signaling System 1 (DPNSS) package 123 equipped and SIGL not DPN.	dass2-16
TIER	0-511	Tie Reference route number Determines how incoming TIE or private call types are handled for the associated Integrated Service Access route or ISA. Precede with X to delete. Prompted when TKTP = ISA, IFC = D100 or SL-1 and NSF = YES.	pra-12
TIMR	aaa xxx	Trunk Timers. Where: <ul style="list-style-type: none">• aaa = timer mnemonic• xxx = timer value in milliseconds unless stated otherwise	basic-1
	AAD (384)-2048	Address Acknowledge Delay timer AAD is the minimum time for the system to delay before sending the address acknowledge signal to the central office. Inputs are in increments of 128 ms. Allowed only if Japan trunks and Meridian 1 packages are equipped.	jpn-9
	ARD 512-(1024)-2048	ANI Request Duration Timer in 256ms increments	
	ARP 1-(3)-255	Autoguard Repeat Prevention timer Only valid for Loop start COT. Inputs are in one second increments. International Supplementary Features (SUPP) package 131 and Meridian 1 XPE (XPE) package 203 required. Recommended value for Australia is 200.	xpe-18

Prompt	Response	Comment	Pack/Rel
	ATO 128-(4992)-6528	ANI Time-out timer in milliseconds. For CIS outgoing trunk routes, the ATO value defines the time delay which follows toll access code outputting. During this time delay, further outputting is halted until a special card firmware message confirms that the ANI response/request interaction has been successful.	ani-1
	CRD 0-(512)-639	CO Release Delay timer.	basic-18
	DDL 0-(70)-511	Dial Delay timer	basic-1
	DSI 128-(34944)-499200	Disconnect Supervision timer	basic-1
	EESD 0-(1024)-4992	End to End Signalling Delay timer. The outputting DTMF tone using EES (or IEES) is delayed "EESD" ms after the sending of the first recall signal to the Norstar. If EESD = 0, the timer is not started and the buffered digits will not be outputted. The EESD timer is accepted if ACRL package 236 is equipped and if the route is analog TIE.	arcl-22
	EOD 128-(13952)-32640	End-of-Dial timer, non-digitone trunks For DID incoming calls in the U.S., to comply with FCC regulations, the EOD timer expires at 19,968 ms, even if configured otherwise. All other call types utilize the configured timer parameters. Refer to X11 features and services for complete details concerning the FCC Compliance feature.	basic-1

LD 16

Prompt	Response	Comment	Pack/Rel
	FLH 0-(510)-32640	<p>Hook Flash timer (in msec.) The range for Centrex Switchhook flash timer is 256-(512)-1536. For CAS, it is recommended that the timer be set at 768 or greater.</p> <p>This timer must be at least 256 ms shorter than the remote OGF timer and 256 ms shorter than the ICF timer.</p> <ul style="list-style-type: none">• 60-89 ms = Digit 1 is sent• 90 ms = Hard coded for XFCOT hook flash• 91-255 ms = Digit 1 is sent• 256-1536 ms = Existing software controlled hook switch flash <p>Range for Centrex Switchhook flash timer is 60-(510)-1536 msec (the value is rounded to the nearest 10 msec).</p> <p>Software controlled Centrex/Trunk Switch Flash timer range of 60- 127 msec is done by sending digit 1.</p> <p>The range of 128-1536 msec is already controlled by Centrex Switchhook Flash feature.</p> <p>Firmware flash user can enter any value from 60 to 1536.</p> <p>FWTM must be YES in LD 14 for the trunk associated with this route, if firmware timing is to be used.</p>	thf-20
	GRD 0-(896)-32640	Guard timer (response disallowed)	basic-1
	GTI 0-(896)-32640	<p>Incoming Guard timer (ms)</p> <p>For DTI2 trunk routes, guard timer of 0 may be defined (meaning that timing is not necessary).</p> <p>An Incoming Guard Timer on the ISPC SLAVE side (when SMAS = NO) must be set to 0.</p>	xct1-16
	GTO 128-(896)-32640	Outgoing Guard timer	xct1-16

Prompt	Response	Comment	Pack/Rel
	ICF 0-(512)-32640	Incoming Flash timer	basic-1
	IENB 2-(5)-10	Idle Extension Notification Block timer (in minutes) Semi-Automatic Camp-On (SACP) package 181 and Network Attendant Services (NAS) package 159 must be equipped.	nas-18
	LCT 0-128-32640	Loop Calling detection timer Default for COT trunks = 128 Default for all others trunks = 256	basic-1
	LEXT 50-(100)-350	Loop Extender timer (timer is in milliseconds) The minimum amount of time the Meridian 1 waits to determine whether the tip is ground. When the time is expired, the loop is closed to outputting.	tip-19
	MAD 0-(500)-1000	Minimum Answer Delay timer The minimum amount of time the Meridian 1 remains On-Hook after the called party is first alerted. Inputs are in steps of 100 ms, numbers are rounded up to next valid entry. Allowed only if Japan trunks and Meridian 1 packages are equipped.	xujt-16
	MFC 128-(12032)-65408	Multifrequency Compelled Signaling (MFC) timer	mfc-9
	MFE 128-(14976)-65408	MFC Interdigit timer	mfe-10
	MFID (0) - 25088	R2MFC Interworking timer. This timer will be in the range of 0 - 25 seconds, in 128ms increments. A value of 0 will indicate that the timer is disabled and existing timing functionality will be used.	basic-23
	MFK 128-(4992)-32640	First backward signal awaiting timer	kd3-20

LD 16

Prompt	Response	Comment	Pack/Rel
	MFKM 45-(90)-180	Timer value in seconds representing the total amount of time the signal exchange equipment can be occupied in a call expressed in seconds.	kd3-20
	MFO (0)-16256	MFC Transmit timer If 0, then use current value of MFC Timer.	
	MFR128-(2048)-16256	MFC Reception timer	kd3-20
	MFX128-(4096)-16256	MFC Transmission timer	kd3-20
	NBL 128-(4096)-32640	Enblock Long dialing timer Long timeout period set to check if all digits have been entered.	basic-12
	NBS 128-(2048)-32640	Enblock Short dialing timer Short timeout period set to check if all digits have been entered.	basic-12
	NRAG (30)-240	Network Ring Again timer or DPNSS duration for T6 and T7 timers, in minutes. Currently, only 30 minutes is supported.	pra-13
	NRD 128-(10112)-32640	No Ringing Detector change	basic-1
	OBA 2-(120)-510	Outgoing B-Answer timer Time in seconds to wait for B-answer on outgoing ATL trunks for Sweden.	supp-15
	ODT 256-(4096)-16128	End-of-dial timer for DIGITONE trunks	basic-1
	OGF 0-(512)-32640	Outgoing Flash timer	basic-1

Prompt	Response	Comment	Pack/Rel
RAS 128-(13952)-32640		Receipt of Answer Signal timer	
RGV 128-(640)-1920		Ring Validation timer Ring Validation timer for Japan Information Notification Service set as 256.	basic-1
RMA 1024-32640		Receipt of Message Acknowledgment Default = 5120 for SIGL = DPN. Default = 20480 for SIGL = DAS	
RTD 0-(12)-60		Tone Detector Response Timer in seconds. An odd numbered entry is rounded up to the next even number.	ardl-22
SFB 3-(3)-255		Seize Fail Busy timer This timer controls the time that a trunk is held busy following a seize acknowledge failure or call collision. The recommended value for trunks with seizure supervision is 25 seconds. The recommended value for trunks with no seizure supervision is 3 seconds. This value applies to all analog trunks except those which use the ARP timer.	
SRM 1024-(32640)		Service Request Message timer	
TFD (0)-3600		Timed Forced Disconnect, in 30 second increments. TFD applies to CO, DIC, FEX, PAG, TIE and WATS routes.	basic-15
TTO (128)-7040		Taiwan Time Out value	twr1-24
VGD 0-(6)-31		VNS Guard timer The time allowed for the trunk call to disconnect in seconds. This is the guard timer on the associated VNS DN.	vns-20

LD 16

Prompt	Response	Comment	Pack/Rel
	VSS (0)-1-2-1023	VNS Set Speechpath Timer. Where: <ul style="list-style-type: none">• 0 = Do not answer the bearer channel until the terminating party answers• 1 = Answer the bearer channel immediately on arrival• 2-1023 = Answer the bearer channel after the specified seconds (rounded down to 2-second multiple) if the terminating party has not already answered.	vnv-20
TITH	(0) - 300	Waiting Time Threshold (seconds). Prompted only if BDCT = YES and for Start/Stop RAN machine with STRT = DDL. Default value zero means no threshold applies.	ranbrd- 23 ran- 23
TKTP		Trunk Type You must respond to this prompt when REQ = NEW.	
ADM		Add-on Data Module associated with a Data Interface Card i.e., DLC, 4PDLC, AILC Not supported on Option 11C.	basic-5
AID		Automatic Incoming Outgoing Dial trunk. Not supported on Option 11C.	aiod-5
AWR		Automatic Wake Up trunk block for RAN/Music Requires Automatic Wake Up (AWU) package 102.	awu-10
CAA		Common Control Switching Arrangement Automatic Number Identification data block Requires Automatic Number Identification (ANI) package 12.	basic-1
CAM		Central Automatic Message Accounting trunk data block	basic-1
CBCT		Call by call master route	cbc_pkg-23
COT		Central Office Trunk data block Supported for ISDN BRI Trunk Access feature.	basic-1
CSA		Common Control Switching Arrangement access line data block	basic-1

Prompt	Response	Comment	Pack/Rel
	DIC	Dictation trunk data block	basic-1
	DID	Direct Inward Dialing trunk data block Supported for ISDN BRI Trunk Access feature.	basic-1
	FEX	Foreign Exchange trunk data block	basic-1
	FGDT	Feature Group D trunk	fgd-17
	IDA	Integrated Digital Access Requires Integrated Digital Access (IDA) package 122.	ida-16
	ISA	Integrated Service Access route or Call-by-Call route type For ISDN applications, only TIE or ISA Trunks can connect a SL-1 directly to another SL-1. Requires Call-by-Call service (CBC) package 117. Must have ISDN configured in LD 15 and LD 17.	isl-12
	MCU	Meridian Communications Unit port	basic-18
	MDM	Modem trunk data block for data port interfacing with QPC60 500/2500 type card	amp-5
	MUS	Music trunk data block Requires Music (MUS) package 44.	mus-1
	PAG	Paging trunk data block	basic-1
	R232	DAC for NT7D16 on RS-232 port	basic-18
	R422	DAC for NT7D16 on RS-422 port	basic-18
	RAN	Recorded Announcement trunk data block Requires Recorded Announcement (RAN) package 7.	ran-1
	RCD	Emergency Recorder trunk data block Requires Basic Automatic Call Distribution (BACD) package 40.	bacd-1
	RLM	Release Link Main trunk data block Requires Centralized Attendant Services (Main) (CASM) package 26.	casm-1
	RLR	Release Link Remote trunk data block	casr-1

LD 16

Prompt	Response	Comment	Pack/Rel
		Requires Centralized Attendant Services (Remote) (CASR) package 27.	
	TIE	TIE trunk data block Supported for ISDN BRI Trunk Access feature.	basic-1
	TIE ATL	TIE ATL data block for Sweden	supp-15
	TIE SEMI	Semi-automatic TIE trunk data block	opcb-14
	TIE AUTO	Automatic TIE trunk data block	opcb-14
	TIE TONE	Tone TIE trunk data block	opcb-14
	WAT	Wide Area Telephone Service trunk data block	basic-18
TOBO		Toll Operator Break-Out. TOBO is prompted if DTRK = YES, DGTP = DTI2, MFC = YES and OPCB = YES.	pedm-18
	(NO)	OPCA signals received after a toll operator break in operation will be ignored.	
	YES	An OPCA signal received after a toll operator break-in operation has been completed, will result in the toll operator being removed from the call.	
TOV		Data Timeout Value	basic-18
	(0)	No timeout	
	1	15 minutes	
	2	30 minutes	
	3	60 minutes	
		Prompted if TKTP = R232, R422 or MCU.	
TRAN	(ASYN) SYN	Asynchronous Transmission mode Synchronous Transmission mode	basic-18
		If PSDS = YES, then TRAN must be SYN. Prompted if TKTP = MCU.	
TRMB	(YES)	Tromboning allowed. Incoming call on route may be routed directly back out on the same route.	tat-21
	NO	Tromboning denied. Incoming trunk call on route may not be routed directly back out on the same route.	
		Only applies to calls routed using NARS/BARS or CDP. Does not apply to calls redirected by HUNT, Forward All Calls, or Forward No Answer.	

Prompt	Response	Comment	Pack/Rel
TRMT	(NONE), FAIL, TEST, NPA	Numbering Plan Digit or Information Digit treatment FAIL = Interrupts the NPD/ID as an ANI failure TEST = Interrupts the call as a 911 test call (for 922T calls only) This prompt appears when the Meridian 911 (M911) package 224 is equipped.	m911-19
TRO	(NO) YES	Trunk Route Optimization Prompted if NCRD = YES and IFC = SL-1.	tro-16
TRRL	(NO) YES	Recall signal may be received and transmitted on this route. Recall signal can be neither received nor transmitted on this route. TRRL appears if ACRL package 236 is equipped and the route is analog TIE.	arcl-22
TST	n...n	Test loop around DN, range is 2 to 10 digits	basic-1
TTA	(NO) YES	Time To Answer output in CDR	fcdr-18
TTBL	(0)-31	Tone Table number Table (0), North American default values, is created when the first customer is created. Refer to LD 56 for other tables.	ftc-13
TW_INC_CLID	(NO) YES	CLID Option on an incoming TWR1 route	twr1-24
TW_ROUTE	(NO) YES	Taiwan R1 route	twr1-24
TYPE	ATM NPID RDB SCH	Route type Automatic Trunk Maintenance data block. Requires Automatic Trunk Maintenance (ATM) package 84. Numbering Plan or Information Digit table. Requires Meridian 911 (M911) package 224. Route Data Block. ATM Schedule block. Requires Automatic Trunk Maintenance (ATM) package 84.	atm-19
V25	(NO) YES	V.25 bis option for synchronous operation Prompted if TKTP = MCU and TRAN = SYN.	basic-18

LD 16

Page 418 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
VRAT	(NO) YES	Answer an attendant extended call over VNS immediately on the incoming bearer trunk	vns-20
WAIT	(RGB)	Provide ringback for calls queueing for RAN trunk.	ranbrd- 23
	MUS	Provide music for calls queueing for RAN trunk. Prompted only for RAN route when RAN broadcast package is equipped.	ran- 23 mus- 23
WATR	0-511	Wide Area Telephone Service or WATS Reference route number Determines how incoming WATS call types are handled for the associated Integrated Service Access route or ISA. Precede with X to delete. Prompted when TKTP = ISA, IFC = D250 or SL-1 and NSF = YES.	pra-14
WDGT	(L) F	First or last 4 DNIS digits to be sent on APL and HSL link. WDGT has no effect on AML links. All DNIS digits will be sent for AML. Prompted if NDGT is greater than 4. Also used for CDR when the New Format CDR (FCDR) package 234 is disabled.	dnis-20
XTDT	0-7	Extended Tone Detector Table number If a table other than 0 is entered, it must have already been configured in LD 97. Must be the same value as defined in LD 13. Prompted with Meridian 1 Superloop Administration (XCT1) package 205.	xct1-16

LD 17: Configuration Record 1

System configuration defines system hardware and software parameters. Overlay program 17 is used to modify the following:

- password options
- interface and transmission mode
- common equipment
- overlay automatic maintenance routines
- value added server configuration
- transmission parameters of Meridian Modular / Aries Telephone
- alarm filter

When the Overlay is loaded the available system memory and disk records are output in a header as follows:

```
CFN000
MEM AVAIL: (U/P): xxxxxx USED: xxxxx TOT: xxxxxxxx
DISK RECS AVAIL: xxx
DCH AVAIL: XX USED: XX TOT: 64
AML AVAIL: XX USED: XX TOT: 16
```

Notes on ISDN Configuration

ISDN configuration may be changed by adding the primary D-channel followed by the optional backup D-channel. Be sure to observe the following:

- Primary and back-up D-channels must be on the same card type (DCHI or MSDL)
- Primary D-channel parameters are automatically copied to the back-up D-channel.
- Disable both ends of a D-channel before making any changes to the D-channel.
- Changes to the D-channel pair should be made to the primary D-channel first (except for BCHL and RCVF).
- The backup D-channel must be removed prior to removing the primary D-channel.
- When a backup D-channel is configured for a primary D-channel, the USR of the primary can be changed from SHA to ISLD or PRI, but not from ISLD to PRI or SHA.
- The ADAN DCH MOVE command allows the primary D-channels to move to a new logical number (NDCH), card type (CTYP), device number (DNUM), and port designation (PORT) when adding MSDL cards. You do not need to remove any D-channels or B-channels when using this command with MSDL cards.

Fiber Network Fabric

The Fiber Network Fabric extends and enhances the 5-group network architecture to 8 non-blocking (inter-group) Network groups, with a resulting expansion in network capacity to 8k timeslots available for Intergroup traffic. This is achieved by using OC-12 SONET rings, and adding additional network and PE shelves, packs and cables and software changes to allow using the expanded network capacity. This expansion increases the number of available loops from 160 to 256. This applies to the Option 81C only.

D-Channel Expansion

The D-Channel Expansion feature increases the total number of possible D-channels in a multiple group Meridian 1 system. The number of physical I/O addresses permitted for D-channel application to 16 for each network group. For each MSDL physical I/O address, up to four ports are available for D-channel use. With the D-Channel Expansion feature, the X11 software supports up to 255 D-channels.

For more information on the D-Channel Expansion feature, please refer to the ISDN PRI Description and Administration (553-2901-100) NTP.

LD 17

Prompts and responses

Configuration Record 1

Prompt	Response	Comment
REQ	CHG	Request
TYPE	CFN	Configuration Record
ADAN	aaa bbb x	Action Device And Number (aaa = NEW, CHG, MOV or OUT ; bbb = I/O device type ; x = port number) (see page 424)
PWD	(NO) YES	Change Password options (see page 434)
PARM	(NO) YES	Parameters for Interface and transmission mode (see page 435)
CEQU	(NO) YES	Change to Common Equipment (see page 429)
OVLY	(NO) YES	Overlay (see page 435)
VAS	(NO) YES	Value added server configuration (see page 435)
ATRN	(NO) YES	Change Transmission Parameters of MeridianModular / Aries Telephone (see page 428)
ALARM	(NO) YES	Change Alarm Filter (see page 437)

Gate Opener: ADAN (Action Device and Number)

Prompt	Response	Comment
REQ	CHG	Request
TYPE	ADAN	Action Device And Number
- ADAN	aaa bbb x	Action Device And Number (aaa = NEW, CHG, MOV or OUT; bbb = I/O device type; x = port number)
TTY_TYPE	a...a	TTY logical type for Option 11C (a...a = (SDI), LSL, or PTY)
CAB	x	Cabinet number for Option 11C (x = (0), 1, 2,3 or 4)
- NUMD	1-(2)	Number of floppy disk drives
- FTYP	aa	Floppy Type (aa = (3), 3S, or 5)
- SIZE	(0)-65534	Size of History File buffer in characters
- PDCH	0-63	Primary D-channel associated with a backup D-channel
- TTY	0-15	Pre-defined MSDL-SDI terminal number
- CTYP	a...a	Card Type (CTYP responses can be found on page 450)
- GRP	x	Network group number
- CDNO	0-50	Card number (Option 11C)
- DNUM	0-15	Device number for I/O ports
- ADMIN_PORT	0	Administration Terminal Port number
- LANGUAGE	ENGLISH	English Language supported on STA
- ADDITIONAL_PORT	aa	Additional Port for the Single Terminal Access (aa = P1, P2, or P3)
- PORT	0-15	Port number (range varies according to system option and card/port type)
- DES	d...d	Designator
- BPS	xxxxx	Bits Per Second
- PARY	aaaa	Parity type (aaaa = (NONE) ODD, or EVEN)
- STOP	(1)-1x5-2	Number of Stop bits (To configure value of 1.5, enter 1x5)
- BITL	x	Data Bit Length (aaa = (5), 6, 7, or 8)
- FLOW	(NO) YES	Flow Control
- FLOW_TYPE	a...a	Flow control type for Option 11C (a...a = NONE, XON, MAIL, or HWR)
- -BCST	(NO) YES	Broadcast ports affected by Flow Control
- PARM	aaaa bbb	Parameters for Interface and transmission mode (aaaa = R232 or R422 ; bbb = DCE or DTE)

- FUNC	aaa	MSDL card function (aaa = ABC, FCL, MOD, LME, or SCN)
- USER	a...a	Output message types (USER responses begin on page 497)
- XSM	(NO) YES	Extended System Monitor
- TTYLOG	0-65534	Log buffer size
BANR	(YES) NO	Optional Security Banner option
- CUST	xx	Customer number associated with this function
- SSUP	(NO) YES	Senior Supervisor
- - APRT	(NO) YES	ACD Printer
- STOP	(1)-1x5-2	Number of Stop bits (to configure value of 1.5, enter 1x5)
- DPNS	(NO) YES	Digital Private Network Signaling
- MWIF	aaaa	Message Waiting Interface (aaaa = (STD) or ISDM)
- USR	aaaa	User (aaaa = ISLD, PRI, SHA, SHA, or VNS)
- IFC	a...a	Interface type for D-channel (IFC responses can be found on page 463)
- - PINX_CUST	0-99	This customer number will be used for the DN address translation associated with call independent connection messages received on this D-channel.
- - ISDN_MCNT	60-(300)-350	Layer 3 call control message count per 5 second time interval.
- -CNTY	aaaa	Country (CNTY responses can be found on page 448)
CLID	OPTx	Calling Line Identification (x= 0, 1, 2, 3, 4, or 5)
PROG	a..a	Progress signal (a..a = NCHG, MALE, or MCON)
CO_TYPE	aaa	Central Office switch type (aaa = (STD) or ATT)
- RCVP	(NO) YES	Recovery to Primary
- - ISLM	1-382	Integrated Services Signaling Link Maximum
- - VNSM	0-300	Virtual Network Services Maximum
- - VNCS	(0)-xx	Virtual Network Services Customer number associated with the D-channel
- - VNPS	0-32700	Virtual Network Services Private Network Identifier
- - VCNA	(NO) YES	Virtual Network Services Network Call Party Name Display available over this D-channel
- - VCRD	(NO) YES	Virtual Network Services Network Call Redirection available over this D-channel
- - VTRO	(NO) YES	Trunk Route Optimization before answer available over this D-channel for VNS
- - VSIG	(NO) YES	Virtual Network Services Network Signalling option
- - DCHL	0-255	D-Channel PRI loop number
- BCHL	0-254	PRI loop number for Backup D-channel

- PRI	loop x	Primary Rate Interface
- PRI2	0-255 2-15	Secondary PRI2 loops for nB + D, plus sequence
- OTBF	1-(32)-127	Output request Buffers
- DRAT	aaa	D-channel transmission Rate (aaa = (56K), 64KC, or 64KI)
- BPS	xxxxx	Bits Per Second
- PARM	aaaa bbb	Parameters for Interface and transmission mode (aaaa = R232 or R422 ; bbb = DCE or DTE)
- CLOK	aaa	Clock (aaa = EXT or INT)
- SIDE	aaa	Meridian 1 node type (aaa = (USR) or NET)
- SEMT	(1)-5	Number of Status Enquiry Messages sent within 128 ms from the network side
- CNEG	x	Channel Negotiation option (x = (1) or 2)
- RLS	xx	Release ID of the switch at the far end of the D-channel
- QCHID	(YES) NO	Map channel number to timeslots on a PRI2 loop
- RCAP	aaa	Remote Capabilities (RCAP options begin on page 484)
- - MQC_FEAT	aaaa	MCDN QSIG Feature type
- - PR_RTN	(NO) YES	Retain option supported by the far end PINX
- - PR_TRIGS	aaa xx	Path Replacement Triggers
- OVL R	(NO) YES	Overlap Receiving
- - DIDD	(0)-15	DID Delete
- OVLS	(NO) YES	Overlap Sending
- - OVLT	(0)-8	Overlap Timer, in seconds
- MBGA	(NO) YES	Multilocation Business Group Allowed
- NASA	(NO) YES	Network Attendant Service Allowed
- TIMR	(NO) YES	Change protocol timer value
- - T310	10-(30)-60	Timer used to determine how long SL-1 can wait for the response message when the QSIG outgoing call is in the U3 (outgoing call processing) state
	110-(120)	Timer range for PRI, PRI2, and BRI trunks
- - INC_T306	0-(2)-240	Variable timer for received disconnect message on incoming calls, allowing in-band tone to be heard when sent by the network
- - OUT_T306	0-(30)-240	Variable timer for received disconnect message on outgoing calls, allowing in-band tone to be heard when sent by the network (entered in 2 second increments)
- LAPD	(NO) YES	Link Access Protocol for D-channel Change LAPD parameters
- - T23	1-(20)-31	Interface guard Timer or DCHI only

-- T200	2-(3)-40	Retransmission Timer
-- N200	1-(3)-8	Maximum Number of retransmissions
-- N201	4-(260)	Maximum Number of octets in information element
-- T203	2-(10)-40	Maximum Time allowed without frames being exchanged
-- K	1-(7)-32	Maximum number of outstanding unacknowledged frames
-- N2X4	0-(10)-20	Maximum Number of status inquires when remote is busy only applies to 1TR6
- IADR	0-(3)-255	Individual Address for the data link level HDLC protocol
- RADR	0-(1)-255	Remote Address for the data link level HDLC protocol
- LCTL	(NO) YES	Change Link Control system parameters
-- T1	2-(4)-20	Retransmission Timer. Range in units of 0.5 seconds, (4) = two seconds
-- T2	0-(10)-255	Maximum Time allowed without a frame being exchanged
-- T3	2-(5)-255	Timer for initial link setup in units of 0.5 seconds for ESDI only
-- N1	xxx	Maximum Number of octets per HDLC information frame (xxx = 32, 64, 128, or (512))
-- N2	4-(8)-16	Maximum Number of retransmissions in steps of 1
-- K	1-(7)	Maximum number of outstanding frames
- LTHR	(NO) YES	Link Threshold. Change link performance thresholds for ESDI only
-- RXMT	1-(5)-20	Retransmission Threshold
-- CRC	1-(10)-20	CRC threshold
-- ORUR	1-(5)-255	Overrun/Underruns out-of-service threshold
-- ABOR	1-(5)-255	Number of Aborts before an out-of-service
- ENL	(YES) NO	Enl / Dis error messages (Option 11C)
- DPNS	(NO) YES	Digital Private Network Signaling
- DCHI	0-15	D-channel Interface port number
- CDNO	1-9	Card Number where DCHI resides (Option 11C)
- PORT	0-15	Port number (range varies according to system option and card/port type)

Gate Opener: ALARM (Alarm filters)

Prompt	Response	Comment
REQ	CHG	Request
TYPE	ALARM	Change Alarm Filters
- FMT_OUTPUT	(OFF) ON	Enable/(disable) formatting for the alarm/exception output
- AF_STATUS	(OFF) ON	Alarm and Exception filtering
- A_FILTER	aaa	Alarm Filter entry (aaa = NEW, CHG, or OUT)
- TRIGGER	a...a	Trigger string for alarm tables
- SEVERITY	aaaa	Alarm Severity (aaaa = (NONE), CRITICAL, MAJOR, or MINOR)
- SUPPRESS	0-(5)-127	Alarm occurrence threshold (prior to suppressing)
- ESCALATE	0-(2)-127	Alarm occurrence threshold (prior to escalating)
- A_FILTER	<cr>	Enter carriage return at this prompt to see E_FILTER prompt)
- E_FILTER	aaa	Exception Filter entry (aaa = NEW, CHG, or OUT)
- TRIGGER	a...a	Trigger string for exception tables
- ADAN	aaa bbb x	Action Device And Number (aaa = NEW, CHG, MOV or OUT ; bbb = I/O device type ; x = port number)
- USER	FIL	Alarm filtering message output

Gate Opener: ATRN (Aries Transmission)

Prompt	Response	Comment
REQ	CHG	Request
TYPE	ATRN	Aries Transmission
- CODE	(0)-2	CODEC Coding Law
- SOLR	0-(1)-4	Sidetone Objective Loudness Rating
- ROLR	(0)-63	Receive Objective Loudness Rating
- AOLR	(0)-12 32-50	2216 ACD set Objective Loudness Rating
- TOLR	(0)-63	Transmit Objective Loudness Rating
- AGCD	(NO) YES	Automatic Gain Control Disabled
- VOLR	(NO) YES	Volume Reset
- HRLR	(0)-8, 32-40	Handsfree Receive Objective Loudness Rating
- HTLR	(0)-11, 32-54	Handsfree Transmit Objective Loudness Rating

Gate Opener: CEQU (Common Equipment)

Prompt	Response	Comment
REQ	CHG	Request
TYPE	CEQU	Change to Common Equipment parameters
- MPED	aa	Maximum Peripheral Equipment Density (aa = (SD), DD, 4D, or 8D)
- TERM	a...a	Single Density Terminal equipment loop or loops
- REMO	a...a	Single Density Remote Peripheral Equipment loop or loops
- TERD	a...a	Double Density Terminal equipment loop or loops
- REMD	a...a	Double Density Remote Peripheral Equipment loop or loops
- TERQ	a...a	Quadruple Density Terminal equipment loop or loops
- REMQ	a...a	Quadruple density Remote Peripheral Equipment loop or loops
- DDCS	0-159	Loop number for DPNSS/DASS hardware
- DTCS	1-159	Digital Trunk Channel Switches
- XCT	a...a	Extended Conference/TDS/MFS
- TDS	a...a	Tone and Digit Switch
- CONF	a...a	Conference loop
- MFSD	0, 2, 4...255	Multifrequency Sender loop
- DTDT	aaa	Dial Tone Detector Test (aaa = NO, TDS, or EXT)
- - CODE	x xx xx xx	Code (CODE response is defined on page 448)
- - TN	l s c u	Valid Terminal Number that when accessed returns a test tone
- DLOP	lll dd ff ...	Digital Trunk Interface Loop or Loops (lll = loop number, dd = number of voice or data calls, ff = frame format)
- MODE	aaaa	Mode of operation (aaaa = LINK, PRI, or TRK)
- - TMDI	(YES) NO	TMDI Card (Mode set to PRI OR TRK)
- - LCMT	aaa	Line Coding Method (aaa = (B8S) or AMI)
- - YALM	aaa	Yellow Alarm Method (aaa = (FDL) or DG2)
- - TITE	(0) 2	T1 transmit Equalization
- - TRSH	0-15	Threshold
- - DTIC	0, 4, 8,...254	Starting network loop slot for PRI/DTI card
- PRI2	0-255	2.0 Mb/s Primary Rate Interface or PRI loop number
- APVL	0-159	Analog Private Virtual Loop for virtual TN or channel ID
- DTI2	0-255	2.0 Mb/s Digital Trunk Interface or DTI loop number
- JDMI	0-255	Japan Digital Multiplexer Interface loop number

- EXT0	x aaa bbb	Extenders for CPU 0 to Network (EXT0 ranges are defined on page 457)
-- CNI	s p g	Core to Network Interface card location To delete use: s p xg
- EXT1	x aaa bbb	Extenders for CPU 1 to Network (EXT1 ranges are defined on page 458)
-- CNI	s p g	Core to Network Interface card location To delete use: s p xg
- SYMN	x	Synchronization mode
- MCFN	x x x x x x	Number and size of SIMMs in Options 51C, 61C, 81C
- MEM	0-6	Memory modules
- SMEM	(NO) YES	Short Memory test
- PFTR	YES NO	Prioritize Fast Transfer feature enabled or disabled

Gate Opener: OVLY (Overlay)

Prompt	Response	Comment
REQ	CHG	Request
TYPE	OVLY	Change Overlay area options
- SID	xxxx	System ID number
- BKGD	xx xx	Background Overlay task
- PBXH	00-23	Hour to perform Message Waiting lamp maintenance
- TODR	0-23	Time of Daily Routines
- DROL	xx xx	Daily Routine Overlays
- MULTI_USER	(OFF) ON	Multi-User Log In
- TRLL	1-31 1-31	Test RPE Local Loop back
- CY45	(0)-31	Cycles LD 45 can be run whenever a fault is detected

Gate Opener: PARM (System Parameters)

The following values should be set at the factory. However, it is recommended that these values be reviewed during initial system installation.

Prompt	Response	Comment
REQ	CHG	Request
TYPE	PARM	Change system parameters
- LPIB	96-5000	Low-Priority Input Buffers (range depends on system type)
- RCAP	aaa	Remote Capabilities (RCAP options begin on page 484)
- HPIB	16-5000	High-Priority Input Buffers (range depends on system type)
- 500B	16-5000	Output buffers for single line and digital telephones, and trunks (range depends on system type)
- SL1B	16-2048	SL-1 Buffers
- RPEB	16-1000	Remote Peripheral Equipment Buffers, 2.0 Mb/s RPE
- DTIB	(35)-1000	Digital Trunk Input Buffers
- DTOB	(4)-100	Digital Trunk Output Buffers per Digital Trunk Signaling Link
- NCR	x...x	Number of Call Registers, range depends on system type
- MGCR	0-NCR	Maximum number of Call Registers used by AUX messaging
- CSQI	(20)-255	Maximum number of Call Registers for CSL input queues
- CSQO	(20)-255	Maximum number of Call Registers for CSL/AML output queues
- TUBO	(NO) YES	
- AXQI	(20)-255	Size of Auxiliary Input Queue
- AXQO	(20)-255	Size of Auxiliary Output Queue
- TRNS	aaaa	Selects which messages are going to be translated (aaaa = (NONE), HELP, or BOTH)
- NCPU	x	Number of CPUs (x = 1 or (2))
- CFWS	(NO) YES	Call Forward Saved on SYSLOAD
- PCML	aa	Pulse Code Modulation Companding Law (aa = (MU) or A)
- ALRM	(NO) YES	Minor Alarm displayed on attendant consoles
- ERRM	aaa	Error Messages (aaa = ERR, BUG, or AUD)

- DTRB	xxx	Digitone Burst time in ms (xxx = 50, 60, 70, or (100))
- ABCD	(NO) YES	16-tone DTMF operation enabled
- TMRK	xxx	Length of cadence increments in ms (xxx = 96 or (128))
- FCDR	aaa	Format for Call Detail Recording (aaa = (OLD) or NEW)
- PCDR	(NO) YES	Priority to CDR
- TPO	(NO) YES	Traffic Period Option
- TSO	(NO) YES	Trunk Period Option
- CLID	(NO) YES	Calling Line ID in the CDR
- DUR5	(NO) YES	Duration 0.5
- MLDN	(NO) YES	Multiple Loop DN
- NDRG	(NO) YES	New Distinctive Ringing
- MARP	(YES) NO	Multiple Appearance Redirection Prime feature allowed
- FRPT	aaaa	(Deny) or allow Access to incoming calls by FRE station (aaaa = (NEFR) or OLFR)
- DCUS	0-5	Maximum number of ACD-ADS customers
- MSCL	0-8190	Maximum Speed Call Lists
- PMSI	(NO) YES	Modify Property Management Systems parameters
- - MANU	aaaa	PMS interface (aaaa = (PMS1), PMS2, or PMS3)
- - PMCR	a	Number of Call Registers used for PMSI (a = (x), y or 5)
- - PORT	0-15	Port number (range varies according to system option and card/port type)
- - XTMR	(0)-6	PMS acknowledgment time
- - XNUM	(1)-4	Number of retransmissions per message for PMSI
- - PMIN	(NO) YES	Minor alarm when the PMSI link is not responding
- - PTMR	(0)-31	Polling timer for PMSI
- SYNМ	(0)-5	Synchronization Mode
- - MSDT	0-159	Main Synchronization DTSL
- - SSDT	0-159	Standby Synchronization DTSL
- NDIS	(20)-255	Number of Display messages for Background Terminal
- OCAC	(NO) YES	Support the Original Carrier Access Code format
- MTRO	aaa	Message Registration or Periodic Pulse Metering (aaa = (MR) or PPM)

- SBA_ADM_INS	0-(2)-63	Maximum Administrator and/or Installer Log Ins allowed at one time
- SBA_USER	0-(100)-500	Maximum User Log Ins allowed at one time
- BCAP	a...a	Bearer Capability (a...a = SPEE or 31KH)
- NORTEL_BRAND	YES NO	"NORTEL" Electronic Brandling is displayed.
IDLE_SET_DISPLAY	aaaa	Current customized text string "aaaa" is shown. This is for information only
- MODIFY	(NO) YES	Change Electronic Brandling Terminal Text Broadcast Configuration
- PWD2	x...x	Password 2
- SUPPORTED_TEXT_ONLY	(YES) NO	Change customized text string by text string input
- - IDLE_DISP_STRING	aaaa	Enter customized text string by text string input
IDLE_SET_DISPLAY	aaaa	This is information only. Displayed for confirmation with the following OK prompt
- OK	(YES) NO	Confirm customized text string
- -IDLE_DISP_CHAR	xx c/hh	Change customized text string character by character, where: xx = (01 to 24) c = one supported character hh = 2 hexadecimal digits representing a supported character
IDLE_SET_DISPLAY	aaaa	IDLE_DISP_CHAR customized text string "aaaa" is shown. This is information only. Displayed for confirmation with the following OK prompt
- OK	(YES) NO	Confirm customized text string

Gate Opener: PWD (Password)

The PWD2 prompt appears immediately following the TYPE = PWD entry, unless the LAPW password Multi User Login are enabled. To view LAPW prompts, LAPW package 149 must be equipped. LAPW users can change their passwords by entering the current password at prompt LPWD and entering the new password at the NLPW prompt.

Prompt	Response	Comment
REQ	CHG	Request
TYPE	PWD	Change Password options
- PWD2	x...x	Password 2
- LNAME_OPTION	(NO) YES	Require Log In Name for password access
- NPW1	x...x	New Password 1 (PWD1 Log In password)
- - LOGIN_NAME	aaa	Log In Name for password access
- NPW2	x...x	New Password 2 (PWD2)
- - LOGIN_NAME	aaa	Log In Name for password access
- LOUT	1-(20)	Logout
- LAPW	0-99	Limited Access to Overlays Password number
- PWTP	aaaa	Password Access Type (aaaa = (OVLY) or SBA)
- - PWnn	x...x	Password (you may enter new password for SBA)
- LOGIN_NAME	aaa	Log In Name for password access
- LEVL	aaaa	Access Level for Set Based Administration password (aaaa = (INST) or ADMN)
- - OVLA	xx xx ... xx	Overlays Allowed
- - CUST	aaa	Customer to be accessible by way of PWnn
- - TEN	aaa	Tenant to be accessible by way of PWnn
- - HOST	(NO) YES	Enable HOST mode Log In for password PWnn
- - MAT	(NO) YES	Enable MAT Log In for password PWnn
- - - MAT_READ_ONLY	(NO) YES	Restrict MAT write access for password PWnn
- - OPT	a...a	Options for password PWnn (OPT responses can be found on page 474)

- LPWD	x...x	Limited Access to Overlays log on password to be changed
- - NLPW	x...x	New Limited Access to Overlay Log On Password for the user
- FLTH	0-(3)-7	Failed Log In Threshold
- LOCK	0-(60)-270	Lockout time
- FLTA	(NO) YES	Failed Log In Threshold Alarm
- AUDT	(NO) YES	Audit Trail for password usage
- - SIZE	(50)-1500	Word Size of Audit Trail buffer
- LLID	(NO) YES	Last Log In Identification
- INIT	(YES) NO	Initialize to reset locked-out ports

Gate Opener: VAS (Value Added Server)

Prompt	Response	Comment
REQ	CHG	Request
TYPE	VAS	Value Added Server configuration
VAS	aaa	Value Added Server data block (aaa = NEW, CHG or OUT)
- VSID	0-15	VAS Identifier
- DLOP	ll dd ff ...	Digital Trunk Interface Loop or Loops (ll = loop number, dd = number of voice or data calls, ff = frame format)
- ELAN	x	Associate Value Added Server ID (VSID) x with Application Module Link over Ethernet (ELAN) x
- AML	0-15	Application Module Link
- - SECU	(NO) YES	Security for Meridian Link applications
- - INTL	1-12	Interval for checking Meridian Link for overload in five second increments
- - MCNT	5-100000	Threshold for number of Meridian Link messages per time interval
- - CONF	aaa	CSL Configuration (aaa = DIR or IND)
- APPL	aaa VMBA	Application (aaa = NEW, CHG, or OUT; VMBA = Voice Mailbox administration)
- -CUST	xx	Customer number

-- DATA_CORRECT	(OFF) ON	Enable Voice Mailbox Database correction
-- AUTO_AUDIT	(ON) OFF	Enable the Automatic Voice Mailbox database audit
-- SATN	I s c u	SADM/Data Line Card TN
-- IDLP	0-254	DTI loop number used for IND CSL loop
- DLOP	lll dd ff ...	Digital Trunk Interface Loop or Loops (lll= loop number, dd = number of voice or data calls, ff = frame format)
- CMS	0-15	ESDI port number used for the CSL
-- SECU	(NO) YES	Security for Meridian Link applications
-- INTL	1-12	Interval
-- MCNT	5-100000	Message Count Threshold
-- CONF	aaa	CSL Configuration (aaa = DIR or IND)
-- SATN	I s c u	SADM/Data Line Card TN
-- IDLP	0-254	IND DTI Loop

ROLR / TOLR/ AOLR Offsets and Values

Offset	ROLR/AOLR	TOLR	Offset	ROLR/AOLR	TOLR
0	+45.00	-45.00	32	+45.00	-45.00
1	+45.85	-44.50	33	+44.15	-45.50
2	+46.70	-44.50	34	+43.30	-46.00
3	+47.55	-44.00	35	+42.45	-46.00
4	+48.40	-43.50	36	+41.60	-46.50
5	+49.25	-43.00	37	+40.75	-47.00
6	+50.10	-43.00	38	+39.90	-47.50
7	+50.95	-42.50	39	+39.05	-47.50
8	+51.80	-42.00	40	+38.20	-48.00
9	+52.65	-41.50	41	+37.35	-48.50
10	+53.50	-41.50	42	+36.50	-49.00
11	+54.35	-41.00	43	+35.65	-49.00
12	+55.20	-40.50	44	+34.80	-49.50
13	N.A.	-40.00	45	+33.95	-50.00
14	N.A.	-40.00	46	+33.10	-50.50
15	N.A.	-39.50	47	+32.25	-50.50
16	N.A.	-39.50	48	+31.40	-51.00
17	N.A.	-38.50	49	+30.55	-51.50
18	N.A.	-38.50	50	+29.70	-52.00
19	N.A.	-38.00	51	N.A.	-52.00
20	N.A.	-38.00	52	N.A.	-52.50
21	N.A.	-37.00	53	N.A.	-53.00
22	N.A.	-37.00	54	N.A.	-53.50
23	N.A.	-36.50	55	N.A.	-54.00
24	N.A.	-36.00	56	N.A.	-54.00
25	N.A.	-35.50	57	N.A.	-54.50
26	N.A.	-35.50	58	N.A.	-55.00
27	N.A.	-35.00	59	N.A.	-55.00
28	N.A.	-34.50	60	N.A.	-55.50
29	N.A.	-34.00	61	N.A.	-56.00
30	N.A.	-34.00	62	N.A.	-56.50
31	N.A.	-33.50	63	N.A.	-56.50

Note: ROLR values are for reset volume.

HRLR / HTLR Offsets and Values

Offset	HRLR	HTLR	Offset	HRLR	HTLR
0	+42.00	-44.00	32	+42.00	-44.00
1	+42.85	-43.50	33	+41.15	-44.50
2	+43.70	-43.50	34	+40.30	-45.00
3	+44.55	-43.00	35	+39.45	-45.00
4	+45.40	-42.50	36	+38.60	-45.50
5	+46.25	-42.00	37	+37.75	-46.00
6	+47.10	-42.00	38	+36.90	-46.50
7	+47.95	-41.50	39	+36.05	-46.50
8	+48.80	-41.00	40	+35.20	-47.00
9	N.A.	-40.50	41	N.A.	-47.50
10	N.A.	-40.50	42	N.A.	-48.00
11	N.A.	-40.00	43	N.A.	-48.00
12	N.A.	N.A.	44	N.A.	-48.50
13	N.A.	N.A.	45	N.A.	-49.00
14	N.A.	N.A.	46	N.A.	-49.50
15	N.A.	N.A.	47	N.A.	-49.50
16	N.A.	N.A.	48	N.A.	-50.00
17	N.A.	N.A.	49	N.A.	-50.50
18	N.A.	N.A.	50	N.A.	-51.00
19	N.A.	N.A.	51	N.A.	-51.00
20	N.A.	N.A.	52	N.A.	-51.50
21	N.A.	N.A.	53	N.A.	-52.00
22	N.A.	N.A.	54	N.A.	-52.50
23	N.A.	N.A.	55	N.A.	N.A.
24	N.A.	N.A.	56	N.A.	N.A.
25	N.A.	N.A.	57	N.A.	N.A.
26	N.A.	N.A.	58	N.A.	N.A.
27	N.A.	N.A.	59	N.A.	N.A.
28	N.A.	N.A.	60	N.A.	N.A.
29	N.A.	N.A.	61	N.A.	N.A.
30	N.A.	N.A.	62	N.A.	N.A.
31	N.A.	N.A.	63	N.A.	N.A.

Note: All values are OLR ratings measured without inserted loss/gain for trunk card interfaces and computed per IEEE methods. Receive ratings are at a maximum volume. Transmit ratings are measured in an anechoic environment with less than 25 dBA room noise.

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
500B	16-2048	Output buffers for single line and digital telephones, and trunks Buffers for single line telephones, trunks and Digital telephones Option 11C has a value of 500 allocated by the system and cannot be changed. These can be set higher but have no affect on the system operation other than consuming memory. Refer to the <i>Memory Calculations Appendix</i> in the <i>Planning and engineering NTPs</i> .	basic-19
ABCD	(NO) YES <cr>	16-tone DTMF operation enabled Original value is left unchanged	abcd-14
ABOR	1-(5)-255	Number of aborts before an out-of-service. Enter in units of 1, the number of aborts in 15 minutes before an out-of-service is enforced.	csl-7
ADAN	NEW aaa x CHG aaa x MOV aaa x OUT aaa x	Action Device And Number Add I/O device. Where: aaa = type, x = port Change I/O device. Where: aaa = type, x = port Move I/O device. Where: aaa = type, x = port Remove I/O device. Where: aaa = type, x = port Where, aaa and x can be any of the following: <ul style="list-style-type: none"> • AML 0-15 = Application Module Link • BDCH 0-63 = Backup primary D-channel • DCH 0-63 = primary D-channel • FDK 0 = Floppy Disk unit, only ADAN CHG HDK allowed (not applicable for Option 11C or Option 81C) • ELAN 16-31 = Application Module Link over Ethernet 	basic-19

LD 17

Prompt	Response	Comment	Pack/Rel
		<ul style="list-style-type: none">• HDK 0 = Hard Disk unit, only ADAN CHG HDK allowed (not applicable for Options 11C or 81C)• HST = History file• PRT 0-15 = Printer port number• STA 0-15 = Single Terminal Access port number• TRF = Traffic Log file• TTY 0-15 = Teletype port number <p>Note: You cannot configure more than 16 TTY and HST files. If a HST file is one of 16 TTY files configured and a new TTY is defined, the HST file will be deleted since the TTY has higher priority than HST.</p> <p>The MOV command is not supported for AML, BDCH, HST, PRT, or TTY. MOV is supported for MSDL D-channels only. When using the MOV command, the D-channel must be disabled, as well as all associated PRI and DCH loops. This command is not allowed for a D-channel with a backup D-channel configured, and a backup D-channel cannot be moved to another physical address. MOV supports D-channels in PRI user mode only. It cannot be used if in shared or ISL mode. If the craftsperson attempts to move a configured D channel from the MSDL card to the DCHI card when the D channel interface is based on UIPE, the move will not be allowed.</p> <p>The D channel must be disabled before it can be outed, changed or moved. OUT is not allowed on device 0.</p> <p>Changes to I/O devices are saved before ADAN is reprompted. To indicate the data has been saved, one of the following is output:</p> <ul style="list-style-type: none">• ADAN DATA SAVED• ADAN DATA CHGED• ADAN DATA REMOVED• ADAN DATA MOVED <p>Entering 4 asterisks (****) after the ADAN prompt saves the changes and exits the overlay.</p>	

Prompt	Response	Comment	Pack/Rel
		Where aaa is the primary D-channel and <ul style="list-style-type: none"> • x = 0-254 for multi-group systems • x = 0-63 for single-group systems • x = 0-79 for Option 11C 	basic-25
ADDITIONAL_PORT	P1 P2 P3	Additional port number for STA terminal This is the port for the Single Terminal Access regular terminal, or the STA system monitor connection. This prompt repeats until <CR> is entered. There can be up to 3 ports for each STA application. Precede with X to delete the port.	sta-19
ADMIN_PORT	0	This is the port used to connect the Single Terminal Access Administration Port. This must be 0 (zero). Prompted if ADAN = STA	sta-19
A_FILTER	NEW CHG OUT	Add New Alarm Filter entry Change an Alarm Filter entry Remove an Alarm Filter entry This is reprompted for subsequent Alarm Filters. Up to 50 Alarm Filters may be configured. Entering <CR> moves on to the E_FILTER prompt. Precede with X to remove.	alarm-19
AF_STATUS	(OFF) ON	This prompt enables (disables) the alarm and exception filtering. <CR> retains the current filtering status	alarm-19
AGCD	(NO) YES	Automatic Gain Control Disabled	
ALARM	(NO) YES	Change Alarm filters Must have Alarm Filtering (ALRM_FILTER) package 243.	alarm-19
ALRM	(NO) YES	Minor Alarm displayed on attendant consoles. (NO) disables the minor alarm on consoles.	alarm-12
AML	0-15	Application Module Link	msdl-18

LD 17

Prompt	Response	Comment	Pack/Rel
AOLR	(0)-12 32-50	2216 ACD set Objective Loudness Rating The default value for the AOLR prompt will be the same default value as for ROLR prompt. See “ROLR / TOLR/ AOLR Offsets and Values” on page 437 to determine the decibel level which corresponds to your response to AOLR.	basic-22
APPL	NEW VMBA CHG VMBA OUT VMBA	Application Add Voice Mailbox Change Voice Mailbox Remove Voice Mailbox This prompt allows the user to add, change, or remove an application associated with the VAS ID. The APPL prompt appears when VAS = NEW or CHG.	vmba-19
	ISAP	User application type: Meridian Link ISDN/AP	iap3p-13
APRT	(NO) YES	ACD printer APRT cannot be YES if prompt SSUP = YES.	acdc-1
APVL	0-159 1-9 11-19 21-29 31-39 41-49	Analog Private Virtual Loop for virtual TN or channel ID Option 11C Precede with X to remove.	dpnss-16 lse-24
ATRN	(NO) YES	Aries Transmission Change Transmission parameters for Meridian Modular or Aries telephones These transmission parameters are downloaded to Meridian Modular telephones: <ul style="list-style-type: none">• after sysload (except during parallel reload)• when enabling the loop, shelf or card• when the telephone is plugged in. These values determine the loudness of the receiver and transmitter. Note: Before changing these values, refer to the <i>Summary of Transmission Parameters NTP</i> and the <i>International Loss and Level Plan</i> planning and engineering NTP.	arie-14

Prompt	Response	Comment	Pack/Rel
AUDT	(NO) YES	Audit Trail for password usage Prompted for PWD1 and PWD2.	lapw-16
AUTO_AUDIT	(ON) OFF	Automatic Voice Mailbox database correction When enabled, the Voice Mailbox data is audited every 5 days to ensure consistency between the Meridian Mail and Meridian 1 databases. The audit takes place during the daily routines every 5 days.	vmba-19
AXQI	(20)-255	Size of Auxiliary Input Queue Maximum lesser of 25% of the maximum number of call registers defined for the system, or 255.	basic-1
AXQO	(20)-255	Size of Auxiliary Output Queue Maximum lesser of 25% of the maximum number of call registers defined for the system, or 255.	basic-1
BANR	(YES) NO	Optional Security Banner option. BANR is prompted when USER = SCH and/or MTC. Enable security banner printing option Disable security banner printing option If BANR = YES, the following Security Banner will be printed at the time a login is attempted, whether or not the login is successful: <i>“Warning: The programs and data stored on this system are licensed to or are the property of NT/BNR and are lawfully available only to authorized users for approved purposes. Unauthorized access to any program or data on this system is not permitted. This system may be monitored at any time for operational reasons. Therefore, if you are not an authorized user, DO NOT ATTEMPT TO LOG IN.”</i> The programmer will not modify an existing I/O block by hitting carriage return (<cr>) in response to BANR.	basic-22
BATT	(NO) YES	Battery backup for memory installed on Option 21E and STE only	basic-18
BCAP	(SPEE) 31KH	Bearer Capability Speech 3.1 KHZ	euroisdn-22

LD 17

Prompt	Response	Comment	Pack/Rel
BCHI	1-15	Backup D-channel port number. Precede with "X" to remove.	pri-12
BCHL	0-159	PRI loop number for Backup D-channel. Prompted when ADAN = BDCH.	pri-12
	1-9 11-19 21-29 31-39 41-49	Option 11C PRI loop number	lse-24
	0-255	PRI loop number for Backup D-channel on Option 81C with Fiber Network Fabric Precede with X to remove.	fnf-25
BCST	(NO) YES	Only this broadcast port is affected by flow control All broadcast ports of the same user type are affected by flow control. Use this prompt with caution. For example, if BSCT = YES, and a maintenance port receives an X-off command, system output to all maintenance ports will eventually be blocked. This prompt appears only if FLOW = YES. BSCT is not prompted for TTY_TYPE = LSL.	basic-18
BITL	(5), 6, 7, 8	Bit length. Prompted for asynchronous ESDI ports. For Option 11C, BITL is not prompted for CARD 0 PORT 0 or when TTY_TYPE = PTY.	cls-7
BKGD	30, 33, 34, 35, 36, 37, 38, 40, 41, 43, 44, 45, 46, 53	Background overlay task Enter the diagnostic program number 30, 33 and so on, to run sequentially in background when the overlay area is idle. The data dump routine LD 43 should be reserved for the DROL to preserve data integrity. Programs 33, 45, 46 and 53 are not applicable to Option 11C.	basic-1

Prompt	Response	Comment	Pack/Rel
BPS		Asynchronous baud rates (bits per second):	cls-7
	1200	1200 Bits Per Second	
	2400	2400 Bits Per Second	
	4800	4800 Bits Per Second. Default for AML ports.	
	9600	9600 Bits Per Second. Default for Option 81C CP card.	
	19200	19200 Bits Per Second	
	48000	48000 Bits Per Second	
	56000	56000 Bits Per Second	
	64000	64000 Bits Per Second. Default for ISL D-channels.	
		If the baud rate is set differently (e.g., 4800) the system will return to the default TEMPORARILY if it is manually initialized. The entered baud rate will return when the initialization is complete.	
		For Option 11C, BPS is not prompted for CARD 0 PORT 0 or when TTY_TYPE = PTY.	
CAB		Cabinet number for Option 11C	basic-22
	(0)	Main cabinet	
	1	Expansion cabinet 1	
	2	Expansion cabinet 2	
	3	Expansion cabinet 3	lse-24
	4	Expansion cabinet 4	lse-24
		Note the following:	
		1. LSL is only supported on the main cabinet. When TTY_TYPE = LSL, CAB is not prompted. Instead, CAB 0 is printed automatically.	
		2. Pseudo TTY does not belong to any cabinet. Hence, for TTY_TYPE = PTY, CAB is not prompted.	
CDNO	0-15	Serial Data Interface (SDI) Card number Number the SDI cards logically with the system. Keep a paper record of the number and physical location of each SDI card. Enter 0 if you are not using CDNO to keep track of SDI ports and cards.	xpe-15
	1-10	DCHI Option 11C Card number	
	1-9 11-19 21-29 31-39 41-49	MSDL application Option 11C Card number	lse-24

LD 17

Prompt	Response	Comment	Pack/Rel
	0-10	SDI, LSL or PTY Option 11C Card number Expansion cabinets only support one TTY port which is on the Fibre Receiver Pack. When CAB = 1 or 2, CDNO is not prompted. Pseudo TTY does not belong to any card. When TTY_TYPE = PTY, CDNO is not prompted.	basic-20
	0-50	SDI, LSL or PTY Option 11C Card number	lse-24
	1-50	AML application Option 11C Card number	lse-24
CEQU	(NO) YES	Change to Common Equipment parameters	basic-1
CFWS	(NO) YES	Call Forward Saved on SYSLOAD and reactivate on completion. To save information, set CFWS = YES.	basic-20
CLID	(NO) YES	Calling Line ID in the CDR If CLID = NO, "XXXXXXXXXXXX" will be printed in CLID field of CDR record. Prompted when CDR = YES and the Integrated Services Digital Network (ISDN) package 145 is equipped.	pri-12
	OPT0	Prefix = 0 for North American dialing plan. OPT0 is the default for ESIG and ISIG interfaces.	euroisdn-22
	OPT1	Prefix = 1 for international PFXs in CLID. Any numbering type is supported. OPT1 is the default for all EuroISDN interfaces.	
	OPT2	Prefix = 2, for international PFXs in CLID. CCITT numbering types supported are: UKWN, INTL, NPA, and NXX. OP2 is the default for CO/DID routes for the Telecom New Zealand interface.	
	OPT3	Prefix = 3 for international PFXs in CLID. Only the NXX number type is supported. OPT3 is the default for TIE routes for the Telecom New Zealand interface.	
	OPT4	For international COs, if the call originates from a CO trunk type, add nothing. Otherwise, add PFX1 and PFX2. OPT4 is the default for all Asia Pacific interfaces.	

Prompt	Response	Comment	Pack/Rel
	OPT5	This is the same as OPT4, except it supports a maximum of 10 digits in the CLID. OPT5 is the default for the Austrian interface.	
CLOK		Source of primary clock is either internal or external. Prompted for ISL D-channels and ESDI synchronous ports. Other D-channels are automatically set to EXT.	pri-12
	EXT	External Clocking. When USR = ISLD, CLOK should be set to External. Default for ISL D-channels is EXT.	
	INT	Internal Clocking. INT is used only during D-channel loopback tests, where one side is set to INT, the other is set to EXT. Default for ESDI AML ports is INT.	
CMS	0-15	ESDI port number used for the CSL Synchronous ESDI port number used for the CSL. This must be the same value as the port number defined at the ADAN prompt. Precede with X to remove. Prompted when SYNC and USER = CMS.	cls-7
CNEG	(1) 2	Channel Negotiation option Channel is indicated and no alternative acceptable, exclusive. Default value for all EuroISDN interfaces except FRA interface. Channel is indicated and any alternative acceptable, preferred. Default value for all EuroISDN interfaces except FRA interface. CNEG is prompted when IFC = APAC, AXEA, AXES, D70, NUME, SS12, ESIG, ISEG or TCNZ.	ipra-15
CNI	s p g	Core to Network Interface card location. To OUT a CNI card, it must be hardware disabled and located in the inactive CPU. For Option 81C with Fiber Network Fabric: s = slot 12-14; p = port 0-1; g = group 0-4 Both ports (0 and 1) can be used to configure network switching groups for card slot 12. No CNI cables are required for port 0 of card slot 12.	basic-21

Prompt	Response	Comment	Pack/Rel
	1	A Law, inverted for Sweden only	
	2	A Law, even-bit interleaved	
CONF	DIR	Direct link CSL Configuration	basic-1
	IND	Indirect link CSL Configuration	
	0-158	Conference loop Use even-numbered loops for Conference. You may configure more than 16 Conference loops; however, enabling more than 16 Conference loops may cause the system to lock-up. Precede with X to remove.	
	0-255	Conference loop, Option 81C with Fiber Network Fabric	fnf-25
	29-31	Option 11C, 31 is for Expansion Module	
	D0-D158	Dealer Conference loop	ohol-20
	S0-S158	Spare dealer Conference loop Should be in the same group as the units planned to use this loop.	ohol-20
	29 30	Option 11C base conference capability	
	31	Option 11C Provided on the first single port daughterboard	
	62	Option 11C Provided on the second single port expansion daughterboard	
	31 94	Option 11C Line Size Expansion Provided on the first dual port fibre expansion daughterboard	lse-24
	62 95	Provided on the second dual port fibre expansion daughterboard	
CO_TYPE	(STD)	Central Office switch type. Prompted if IFC = NI2.	ni2-21
	ATT	100% compatible with Bellcore standard AT&T 5ESS	
CRC	1-(10)-20	CRC threshold. Enter in units of 5 per cent. CRC establishes the % of Cyclic Redundancy Code (CRC) errors detected in 15 minutes before an out-of-service threshold is enforced. CRC = (# of packets retransmitted) ÷ (total # packets sent).	cls-7

LD 17

Prompt	Response	Comment	Pack/Rel
CSQI	(20)-255	Maximum number of call registers for CSL input queues These call registers are used for Command and Status Link applications such as Meridian Link. Set CSQI and CSQO equal to the larger number of either: 1. ACD agents or AST sets to be controlled by the host computer, or 2. 50. Do not set CSQI and CSQO to a number exceeding 25 percent of the total number of call registers.	cls-7
CSQO	(20)-255	Maximum number of call registers for CSL/AML output queues These call registers are used for Command and Status Link applications such as Meridian Link. Set CSQI and CSQO equal to the larger number of either: 1. ACD agents or AST sets to be controlled by the host computer, or 2. 50. Do not set CSQI and CSQO to a number exceeding 25 percent of the total number of call registers.	cls-7
CTYP		Card Type (Input/output port card type)	msdl-18
	CPSI	Call Processor card (Option 81C)	
	DCHI	D-channel Interface card	
	ESDI	Enhanced Serial Data Interface	
	ELAN	AML over Ethernet card	
	MSDL	Multi-purpose Serial Data Link (for Downloadable D-Channel on Option 11C)	
	MSPS	Misc./SDI/Peripheral Signaling card	
	PTY	Pseudo TTY (Option 81C)	
	SDI	Single port SDI card	
	SDI2	Dual-port SDI card	
	SDI4	Four-Port SDI card	
	SPDC	Single Port DCH card	
	SDI4	Four port SDI card	

Prompt	Response	Comment	Pack/Rel
	TMDI XSDI	D-Channel configuration on TMDI (NTRB21) card SDI paddle board Note: CTYP may printout as being set as QSDI from previous software, but CTYP must be set to SDI4 when configuring data.	basic-24
CUST	0-99	Customer number associated with this function (as defined in LD15)	lapw-16
	xxx	Customer to be accessible by way of PWnn. Enter the customer (0-99) and the associated Tenant numbers (entered at the TEN prompt) to have access with PWnn to overlays specified at prompt OVLA.	
	ALL	All customers and associated tenants have access with this password.	
	<cr>	No change to previous definitions. Precede with X to remove.	
CY45	(0)-31	Cycles LD 45 can be run whenever a fault is detected If any number from 1 to 31 is entered, that is the number of times LD 45 will run under fault conditions. If 0 is entered the system will perform as before without limiting the number of LD 45 runs.	supp-16
DATA_CORRECT (OFF) ON		Voice Mailbox Database Correction In enabled state, the Meridian Mail database is updated to match the Meridian 1 database when the database audit discovers a discrepancy.	vmba-19
DCHI	0-15	D-channel Interface port number When adding a D-channel the MEM AVAIL data is output after this prompt indicating the channel has been added. You can therefore abort the program and save the changes without going to the REQ prompt. Precede with X to remove.	pri-12

LD 17

Prompt	Response	Comment	Pack/Rel
DCHL	0-159	PRI loop number	pri-12
	0-159 1-126	PRI loop number and interface identifier for the DCH when IFC = D70 or CNTY = JAPN.	
	0- 159 (0)-3	PRI loop number and interface identifier for the DCH when IFC = TCNZ or CNTY = MSIA.	
	0-159 2-15	PRI loop number and interface identifier for all other interfaces	
	0 - 255	PRI loop number, option 81C with Fiber Network Fabric	fnf-25
	xx	Option 11C PRI card number Where xx is the PRI card number: 1-9 11-19 21-29 31-39 41-49	
	xx (0)-3	Option 11C PRI card number (D channel loop) and interface identifier for the DCH when IFC = TCNZ or CNTY = MSIA. Where xx is the PRI card number: 1-9 11-19 21-29 31-39 41-49	
	xx 1-126	Option 11C PRI loop number and interface identifier for the DCH when IFC = D70 or CNTY = JAPN. Where xx is the PRI card number: 1-9 11-19 21-29 31-39 41-49	
	xx 2-15	Option 11C PRI loop number and interface identifier for all other interfaces Where xx is the PRI card number: 1-9 11-19 21-29 31-39 41-49 One DCH can support up to 16 PRIs, except for D70 and JAPN (9 PRIs) and TCNZ and MSIA (4 PRIs). Precede with X to remove.	
DCUS	0-5	Maximum number of ACD-ADS customers	acdd-1
DDCS	0-159 1-9 11-19 21-29 31-39 41-49	Loop number for NT DPNSS/DASS hardware Option 11C Precede with X to remove.	dpnss-16

Prompt	Response	Comment	Pack/Rel
DENS	SDEN DDEN 4DEN	Single ports on SDI card Double ports on SDI card Quad ports on SDI card	basic-15
DES	d...d	Designator (AML port designation) DES is used to identify the link and can be up to 16 alphanumeric characters: 0-9, and upper case (A-Z). Characters * and # are not allowed. Spaces are removed by the system. For example "MERIDIAN MAIL" becomes "MERIDIANMAIL". Use the underscore character instead, such as MERIDIAN_MAIL DES can be left blank or changed as required. If DES is already defined for a link, the system outputs the current name and reprompts DES. Precede the existing DES with X to remove. Example: "XMERIDIAN_MAIL".	msdl-18
DIDD	(0)-15	DID Delete Number of leading digits to delete when receiving digits from DID trunk.	isdn-16
DLOP	lll dd ff	Digital Trunk Interface Loop or Loops. Where: <ul style="list-style-type: none"> • lll = 0-159 • lll = 1-9 11-19 21-29 31-39 41-49 Option 11C • lll = 0-255 Option 81C with Fiber Network Fabric • dd = maximum number of simultaneous voice or data calls 0-(24) • ff = frame format D2, D3, D4, or ESF <p>The default for frame format ff is ESF if prompt MODE is set to PRI; D3 if MODE is set to DTI or LINK. Loop must be removed before a change to ff can be made.</p>	dti-5 lse-25 fnf-25
	L1 L2 Ln	Digital Trunk Interface Loop or Loops Loop numbers of the DTI Loops associated with this VAS. Loops must have previously been defined as MODE = LINK. Precede with X to remove.	

LD 17

Prompt	Response	Comment	Pack/Rel
DNUM	0-15	Device number for I/O ports. All ports on the MSDL card share the same DNUM. The MSDL card address settings must match the DNUM value. For all other ports such as SDI, DCHI, etc., the device number should match the port address switch settings. To configure a D-channel on an even number port the card type must be SPDC or MSDL.	msdl-18
DPNS	(NO) YES	Digital Private Network Signaling	dpnss-16
DRAT	(56K) 64KC 64KI	D-channel transmission Rate 56 kb/s when LCMT is AMI 64 kb/s clear. Allowed if LCMT = B8S for SL-1 to SL-1 only. Default for PRI2. 64 kb/s inverted HDLC, 64 kb/s restricted DRAT must match the far end. DRAT is not prompted when configuring the ISLD-channel because speed is controlled by the modem baud rate.	pri-12
DROL	30, 32, 33, 34, 35, 36, 37, 38, 40, 41, 43, 44, 45, 46, 51, 53, 60, 61	Daily Routine Overlays. Daily or midnight routine programs are run once a day at the time specified by prompt TODR. Programs 33, 45, 46 and 53 are not applicable to Option 11C.	basic-1
DTCS	1-159	Digital Trunk Channel Switches (Loop numbers for GPT hardware) Precede with X to remove. Not required for NT5K75AA. Prompted with Integrated Digital Access (IDA) package 122. DTCS does not apply to Option 11C.	supp-16
DTDT	NO TDS EXT	Dial Tone Detector Test No DTD tests are required The DTD is to be tested against a tone from the TDS The DTD is to be tested against an external source	dtd-10
DTI2	0-159	2.0 Mb/s Digital Trunk Interface loop number	ipra-14

Prompt	Response	Comment	Pack/Rel
	N0-N159	2.0 Mb/s Digital Trunk Interface phantom loop number. Precede loop number with an "N" to configure this loop as a phantom loop for trunks.	
	0-255	DTI2 loop number, Option 81C with Fiber Network Fabric	fnf-25
	1-9 11-19 21-29 31-39 41-49	Option 11C format for DTI2 loop number Option 11C format for DTI2 phantom loop number. Precede loop number with an "N" to configure this loop as a phantom loop for trunks. On an Option 11C, a Phantom loop can be included between 1-9. Precede any DTI2 entry with X to remove.	lse-24
DTIB	(35)-1000	Digital Trunk Input Buffers Required for IDA trunks. Prompted with Integrated Digital Access (IDA) package 122. Used with NT5K75AA DCHI operating in mode 0 or 1.	dass2-1 6
DTIC	0, 4, 8,...156 0, 4, 8,... 254	Starting network loop slot for PRI/DTI card Option 81C with Fiber Network Fabric On non-Network loops, enter return <cr> and ignore the SCH2035 message. Do not input loop numbers that take the system out of its bounds. Number must be even for all systems. Not prompted for Option 11C.	di-5 fnf-25
DTOB	(4)-100	Digital Trunk Output Buffers per Digital Trunk Signaling Link Required for IDA trunks. Prompted with Integrated Digital Access (IDA) package 122. Used with NT5K75AA DCHI operating in mode 0 or 1.	dass2-16

LD 17

Prompt	Response	Comment	Pack/Rel
DTRB		Digitone Burst time in ms	
	(100)	100 ms bursts of DTMF with 100 ms interdigit pause	
	50	50 ms bursts of DTMF with 50 ms interdigit pause	
	60	60 ms bursts of DTMF with 90 ms interdigit pause	
	70	70 ms bursts of DTMF with 70 ms interdigit pause	
		This determines the DTMF burst and interdigit pause for the Tone and Digit Switch or TDS.	
		Burst time of 50 ms is used for the Fast TDS; 100 ms is used for the standard TDS. Burst time of 60 ms and 70 ms is used for international requirements.	
DUPX	(FULL)	Full Duplex mode Enter FULL if each end can simultaneously send and receive.	csi-7
	HALF	Half Duplex mode	
DUR5		CDR call duration with 0.5 second accuracy. DUR5 does not apply to CDR data link.	cdr-8
	(NO)	CDR call record output on TTY with 2.0 second duration accuracy.	
	YES	CDR call record output on TTY with 0.5 second duration accuracy for Japan.	
		0.5 second duration accuracy is available for outgoing trunks with answer supervision outside Japan.	
ELAN	x	Application Module Link (AML) over Ethernet Associate Value Added Server ID (VSID) x with AML over Ethernet (ELAN) x. The configured VSID of the ELAN will be used to distinguish the connection between the Meridian 1 and each application in a multiple application Ethernet environment. If the Nortel Symposium Call Center (NGCC) package 311 is not equipped, a maximum of 16 ELANs can be configured and supported in the range of 16 to 31.	nxcc-22
ENL	(YES) NO	ENL error message for Option 11C DIS error message for Option 11C	ains-16

Prompt	Response	Comment	Pack/Rel
ERRM	ERR BUG AUD	Error Messages (prompted when USER = MTC) Error monitor-hardware Error monitor-software Software Audit The messages, if enabled here, are output on the maintenance port. Precede with X to remove.	basic-1
ESCALATE	0-(2)-127	Alarm occurrence threshold (prior to escalating) This determines the number of times a major alarm may occur before it becomes critical. Entering 0 disables the alarm escalation. This applies to major alarms only.	alarm-19
ESDI	YES NO	Enhanced Serial Data Interface Default is as previous if ADAN = CHG. The default is NO if ADAN = NEW and no ports on the card are configured, or if the other port is configured and is not ESDI. The default is YES if the other port is configured and is ESDI.	
EXT0	x aaa bbb	Extenders for CPU 0 Not prompted for Option 11C. Identifies the types of extenders that connect the Central Processing Unit or CPU to the various Network shelves. Where: <ul style="list-style-type: none"> • x = Group number • aaa = extender type located on the CPU shelf • bbb = extender type located on the Network shelf 	basic-19

Prompt	Response	Comment	Pack/Rel
		<p>Valid inputs :</p> <ul style="list-style-type: none"> • x = 0-4 • aaa = NIL for ACB cables or passive Bus Extender on CPU shelf 0. • aaa = SBE for Segmented Bus Extender on CPU shelf 0 cabled to Network shelf 3PE or Network shelf backplane connectors ACB. • bbb = NIL if Network shelf not equipped. • bbb = 3PE for 3 Port Extender on a Network shelf cabled to a SBE on CPU shelf 0, or cabled to CPU shelf 0 backplane connectors ACB. <p>Note: bbb must be 3PE for core side 0 for Network Capacity Expansion</p>	fnf-25
EXT1	x aaa bbb	<p>Extenders for CPU 1</p> <p>Identifies the types of extenders that connect the Central Processing Unit or CPU to the various network shelves. Where:</p> <ul style="list-style-type: none"> • x = Group number • aaa = extender type located on the CPU shelf • bbb = extender type located on the Network shelf <p>Valid inputs:</p> <ul style="list-style-type: none"> • x = 0-4 • aaa = NIL for ACB cables or passive Bus Extender on CPU shelf 1 • aaa = SBE for Segmented Bus Extender on CPU shelf 1 cabled to Network shelf 3PE or Network shelf backplane connectors ACB. • bbb = NIL if Network shelf not equipped. • bbb = 3PE for 3 Port Extender on a Network shelf cabled to a SBE on CPU shelf 1, or cabled to CPU shelf 1 backplane connectors ACB. <p>EXT1 is not prompted for Options 11C.</p> <p>Note: bbb must be 3PE for core side 1 for Network Capacity Expansion</p>	basic-19
			fnf-25

Prompt	Response	Comment	Pack/Rel
E_FILTER	NEW CHG OUT	Add an Exception Filter entry. Change an Exception Filter entry. Remove an Exception Filter entry. This is reprompted for subsequent exception filters. Up to 50 Exception Filters can be configured. Entering <CR> completes exception filter entries. Precede with X to remove.	alarm-19
FCDR	(OLD) NEW	Format for Call Detail Recording OLD format Information field location varies according to which features are equipped. NEW CDR format. Information field locations are fixed. Prompted when New Format CDR (FCDR) package 234 is equipped.	fcd-20
FLOW	(NO) YES	Flow control capability This prompt appears for Options: 51C, 61C, and 81C. For Option 11C, FLOW is not prompted when TTY_TYPE = LSL.	csi-7
FLOW_TYPE	NONE XON MAIL HWR	Flow control type for Option 11C. FLOW_TYPE is prompted when TTY_TYPE = LSL. No flow control XON/XOFF flow control Mail style flow control protocol Hardware flow control protocol FLOW_TYPE must be MAIL for the LSL used for Meridian Mail administration / maintenance access. When TTY_TYPE = LSL and CARD = 0, only NONE and XON are valid responses.	basic-22
FLTA	(NO) YES	Failed Log In Threshold Alarm Activate minor alarm in the event of FLTH being reached. Prompted with International Supplementary Features (SUPP) package 131.	supp-18
FLTH	0-(3)-7	Failed Log In Threshold Prompted for PWD2 users.	lapw-16

LD 17

Prompt	Response	Comment	Pack/Rel
FMT_OUTPUT	(OFF)	Alarm Filters Formatted printing	alarm-19
	ON	This prompt disables formatting for the alarm/exception output.	
	<CR>	This prompt enables formatting for the alarm/exception output. Retains the current formatting status.	
FRPT	(NEFR) OLFR	Access to incoming calls by FRE station denied Access to incoming calls by FRE station allowed If FRPT = OLFR, then a FRE station can do Ringing Number Pickup, Night Answer and receive modified calls.	basic-1
FTYP	(3) 3S 5	3.5 inch high density floppy type 3.5 inch super density floppy type 5.25 inch floppy type	basic-20
		Prompted if ADAN = FDK or HDK. Not prompted for Option 11C.	
FUNC	ABD FCL MOD LME SCN	MSDL card Function. This prompt is used when applying the MSDL card to the SDI application.	msdl-19
		Autobaud Flow Control (XON/XOFF handling) Modem support Line Mode Editing Character Screening Precede with X to delete.	

Prompt	Response	Comment	Pack/Rel
GRP	0-4	<p>Network Group number (Option 81C)</p> <p>Group numbers cannot be changed until the I/O devices associated with that group are disabled.</p> <p>The option 61C supports 1 network group (0). The Option 81C supports up to 5 network groups (0-4).</p> <p>For the option 81C:</p> <p>Port 0 of the CNI card in slot 8 in the NT6D60 Core Module must be configured as "group 5." This configuration is not equivalent to a network switching group (groups 0-4). "Group 5" extends the inter-processor section to the interface bus, within the Core Module, through the CNI card in slot 8 and the 3PE card in slot 7.</p>	81-19
	0-7	Option 81 C with Fiber Network Fabric	fnf-25
HOST	(NO) YES	<p>Enable HOST mode Log In for password PWnn.</p> <p>When a HOST user logs in, the outputs defined for the port are only output to that port. For example, two ports are defined by prompt USER to output BUG and SCH messages. When a HOST user logs in to one of these ports, the other port does not require BUG and SCH messages until the HOST user logs out.</p> <p>This removes the restriction that ports with the same output must operate at the speed of the slowest port. This feature is primarily used by applications such as Meridian Manager.</p>	lapw-17
HPIB	16-1000 16-5000	<p>High-Priority Input Buffers</p> <p>High-Priority Input Buffers for System Options 51C, 61C, and 81C.</p> <p>Recommended for attendant consoles and DID/TIE trunks. High priority line or trunk cards are placed in slot 1 and assigned have CLS = HPR in LD 10, 11, 12 or 14. Superloops do not require any line or trunk cards assigned as high priority.</p> <p>Refer to Appendix 553-2201-151.</p>	basic-19

LD 17

Prompt	Response	Comment	Pack/Rel
HRLR	(0)-8, 32-40	<p>Handsfree Receive objective Loudness Rating</p> <p>The HRLR value is downloaded to Meridian Modular telephones after sysload, except when performing a parallel reload. Refer to the Transmission parameter and International loss and level plan NTP's before adjusting this value.</p> <p>The default is 0. The number entered in this field corresponds to an offset value. The offsets and their corresponding values are provided on page 438.</p>	hfdl-20
HTLR	(0)-11, 32-54	<p>Handsfree Transmit Objective Loudness Rating</p> <p>The HTLR value is downloaded to Meridian Modular telephones after sysload, except when performing a parallel reload. Refer to the Transmission parameter and International loss and level plan NTP's before adjusting this value.</p> <p>The default is 0. The number entered in this field corresponds to an offset value. The offsets and their corresponding values are provided on page 438.</p>	hfdl-20
IADR	0-(3)-255	<p>Individual Address for the data-link level HDLC protocol.</p> <p>The IADR and RADR prompts must be coordinated with the far end. If IADR is defined as 3, then RADR must be 1.</p>	cls-7
IDLE_DISP_CHAR	xx c/hh	<p>Change customized text string character by character, where xx (01 to 24) is the position of the character in the customized text string. Prompted if the Electronic Brandlining ISM parameter is set to Terminal Text Broadcast (EBLN ISM value of 2).</p> <p>The IDLE_DISP_CHAR prompt is only prompted if SUPPORTED_TEXT_ONLY = NO and is re-prompted until a <CR> is entered or xx = 24th character has been entered, thus allowing additional characters to be entered. Where:</p> <p>c = one supported character. hh = 2 hexadecimal digits (0-9, A-F, a-f) representing a supported character.</p>	basic-23

Prompt	Response	Comment	Pack/Rel
IDLE_DISP_STRING	aaaa	Enter customized text string by text string input. A maximum of 24 characters are accepted and validated. Enter <CR> for a blank Electronic Brandlining display. Prompted if the Electronic Brandlining ISM parameter is set to Terminal Text Broadcast (EBLN ISM value of 2).	basic-23
IDLE_SET_DISPLAY	aaaa	<p>IDLE_DISP_STRING entered customized text string "aaaa" is shown. This is information only. This information is shown under three scenarios:</p> <ol style="list-style-type: none"> 1. to show the current EBLN Terminal Text Broadcast customized text string before the MODIFY prompt to let the user decide if a change is required. 2. To show the customized text string entered in response to the IDLE_DISP_STRING prompt for confirmation with the following OK prompt. 3. To show the customized text string entered in response to the IDLE_DISP_CHAR prompt (s) for confirmation with the following OK prompt. <p>Prompted if the Electronic Brandlining ISM parameter is set to Terminal Text Broadcast (EBLN ISM value of 2).</p>	basic-23
IDL P	0-158	IND DTI Loop DTI loop number used for IND CSL loop. See DLOP prompt.	csi-7
	xx	Defines DTI card number used for IND CSL, Option 11C	
	0-255	DTI loop number used for IND CSL loop, Option 81C with Fiber Network Fabric	fnf-25
IFC		Interface type for D-channel. Note that when USR = ISLD or SHA, the interface is automatically entered as SL1.	pri-17
	(D100)	Meridian DMS-100	
	1TR6	1 TR 6 for Germany	
	APAC	Asia-Pacific ISDN interface for Australian BRI UIPE PRI, China, Hong Kong, Indonesia, Japan BRI UIPE PRI, Malaysia, Singapore & Thailand	
	AXEA	Ericsson AXE-10 for Australia	

LD 17

Prompt	Response	Comment	Pack/Rel
	AXES D250 D70	Ericsson AXE-10 for Sweden Interface to Meridian DMS-250 Interface to Japan D70	
	EGF4	Q Reference Signalling Point interface	qsig gf-24
	E403 ESGF	EuroISDN interface for ETS 300 403 ESIG interface with GF platform (allowed if QSIG and QSIGGF packages are both equipped)	euro-24
	ESIG	ETSI Q reference signalling point (QSIG) Interface ID. Allowed only if the new D channel is configured on the MSDL card.	
	ESS4 ESS5 EURO	Interface to AT&T ESS#4 AT&T ESS#5 EuroISDN interface If IFC = EURO, the MOV command (REQ = MOV) may only be used to move an MSDL card to another MSDL card. For example, when IFC = EURO, an MSDL card cannot be moved to a DCHI card.	
	ISGF	ISIG interface with GF platform (allowed if QSIG and QSIGGF packages are both equipped)	
	ISIG	ISO Q reference signalling point (QSIG) Interface ID. Allowed only if the new D channel is configured on the MSDL card.	
	JTTC	Interface ID for JAPAN TTC; This input is only valid if the new D-channel is configured on the MSDL card	jttc- 23
	NI2 NUME S100 SL1 SS12 SWIS TCNZ	NI-2 TR-1268 interface type Numeris for France Meridian SL-100 Meridian SL-1 SYS-12 for Norway SwissNet Telecom New Zealand (NEAX-61)	

Prompt	Response	Comment	Pack/Rel
INC_T306	0-(2)-240	Variable timer for received disconnect message on incoming calls, allowing in-band tone to be heard when sent by the network (entered in 2 second increments). The network will stop sending tone after this timer expires. Default values for this timer include: 30 for China, Indonesia, Japan, Malaysia, Hong Kong, Singapore, New Zealand, and Thailand. 60 seconds for Australia PRI.	ddsp-20
INIT	(YES) NO	Manual initialization to reset ports which were locked-out due to failed LOGI attempts.	lapw-16
INTL	1-12	CAUTION: While established calls in progress are unaffected, calls in the signaling state will be aborted. Interval Time interval for checking Meridian Link for overload in five second increments This is the interval for counting the number of messages on a Meridian Link. See prompt MCNT.	iap3p-12
ISDN_MCNT	60-(300)-350	Layer 3 call control message count per 5 second time interval.	qsig-22
ISLM	1-382	Integrated Services Signaling Link Maximum. Maximum number of ISL trunks controlled by the D-channel. There is no default value.	isl-12
JDMI	0-159 0-255	Japan Digital Multiplexer Interface loop number JDMI loop number, Option 81C with Fiber Network Fabric Precede with X to remove. Not for Option 11C.	jdtm-14 fnf-25
K	1-(7)-32	Maximum number of outstanding frames This value should be the same for the Meridian 1 (near-end) and the host processor (far-end). Where: <ul style="list-style-type: none"> • 7 = recommended value for AUX applications • 2 = recommended value for CCITT 	cls-7
LANGUAGE	ENGLISH	Language supported on STA	sta-19

LD 17

Prompt	Response	Comment	Pack/Rel
LAPD	(NO) YES	Link Access Protocol for D-channel Change LAPD parameters.	pri-12
LAPW	0-99 <cr>	Enter Limited Access to Overlays Password number to be created, modified or deleted. No more password changes Precede with X to remove. LAPW is reprompted after the OPT prompt, thus allowing multiple Limited Access to Overlays Password users to be created. If the overlay is exited after the OPT prompt the LAPW information is saved. If the overlay is exited before the OPT prompt, the information is not saved.	lapw-16
LCMT	(B8S) AMI	B8ZS Line Coding Method Alternate Mark Inversion, B7 Line Coding Method The default is B8ZS when the frame format is ESF. When the frame format is D2, D3, or D4, the default is AMI.	pri-19
LCTL	(NO) YES	Change Link Control system parameters	cls-7
LEVEL	(INST) ADMN	Access Level for Set Based Administration password Installer. Access Level for Set Based Administration password Administrator.	adminset-21
LLID	(NO) YES	Last Log In Identification Identification display of last Log In and failed Log In attempts message allowed. Prompted with International Supplementary Features (SUPP) package 131.	supp-18

Prompt	Response	Comment	Pack/Rel
LNAME_OPTION	(NO) YES	<p>Require Log In name for password access</p> <p>If the option is changed to YES, each password currently in the system is given a default name which is used until new names are assigned.</p> <p>The default names applied to the passwords are:</p> <ul style="list-style-type: none"> • ADMIN1 is applied to the current PWD1 • ADMIN2 is applied to the current PWD2 • USER0 is applied to the current Password 00 • USER1 is applied to the current Password 01 • (and so on to USER 99) <p>The following message is output before reprompting REQ: DEFAULT LOGIN NAMES SAVED.</p> <p>To login to the system with the LNAME_OPTION enabled, use: LOGIN ADMIN2 <cr> PASS (prompted by the system) Enter the current second level administration password.</p> <p>If the option is changed from YES to NO, random passwords are assigned by the system to ensure no password duplication. The default password for PWD2 is output to the terminal when this option is disabled. The following message is output:</p> <p>WARNING: PASSWORDS WILL BE CHANGED TO DEFAULT VALUES.</p> <p>OK? (Y/N)</p> <p>If Y is entered, the following appears:</p> <p>DEFAULT PASSWORDS SAVED</p> <p>PWD2 = <pwd2 password></p> <p>Note that entering YES forces the user to define passwords. If NO is entered, Log In name may still be entered, but is not required.</p>	lapw-19

LD 17

Prompt	Response	Comment	Pack/Rel
		<p>To find the other default passwords assigned by the system, Load Overlay 22 and print PWD.</p> <p>With Multi-user Log In enabled, it is possible for more than one user to be logged in with the same name/password combination. However, no two Log In names can have the same password associated with them.</p>	
LOCK	0 -(60)-270	<p>Lockout time, prompted for PWD1 and PWD2 users.</p> <p>The is the time, in minutes, that a port is locked out once the Failed Log In Threshold or FLTH has been exceeded.</p> <p>Messages of the lockout are displayed on maintenance terminals and supervisory stations.</p>	lapw-16
LOGIN_NAME	aaa aaaa	<p>Log In name for password access</p> <p>When LNAME_OPTION is YES, the names must be associated with each Log In password. This can be up to 11 alphanumeric characters (0-9, A-Z, a-z).</p>	lapw-19
LOUT	1-(20)	<p>Logout</p> <p>The number of minutes after which the system will logout if no information has been exchanged. Prompted with International Supplementary Features (SUPP) package 131.</p>	supp-18
LPIB	96-5000 96-1000	<p>Low-Priority Input Buffers for Options 51C/61C/81C. Low-Priority Input Buffers all other options.</p> <p>Most stations and trunks are defined as low priority. See prompt HPIB. Refer to the <i>Memory Calculations Appendix</i> in the <i>Planning and Engineering NTPs</i>.</p>	basic-19
LPWD	aaaa <cr>	<p>Enter current LAPW password to change user password.</p> <p>Leave Log In password unchanged</p> <p>This prompt appears only for LAPW users logged in with a LAPW password. This prompt is used by Limited Access to Overlay users to change their password.</p>	lapw-16

Prompt	Response	Comment	Pack/Rel
LTHR	(NO) YES	Link Threshold Change link performance thresholds for ESDI only.	cls-7
MANU	(PMS1) PMS2 PMS3	Standard PMS interface Requires <cr> HOD to recognize input message Updated RMS message is followed by the old RMS when a room DN checks IN or OUT.	pmsi-19
MAGT	0-1200	Maximum number of ACD agent IDs per customer.	acdc-18
MARP	(YES) NO	Multiple Appearance Redirection Prime feature allowed.	marp-18
MAT	(NO) YES	Enable MAT 5.0 Log In for password PWnn Mat 5.0 users can remote log in from a PC to perform Alarm Management and Maintenance operations through a graphical interface. PWD1 and PWD2 users always have MAT 5.0 access.	mat-22
MAT_READ_ONLY	(NO) YES	Do not restrict MAT 5.0 write access for password PWnn Restrict MAT 5.0 write access for password PWnn Read only provides MAT 5.0 users access to Alarm Management and Equipment View windows. However, read only users cannot clear or acknowledge alarms, and can only perform status commands. PWD1 and PWD2 users always have MAT 5.0 write access.	mat-22
MBGA	(NO) YES	Multilocation Business Group, for tenant, messages are allowed to be sent on this D-channel. Multilocation Business Group, for tenant, messages are allowed to be sent on this D-channel.	isdn-16

LD 17

Prompt	Response	Comment	Pack/Rel
MCFN	x x x x x x	Number and size of SIMMs in options: 51C, 61C, and 81C. Where x = 0, 4, or 16 (for SIMM size in megabytes). The SIMM size depends on the CP card type. If size is not specified, the system assumes they are unequipped (ie. size = 0). This does not affect system operation.	basic-21
MCNT	5-100000	Message Count Threshold Threshold for number of Meridian Link messages per time interval. The recommended setting is 400. With INTL = 4 and MCNT = 400, the maximum flow is 20 messages per second.	iap3p-12
MEM	0-6	Memory modules, prompted when MTYP = 0. Add memory modules of 64K words. QPC51 card Precede with X to remove.	basic-1
MFSD	0, 2, 4...158 1-9 0, 2, 4... 254	Multifrequency Sender loop. Use even-numbered loops for Multifrequency Sender. Option 11C Precede with X to remove. Multifrequency Sender loop, Option 81C with Fiber Network Fabric	basic-1 fnf-25
MGCR	0-NCR	Maximum number of call registers used by AUX messaging. MGCR is associated with the NCR prompt. It is the maximum number of call registers that can be queued for use by AUX messaging before extra processing time is allocated to handle them.	basic-1
MLDN	(NO) YES	Multiple Loop DN. MLDN allows multiple appearance DNs to be on different loops.	basic-1
MODE	LINK PRI TRK	Mode of operation Digital Link mode (Not supported for Option 11C) Primary Rate Interface mode Digital Trunk mode	dti-8

Prompt	Response	Comment	Pack/Rel
MODIFY	(NO) YES	Change Electronic Brandlining Terminal Text Broadcast configuration. Prompted if the Electronic Brandlining ISM parameter is set to Terminal Text Broadcast (EBLN ISM value of 2).	basic-23
MPED	(SD) DD 4D 8D	Single (Maximum Peripheral Equipment Density) Double (Maximum Peripheral Equipment Density) Quadruple (Maximum Peripheral Equipment Density) Octal (Maximum Peripheral Equipment Density) Set to 8D for superloops. See LD 97. For Option 11C, MPED = 8D in the default data and must remain at this value for the peripherals to work.	basic-7
MQC_FEAT		MCDN QSIG Feature type Prompted if RCAP = MQC Precede MQC Feature type with X to remove MCDN NAS functionalities are supported over QSIG MCDN NACD functionalities are supported over QSIG MCDN NMS - MC functionalities are supported over QSIG	meet-24
MSCL	(0)-8190	Maximum number of Speed Call Lists that can be defined on the system	optf-13
MSDT	0-159	Main Synchronization DTSL. Enter number of DTSL used for main synchronization. Prompted if SYNM = 1, 2 or 4.	supp-16
MTRO	(MR) PPM	Message Registration Periodic Pulse Metering	mr-20
MULTI_USER	(OFF) ON	Multi-User Log In	muli-19
MWIF	(STD) ISDM	Message Waiting Interface Standard Message Waiting Interface Plessey ISDX switch with remote message notification capability	samm-20
N1	32, 64, 128, (512)	Maximum Number of octets per HDLC information frame. An entry of 128 or 512 is recommended for ELAN.	csi-7

LD 17

Prompt	Response	Comment	Pack/Rel
N2	4-(8)-16	Maximum Number of retransmissions in steps of 1.	pri-12
N200	1-(3)-8	Maximum Number of retransmissions	pri-12
N201	4-(260)	Maximum Number of octets in information element	pri-12
N2X4	0-(10)-20	Maximum Number of status inquires when remote is busy (N2X2 only applies to 1TR6)	ovlp-16
NASA	(NO) YES	Network Attendant Service not allowed Network Attendant Service allowed Network Attendant Service signaling messages are sent on this D-channel.	nas-20
NCPU	1-(2)	Number of CPUs This value is normally programmed at the factory.	basic-18
NCR	xx	Number of Call Registers, range depends on system type. Where: <ul style="list-style-type: none">• xx = 26-2047 for System Option 51C• xx = 26-20000 for System Option 81C The maximum number of call registers may be limited by the amount of system memory. In this case the number of call registers is the amount of protected memory available divided by the number of words per call register. Refer to the <i>Memory Calculations Appendix</i> in the <i>Planning and Engineering NTPs</i> .	basic-19
NDCH	0 - 63	Move the primary D-channel to this logical number. The ADAN MOV command is supported for D-channels.	pri-18
NDIS	(20)-255	Number of Display messages for the Background Terminal (BGD). The NDIS entry determines the queue length for display messages for the BGD application.	bgd-10

Prompt	Response	Comment	Pack/Rel
NDRG	(NO) YES	New Distinctive Ringing Prompted if Distinctive Ringing (DRNG) package 74 equipped, and if packages ATVN 68, FTC 125 and JTDS 171 are turned off.	drng-10
NLPW	x...x <cr>	New Limited Access to Overlay log on password for the user Leave Log In password unchanged Length is 4-16 characters with Limited Access to Overlays (LAPW) package 164. Valid characters are 0-9, A-Z and a-z.	lapw-16
NORTEL_BRAND	(YES) NO	“NORTEL” Electronic Brandling display option. Prompted only if the EBLN ISM parameter value is set to “0” or “1”. Show the “NORTEL” Electronic brandline. Show a blank brandline along with the Time and Date on an idle MDT set.	basic-23
NPW1	x...x <cr>	New Password 1(PWD1 Log In password) No change Valid characters are 0-9, A-Z and a-z. Length is 4-16 characters with Limited Access to Overlays (LAPW) package 164. Without the LAPW package, the password requires 4 hexadecimal digits (0-9, A-F).	basic-1
NPW2	x...x <cr>	New Password 2 (PWD2) No change Valid characters are 0-9, A-Z and a-z. Length is 4-16 characters with Limited Access to Overlays (LAPW) package 164. Without the LAPW package, the password requires 4 hexadecimal digits (0-9, A-F).	basic-1
NPWC	aaaa	Enter New Mini-CDR password. This password requires 4 hexadecimal digits (0-9, A-F).	mcdcr-1
NUMD	1- (2)	Number of floppy disk drives Prompted if ADAN = FDK or HDK. Not prompted for Option 11C.	basic-15

LD 17

Prompt	Response	Comment	Pack/Rel
OCAC	(NO) YES	Support the Original Carrier Access Code format The expanded CAC format is automatically supported. OCAC should be set to YES before and during the interim period. If OCAC is not set properly, Equal Access screening will not function.	fcc-20
OK	(YES) NO	Confirm validated Terminal Text Broadcast customized text string "aaaa" entered at the IDLE_DISP_STRING or at the IDLE_DISP_CHAR prompts. Prompted if the Electronic Brandlining ISM parameter is set to Terminal Text Broadcast (EBLN ISM value of 2). Keep the new text sting. Re-enter a new text string.	basic-23
OPT		Options for password PWnn. Multiple entries must be separated by a space.	
	(CFPA) CFPD	Configuration Prompts Allowed Configuration Prompts Denied CFPD allows access to prompts LPWD and NLPW to change one's own password.	lapw-16
	(DTD)	Deny DN-TN correspondence (administrator access only)	adminset-21
	DTA	Allow DN-TN correspondence (administrator access only)	
	(FEAD)	Deny Change Set Features (administrator & installer access)	adminset-21
	FEAA	Allow Change Set Features (administrator & installer access)	
	(FORCD) FORCA	Deny the Force command Allow the Force command	muli-19
	(LLCD) LLCA	Line Load Control Denied Line Load Control Allowed Access to Line Load Control commands in LD 2.	lapw-16
	(LOSD)	Loss Plan Customization Denied	xpe-20

Prompt	Response	Comment	Pack/Rel
	LOSA	Loss Plan Customization Allowed	
	(MOND) MONA	Deny the Monitor command Allow the Monitor command	multi-19
	(NAMD) NAMA	Deny Change CPND Names (administrator and installer access) Allow Change CPND Names (administrator and installer access)	adminset-21
	(PROD) PROA	Print Only Denied Print Only Allowed	lapw-16
	(PSCA) PSCD	Restricts overlay access to printing functions only. Printing of Speed Call lists Allowed Printing of Speed Call lists Denied Printing Speed Call lists can be allowed even though the overlay is restricted for all other functions.	lapw-16
	(RDBD) RDBA	Access to Resident Debug Denied Access to Resident Debug Allowed Access to Resident Debug (denied) allowed Must have International Supplementary Features (SUPP) package 131.	lapw-15
	(TADD) TADA	Deny Set Time and Date (administrator and installer access) Allow Set Time and Date (administrator and installer access)	adminset-21
	(TOLD) TOLA	Deny Change Toll Restrictions (administrator and installer access) Allow Change Toll Restrictions (administrator and installer access)	adminset-21
	(TRKD) TRKA	Deny Change Trunks (Opt 11E administrator access only) Allow Change Trunks (Opt 11E administrator access only)	adminset-21
ORUR	1-(5)-255	Overrun/Underruns out-of-service threshold Enter in units of 1, the number of overrun/underrun in 15 minutes before an out-of-service is enforced.	basic-1
OTBF	1-(32)-127	Output request buffers	pri-12

LD 17

Prompt	Response	Comment	Pack/Rel
OUT_T306	0-(30)-240	Variable timer for received disconnect message on outgoing calls, allowing in-band tone to be heard when sent by the network. The network will stop sending tone after this timer expires. Default values for this timer include: 30 for China, Indonesia, Japan, Malaysia, Hong Kong, Singapore, New Zealand, and Thailand. 60 seconds for Australia PRI.	ddsp-20
OVLA	1-99 ALL XALL <cr>	List of Overlay programs from 1 to 99 to be accessible by way of password PWnn Overlay number To allow access to all overlays To deny access to all overlays No change to previous definitions Multiple entries must be separated by a space and the last entry must be followed by a carriage return. Precede with X to remove.	lapw-16
OVLR	(NO) YES	Overlap Receiving	ovlp-15
OVL S	(NO) YES	Overlap Sending	ovlp-15
OVL T	(0)-8	Overlap Timer (in seconds) This timer controls the interval between the sending of INFORMATION messages.	ovlp-15
OVL Y	(NO) YES	Overlay	basic-1

Prompt	Response	Comment	Pack/Rel
PARM	(NO) YES	Gate opener for System Parameters.	
	R232/R422 DCE/DTE	Parameters for Interface and transmission mode, prompted for MSDL ports. The RS-422 parameters are established with switch settings on the MSDL card. This prompt is used to verify those settings prior to enabling the card. RS-232 parameters are set both on the card and at this prompt. Both values must be entered even if only one of them is being changed. For example "R232 DCE." Default for AML is R232 DCE. Default for D-channels is R422 DTE.	msdl-18
PARY	(NONE) ODD EVEN	Parity type. Prompted for asynchronous ESDI ports. For Option 11C, PARY is not prompted for CARD 0 PORT 0 or when TTY_TYPE = PTY. No parity bit Odd parity bit Even parity bit	basic-19
PBXH	0-23 X	Hour to perform Message Waiting lamp maintenance X = No test to be performed.	mwc-15
PCDR	(NO) YES	Priority to CDR YES gives CDR priority over call processing.	cdr-1
PCML	(MU) A	Pulse Code Modulation companding Law for the system μ -Law (use μ -Law for North America) A-Law This takes precedence over the response to the INTN prompt in Overlay 97 for Option 11C DTI/PRI.	basic-1
PDCH	0-63	Primary D-channel associated with a backup D-channel Both D-channels must be on the same card type that is DCHI or MSDL. Prompted if ADAN = BDCH	msdl-18

LD 17

Prompt	Response	Comment	Pack/Rel
PINX_CUST	0-99	This customer number will be used for the DN address translation associated with call independent connection messages received on this D-channel. Prompted when IFC = ISGF or ESGF.	qsig-22
PMCR	5 (x) y	Number of call registers used for PMSI. Minimum number of call registers to be configured is 5 The lesser of either 60 or 25 percent of the total system call registers The lesser of either 250 or 25 percent of the total system call registers For example, if you enter 65, but 25 percent of the system total is 45, the number entered by the system will be 45.	pms-19
PMIN	(NO) YES	Minor alarm when the PMSI link is not responding. This is not prompted if XTMR = 0. When this prompt is Yes, the attendants minor alarm is activated when the PMSI link does not respond. Note that when the link responds again, the alarm is not cleared.	pms-19
PMSI	(NO) YES	Modify Property Management Systems parameters This is prompted if Property Management Systems Interface (PMSI) is enabled.	pms-19
PORT	0-1 0-3 0-7 0-15	<i>Port number for MSDL cards, Option 81C I/O devices, or PMSI ports:</i> Port number for the CP card Port number for the MSDL card Port number for Pseudo TTYs This prompt appears for Property Management Systems Interface (PMSI) port configuration. Prompted only when CTYP = MSDL (Multi-purpose Serial Data Link), CPSI (Option 81C CP card), or PTY (Option 81C Pseudo TTY). <i>Port number for Option11 systems:</i>	basic-19
	0-1 0-2	Option 11C TDS/DTR Port number Option 11C System Core port number. Port 0 is configured on System Core but cannot be modified.	

Prompt	Response	Comment	Pack/Rel
	0-2 0-3	<p>Option 11C, prompted for CAB 1-4 if CAB_TYPE = IP Option 11C DCHI/SDI Port number or Option 11C pseudo TTY port number</p> <p><i>For Option 11C:</i></p> <ol style="list-style-type: none"> 1. Expansion cabinets only support one TTY port which is on the Fibre Receiver Pack. When CAB = 1 or 2, PORT is not prompted. 2. The maximum number of pseudo TTY supported is 4. 3. For TTY_TYPE = LSL, Card 0 Port 0 is not allowed. 	
	1, 3	<p>DCHI Port number</p> <p>If D-channel is on PRI/PRI2 card, the valid Port number is 1. If D-channel is on NTAK02 card, Ports 1 and 3 are valid.</p>	
PRI		<p>Primary Rate Interface</p> <p>ISDN PRI architecture is composed of three protocol layers providing different services:</p> <ul style="list-style-type: none"> • layer 1: physical layer • layer 2: link layer • layer 3: network layer <p>These layers provide a standard interface for voice and data communication. Each layer uses the services provided by the layer below, and builds on these services to perform functions for the layer above. Each layer or block can be modified without affecting the protocols in another layer.</p>	pri-12

LD 17

Prompt	Response	Comment	Pack/Rel
	loop x	<p>Enter loop number for additional PRI loops using the same D-channel and the interface ID for the additional loop numbers. Where:</p> <ul style="list-style-type: none">• loop = 0-159 for PRI loop number• loop = 0-255, Option 81C with Fiber Network Fabric• x = 2-15 for Interface ID or 1-126 if IFC= D70 or CNTY = JAPAN <p>The PRI prompt is used to assign the PRI loops controlled by the D-channel. Each loop is given an Interface ID.</p> <p>The PRI loop carrying primary D-channel (DCHI) and backup D-channel (BCHI) are assigned an Interface ID 0 and 1, respectively. The 14 remaining PRI loops that can be assigned to the D-channel are defined here and given an Interface ID of 2-15.</p>	fnf-25
	card x	<p>Option 11C Where:</p> <ul style="list-style-type: none">• card = 1-9 for PRI card number• x = 2-15 for Interface ID or 1-126 if IFC= D70 or CNTY = JAPAN <p>Precede with X to remove. This prompt is repeated until <cr> is entered.</p>	
PRI2	0-159 2-15	Secondary PRI2 loops for nB + D, plus sequence, when IFC = SL-1 and DCHL is a PRI2 loop.	ipra-14
	card 2-15	Option 11C Secondary PRI2 loops for nB + D, plus sequence, when IFC = SL-1 and DCHL is a PRI2 loop. Where:	
		<ul style="list-style-type: none">• card = 1-9 11-19 21-29 31-39 41-49 PRI card number	
	0-159 0-3	Secondary PRI2 loops for nB + D, plus sequence, when IFC = TCNZ or CNTY = MSIA. The D-channel is not necessarily on IFC ID 0. This is set by service change.	

Prompt	Response	Comment	Pack/Rel
	xx 0-3	Option 11C when IFC=TCNZ and or CNTY=MSIA. Where: <ul style="list-style-type: none"> xx = 1-9 11-19 21-29 31-39 41-49 PRI card number 	
	0-159 xx	2.0 Mb/s Primary Rate Interface or PRI loop number Option 11C Where: <ul style="list-style-type: none"> xx = 1-9 11-19 21-29 31-39 41-49 PRI card number 	
	0-255	PRI2 loop number, Option 81C with Fiber Network Fabric Precede with X to remove. This prompt is repeated until <cr> is entered.	fnf-25
PRIM	0-15	Primary PMS port. To remove port, enter X.	pms-19
PROG		Progress	euroisdn-22
	NCHG	Send a PROGRESS signal when a CALL PROCEEDING message which contains a progress Indicator Information Element is received at the Meridian 1 EuroISND gateway. NCHG is the default for all interfaces except Australian, Austrian and Japan interface.	
	MALE	Send an ALERT signal when a CALL PROCEEDING message which contains a progress Indicator Information Element is received at the Meridian 1 EuroISND gateway. MALE is the default for Japan interface.	
	MCON	Send a CONNECT signal when a CALL PROCEEDING message which contains a progress Indicator Information Element is received at the Meridian 1 EuroISDN gateway. MCON the default for Australian and Austrian interface.	

LD 17

Prompt	Response	Comment	Pack/Rel
PR_RTN	(NO) YES	The prompt PR_RTN is printed only if the RCAP is set to PRI or PRO. Retain option is (is not) supported by the far end PINX.	qsig ss- 23
PR_TRIGS	<CR>	Path Replacement Triggers are set to their default values: DIV 2 3 CNG 2 3 XCON 2 3 2 Path Replacement attempts with a delay of 3 minutes for Diversion and Congestion triggers but Connected number is not a trigger. DIV xx y CNG xx y CON xx y Diversion is used to trigger Path Replacement. Congestion is used to trigger Path Replacement. A Connected number different from a called number is used to trigger Path Replacement. Precede with X to remove. xx = 0 - 15, the number of Path Replacement attempts. y = 1 - 7, the delay between two Path Replacement attempts in minutes.	qsig ss-23
PRTY	xx xx xx	Priority overlay programs to be stored in cache memory Priority overlays stay in cache memory when a new overlay is loaded. Enter one or more commonly used overlay program numbers. Priority can be set only for the number of overlays specified in the CACH. xx = the overlay number. Precede with X to remove an overlay program number.	basic-18
PTMR	(0)-31	Polling Timer for PMSI This is the polling timer, in minutes. When PTMR = 0, polling does not occur.	pms-19
PWD	(NO) YES	Change Password options	basic -19

Prompt	Response	Comment	Pack/Rel
PWD2	x...x	<p>Password 2</p> <p>Enter current second level administration password. This password is required to change existing passwords PWD1, PWD2, LAPW passwords and to change the Electronic Brandlining Terminal Text Broadcast customized text string.</p> <p>Valid characters are 0-9, A-Z and a-z. Length is 4-16 characters with Limited Access to Overlays (LAPW) package 164.</p> <p>Without the LAPW package, the password requires 4 hexadecimal digits (0-9, A-F).</p>	basic-1
PWnn	x...x	<p>Password</p> <p>Length is 4-16 characters with Limited Access to Overlays (LAPW) package 164. Valid characters are 0-9, A-Z and a-z.</p> <p>Where: nn = number entered in response to LAPW prompt.</p> <p>Enter the LAPW password to be used for PWnn.</p> <p>Note: If the LAPW password is a Set Based Administration (SBA) password (PWTP=SBA), the PWnn response length is 4-16 numeric characters, where the valid characters are digits 0-9 only.</p>	lapw-16
PWTP	(OVLY) SBA	<p>OVLY Password Access Type</p> <p>SBA Password Access Type</p>	adminset-21
QCHID	(YES) NO	<p>This rule is applicable for both encoding and decoding of Channel Identification IE</p> <p>Timeslot values 17 to 31 of the PR12 loop associated to channel number 17 to 31 of the Channel Identification IE (previous behavior)</p> <p>Timeslot values 17 to 31 of the PR12 loop associated to channel number 16 to 30 of the Channel Identification IE</p>	qsig gf-24
RADR	0-(1)-255	<p>Remote Address for the data-link level HDLC protocol</p> <p>The IADR and RADR prompts must be coordinated with the far-end. If IADR is defined as 3, then RADR must be 1.</p>	cls-7

LD 17

Prompt	Response	Comment	Pack/Rel
RCAP		Remote Capabilities. Enter one or more values to define the capabilities of the far-end.	pri-19
	BRI	Basic Rate Interface (when IFC = APAC, SL1, D70, ESS4, or ESS5)	
	CCBI	Call Completion to busy subscriber using integer value for operation coding CCBO/CCBI are mutually exclusive.	qsig ss-24
	CCBO	Call Completion to busy subscriber using object identifier for operation coding CCBO/CCBI are mutually exclusive	qsig ss-24
	XCCB	To remove remote capability.	
	CCBS	Call Completion to Busy Subscriber for QSIG and EuroISDN BRI interfaces. CCBS is allowed if QSIG supplementary services package 316 is equipped.	
	CCNI	Call Completion on no response using integer value for operation coding CCNO/CCNI are mutually exclusive.	qsig ss-24
	XCCN	To remove remote capability.	
	CCNO	Call Completion on no response using object identifier for operation coding CCNO/CCNI are mutually exclusive.	qsig ss-24
	XCCN	To remove remote capability.	
	CCNR	Call Completion to No Reply for QSIG and EuroISDN BRI interfaces. CCNR is allowed if QSIG supplementary services package 316 is equipped.	
	CPK	Network Call Park. CPK is allowed if: <ul style="list-style-type: none">• IFC = SL1• CPRKNET package 306 is equipped	
	COLP	Connected Line Identification Presentation Connected Number IE Presentation is supported on Indonesian interfaces. Default value for ESIG, ISIG, NI2, EUROISDN and Indonesian interfaces except AUS, EIR, DUT, BEL, FRA interfaces.	basic- 23

Prompt	Response	Comment	Pack/Rel
	XCOL	to remove Connected Number IE Presentation Default value for all APAC, AUS, EIR, DUT, BEL and FRA interfaces.	
	CTI	Call Transfer Integer CTI and CTO are mutually exclusive.	qsig ss-24
	CTO	Call Transfer Object CTI and CTO are mutually exclusive. QSIG SS Call Diversion Notification remote capability. Configure sending of QSIG Diversion Notification Information, treatment of Rerouting request and coding of operations. If coded as Object Identifier, the remote capability ends with 'O', whereas for Integer Value, the remote capability ends with 'I'. Only one remote capability is allowed. Add "call transfer notification" remote capability to the EuroISDN interface.	qsig ss- 23 bne-25
	DV11	Precede with 'X' to remove capability. Diversion information is sent to remote switch.	
	DV10	Diversion information is sent to remote switch.	
	DV21	Rerouting requests from remote switch are processed.	
	DV20	Rerouting requests from remote switch are processed.	
	DV31	Diversion information is sent to remote switch. Rerouting requests from remote switch are processed.	
	DV30	EuroI ISDN Call Diversion Diversion information is sent to remote switch. Rerouting requests from remote switch are processed.	bne-25
		Precede with 'X' to remove capability.	
	ECTO	Add call transfer notification and invocation remote capability to the EuroISDN Precede with 'X' to remove capability.	bne-25
	MCID	MCID = Add MCID as a new remote capability.	etsi-ss- 23
	XMCI	To remove remote capability.	
	MQC	MCDN QSIG Conversion as a Remote capability	meet-24
	MSL	Remote D-channel is on a MSDL card	
	MWI	Message Waiting Interworking with DMS-100	

LD 17

Prompt	Response	Comment	Pack/Rel
	NAC	Network Access data. Enter XNAC to remove NAC as a remote capability. NAC is allowed if: <ul style="list-style-type: none">• the D-channel is defined on an MSDL card (i.e. CTYP=MSDL)• the D-channel interface type is SL1 (IFC=SL1)	
	NCT	Network Call Trace supported	
	ND1	Network Name Display method 1	
	ND2	Network Name Display method 2	
	ND3	Network Name Display method 3. ND3 ensures the same level of service between the MCDN and QSIG name display services.	
	NDI	Name Display - Integer ID Coding	qsig-24
	NDO	Name Display - Object ID Coding	qsig-24
		Add Path Replacement as a remote capability. Only one capability can be configured per link.	qsig ss-23
	PRI	The encoding method uses Integer Values.	
	PRO	The encoding method uses Object Identifier. Precede with 'x' to remove capability.	
	RVQ	Remote Virtual Queuing RCAP is prompted until only <cr> is entered in response. Precede a value with X to remove. ND1 and ND2 are used with Network Call Party Name Display or NCPND. Both ends must have NCPND. ND2 requires SL-100, DMS with BCS32 and later. Prompted with Remote Virtual Queuing (ORC_RVQ) package 192.	
	TAT	Invoke Trunk Anti-Tromboning operation if the far-end switch also supports this feature. TAT may be input if: TAT package is equipped, CTYP = MSDL, IFC = D100, SL1, S100 or D250.	
	UUS1	User-to-User Service 1 Decode UUS IE sent by Central Office Send UUS IE to Central Office	rne-25
	XUSS	Remove User-to-User Service 1	

Prompt	Response	Comment	Pack/Rel
RCVP	(NO) YES	Auto-recovery to primary D-channel option. RCVP is supported on SL-1 to SL-1 connections only. When RCVP = YES, the primary D-channel is automatically forced to be the active channel after it is brought up from a released state. This option must be coordinated with the far end. Both sides must be either YES or NO. If the two sides do not match, both sides default to NO. When IFC = SL-1, RCVP changes to NO. For Backup DCH only.	pri-13
REMD	0, 1, 2, ...159 G0,G1...G159 T0,T1...T159 0-255	Double Density Remote Peripheral Equipment loop(s) Meridian 1 loop or loops GEC loop or loops TVT loop or loops Precede loop number with X to remove. If entry is for an odd-numbered loop, the preceding even numbered loop cannot be TDS, CONF or MFSD. Option 81C with Fiber Network Fabric	rpe-1 fnf-25
REMO	0, 1, 2, ...159 G0,G1...G159 T0,T1...T159 0-255	Single Density Remote Peripheral Equipment loop(s) Meridian 1 loop or loops GEC loop or loops TVT loop or loops Precede loop number with X to remove. If entry is for an odd-numbered loop, the preceding even numbered loop cannot be TDS, CONF or MFSD Option 81C with Fiber Network Fabric	basic-1 fnf-25
REMQ	0, 1, 2, ...159 G0, 1...G159 T0,T1...T159	Quadruple density Remote Peripheral Equipment loop(s) Meridian 1 loop or loops GEC loop or loops TVT loop or loops Precede loop number with X to remove.	rpe-7
REQ	CHG END	Request: Change existing data block Request: Exit overlay program	basic-1

LD 17

Prompt	Response	Comment	Pack/Rel																																
RLS	xx	<p>Release ID of the switch at the far-end of the D-channel.</p> <p>This is the software release at the far-end. If the far-end has an incompatible release, it prevents the sending of application messages.</p> <p>Shown below is the relationship between the ISDN application, equipment and the Release ID X11 or BCS at the far-end.</p> <table><thead><tr><th><u>Application</u></th><th><u>Far-End</u></th><th><u>Minimum RLS</u></th></tr></thead><tbody><tr><td rowspan="3">Network Ring Again</td><td>SL-1</td><td>12</td></tr><tr><td>SL-100</td><td>26</td></tr><tr><td>DMS-100/250</td><td>26</td></tr><tr><td rowspan="2">Network ACD</td><td>SL-1</td><td>15</td></tr><tr><td>SL-100</td><td>29</td></tr><tr><td rowspan="2">Network Message Service - Message Center</td><td>SL-1</td><td>15</td></tr><tr><td></td><td></td></tr><tr><td rowspan="2">Network Message Service - Meridian Mail</td><td>SL-1</td><td>16</td></tr><tr><td></td><td></td></tr><tr><td rowspan="3">Message Waiting Indication Interworking with DMS-100</td><td></td><td></td></tr><tr><td>SL-1</td><td>19</td></tr><tr><td>DMS-100</td><td>36</td></tr></tbody></table> <p>The Release ID information is required and supported for connection to Northern Telecom equipment only. For connections to AT&T ESS#4 and ESS#5, set RLS = 1.</p>	<u>Application</u>	<u>Far-End</u>	<u>Minimum RLS</u>	Network Ring Again	SL-1	12	SL-100	26	DMS-100/250	26	Network ACD	SL-1	15	SL-100	29	Network Message Service - Message Center	SL-1	15			Network Message Service - Meridian Mail	SL-1	16			Message Waiting Indication Interworking with DMS-100			SL-1	19	DMS-100	36	pri-19
<u>Application</u>	<u>Far-End</u>	<u>Minimum RLS</u>																																	
Network Ring Again	SL-1	12																																	
	SL-100	26																																	
	DMS-100/250	26																																	
Network ACD	SL-1	15																																	
	SL-100	29																																	
Network Message Service - Message Center	SL-1	15																																	
Network Message Service - Meridian Mail	SL-1	16																																	
Message Waiting Indication Interworking with DMS-100																																			
	SL-1	19																																	
	DMS-100	36																																	

Prompt	Response	Comment	Pack/Rel
ROLR	(0)-63	<p>Receive Objective Loudness Rating</p> <p>The default is 0, indicating no change to the default +45 dB. The number entered in this field corresponds to an offset value. The offsets and their corresponding values are provided on page 437.</p> <p>The ROLR value is downloaded to Meridian Modular telephones after sysload except when performing parallel reload. Refer to the Summary of Transmission Parameters NTP and the International Loss and Level Plan planning and engineering NTP before changing these values. Not prompted when United Kingdom (UK) package 190 is equipped.</p>	arie-14
RPEB	16-1000	Remote Peripheral Equipment Buffers, 2.0 Mb/s RPE	rpe-15
RXMT	1-(5)-20	<p>Retransmission Threshold</p> <p>Enter in units of 5 per cent. RXMT is the % of retransmissions allowed in 15 minutes before out of service is enforced, or:</p> $\text{RXMT} = (\# \text{ of packets retransmitted}) \div (\text{total} \# \text{ packets sent}).$	basic-1
SATN	I s c u	<p>TN of SADM/Data Line Card associated with IND CSL. For SL-1 telephone with CLS = CMSA.</p> <p>I = 0-255, Option 81C with Fiber Network Fabric</p>	cls-7 fnf-25
SBA_ADM_INS	0-(2)-64	Maximum Administrator and/or Installer Log Ins allowed at one time.	adminset-21
SBA_USER	0-(100)-500	Maximum User Log Ins allowed at one time.	adminset-21
SECU	(NO) YES	<p>Security for Meridian Link applications</p> <p>When set to NO, the host computer must specify both the TN and DN of the associate set in connect, answer and release messages.</p> <p>Prompted when the Integrated Services Digital Network Application Module Link for Third Party Vendors (IAP3P) package 153 is equipped for ISDN/AP Third Party.</p>	iap3p-12

Prompt	Response	Comment	Pack/Rel
SMEM	(NO) YES	Short Memory test On a manual SYS load the memory is tested on one pass, if (NO), memory is tested with normal six pass test. Not prompted on Option 81C.	smem-19
SOLR	0-(1)-4	Sidetone Objective Loudness Rating The SOLR value is downloaded to Meridian Modular telephones after sysload except when performing parallel reload. Before changing these values, refer to the <i>Summary of Transmission Parameters</i> NTP and the <i>International Loss and Level Plan</i> Planning and Engineering NTP.	arie-14
	(1)	12 dB	
	0	7 dB	
	2	17 dB	
	3	22 dB	
	4	sidetone disabled	
		The default is 0, indicating no change to the default +45 dB. The number entered in this field corresponds to an offset value. The default value is 1 (12 dB). The recommended North American value for all releases is 1 (12 dB). Does not apply to M2216.	
SSDT	0-159	Standby Synchronization DTSL Enter the number of the DTSL used for Standby Synchronization. Prompted if SYNM = 2 or 5.	basic-16
SSUP	(NO) YES	Senior Supervisor Device assigned used by senior supervisor/load manager. Cannot be YES if prompt APRT is YES.	acdc-1
STOP	(1)-2	Number of stop bits Options 51C, 61C, and 81C. Prompted for asynchronous ESDI ports.	cls-19
	(1)-1.5-2	Option 11C. To enter 1.5, use 1X5. STOP is not prompted for CARD 0 PORT 0 or when TTY_TYPE = PTY.	

LD 17

Prompt	Response	Comment	Pack/Rel
SUPPORTED_TEXT_ONLY		Change customized text string by text string input. Prompted if the Electronic Brandling ISM parameter is set to Terminal Text Broadcast (EBLN ISM value of 2).	basic-23
	(YES)	Input by text string and IDLE_DISP_STRING is prompted.	
	NO	Input character by character and IDLE_DISP_CHAR nn is prompted.	
SUPPRESS	0-(5)-127	Alarm occurrence threshold (prior to suppressing) This determines the number of times an alarm may occur before it is no longer output. Entering 0 indicates that all alarm occurrences are output (no suppression)	alarm-19
SYNC	(NO) YES	Asynchronous mode of operation for ESDI port Synchronous mode of operation for ESDI port	csl-7
SYNM		Synchronization Mode	ida-16
	(0)	No synchronization	
	1	Main input from Digital Trunk Signaling Link or DTSL	
	2	Main input and standby input from DTSL	
	3	Main input from external clock	
	4	Main input from DTSL; standby input from external clock	
	5	Main input from external clock; standby input from DTSL	
		SYNM is prompted with Integrated Digital Access (IDA) package 122.	
T1	2-(4)-20	Retransmission Timer Range in units of 0.5 seconds, (4) = two seconds	cls-7
T2	0-(10)-255	Maximum Time allowed without a frame being exchanged.	cls-7
T200	2-(3)-40	Retransmission Timer Entry is in units of 0.5 seconds.	pri-12

Prompt	Response	Comment	Pack/Rel
T203	2-(10)-40	Maximum Time allowed without frames being exchanged	pri-15
T23	1-(20)-31	Interface guard Timer or DCHI only This timer checks how long the interface takes to respond. Entry is in units of 0.5 seconds.	pri-12
T3	2-(5)-255	Timer for initial link setup in units of 0.5 seconds for ESDI only.	cls-7
T310	110-(120)	Timer used to determine how long SL-1 can wait for the response message when the QSIG outgoing call is in the U3 (outgoing call processing) state. This range applies to PRI, PRI2, and BRI trunks	qsig-20
TDS	0, 2, 4...158 1-9 11-19 21-29 31-39 41-49	Tone and Digit Switch (TDS or Fast TDS service loop) Use even-numbered loops for Tone and Digit Switch (TDS). Precede with X to remove. Option 11C Note: For Option 11C, all XTD/DTR units must be removed from the SSC card (card 0) before TDS 0 can be removed.	basic-1 lse-24
	0-255	Tone and Digit Switch loop, Option 81C with Fiber Network Fabric	fnf-25
TEN	xxx ALL <cr>	Tenant to be accessible by way of PWnn All Tenants allowed No change to previous definitions. Precede with X to remove.	lapw-16
TERD	0, 1, 2, ...159 G0,G1...G159 N0,N1,...N159 T0, T1...T159 X0,X1,...X159	Double Density Terminal equipment loop or loops Meridian 1 loop or loops GEC loop or loops Precede loop number with N to create a phantom loop for third party applications TVT loop or loops Precede loop number with X to remove. If entry is for an odd numbered loop, the preceding even numbered loop cannot be TDS, CONF or MFSD.	phtn-20
	0-255	Option 81C with Fibre Network Fabric	fnf-25

LD 17

Prompt	Response	Comment	Pack/Rel
TERM	0, 1, 2, ...159	Single Density Terminal equipment loop or loops	phtn-20
	G0,G1...G159	Meridian 1 loop or loops	
	N0,N1,...N159	GEC loop or loops	
	T0, T1...T159	Precede loop number with N to create a phantom loop for third party applications	
	X0,X1,...X159	TVT loop or loops	
	0-255	Precede loop number with X to remove. If entry is for an odd-numbered loop, the preceding even numbered loop cannot be TDS, CONF or MFSD Option 81C with Fibre Network Fabric	fnf-25
TERQ	0, 1, 2, ...159	Quadruple Density Terminal equipment loop or loops	phtn-20
	G0,G1...G159	Meridian 1 loop or loops	
	N0,N1,...N159	GEC loop or loops	
	T0, T1...T159	Precede loop number with N to create a phantom loop for third party applications	
	X0,X1,...X159	TVT loop or loops	
		Precede loop number with X to remove.	
TIMR	(NO) YES	Change protocol timer value	basic-1
TMDI	(YES)	TMDI Card (Mode set to PRI OR TRK) Option 11C	basic-24
	NO	Other Card	
TITE		T1 transmit Equalization	basic-24
	(0)	0 - 200 feet	
	2	200 - 400 feet	
TMRK	96, (128)	Length of cadence increments in ms Refer to the Flexible Tone and Digit Switch cards NTP. See CLN prompt in LD 56.	basic-13
TN	l s c u	Valid Terminal Number that when accessed returns a test tone	basic-1
	c u	Valid Terminal Number, Option 11C Prompted when DTD = EXT.	
TODR	0-23	Time Of Daily Routines	basic-1

Prompt	Response	Comment	Pack/Rel
TOLR	(0)-63	<p>Transmit Objective Loudness Rating</p> <p>The default is 0, indicating no change to the default +45 dB. The number entered in this field corresponds to an offset value. The offsets and their corresponding values are provided on page 437.</p> <p>The TOLR value is downloaded to Meridian Modular telephones after sysload except when performing parallel reload. Refer to the Summary of Transmission Parameters NTP and the International Loss and Level Plan planning and engineering NTP before changing these values. Not prompted when UK package is equipped</p>	arie-14
TPO	(NO) YES	<p>Do not enable Traffic Period option</p> <p>Enable Traffic Period option</p>	basic-21
TRIGGER	a...a	<p>Trigger string for alarm tables</p> <p>The trigger string can be up to 10 alphanumeric characters. At least one character must be alphabetic (a-z). Plus sign (+) can be used to indicate the "wild card" entry.</p> <p>For example, BUG++++ includes all BUG system messages. The mnemonics supported for this prompt are lists at the beginning of this overlay. A value must be entered; <CR> is not accepted</p>	alarm-19
TRLL	1-31 1-31	<p>Test RPE Local Loop back</p> <p>Perform complete 2.0 Mb/s RPE loop testing, including local loop back, in the RPE groups as part of daily routine. Not supported for Option 11C. Precede with X to delete.</p>	rpe2-15
TRNS	(NONE) HELP BOTH	<p>Selects which messages are going to be translated</p> <p>Help and Option 81C specific system messages are printed in English version</p> <p>HELP is printed in translated version and Option 81C specific system messages in English</p> <p>BOTH Help and Option 81C specific system messages are printed in translated version</p>	mlms-20
TRSH	0-15	<p>Threshold</p> <p>Digital Trunk Interface Threshold set defined in LD 73.</p>	pri-19

LD 17

Prompt	Response	Comment	Pack/Rel
TSO	(NO) YES	Do not enable Trunk Period option Enable Trunk Period option	basic-21
TTY	0-15	Pre-defined MSDL-SDI terminal number Prompted if ADAN = STA	sta-19
TTY_TYPE	(SDI) LSL PTY	TTY logical type for Option 11C. TTY_TYPE is only prompted when adding or changing TTY devices. For a PRT device, TTY_TYPE is fixed as SDI. Standard TTY type (default) Low speed Link type Pseudo TTY type	basic-22
TTYLOG	0-65534	Log buffer size When 0 is entered, there is no log file	multi-19
TUBO	(NO) YES		
TYPE		Type of data block	
	ADAN	All input/output devices (includes D-channels)	basic-19
	ALARM	Alarm filter configuration data When TYPE = ALARM, the system automatically prints out the current alarm and exception filters Must have Alarm Filtering (ALRM_FILTER) package 243.	alarm-19
	ATRN	Aries Transmission	basic-19
	CEQU	Common Equipment parameters	basic-19
	CFN	Configuration data block	basic-1
	OVLY	Overlay area options	basic-19
	PARM	System Parameters	basic-19
	PWD	System Password and Limited Access to Overlay Password When entering yes, the PWD2 is prompted unless LAPW is used and Multi-User Log In is enabled.	basic-19
	VAS	Value Added Server	basic-19

Prompt	Response	Comment	Pack/Rel
USER		<p>Output message types</p> <p>When ADAN = HST, users may be BUG, MCT, MTC, SCH and TRF. Prompted when ADAN is PRT, TTY or, HST.</p> <p>For Option 11C:</p> <ol style="list-style-type: none"> 1. LSL is not a valid response for the USER prompt 2. USER is not prompted if TTY_TYPE = LSL. <p>When TTY_TYPE = PTY, the response to USER must be one of the following: MTC, BUG, SCH, FIL, TRF, MCT</p>	basic-20
	ACD	Automatic Call Distribution printer for reports	
	ADM	Administrator SBA access level to be stored in the history file. Precede with X to remove.	adminset-21
	APL	Auxiliary Processor Link for IVMS	
	BGD	Background Terminal Mutually exclusive with ACD, APL, CDL, CMC, CMS, HSL, and LSL.	
	BUG	Software error	
	CDL	CDR Data Link	
	CMC	Communications Management Center	
	CMS	Command and Status Link Port must be defined as a synchronous ESDI	
	CSC	Customer Service Changes: Automatic Set Relocation and Attendant Administration	
	CTY	CDR TTY port to output CDR records	

LD 17

Prompt	Response	Comment	Pack/Rel
	FIL	<p>This is a special response which applies to Alarm Filtering message output.</p> <p>When a port is assigned this User type, only Alarm Filtered messages will be output. The messages listed at the TRIGGER prompt are the messages that appear for this user type.</p> <p>When AF_STATUS = OFF, no system messages are output to the port with FIL type.</p> <p>The output appears as shown below. The field definitions follow.</p> <pre><severity> <report id> <time> <date> <sequence number> <event> <tab> Operator data: <data> <tab> Expert data: <data></pre> <p>Where:</p> <p><u>severity</u>:</p> <ul style="list-style-type: none">• **** = Critical• *** = Major• ** = Minor• blank = None <p><u>report id</u>: The system message character string (BUG1234, ERR5683, etc.)</p> <p><u>time</u>: hh:mm:ss</p> <p><u>date</u>: dd/mm/yy</p> <p><u>sequence number</u>: The sequence the message appears. The range is 0-65535, and the numbers are right justified. Meridian 1 and auxiliary processor messages have separate sequence numbers.</p> <p><u>event</u>: This indicates the type of event that is being output: MSG (message), SET (set alarm), CLR (clear alarm).</p>	alarm-19

Prompt	Response	Comment	Pack/Rel
		<u>tab</u> : 6 character indent	
		<u>Operator data</u> : This contains additional information to help clear the fault. This field contains the additional message information (TN, loop number, etc.) that the message contains. Up to 30 characters will appear.	
		<u>Expert data</u> : This field may not always appear. It contains system expert information.	
HSL		ACD/D High-Speed AUX link	
ICP		Intercept Computer Link	
INS		Installer SBA access level to be stored in the history file. Precede with X to remove.	adminset-21
LSL		ACD/D Low-Speed AUX link Option 11C uses LSL for Meridian Mail administration/maintenance access	
MCT		Malicious Call Trace TTY port along with other users	mct-20
MTC		Maintenance includes AUD, BUG and ERR if enabled by prompt ERRM in PARM. Use MTC for the system monitor or XSM.	
NOO		No Overlay allowed	
PMS		Property Management System interface	
SCH		Service Change or any data base change	
TRF		Traffic	
USR		User SBA access level to be stored in the history file. Precede with X to remove.	adminset-21

LD 17

Prompt	Response	Comment	Pack/Rel
USR		User. Precede any of the following with X to remove.	pri-12
	ISLD	Integrated Services Signaling Link Dedicated. D-channel for ISL only, in dedicated mode, without using the PRI channel.	
	PRI	Primary Rate Interface. D-channel for ISDN PRA only.	
	SHA	Shared mode. D-channel used for both ISDN PRA and ISL. D-channel must be using a PRI channel.	
	SHAV	Shared Virtual Network Services. D-channel shared between PRA, VNS and ISLD.	
	VNS	Virtual Network Services. D-channel used for Virtual Network Services or for ISLD.	
VAS	NEW CHG OUT <cr>	New Value Added Server Change Value Added Server Remove Value Added Server End VAS prompting sequence	cls-7
VCNA	(NO) YES	Virtual Network Services Network Call Party Name Display available over this D-channel	vns-16
VCRD	(NO) YES	Virtual Network Services Network Call Redirection available over this D-channel	vns-16
VNSC	(0)-xx	Virtual Network Services Customer number associated with the D-channel. Customer number is defined in LD 15. Customer 0 is the default for the D-channel. Ensure customer 0 is not actually a user of the D-channel before changing.	vns-16
VNSM	1-300	Virtual Network Services Maximum controlled by the D-channel	vns-16
VNSP	0-32700	Virtual Network Services Private Network Identifier (PNI) for the far-end customer	vns-16
VOLR	(NO) YES	Handset Volume Reset To have handset volume reset whenever the user hangs up or uses handsfree, set VOLR = YES.	agcr-20

Prompt	Response	Comment	Pack/Rel
VSID	0-15	<p>VAS Identifier</p> <p>Identifier for the VAS providing the services, this includes IS, Data Services, Voice Messaging, Alpha terminals.</p> <p>The value entered here is associated with the value which may be entered at the ELAN prompt. By responding to VSID, you are preparing to associate a link with a Value Added Server ID to allow message transmission.</p>	cls-7
VSIG	(NO) YES	<p>Virtual Network Services Network Signalling denied/allowed.</p> <p>VSIG=YES equal Signalling arrangement =ESN5</p> <p>VSIG=NO equal Signalling arrangement =STD</p>	basic-23
VTRO	(NO) YES	<p>Trunk Route Optimization before answer available over this D-channel for VNS.</p> <p>VTRO will be prompted if:</p> <ol style="list-style-type: none"> 1. Advanced Network Services (NTWK) package 148 <i>is</i> equipped 2. Trunk Anti-Tromboning (TAT) package 293 <i>is not</i> equipped 3. VCRD = YES 	vns-21

LD 17

Prompt	Response	Comment	Pack/Rel
XCT	0, 2, 4,...158	<p>Extended Conference/TDS/MFS</p> <p>Loop number for NT8D17 Conference/TDS/MFS card. Enter an even network loop number for TDS/MFS functions. The Conference function is automatically assigned the next higher or odd loop number.</p> <p>System prints: TDS n MFS n CNF n+1</p> <p>This indicates that TDS and MFS functions are configured on the even loop "n" and conference function is configured on the next higher odd loop.</p> <p>Precede with X to remove. Both loops must be disabled first. Since TN 0 0 0 0 cannot be used in non-multigroup systems, it is recommended that Conference/TDS/MFS card be placed in loop 0.</p> <p>You may configure more than 16 conference loops; however, enabling more than 16 conference loops may cause the system to lock-up.</p>	xct-15
	D0-D158	Dealer conference loop	ohol-20
	S0-S158	Spare dealer conference loop Should be in the same group as the units planned to use this loop.	ohol-20
	0-254	XCT loop number for NT8D17 Conference/TDS Card, Option 81C with Fiber Network Fabric	fnf-25
XNUM	(1)-4	Number of retransmissions per message for PMSI. If XTMR = 0, this prompt does not appear.	pms-19
XSM	(NO) YES	<p>Extended System Monitor</p> <p>This is the SDI port for the Extended System Monitor. Prompt USER must be set to MTC (maintenance messages) for the system monitor port. Only one port can be XMS = YES.</p>	xpe-15

Prompt	Response	Comment	Pack/Rel
XTMR	(0)- 6	PMS acknowledgment time (the time measured in seconds to wait for the acknowledgment message from the PMS) Where: 0 = no retransmission.	pms-19
YALM	(FDL) DG2	Yellow Alarm Method Prompted only if the frame format is ESF. If YALM is not prompted, DG2 was set automatically. If YALM is prompted the response varies between countries. The default is FDL when the frame format is ESF. When the frame format is D2, D3, or D4, the default is DG2.	pri-19

LD 17

LD 18: Speed/Group Call, Pretranslation, Special Service, 16-Button DTMF and Hotline

This overlay allows data for Speed Call, System Speed Call, Group Call, Pretranslation, Special Service, Enhanced Hotline and 16-Button DTMF to be created or modified. The data may be printed using Overlay 20.

The overlay allows the ability to add and copy multiple Speed Call lists and System Speed Call lists. The number of lists allowed by each system is subject to the system type and memory available. Refer to *X11 features and services* for details concerning speed call requirements.

The Pretranslation List configuration takes place in this program. To enable the Pretranslation feature in LD 15, the list must be configured here using the XLAT prompt.

Prompts and responses

Table of Contents

Section	Page
<i>Prompts and responses by task:</i>	
Table of Contents Compute Speed Call list memory size and disk records	page 506
Configure Group Call lists	page 507
Configure Speed Call lists	page 507
Assign a Pretranslation group to Speed Call list	page 508
Configure Enhanced Hot Line lists	page 508
Configure Special Service List	page 509
Move from one group or list to another	page 509
Configure Group Hunt	page 510
Configure ABCD data block	page 511
<i>Other Information:</i>	
Flexible feature code information	page 512

Compute Speed Call list memory size and disk records

Use this prompt sequence to determine if there are enough memory and disk records for new Speed Call and Hot Line lists. Compare the output with the “MEM AVAIL” and “DISK RECS AVAIL” values output before the REQ prompt. See also “System memory and disk space” at the beginning of this document.

Prompt	Response	Comment
REQ	COMP	Request = COMP (Compute disk and memory required for new lists)
TYPE	aaa	Type of data block, where: aaa = SCL, SSC or HTL (Speed Call, System Speed Call or Hot Line estimation)
NOLS	1-8191	Number of lists to be added
DNSZ	4-(16)-31	Maximum length of digits allowed for new lists
SIZE	1-1000	Maximum number of DNs allowed in new lists

Configure Group Call lists

Prompt	Response	Comment
REQ	aaa	Request (REQ responses begin on page 517)
TYPE	GRP	Type of data block = GRP (Group Call list)
CUST	0-99	Customer number associated with this data block
GRNO	0-63	Group number for group call
GRPC	(YES) NO	Allow or deny group call control to the originator
STOR	xxx yy...y	Entry number (0-19) and the digits stored with it Entry number (0- 5) and digits stored with it for Option 11C systems

Configure Speed Call lists

Prompt	Response	Comment
REQ	aaa	Request (REQ responses begin on page 517)
TYPE	aaa	Type of data block, where aaa = SCL or SSC (Speed Call list or System Speed Call list)
LSNO	0-8190	List Number for Speed Call (SCL)
	0-4095	List Number for System Speed Call (SSC)
TOLS	0-8190	To List (New speed call list number)
NCOS	(0)-99	Network Class of Service for SSC
DNSZ	4-(16)-31	Maximum number of DNs allowed for Speed Call lists
SIZE	1-1000	Maximum number of DNs in Speed Call list
WRT	(YES) NO	Data is correct and can be updated in the data store
STOR	xxx yy...y	Entry number (0-999) and the digits stored with it
WRT	(YES) NO	Data is correct and can be updated in the data store

LD 18

Assign a Pretranslation group to Speed Call list

Prompt	Response	Comment
REQ	aaa	Request (REQ responses begin on page 517)
TYPE	PRE	Type of data block = Pretranslation calling group assignment
CUST	0-99	Customer number
XLAT	0-254 0-8191	Pretranslation list (Calling group to Speed Call list correlation)
	0-254 8191	If list number 8191 is assigned to a group then pretranslation is removed for that group
- PRE	0-8190	Pretranslation Speed Call List number
- PST	0-8190	Post-translation Speed Call List number
- SDA	0-8190	Single-Digit Access Speed Call List number

Configure Enhanced Hot Line lists

Prompt	Response	Comment
REQ	aaa	Request (REQ responses begin on page 517)
TYPE	HTL	Type of data block = Hot Line list
CUST	0-99	Customer number
LSNO	0-8190	List Number for Hotline (one for customer)
NCOS	0-4095	Network Class of Service for HTL
DNSZ	4-(16)-31	Maximum number of DNs allowed for Hot Line list
SIZE	1-1000	Maximum number of DNs in Hot Line list
WRT	(YES) NO	Data is correct and can be updated in the data store
STOR	xxx yyy...y	Entry number (0-999) and the digits stored with it
WRT	(YES) NO	Data is correct and can be updated in the data store

Configure Special Service List

Prompt	Response	Comment
REQ	aaa	Request (REQ responses begin on page 517)
TYPE	SSL	Type of data block = Special Service list
SSL	1-15	Special Service List number
SSDG	xxxx	Special Service Digit or Digits
- CDPC	(NO) YES	Called Party Control is enabled
- TOLL	(NO) YES	Toll number
- ALRM	(NO) YES	Alarm is enabled
- TNDM	(NO) YES	Tandem
- SSUC	(NO) YES	Special Service Unanswered Call Mark
- NDGT	(0) - 15	Number of digits collected before the seizure of the outgoing CIS MFS trunk
- SSDG	<cr>	Special Service Digit or Digits

Move from one group or list to another

Prompt	Response	Comment
REQ	MOV	Request = MOV
TYPE	aaa	Group or List Type (aaa = GHT, GRP, SCL, SSC, or SSL)
CUST	0-99	Customer number
LSNO	xxxx	List Number
TOLS	0-254	To List
GRNO	xx	Group Number
TOGR	0-63	To Group

LD 18

Configure Group Hunt

Prompt	Response	Comment
REQ	aaa	Request (REQ responses begin on page 517)
TYPE	GHT	Type of data block = Group Hunt
LSNO	0-254	List Number
CUST	xx	Customer Number
PLDN	xxxx	Pilot DN
PLAT	1-254 0-8191	Post-translation calling group and list number
GRNO	0-63	Group Number for group call
GRPC	(YES) NO	Group Call originator (does) does not have control
DNSZ	4-(16)-31	Directory Number Size
SIZE	1-1000	Size of list
STOR	xxx yyy...y	Entry number (0-999) and the digits stored with it
WRT	(YES) NO	Data is correct and can be updated in the data store

Configure ABCD data block

Prompt	Response	Comment
REQ	aaa	Request (REQ responses begin on page 517)
TYPE	ABCD	Type of data block = ABCD (16 Button DTMF)
TBNO	1-254	Table Number
DFLT	1-254	Default function table number
PRED	(NO) YES	Pre-Dial
- A	aaaa	A key assignment
- B	aaaa	B key assignment
- C	aaaa	C key assignment
- D	aaaa	D key assignment
- *	aaaa	asterisk key assignment
- #	aaaa	# key assignment
- RCAL	ADL x...x	Recall button assignment
POST	(NO) YES	Post-dial
- A	aaaa	A key assignment
- B	aaaa	B key assignment
- C	aaaa	C key assignment
- D	aaaa	D key assignment
- *	aaaa	asterisk key assignment
- #	aaaa	# key assignment
CONT	(NO) YES	Control
- A	aaaa	A key assignment
- B	aaaa	B key assignment
- C	aaaa	C key assignment
- D	aaaa	D key assignment
- *	aaaa	asterisk key assignment
- #	aaaa	# key assignment

Flexible feature code information

Table 4
Default 16-button DTMF Flexible Feature Code functions

Button	Pred	Post	Control
A	RGAD	RGAA	CNFD
B	SNR	SNS	TGLD
C	CFWA	NUL	DISD
D	SPCU	NUL	NUL
*	NUL	NUL	NUL
#	NUL	NUL	NUL
RCAL	NUL		

Table 5
Flexible Feature Code mnemonics

Function	Pre-dial mode mnemonic	Post-dial mode mnemonic	Control mode mnemonic
ADL x...x (maximum 31 digits)	ADL x...x	ADL x...x	
Authorization Code	AUTH		
Automatic Set Relocation	ASRC		
Automatic Wake Up Activate	AWUA		
Automatic Wake Up Deactivate	AWUD		
Automatic Wake Up Verify	AWUV		
Busy Number Redial Activate		BNRA	
Busy Number Redial Deactivate	BNRD		
Busy Number Redial Toggle	BNRK	BNRK	
Call Detail Recording Charge Account	CDRC	CDRC	
Call Forward All Calls Activate	CFWA		
(Part 1 of 3)			

Function	Pre-dial mode mnemonic	Post-dial mode mnemonic	Control mode mnemonic
Call Forward All Calls Deactivate	CFWD		
Call Forward All Calls Verify	CFWV		
Call Forward Destination Deactivation	CFDD		
Call Forward Hunt Override	CFHO		
Call Park		CPRK	
Call Park Access	CPAC		
Carriage return (use default from Table 7)	<cr>	<cr>	<cr>
Conference Diagnostics	COND		
Conference Digit 1			CNFD
Conference 6 Trunk Disconnect		C6DS	
Customer Call Forward Activate	CCFA		
Customer Call Forward Deactivate	CCFD		
Customer Call Forward Toggle	CCFK		
Deactivate RGA/LND/SNR/CFW	DEAF		
Disconnect Digit 3			DISD
Electronic Lock Activate	ELKA		
Electronic Lock Deactivate	ELKD		
Group Hunt Pilot DN	GRHP		
Incoming Call Indicator Activate	ACAI		
Incoming Call Indicator Deactivate	ICID		
Incoming Call Indicator Override		ICPO	
Incoming Call Indicator Print	ICIP		
Integrated Message System Access	IMSA		
Last Number Redial	RDLN	RDLN	
Maintenance Access	MNTC		
Malicious Call Trace		MTRC	
NUL (leave key without an assigned function)	NUL	NUL	NUL
(Part 2 of 3)			

LD 18

Function	Pre-dial mode mnemonic	Post-dial mode mnemonic	Control mode mnemonic
Override		OVRD	
Paging and Radio paging code	PAG x...x	PAG x...x	
Permanent Hold		HOLD	
Pickup DN	PUDN		
Pickup Group		PUGR	
Pickup Ringing Number		PURN	
Ring Again Activate		RGAA	
Ring Again Deactivate	RGAD		
Ring Again Verify	RGAV		
Room Status	RMST		
Speed Call Controller	SPCC		
Speed Call Erase	SPCE		
Speed Call User	SPCU	SPCU	
Store Number (Erase)	RDNE		
Store Number (Redial)	RDSN	RDSN	
Store Number (Save)	RDST	RDST	
System Speed Call User	SSPU	SSPU	
Terminal Diagnostics	TRMD		
Toggle Digit 2			TGLD
Trunk Answer From Any Station	TFAS		
Trunk Verification	TRVS		
User Status	USTA		
User for set based administrator	USER		

(Part 3 of 3)

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
#	aaaa	# key assignment (see Table 4 and Table 5 starting on page 512)	abcd-14
*	aaaa	asterisk key assignment (see Table 4 and Table 5 starting on page 512)	abcd-14
A	aaaa	A key assignment (see Table 4 and Table 5 starting on page 512)	
ALRM	(NO) YES	Alarm is enabled	basic-1
B	aaaa	B key assignment (see Table 4 and Table 5 starting on page 512)	abcd-14
C	aaaa	C key assignment (see Table 4 and Table 5 starting on page 512)	abcd-14
CDPC	(NO) YES	Called Party Control is enabled	basic-1
CONT	(NO) YES	Control; default mnemonics are used; see Table 4. Modify control mode table; see Table 5.	basic-1
CUST	xx	Customer number associated with this function as defined in LD 15 Prompted when REQ = NEW or CHG and LSNO = <cr>	basic-1
D	aaa	D key assignment (see Table 4 and Table 5 starting on page 512)	abcd-14
DFLT	1-254 <cr>	Default function table number Prompted if a table has been defined for the customer. No table is to be used as the default.	basic-1
DNSZ	4-(16)-31	Directory Number Size Maximum length of DN allowed for Speed Call list or Group Hunt list. Range is 4, 8, 12, 16, 20, 24, 28, 31. For Speed Calling the default = 16. Numbers between 1 and 30 are rounded up to the next valid number. Once defined DNSZ should not be changed. Instead, print out the list, remove it with REQ = OUT and rebuild the list with the new DNSZ. Prompted when REQ = NEW and TYPE = GHT.	optf-1

LD 18

Prompt	Response	Comment	Pack/Rel
GRNO	0-63	Group Number for group call	grp-20
GRP	0 - 4095 <CR> X	Ringin Number Pickup Group (RNPG) using this speed call list. Repeat for all groups sharing the same list. To reprompt "LSNO" To remove	grp-1
GRPC	(YES) NO	Group Call originator does have control Group Call originator does not have control If GRPC = YES in the Group Call List, the originator has control: when the originator goes on hook, the call is terminated. If GRPC = NO and the originator goes on hook, the Group Call acts like a conference call: the call remains active until all members go on hook.	grp-20
LSNO	0-4095 0-8190 <cr>	List Number for Speed Call, System Speed Call, Group Hunting and Hotline System Speed Call and Hot Line lists A Speed Call list associated with Call Pickup network wide groups. to end Use only when REQ = CHG and TYPE = GHT. List numbers exceeding four digits will have the left most digits truncated, and only the right most digits will be accepted. A Hot Line list uses a System Speed Call list entry, only one Hot Line list is allowed per customer. MSCL must be defined in LD 17.	optf-1
NCOS	(0)-99	Network Class of Service Prompted when TYPE = SSC or HTL.	basic-17

Prompt	Response	Comment	Pack/Rel
NDGT	(0) - 15	Number of digits which should be collected before the seizure of the outgoing CIS MFS trunk. Number of digits to be accepted from the incoming MFS trunk. If the outgoing call is recognized as MFS call then the trunk should not be seized until the number of the user dialed digits equals to the NDGT or EOD timer expires or the OCTO ('#') is dialed. If the incoming MFS call is recognized then the trunk should be requested to issue the BX MFS signal to the CIS CO party until the number of the accepted from the trunk digits equals to NDGT.	cismfs- 23
NOLS	1-8191	Number of lists to be added. Prompted if REQ = COMP	
PLAT	1-254 0-8191	Post-translation calling group and list number List number 8191 is used to remove the group from being post-translated.	pldn-15
PLDN	xxxx	Pilot DN. Prompted when LSNO = <cr>.	pldn-15
POST	(NO) YES	Do not modify Post-dial table Default mnemonics are used; see Table 7. Modify Post-dial table	abcd-14
PRE	0-8190	Pre-translation Speed Call List number Precede with X to remove.	pxlt-15
PRED	(NO) YES	Do not modify Pre-dial pre-dial function table Default mnemonics are used; see Table 4. Modify the pre-dial function table, see Table 5.	abcd-14
PST	0-8190	Post-translation Speed Call List number Precede with X to remove.	pxlt-15
RCAL	ADL x...x NUL	Recall button assignment Autodial, where x...x is the autodial number to a maximum of 31 digits. To leave the RCAL button without an assigned autodial number	abcd-14
REQ		Request	basic-19

LD 18

Prompt	Response	Comment	Pack/Rel
	CHG	Change existing data block	
	COMP	Compute memory and disk requirements for new Speed Call, System Speed Call or Hot Line lists	
	CPY xxx	Copy speed call data. Where: xxx = 1-100. The ability to copy multiple Speed Call and System Speed Call lists is supported.	
	END	Exit overlay program	
	MOV	Move data block from one group or list to another.	
	NEW xxx	Add new data block. Where: xxx = 1-100. The ability to create multiple speed Call and System Speed Call lists is supported.	
	OUT	Remove data block.	
SDA	0-8190	Single-digit Access Speed Call List number Precede with X to remove.	pxlt-15
SIZE	1-1000 1-96	Maximum number of DNs in Speed Call or Hot Line lists Maximum number of DNs in Group Hunt list Once defined, SIZE should not be changed. Instead, print out the list in LD 20, remove it with REQ = OUT and rebuild the list with the new SIZE. SIZE is not prompted for TYPE = GRP or PRE.	optf-1
SSDG	xxxx <cr> X	Special Service Digitone Digit or Digits (1-4 digits) To proceed past SSDG prompt. Precede SSDG entry with X to remove it. The SSDG prompt, followed by the CDPC, TOLL and ALRM prompts, reappears after each ALRM prompt until the list contains 100 entries or a <cr> is entered for SSDG. Precede with X to remove.	opcb-14
SSL	1-15 X	Special Service List number Precede with X to remove.	supp-14
SSUC	(NO) YES	Special Service Unanswered Call mark If the outgoing call is recognized as SSUC (that is, if the first 1 - 4 digits outpulsed to the trunk = SSDG with SSUC = YES), then such a call requires some specific disconnect treatment.	cist-21

Prompt	Response	Comment	Pack/Rel
STOR	xxx yyy ... y	<p>Store</p> <p>For TYPE = SCL, SSC, or HTL the input format is entry number and digits stored against it. Where:</p> <ul style="list-style-type: none"> • xxx = list entry number from 000 to 999 • yyy ... y = digits stored with each list entry number xxx 	optf-1
	xx yyyy	<p>For TYPE = GRP the input format is member number and member DN. Where:</p> <ul style="list-style-type: none"> • xx = member number (00-19 for 51C, 61C, and 81C or 0-5 for Option 11C) • yyyy = member DN <p>If the Directory Number Expansion (DNXP) package is equipped, up to seven digits are allowed; otherwise, only four digits can be entered.</p>	
	xx yy	<p>For TYPE = GHT the input format is Group Hunt entry and digits stored against it. Where:</p> <ul style="list-style-type: none"> • xx = GHT entry number from 00 to 95 • yyyy = digits stored 	
	<cr>	<p>Stop STOR prompt</p> <p>For Speed Call, System Speed Call or Hot Line the member number must conform with SIZE and the number of digits must conform to prompt DNSZ.</p> <p>Digits may include "*" and "#" if the Outpulsing, asterisk and octothorpe (OPAO) package 104 is equipped.</p>	
	xxx <space> <cr>	<p>Remove entry</p>	
TBNO	1-254	<p>Table Number</p> <p>The number of the ABCD table to be added, changed or removed</p>	abcd-14
TNDM	(NO) YES	<p>Send MFC H tandem signal</p> <p>Prompted when the International Supplementary Features (SUPP) package 131 and Multifrequency Compelled Signaling (MFC) package 128 are equipped.</p>	supp-14
TOGR	0-63	<p>To Group</p> <p>New group call group number.</p>	grp-1

LD 18

Prompt	Response	Comment	Pack/Rel
TOLL	(NO) YES	Toll number The SSDG entry is a toll number	opcb-14
TOLS	0-8190	To List New speed call list number.	optf-1
TYPE		Type of data block	basic-1
	ABCD	16-Button DTMF data block	
	CPNW	Call Pickup Network Wide data	
	GHT	Group Hunt data block	
	GRP	Group call data block	
	HTL	Hot Line data block	
	PRE	Pretranslation data block	
	SCL	Speed Call List or pretranslation data block	
	SSC	System Speed Call data block	
WRT	(YES) NO	Write Data is correct and can be updated in data store. The Prompt WRT follows prompts SIZE and STOR asking you to confirm the correctness of the data just entered. If data is correct, enter "YES" or <cr>. A response of "NO" causes the data just entered to be ignored and SCH3213 is output. A response of "*****" aborts the program. Only the last STOR value is lost. All previous values to which WRT was "YES" or <cr> are saved. The following information is output with the WRT prompt: ADDs: MEM: xxxxx DISK: yy.y Where: <ul style="list-style-type: none">• xxxxx = the amount of protected memory• yy.y = the number of disks records required for the new Speed Call list Check the "MEM AVAIL" and "DISK RECS AVAIL" output values before the REQ prompt. See also "System memory and disk space" at the beginning of this document.	optf-1

Prompt	Response	Comment	Pack/Rel
XLAT	xxx yyyy	<p>Calling group number to translation Speed Call list number correlation. Format if International Supplementary Features (SUPP) package 131 is not equipped, where:</p> <ul style="list-style-type: none"> • xxx = Pretranslation group number, 0-254 • xxx = Group 0 is used for trunks. • xxx = Group 1 is used for attendant consoles. • xxx = Groups 2-254 can be used for other calling groups. • yyyy = List number to be used for Pretranslation, 0-8191. 8191 is used to remove the group from pretranslation. 	pxlt-8
	xxx	<p>Pretranslation group number. Format if International Supplementary Features (SUPP) package 131 is equipped, where:</p> <ul style="list-style-type: none"> • xxx = Group 0 is used for trunks. • xxx = Group 1 is used for attendant consoles. • xxx = Group 2-254 can be used for other calling groups. 	
	<cr>	End the prompt group.	

LD 18

LD 19: Code Restriction

Overlay program 19 allows data for code restrictions to be created or modified.

Code Restriction is used to control the digits that can be dialed on a COT or FEX trunk route by a Toll Denied (TLD), Conditionally Toll Denied (CTD) or Conditionally Unrestricted (CUN) Class of Service telephone. See also New Flexible Code Restriction in LD 49.

Route 31 is not an exclusively private route. It can be configured as a private route in LD 16.

For Option 11C Systems Overlay program 19 is replaced by Overlay 49.

Prompts and responses Table of Contents

Section	Page
<i>Prompts and responses by data block:</i>	
ANI: Automatic Number Identification data block	page 524
CRB: Code Restriction data block	page 525
FGDB: Feature Group D data block	page 526

ANI: Automatic Number Identification data block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	ANI	Type of data block = ANI (Automatic Number Identification)
ANII	0-31	ANI Data Block Index
ANIT	xxx	Invalid ANI treatment
NPA	200- 999	First 3 ANI digits in NPA format
3ANI	xxx	3 Digit ANI (denied) allowed
SLV3	NXX	Number of digits for screening
NXX	xxx yyy	Range of end-office numbers
SLV6	xxx	Number of digits for screening
- SUB	xxxx yyyy	Range of subscriber numbers

CRB: Code Restriction data block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	CRB	Type of data block = CRB (Code Restriction)
NCOS	0-99	NCOS value for subscribers
CUST	xx	Customer number associated with this data block
ROUT	0-511	Route number
TORT	0-511	To Route
CLR	aaaa	Codes (aaaa = DENY or ALLOW)
ALLOW	200-999 ... 200-999	NXX, NPA codes allowed
DENY	200-999 ... 200-999	NXX, NPA codes denied

FGDB: Feature Group D data block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	FGDB	Type of data block = Feature Group D
FGNO	0-127	Feature Group D block number
CIC	0000-9999	Carrier ID
CCLS	a...a	Carrier Class (a...a = IC, INC, or CONS)
PRES	(YES) NO	Presubscription
OVLP	(YES) NO	Overlapped outpulsing by Local Exchange Carrier (LEC)
CCAN	aaa bbb	Call Categories on calls to Carrier, and ANI screening (aaa = NAM, NA0, INT, IN0, OPR, SAM, SAX, SA0, CUT, or (ALL); bbb = (YES) or NO)
SAC	xxx xxx xxx	Service Access Codes
ANII	0-31	ANI Data Block Index
CDAN	(NO) YES	ANI Digits in CDR Records
SHAN	(NO) YES	Show ANI Digits on Terminal Displays
PRTD	(NO) ALL	Printout Control for Invalid II or ANI Digits
LDAC	aaa	Long Distance Access Code (aaa = AC1 or AC2)
LAAC	aaa	Local Area Access Code (aaa = AC1 or AC2)
OPER	DN nnn ... nnn RAN nnn	Treatment for 0+, 0- calls
INTR	(NO) YES	Intercept Treatment
ADFT	(OVF) RAN nnn DN nnn ... nnn	Intercept Treatment for Invalid Address Format
IIT	(OVF) RAN nnn DN nnn ... nnn	Intercept Treatment for Invalid IIs
IITP	xx yyyy zz	Valid II, II Type, and NCOS for ANI screening bypass
CPAR	(NO) YES	Call Processing parameters
INIT	(NO) YES	Length of Initial String of dialed digits on outgoing calls
ENBL	1-(12)-30	Long Enbloc dialing timeout
ENBS	1-(5)-30	Short Enbloc dialing timeout
IFTO	2-(120)-254	Inter-field FGD timeout in increments of 2 seconds
DGTO	128-(640)-5000	Interdigits timeout
MONT	0-(256)-2048	Minimum On-Hook Time

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
3ANI	(DENY) NCOS xx	3 Digit ANI denied Apply invalid ANI treatment 3 Digit ANI allowed Use this NCOS value (0-99)	fdg-17
ADFT	(OVF) RAN nnn DN nnn . . . nnn	Intercept Treatment for Invalid Address format	fgd-17
ALOW	200-999 ... 200-999 <cr>	NXX, NPA codes Allowed Proceed to next prompt Prompted when CLR = DENY or <cr>.	basic-1
ANII	0-31	ANI Data Block Index When ANII = 0, there is no ANI screening; 1-31 is the ANI block index number.	fgd-17
ANIT	(OVF) RAN xxx DN xxxx NCOS xx	Invalid ANI treatment Overflow tone RAN route (0-511) Internal or external DN (1-16 digits) Network Class of Service value (0-99)	fgd-17
CCAN	aaa (YES) aaa NO	Call Categories on calls to Carrier, and ANI screening provided. Call Categories on calls to Carrier, and ANI screening not provided. aaa can be any of the following:	fgd-17
	NAM NAO	1 + (inside World Zone 1) 0 + (inside World Zone 1)* (see note below)	
	INT INO	1 + (outside World Zone 1) 0 + (outside World Zone 1)* (see note below)	
	OPR	0 - calls	
	SAM SAX SAO	1 + (Embodied SAC) 1 + (External SAC) 0 + (External SAC)* (see note below)	
	CUT	Cut-Through	

LD 19

Prompt	Response	Comment	Pack/Rel
	(ALL)	All call types (Default when REQ = NEW) Note: aaa entries marked with the symbol * use zero; not the letter O. If the letter is entered in place of the number zero, no error appears. However, NAM and SAM will be overridden.	
CCLS	IC INC CONS	Inter-Exchange Carrier Class International Carrier Class Consolidated Carrier Class	fgd-17
CDAN	(NO) YES	ANI Digits in CDR Records	fgd-17
CIC	0000-9999	Carrier ID. Response must be three or four digits.	fgd-17
CLR	DENY	Denied codes. If CLR = DENY all NPA/NXX codes are denied except those entered in response to prompt ALOW (only ALOW is prompted).	basic-1
	ALLOW	Allowed codes. If CLR = ALLOW all NPA/NXX codes are allowed except those entered in response to prompt DENY (only DENY is prompted).	
	<cr>	Proceed to next prompt when REQ = CHG When changing a CRB, if CLR = <cr> then both ALOW and DENY are prompted. For a new CRB, CLR must = ALLOW or DENY.	
CPAR	(NO) YES	Call Processing Parameters	fgd-17
CUST	xx	Customer number associated with this data block as defined in LD 15	basic-1
DENY	200-999 ... 200-999 <cr>	NXX, NPA codes Denied Proceed to next prompt Prompted when CLR = ALLOW or <cr>.	basic-1

Prompt	Response	Comment	Pack/Rel
DGTO	128-(640)-5000	Interdigits timeout The maximum time between two digits within the same field, in multiples of 128 milliseconds. 5000 rounds down to 4992.	fgd-17
ENBL	1-(12)-30	Long Enbloc dialing timeout Before initial string is complete on outgoing calls.	fgd-17
ENBS	1-(5)-30	Short Enbloc dialing timeout After initial string is complete on outgoing calls.	fgd-17
FGNO	0-127	Feature Group D block number The system automatically assigns FGNO numbers in sequential order when REQ = NEW.	fgd-17
IFTO	2-(120)-254	Inter-field FGD Timeout in increments of 2 seconds The maximum time between two fields on incoming calls (in seconds).	fgd-17
IIT	(OVF) RAN nnn DN nnn . . . nnn	Intercept Treatment for Invalid IIs. Where: <ul style="list-style-type: none"> • OVF = Overflow tone • RAN nnn = RAN route • DN nnn . . . nnn = Network or local DN 	fgd-17

LD 19

Prompt	Response	Comment	Pack/Rel
IITP	xx yyyy zz	<p>Valid II, II Type, and NCOS for ANI screening bypass. Where:</p> <p>xx = II in range 00-99</p> <p>yyyy = one of the following II types:</p> <ul style="list-style-type: none">• REGU = Regular• 4A8P = 4 or 8 party• HOTL = Hotel/Motel• CLES = Coinless• TST3 = Test 3• AIOD = Automatic Identification of Outward Dialing• COIN = Coin• TST7 = Test 7 <p>zz = optional NCOS number defining ANI screening bypass (00-99)</p> <p>When IITP = <CR> and REQ = NEW, the following shows the default arrangement. International codes (12-19) are left undefined.</p> <p><u>xxyyyyzz</u></p> <p>00REGUno</p> <p>014A8Pno</p> <p>06HOTLno</p> <p>07CLESno</p> <p>10TST3no</p> <p>20AIODno</p> <p>27COINno</p> <p>95ST7no</p>	fgd-17
INIT	(NO) YES	Length of Initial String	fgd-17
INTR	(NO) YES	Intercept Treatment	fgd-17
LAAC	AC1, AC2	Local Area Access Code Prompted with Network Alternate Route Selection (NARS) package 58.	fgd-17

Prompt	Response	Comment	Pack/Rel
LDAC	AC1, AC2	Long Distance Access Code Prompted with Network Alternate Route Selection (NARS) package 58.	fgd-17
MONT	0-(256)-2048	Minimum On-hook Time The minimum amount of time between acknowledgment wink and answer off-hook signal, in multiples of 128 milliseconds.	fgd-17
NCOS	0-99	NCOS value for subscribers Reprompts current level NPA, NXX, or SUB.	fgd-17
NPA	200-999	First 3 ANI digits in NPA format. Only 3 digits are allowed, even when using 1+ dialing.	nanp/ fgd-17
	<cr>	Return to REQ	
NXX	xxx yyy	Range of end office numbers Prompted if SLV3 = NXX. Where: <ul style="list-style-type: none"> • xxx = starting or only NXX • yyy = ending NXX (optional) 	fgd-17
	<cr>	Reprompts NPA	
OPER	DN nnn. . . nnn	RAN nnn Treatment for 0+, 0- calls. Where: <ul style="list-style-type: none"> • DN nnn . . . nnn = 1-16 digit network or local DN • RAN nnn = RAN route (0-511) 	fgd-17
OVL	(YES) NO	Overlapped outpulsing by Local Exchange Carrier (LEC)	fgd-17
PRES	(YES) NO	Presubscription	fgd-17
PRTD	(NO) ALL REJ	Printout Control for Invalid II or ANI Digits No printout Printout for all invalid ANI and II digits Printout all invalid II digits. Printout invalid ANI when not mapped to NCOS.	fgd-17
REQ		Request	basic-1
	CHG END	Change the existing data block Exit overlay program	

LD 19

Prompt	Response	Comment	Pack/Rel
	MOV NEW OUT PRT	Move data block to a new route Add new data block to the system Remove the data block Print FGD or ANI data block	
ROUT	0-511	Route number	basic-1
SAC	xxx xxx xxx . . . xxx	Service Access Codes. Default codes: 700, 800, 900, 601.	fgd-17
SHAN	(NO) YES	Show ANI Digits on Terminal Displays	fgd-17
SLV3	NXX NCOS xx	Number of digits for screening 6 or 10 digit screening. NXX prompt follows. NCOS xx = 3 digit screening (0-99), all NPA map to NCOS value, NPA is reprompted.	fgd-17
SLV6	SUB NCOS xx	10 digit screening level, SUB prompt appears next. Not allowed if an ending NXX level (yyy) was entered at NXX prompt. 6 digit screening level, reprompts NXX. All XXXX numbers under the NPA map to NCOS value (0-99)	fgd-17
SUB	xxxx yyyy	Range of subscriber numbers. Where: <ul style="list-style-type: none">• xxxx = starting or only subscriber number• yyyy = ending subscriber number (optional)	fgd-17
TORT	0-511	To Route New route number TORT is prompted when REQ = MOV.	basic-1
TYPE	ANI CRB FDGB	Type of data block ANI screening data block (for Feature Group D) Code Restriction data Block Feature Group D data Block	basic-1

LD 20-22: Print Reports Guide

This module documents only those print reports which can be obtained in LDs 20, 21, and 22. In the Alphabetical list of many other Administration Overlays, you can find print options at the REQ and TYPE prompts.

To obtain a list of telephones which have particular features, refer to LD 81. Consult LD 93 to print data for Attendant Console groups. Consult LD 95 to print information for the Call Party Name Display (CPND) data block.

Print Report	LD	Page
2.0 Mb/s Digital Trunk Interface (DT2) data	20	page 540
Alarm and Exception Filter (ALARM) data	22	page 591
Application Module Link (AML) data Attendant Console (ATT) data from LD 15 Automatic Number Identification (ANI) data	21	page 575
Analog set (500 and PBX) data	20	page 540
Application Module Link (AML) data Attendant Console (ATT) data from LD 15 Automatic Number Identification (ANI) data	21	page 575
Attendant console (ATT, 1250, and 2250) data from LD 12	20	page 541
Audit trail (AUDT) data	22	page 592
Automatic Call Distribution Priority Agent (PRI2) data	20	page 541
Application Module Link (AML) data Attendant Console (ATT) data from LD 15 Automatic Number Identification (ANI) data	21	page 575
Automatic Trunk Maintenance (ATM) route data	21	page 576
(Part 1 of 4)		

LD 20-22

Print Report	LD	Page
Automatic Trunk Maintenance (ATM) schedule data	21	page 576
Automatic Wake Up (AWU) data	21	page 576
Business Communicaton Set (BCS) data	20	page 542
Call Detail Recording (CDR) data Call Redirection (RDR) data Centralized Attendant Service (CAS) data Centralized Attendant Service (CASK) Key	21	page 577
Call Pickup Network Wide (CPNW) data	20	page 542
Channel data: Real Analog, Virtual Analog and Virtual Digital	20	page 543
Code Restriction (CRB) data	21	page 578
Common Equipment (CEQU) data	22	page 592
Configuration Record (CFN) data	22	page 592
Controlled Class of Service (CCS) data	21	page 578
Core Inventory (CINV) data for Option 51C/61C/81C	22	page 592
Customer data block (CDB)	21	page 578
Data access card (DAC) data	20	page 544
Dial Intercom Group (DIG) data	20	page 545
Dial Tone Detector (DTD and XTD) data	20	page 545
Digital Communications Set data	20	page 545
Digital set (2000 series, 3000, and Aries) data	20	page 546
Digitone Receiver (DTR) data	20	page 547
Directory number (DNB) data	20	page 547
Directory number (DNB) range data	20	page 548
Directory number (DNB) selection Group Call (GRP) data	20	page 548
Features and options (FTR) data Flexible Code Restriction (FCR) data Flexible Feature Codes (FFC) data Hospitality Management (HSP) data	21	page 579
Features and options (FTR) data Flexible Code Restriction (FCR) data Flexible Feature Codes (FFC) data Hospitality Management (HSP) data	21	page 579

(Part 2 of 4)

Print Report	LD	Page
Generic version and issue of software	22	page 598
Features and options (FTR) data Flexible Code Restriction (FCR) data Flexible Feature Codes (FFC) data Hospitality Management (HSP) data	21	page 579
Hot Line List (HTL) data	20	page 549
Hunting (HNT, GHT, and EHT) data	20	page 549
Input/output device (ADAN) data Integrated Message Service (IMA) data Issue and Release (ISS) Meridian Modular Telephone (ATRN) data	22	page 593
Input/output device (ADAN) data Integrated Message Service (IMA) data Issue and Release (ISS) Meridian Modular Telephone (ATRN) data	22	page 593
Integrated Message Service (IMS) data	21	page 580
Intercept Computer Update (ICP) data	21	page 580
Intercept Treatments (INT) data	21	page 580
ISDN Signaling Link (ISLL) data	21	page 580
Listed Directory Numbers (LDN) data Multi-Party Operations (MPO) data Networking (NET) data Night Service (NIT) data Off Hook Alarm Security (OAS) data Password (PWD) data Periodic Pulse Metering (PPM) data Recorded Overflow Announcement (ROA) data	21	page 581
Multifrequency (MFC, MFE, MFR, MFK5, MFK6, MFVE) data	20	page 550
Listed Directory Numbers (LDN) data Multi-Party Operations (MPO) data Networking (NET) data Night Service (NIT) data Off Hook Alarm Security (OAS) data Password (PWD) data Periodic Pulse Metering (PPM) data Recorded Overflow Announcement (ROA) data	21	page 581
Out of Service unit (OOSSLT and OOSMLT) data	20	page 550
Overlay area (OVLY) data	22	page 594
Package (PKG) information	22	page 594
Password (PWD) data	22	page 594
Peripheral Software Version (PSWV) data	22	page 594
Power (PWR) data	20	page 551
(Part 3 of 4)		

LD 20-22

Print Report	LD	Page
Pretranslation (PRE) data	20	page 551
Route Data Block (RDB) Set Relocation (SRDT) data	21	page 583
Route Data Block (RDB) Set Relocation (SRDT) data	21	page 583
SL1 set data	20	page 551
Special Service List (SSL) data	20	page 552
Speed call lists (SCL) data	20	page 552
System Limits (SLT) data	22	page 595
System Loop Limits	22	page 595
System Patch (ISSP) data	22	page 595
Tandem Connection (TCON) data	20	page 552
Tape ID (TID) data	22	page 595
Template (TEM) data	20	page 553
Terminal Number Block (TNB) data for telephones and trunks	20	page 554
Terminal Number Block (TNB) range data	20	page 555
Test lines (TST) data	21	page 583
Timers (TIM) data	21	page 584
Tone Detector (TDET) data	20	page 555
Trunk data: All Trunks	20	page 555
Trunk Members (LTM) data	21	page 584
Trunk data: Specific Trunk types	20	page 556
Unused Card (LUC) data	20	page 557
Unused Directory Number (LUDN) data	20	page 557
Unused Units (LUU) data	20	page 557
Unused Voice or Data unit (LUVU or LUDU) data	20	page 558
Value Added Server (VAS) data	22	page 596
Voice Mailbox (VMB) data	20	page 558

(Part 4 of 4)

LD 20: Print Routine 1

Overlay program 20 allows data to be printed for the following blocks:

- all hunting
- group calls
- speed calls
- template data blocks
- terminal numbers
- pre-translation

Data Access Card (NT7D16)

By responding R232, R422, or DAC to the TYPE prompt in LD 20, you can print out the configured parameters for each port, or the entire DAC.

If a specific TN is entered, the current settings are uploaded from the unit and printed with the database settings. This is useful if parameters have been altered during keyboard or Hayes dialing modify procedures.

Templates

Templates store telephone information in system memory. Telephones with the same configuration of keys and Class of Service share the same template. This makes efficient use of Protected Data Store. Template Audit (LD 1) is used to remove unused templates.

Multiple Appearance Redirection Prime (MARP)

When printing the TN block, "MARP" is output next to a DN appearance if it is the MARP TN for that DN. When printing the DN block, "MARP" is output prior to the DES if it is the MARP TN. Refer to X11 features and services for an explanation of the MARP feature.

The security password may be required to print telephone and TN information. The password (SPWD) is required if the Station Security Authcode package (229) is equipped and the password is defined.

Linked Overlays

LDs 10, 11, 20 and 32 are linked thus eliminating the need to exit one Overlay and enter another. Once one of the above Overlays has been loaded it is possible to add, print and get the status of a set without having to exit one Overlay and load another. The input processing has also been enhanced. Prompts ending with a colon (:) allow the user to enter either:

- a question mark (?) followed by a carriage return (<cr>) to get a list of valid responses to that prompt, or
 - an abbreviated response, the system then responds with the nearest match. If there is more than one possible match the system responds with SCH0099 and the input followed by a question mark and a list of possible responses. The user can then enter the valid response.
-

Prompts and responses

Prompt	Response	Comment
REQ:	a...a	Request (REQ responses begin on page 562)
TYPE:	a...a	Type of data block (Type responses begin on page 566)
MODL	xxx	Option 11C Model number (1-3 digits)
TBNO	1-254	Table Number for 16-Button DTMF
TN	l s c u	Terminal Number (l s c u ranges are defined on page 564)
CDEN	aa	Card Density (aa = SD, DD, 4D, or 8D)
CUST	xx xx	Customer number
GRP	1-4095	Group number to be printed
MPHI	YES NO	Meridian Packet Handler Interface
SPWD	xxxx	Security Password
TEN	x...x	Tenant (0 or 1-511)
DN	x...x	Directory Number
DATE	dd mmm yyyy	Date
PAGE	(NO) YES	Data printed on a per-page basis
- ADJUST PAPER THEN <cr>		Adjust Paper so that printing starts at top of sheet
DES	d...d	Designator
CTYP	(XDLC) EDLC	Card type is 16 port DLC Card type is 24 port DLC
NACT	(NO) YES	Next Activity
AACS	NO YES	Application acquired set
SCNO	0-8190	Speed Call list Number
LSNO	0-8190	Speed Call or System Speed Call List Number
RNGE	xxxx yyyy	Range of list entries to be printed, inclusive from first entry number to last entry number.
HTNO	xxxx	Hunt Number
DGRP	0-2045	Dial Intercom Group
DMEM	0-99	Dial Intercom Group (DIG) Member number
FOR	a...a	For telephone type (a...a = 500, 2xxx, SL1, or 3xxx)
KEY	(NO) YES	Print data for multi-line telephones
GRNO	0-63	Group Call Group Number
INFO	aaa	Information for templates (aaa = FRM, USE, USS, or DEF)
TEM	x...x	Template
EHNO	x...x	External Hunt DN

Alphabetical list of print reports

2.0 Mb/s Digital Trunk Interface (DT2) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	DT2	2.0 Mb/s DTI output
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CUST	0-99	Customer number
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Analog set (500 and PBX) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	500	500/2500 type analog sets
	PBX	Private branch exchange sets
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CDEN	SD, DD, 4D, 8D	Single, Double, Quad or Octal Density
CUST	0-99	Customer number
TEN	0-511	Tenant
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis
DES	d...d	Print all units with DES "d...d"
	d+	Print all units starting with "d"
	<cr>	Disregard DES

Automatic Call Distribution Priority Agent (PRI2) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	PRI2	ACD Priority Agents
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CUST	0-99	Customer number
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Attendant console (ATT, 1250, and 2250) data from LD 12

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	ATT	QCW3 or QCW4 Attendant Console
	1250	M1250 Console
	2250	M2250 Console
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CDEN	SD, DD, 4D, 8D	Single, Double, Quad or Octal Density
CUST	0-99	Customer number
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Business Communicaton Set (BCS) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	BCS	Business Communication Sets
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CDEN	SD, DD, 4D, 8D	Single, Double, Quad or Octal Density
CUST	0-99	Customer number
TEN	0-511	Tenant
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis
DES	d...d	Print all units with DES "d...d"
	d+	Print all units starting with "d"
	<cr>	Disregard DES

Call Pickup Network Wide (CPNW) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	CPNW	Call Pickup Network Wide data
CUST	0-99	Customer number

Channel data: Real Analog, Virtual Analog and Virtual Digital

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	RAC	Real Analog Channels
	VAC	Virtual Analog Channels
	VDC	Virtual Digital Channels
TN	l s c u	Terminal Number (loop, shelf, card, unit)
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Class Modem unit data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	CMOD	CLASS modem unit
TN	l s c u	Terminal Number (loop, shelf, card, unit)
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Data access card (DAC) data

By responding R232, R422 or DAC to the type prompt in LD 20, the configured parameters for each port or the entire DAC may be printed.

If a specific TN is entered, the current settings are uploaded from the unit and printed with database settings. This is useful if parameters have been altered during keyboard or Hayes dialing modifying procedures.

Prompt	Response	Comment
REQ:	PRT, LTN, LUU	Print data, TN, or unit for the TN specified
TYPE:	DAC	Print data for whole DAC
	R232	Print data for the RS-232-C ports
	R422	Print data for the RS-422 ports
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CUST	0-99	Customer number
TEN	0-511	Tenant
DATE	dd mmm yyyy	Print data from the date specified
	ACT	Print data from the last Activity
PAGE	(NO) YES	Data printed on a per-page basis
DES	d...d	Print all units with DES "d...d"
	d+	Print all units starting with "d"
	<cr>	Disregard DES

Dial Intercom Group (DIG) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	DIG	Dial Intercom Group
CUST	0-99	Customer number
DGRP	0-2045	Dial Intercom Group
DMEM	0-99	Dial Intercom Group Member number

Dial Tone Detector (DTD and XTD) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	DTD	Dial Tone Detector data
	XTD	Extended Dial Tone Detector
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CUST	0-99	Customer number
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Digital Communications Set data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	DCS	Digital Communications Set
CUST	xx	Customer Number associated with this data block
DMC	l s c	Digital Enhanced Cordless Telecommunications (DECT) Mobility Controller Location

Digital set (2000 series, 3000, and Aries) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	2xxx	Meridian 1 proprietary sets. You may enter: 2000, 2003, 2006, 2008, 2009, 2016, 2018, 2112, 2216, 2317, or 2616.
	3xxx	For Taurus sets: <ul style="list-style-type: none"> • 3901 = M3901 • 3902 = M3902 • 3903 = M3903 • 3904 = M3904 • 3905 = M3905
	ARIE	Aries (M2006, M2008, M2016S, M2216, or M2616) sets and Meridian Communications Unit (MCU) data blocks
	BCS	Business Communication Set
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CDEN	SD, DD, 4D, 8D	Single, Double, Quad or Octal Density
CUST	0-99	Customer number
TEN	0-511	Tenant
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Digitone Receiver (DTR) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	DTR	Digitone Receiver data
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CDEN	SD, DD, 4D, 8D	Single, Double, Quad or Octal Density
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Directory number (DNB) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	DNB	Directory number data block
CUST	0-99	Customer number
DN	x...x	Print for Directory Number
DATE	dd mmm yyyy	Print data from the date specified
	ACT	Print data from the last Activity
PAGE	(NO) YES	Data printed on a per-page basis
DES	d...d	Print all units with DES "d...d"
	d+	Print all units starting with "d"
	+	Print units with no DES assignment
	<cr>	Disregard DES
ADJUST PAPER THEN <cr>	<cr>	Adjust paper so that printing starts at top of sheet

Directory number (DNB) range data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	DNB	Directory Number block
CUST	0-99	Customer number
DN	xxxx-xxxx	Directory Number range

Directory number (DNB) selection

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	DNB	Directory Number block
CUST	0-99	Customer number
DN	xxxx,xxxx,..	Up to 8 DNs can be entered (separated by a comma)
DATE	dd mmm yyyy	Print data from the date specified
	ACT	Print data from the last Activity
PAGE	(NO) YES	Data printed on a per-page basis
DES	d...d	Print all units with DES "d...d"
	d+	Print all units starting with "d"
	+	Print units with no DES assignment
	<cr>	Disregard DES
ADJUST PAPER THEN	<cr>	Adjust paper so that printing starts at top of sheet

Group Call (GRP) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	GRP	Group Call
GRNO	0-63	Group Call Group Number

Hot Line List (HTL) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	HTL	Hot Line List
CUST	0-99	Customer number
RNGE	xxxx...xxxx	Range of Hot Line list entries (0-1000) to be printed for this customer
	<cr>	Print all entries in the Hot Line list

Hunting (HNT, GHT, and EHT) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	HNT	Hunting
	EHT	External Hunting
	GHT	Group Hunting
CUST	0-99	Customer number
HTNO	x...x	Hunt Directory Number
EHNO	x...x	External Hunt Directory Number

Multifrequency (MFC, MFE, MFR, MFK5, MFK6, MFVE) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	MFC	Multifrequency compelled sender/receiver
	MFE	Multifrequency signaling for Socotel sender/receiver
	MFR	Multifrequency receiver (for Feature group D)
	MFVE	Multifrequency versatile units
	MFK5	2/5 Spanish KD3 MF signaling
	MFK6	2/6 Spanish KD3 MF signaling
TN	l s c u	Terminal Number (loop, shelf, card, unit)
	l ch	DTI/PRI loop and channel
CDEN	SD, DD, 4D, 8D	Single, Double, Quad or Octal Density
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Out of Service unit (OOSLT and OOSMLT) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	OOSLT	Single line TNs that are Out-of-Service
	OOSMLT	Multi-line TNs that are Out-of-Service
TN	l s c u	Terminal Number associated with the unit

Power (PWR) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	PWR	Power data block
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CDEN	SD, DD, 4D, 8D	Single, Double, Quad or Octal Density
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Pretranslation (PRE) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	PRE	Pretranslation
CUST	0-99	Customer number

SL1 set data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	SL1	SL1 and M1109 sets, QCW and M1250 console
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CDEN	SD, DD, 4D, 8D	Single, Double, Quad or Octal Density
CUST	0-99	Customer number
TEN	0-511	Tenant
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis
DES	d...d	Designator

Special Service List (SSL) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	SSL	Special Service List
SSL	1-15	Special Service List number

Speed call lists (SCL) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	SCL	Regular and System Speed Call Lists
LSNO	0-8190	List Number for Speed Call or System Speed Call
	<cr>	Print for all lists
RNGE	xxxx xxxx	Range of Speed Call entries (0-1000) to be printed
	<cr>	Print all entries

Tandem Connection (TCON) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	TCON	Tandem Connection for Meridian Packet Handler and PRI connections

Template (TEM) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	TEM	Templates
FOR	aaa	Print template information for telephone type
INFO	FRM	Print key/feature assignment template
	USE	Print number of users of the template
	USS	Print TN using the template
	DEF	Print number of templates defined and the number of templates allowed
TEMP	xxxx	Telephone template number
	<cr>	Print all templates

Terminal Number Block (TNB) data for telephones and trunks

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	TNB	Terminal Number Block
TN	l s c u,...	Terminal Number (Up to 6 TNs can be entered)
CDEN	SD, DD, 4D, 8D	Card Density
CUST	xx xx	Customer number
MPHI	YES, NO	Meridian Packet Handler Interface
SPWD	xxxx	Security Password
TEN	0, 1-511	Tenant
DATE	dd mmm yyyy	Print data from date specified
PAGE	(NO) YES	Date printed on a per page basis
DES	d...d, d+, +	Designator
NACT	(NO) YES, END	Next Activity
AACS	a...a	Application acquired set (a...a = (NO), AGTH, or AGT)
ASID	x...x	Application Service ID
SFNB	1 2 ...	Set Feature Notification Bitmap
SFRB	1 2 ...	Set Feature Route Bitmap
USFB	1 2 ...	Unsolicited Status Message (USM) Filter Bitmap
CALB	1 2 ...	Call Filter Bitmap
SMCB	1-17	Print set message control bitmap
SMOO	(NO) YES	(Do not set) Set message optimize option

Terminal Number Block (TNB) range data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	TNB	Terminal Number Block
TN	l s c u-l s c u	Terminal Number Range

Tone Detector (TDET) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	TDET	Tone Detector data
TN	l s c u	Terminal Number (loop, shelf, card, unit)
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Trunk data: All Trunks

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	TRK	Trunk data block
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CDEN	SD, DD, 4D, 8D	Single, Double, Quad or Octal Density
CUST	0-99	Customer number
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Trunk data: Specific Trunk types

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	ADM	Add-on Data Module
	AWR	Automatic Wake-Up RAN/Music trunks
	CAA	Common Control Switching Arrangement
	CAM	CAMA trunks
	COT	Central Office trunks
	CSA	Common control switching arrangement access line
	DIC	Dictation trunks
	DID	Direct inward dial trunks
	FEX	Foreign Exchange trunks
	FGDT	Feature Group D trunks
	IDA	Integrated digital access trunks
	ISA	Integrated services access trunks (ISDN)
	MCU	Meridian Communications Unit
	MDM	Modem/Data Module
	MUS	Music trunks
	PAG	Paging trunks
	R232	RS-232 mode data
	R422	RS-422 mode data
	RAN	Recorded announcement trunks
	RCD	Recorder trunks
	RDC	Real digital channel
	RLM	Release Link Main trunks
	RLR	Release Link Remote trunks
	TIE	TIE trunks
	WAT	Wide Area Telephone service trunks
TN	l s c u	Terminal Number (loop, shelf, card, unit)
CDEN	SD, DD, 4D, 8D	Single, Double, Quad or Octal Density
CUST	0-99	Customer number
DATE	dd mmm yyyy	Print data from date specified
	ACT	Print data from last activity
PAGE	(NO) YES	Data printed on a per page basis

Unused Card (LUC) data

Prompt	Response	Comment
REQ:	LUC	List Unused Card slots
TN	l s c	Terminal Number (loop, shelf, card)
	l ch	DTI/PRI loop and channel

Unused Directory Number (LUDN) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	LUDN	List Unused Directory Numbers
CUST	0-99	Customer number
DN	xxxx-xxxx	DN range

Unused Units (LUU) data

Prompt	Response	Comment
REQ:	LUU	List Unused Units
TYPE:		Peripheral equipment requiring TNs:
	500	Single line or analog sets
	SL1	SL-1 sets, QCW and M1250 consoles
	2000	Digital sets and M2250 consoles
	DTR	Digitone Receiver
	DSL	Digital Subscriber Loop
	MCU	Meridian Communications Unit
	TRK	All trunks
	a...a	Any specific trunk type (e.g., COT, DID, FEX, WAT, etc.)
TN	l s c u	Terminal Number

Unused Voice or Data unit (LUVU or LUDU) data

Prompt	Response	Comment
REQ:	LUVU	List Unused Voice Units
	LUDU	List Unused Data Units
TYPE:		Peripheral equipment requiring TNs:
	500	Single line or analog sets
	SL1	SL-1 sets, QCW and M1250 consoles
	2000	Digital sets and M2250 consoles
	DTR	Digitone Receiver
	DSL	Digital Subscriber Loop
	MCU	Meridian Communications Unit
	TRK	All trunks
	a...a	Any specific trunk type (e.g., COT, DID, FEX, WAT, etc.)
TN	xx...xxxx	Terminal Number

Voice Mailbox (VMB) data

Prompt	Response	Comment
REQ:	PRT	Print
TYPE:	VMB	Voice Mailbox information
CUST	<cr>	Customer number automatically appears. No entry is needed.
DN	xxxx	Print for Directory Number
VMB_STATE	nnnn	Print based on Voice Mailbox State

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
AACS	NO YES	Application acquired set The TN is not acquired by an application The TN is acquired by an application	ngcc-22
ADJUST PAPER THEN <cr>	<cr>	Adjust paper then <cr> to start printing Start printing	basic-1
ASID	x...x	Application Service ID from which the acquired request originated The ASID is used for sending the monitor/control messages to the application. The ASID value is updated based on the applications's Acquire message for the TN. Since the AML over Ethernet (ELAN) is used to communicate between the Meridian 1 and the application(s), the value of the existing VSID might be used to uniquely identify the application that has acquired this device. ASID is printed if AACS = YES.	ngcc-22
CALB	1 2 ...	Call Filter Bitmap CALB applies to messages such as PCI, DN update, etc. This bitmap is downloaded by the application which is used to control the sending of messages on behalf of the acquired TN. A numeric value would only be printed if the corresponding set message is enabled. CALB is printed if AACS = YES.	ngcc-22
CDEN	SD DD 4D 8D <cr>	Single Card Density Double Card Density Quadruple Card Density Octal Card Density For all card densities	basic-7
CTYP	(XDLC) EDLC	Card type is 16 port DLC Card type is 24 port DLC Note: EDLC not supported on Option 11C	basic-25

Prompt	Response	Comment	Pack/Rel
CUST	xx xx	Customer number as defined in LD 15 Print data range from first to last customer. Not prompted when: <ol style="list-style-type: none"> 1. REQ = LUU or LUC 2. TYPE = SCL, DIG or TEM 3. a complete TN is entered 	basic-1
	<cr>	Print data blocks for all customers	
DATE	dd mmm yyyy	Print data from date specified. Where: <ul style="list-style-type: none"> • dd = 1-31 • mmm = JAN-DEC • yyy = year (e.g. 1993) 	basic-1
	<cr>	DATE is prompted for TN related data.	
	ACT	Print data and show last activity date. Print data from last activity date.	
DES	d...d	ODAS Station Designator Print all units with ODAS designator. Enter a 1-6 alphanumeric character representing an Office Data Administration System (ODAS) Station Designator.	odas-1
	d+	Print units starting with ODAS designator d	
	+	Print units with no ODAS designator assigned	
	<cr>	Disregard ODAS designator DES is prompted on TN related data The printing of data is subject to restrictions imposed by responses to TN and DATE.	
DGRP	0-2045	Dial Intercom Group DIG numbers per customer	basic-1
	<cr>	Print all Dial Intercom Groups for customer DGRP is prompted when TYPE = DIG	
DMC	l s c	Digital Enhanced Cordless Telecommunications (DECT) Mobility Controller Location	mc32-25
	c	Option 11C format	
DMEM	0-99	Dial Intercom Group (DIG) Member number	basic-1
	<cr>	Print all DIG member numbers	

Prompt	Response	Comment	Pack/Rel
DN		Directory Number	basic-19
	xxxx <cr> xxxx <space>	Print data block for DN Print data blocks for all DN If a space is entered after the Directory Number the system will reprompt for DN. A maximum of six DNs can be stacked and printed at one time.	
	x<cr> xx<cr> xxx<cr>	All DNs starting with first digit x (X000-X999) All DNs starting with first two digits xx (XX00-XX99) All DNs starting with first three digits xxx (XXX0-XXX9)	
	x-<cr> x-y<cr> xx-yyy<cr>	All DNs between X000-9999 All DNs between DN X000 through Y999 All DNs between DN XX00 through YYYY	
	xxxx xxxx xxxx-yyy	Two specific DNs. Up to a maximum of 8 DNs. All DNs between XXXX and YYYY	
EHNO	xxxx	External HUNT DN Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. EHNO is prompted when TYPE = EHT	eht-10
FOR	500 2xxx 3xxx SL1	Print template information for telephone type Print data for 500/2500 telephones. Print data for 2000 type telephones (specify type). Print data for 3000 type telephones (specify type) Print data for SL-1 telephones.	basic-1 basic-24
GRNO	0-63 <cr>	Group Call Group Number. Prompted when TYPE = GRP. Print all group call groups.	grp-1
GRP	1 - 4095 <CR>	Group number to be printed All groups assigned to a speed call list are printed.	grp-21
HTNO	x...x	Hunt Directory Number Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Prompted when TYPE = HNT.	basic-1

Prompt	Response	Comment	Pack/Rel
INFO		Information for Templates	basic-1
	FRM	Print key/feature assignment template	
	USE	Print number of users of template	
	USS	Print TN using the template	
	DEF	Print number of templates defined and number allowed Prompted when TYPE = TEM	
LSNO	0-8190	Speed Call Lists	basic-1
		When inputting list number for printout, non-DN input exceeding 4 digits may be truncated. Only the 4 right-most digits will be accepted and printed	
MODL	xxx	Option 11C Model number (1-3 digits)	basic-15
MPHI	YES NO	Meridian Packet Handler Interface. Prompted when TYPE = MCU. Respond Yes if using the MCU for MPH interfaces.	mph-19
NACT		Next Activity	odas-1
	(NO)	Return to REQ prompt	
	YES	Print current system data and end overlay	
	END	End overlay activity	
PAGE	(NO) YES	Data printed on a per-page basis Prompted only on TN related data	basic-1
REQ:		Request	basic-1
	END	Exit overlay program	
	LTN	List TN of TYPE specified	
	LUC	Print Unused Card data blocks of TYPE specified	
	LUDU	List Unused Data Units	
	LUU	Print Unused Unit data blocks of TYPE specified	
	LUVU	List Unused Voice Units	
	PRT	Print data block for the TYPE specified.	

Note: This load is linked with LDs 10, 11 and 32. You may enter one of the responses listed below to the REQ: prompt. Then go to that Load and follow its Prompt and Response sequence. See "Linked Overlays" on page 538 for further information.

Prompt	Response	Comment	Pack/Rel
		<p>LD 32:CDSP CMIN CONV CPWD DISC DISI DISL DISN DISS DISU DSCT DSPS DSXP ENCT ENLC ENLG ENLL ENLN ENLS ENLU ENPS ENXP IDC IDCS IDU LBSY LDIS LIDL LMNT PBXT SDLC STAT SUPL TRK XNTT XPCT XPEC</p> <p>LD 10 or 11: CHG CPY MOV NEW OUT</p>	
RNGE	xxxx yyyy <cr>	<p>Range of list entries to be printed, inclusive from first entry number to last entry number. Print All members of a specified SCL or SSC list.</p>	optf-1
SCNO	0-253 0-8190 <cr>	<p>Speed Call list Number Speed Call list Number Print all lists. Prompted when TYPE = SCL</p>	optf-1
SFNB	1 2 ...	<p>Set Feature Notification Bitmap</p> <p>SFNB is used for messages such as: SFN (login), SFN (logout), ...</p> <p>This bitmap is downloaded by the application which is used to control the sending of SFN messages on behalf of the acquired TN. A numeric value is printed only if the corresponding message is enabled.</p> <p>SFNB is printed if AACS = YES.</p>	ngcc-22
SFRB	1 2 ...	<p>Set Feature Route Bitmap</p> <p>SFRB is used for messages such as: SFR (login), SFR (logout), ...</p> <p>This bitmap is downloaded by the application which is used to control the sending of SFR messages on behalf of the acquired TN. A numeric value is printed only if the corresponding message is enabled.</p> <p>SFRB is printed if AACS = YES.</p>	ngcc-22
SPWD	xxxx	<p>Security Password. This prompt appears when:</p> <ol style="list-style-type: none"> the Station Specific Authcode package (229) is equipped the security password is defined in LDs 10 and 11. 	ssau-19

Prompt	Response	Comment	Pack/Rel
TBNO	1-254	Table Number for 16-Button DTMF Prompted when TYPE = ABCD	supp-10
TEM	xxxxxxx <cr>	Template number Print data for all templates. Prompted when TYPE = TEM	basic-1
TEMP	xxxx	Telephone template number. Enter <cr> to print all templates.	basic-1
TEN	0 1-511 <cr>	Tenant Shared customer resource stations Tenant Service stations Print data blocks for all tenants.	tens-7
TN		Terminal Number	basic-1
	loop	Print data of the specified TYPE for this loop.	
	l s	Print data of the specified TYPE for this loop and shelf	
	l s c	Print data of the specified TYPE for this loop, shelf and card	
	l s c u	Print data of the specified TYPE for this loop, shelf, card and unit.	
	l ch	Print data of the specified TYPE for this loop and channel (format for Digital Trunk and Primary Rate Interfaces).	
	card	Print data of the specified TYPE for this card (Option 11C).	
	c 0 0 u	For Option 11C	
	c u	Print data of the specified TYPE for this card and unit (Option 11C).	
	c ch	Print data of the specified TYPE for this card and channel (digital trunks only) (Option 11C).	

Prompt	Response	Comment	Pack/Rel
	n. . . n<space>	System will prompt for TN. A maximum of six TNs can be stacked and printed at one time.	
	<cr>	Print data for all TNs of the specified TYPE.	
	l s c u, l s c u	List of TNs (up to 6)	
	l s c u, l ch	A TN and a trunk loop/channel can be entered on the same line	
	l s c, l s c	All units within the specified starting and ending cards	
	l s, l s c u	All units, including the specified starting shelf and ending TN	
	l s c u	All TNs starting with the specified TN and ending with the last TN Not prompted when TYPE = SCL, HNT, DIG, TEM, or GRP	
	loop, l s, l c u, l s c u, l ch	l = (0-255) Option 81C format with Fiber Network Fabric	fnf-25

Prompt	Response	Comment	Pack/Rel
TYPE:		Type of data block	basic-1
		<p>Note: This load is linked with LDs 10, 11 and 32. LD 20 permits you to enter LD 10 or 11 responses to the TYPE prompt or a command listed in LD 32. See "Linked Overlays" on page 538 for further information.</p>	
	500 500 M	500/2500 telephone Option 11C Model	
	1250	M1250 Console	
	2000	M2000 type digital telephones	
	2003	2003 Digital telephone	
	2006 2006 M	M2006 Digital telephone Option 11C Model	
	2008 2008 M	M2008 Digital telephone Option 11C Model	
	2009 2009 M	M2009 Digital telephone Option 11C Model	
	2016	M2016 Digital telephone	
	2018 2018 M	M2018 Digital telephone Option 11C Model	
	2112 2112 M 2216	M2112 Digital telephone Option 11C Model M2216 Digital telephone(ACD terminal)	
	2216 M	Option 11C Model	
	2250	M2250 Console	
	2317 2317 M	M2317 Digital telephone Option 11C Model	
	2616 2616 M	M2616 Digital telephone Option 11C Model	
	3000 3000 M	M3000 Digital Touchphone Option 11C Model	

Prompt	Response	Comment	Pack/Rel
	4020	M4020 Model	
	ABCD	16-Button DTMF	
	ADM	Add-on Data Module	
	ADM M	Data port interfacing with a data line card Option 11C Model	
	ARIE	Aries (M2006, M2008, M2016S, M2216 and M2616) sets and Meridian Communications Unit (MCU) data blocks	
	ATT	QCW3 or QCW4 Attendant Console	
	AWR	Automatic Wake Up RAN/Music trunk	
	AWR M	Option 11C Model	
	BCS	Business Communication Set	
	CAA	Common Control Switching Arrangement (CCSA) Automatic Number Identification (ANI) trunk data block	
	CAA M	Option 11C Model	
	CAM	CAMA trunk data block	
	CAM M	Option 11C Model	
	COT	Central Office Trunk (PSTN) data block	
	COT M	Option 11C Model	
	CPNW	Call Pickup Network Wide data	
	CSA	Common Control Switching Arrangement access line	
	CSA M	Option 11C Model	
	DAC	Data Access Card	
	DCS	Digital Communications Set	mc32-25
	DIC	Dictation trunk data block	
	DIC M	Option 11C Model	
	DID	Direct Inward Dialing trunk data block	

Prompt	Response	Comment	Pack/Rel
	DID M	Option 11C Model	
	DIG	Dial Intercom Group	
	DNB	Directory Number Block	
	DSL	Digital Subscriber Loop (S/T or U I/F for ISDN BRI)	
	DT2	2.0 Mb/s DTI output only	
	DTD	Dial Tone Detector	
	DTR	Digitone Receiver	
	EHT	External Hunting	
	FEX FEX M	Foreign Exchange trunk Option 11C Model	
	FGDT	Feature Group D Trunk	
	GHT	Group Hunt	
	GRP	Group call	
	HNT	Hunting	
	HTL	Hot Line	
	i2004	i2004 Digital Telephone	mit-25
	IDA ISA	Integrated Digital Access Integrated Services Access trunk (ISDN)	
	LUDN MCA MCA M	List Unused Directory Numbers. Meridian Communications Adapter Option 11C Model	
	MCU	Meridian Communications Unit	
	MDM MDM M	Modem/Data Module. Data port interfacing with QPC60 500/2500 type card Option 11C Model	

Prompt	Response	Comment	Pack/Rel
	MFC	Multifrequency Compelled sender/receiver data block	
	MFE	Multifrequency Signaling for Socotel sender/receiver	
	MFK5	2/5 Spanish KD3 MF Signaling	kd3-20
	MFK6	2/6 Spanish KD3 MF Signaling	kd3-20
	MFR	Multifrequency Receiver (for Feature Group D)	
	MFVE	Print Multifrequency Versatile units	
	MUS MUS M	Music trunk Option 11C Model	
	OOSMLT	Out-of-Service Multi-Line Terminal	xpe-20
	OOSSLT	Out-of-Service Single Line Terminal	xpe-20
	PAG PAG M	Paging trunk Option 11C Model	
	PBX	PBX sets	
	PRE	Pretranslation	
	PRI2	ACD Priority Agents	
	PWR	Power data block	
	R232	NT7D16 Data Access Card (DAC) port in RS-232 Data mode data block	
	R232 M	Option 11C Model	
	R422	NT7D16 Data Access Card (DAC) port in RS-422 mode data block	
	R422 M	Option 11C Model	
	RAC	Real Analog Channel	
	RAN RAN M	Recorded Announcement trunk Option 11C Model	
	RCD	Recorder trunk	

Prompt	Response	Comment	Pack/Rel
	RDC	Real Digital Channel	
	RLM RLM M	Release Link Main trunk Option 11C Model	
	RLR RLR M	Release Link Remote trunk Option 11C Model	
	SCL	Regular and System Speed Call Lists	
	SL1	SL-1 and M1109 sets, QCW and M1250 console (Not supported on Option 11C)	
	SSL	Special Service List	
	TCON	Tandem Connection for MPH and PRI connections	
	TDET	Tone Detector	
	TEM	Template	
	TIE TIE M	TIE trunk Option 11C Model	
	TNB	Terminal Number	
	TRK	Trunk data block	
	VAC	Virtual Analog Channel	
	VDC	Virtual Digital Channel	
	VMB	Voice Mailbox information	
	WAT WAT M	Wide Area Telephone Service trunk Option 11C Model	
	XTD	Extended Dial Tone Detector and Digitone Receiver	
	<cr>	Print all	

Prompt	Response	Comment	Pack/Rel
USFB	1 2 ...	<p>Unsolicited Status Message (USM) Filter Bitmap</p> <p>USFB applies to messages such as:</p> <ul style="list-style-type: none">Onhook, Offhook, Ringing, Active, Disconnect, Unringing, Hold, Restore, Ready, Not Ready, Walkaway, Walkaway Return, Reserved, Unreserved, ... <p>This bitmap is downloaded by the application which is used to control the sending of USM messages on behalf of the acquired TN. A numeric value would only be printed if the corresponding message set is enabled.</p> <p>USFB is printed if AACS = YES.</p>	ngcc-22
VMB_STATE	nnnn	Print based on Voice Mailbox State	vmba-19

LD 21: Print Routine 2

Overlay program 21 allows data to be printed for the following:

- customer data blocks
- code restriction data blocks
- route data blocks
- trunks within a route
- ATM routes
- ATM schedules
- CAS keys
- associated TN

Set Relocation data

This prints the sets which have “relocated out”, but have not “relocated back in”. With Automatic Set Relocation the set's serial number, NT code, color code, and release are also printed.

Input Processing

Prompts ending with a colon (:) allow the user to enter either

- 1 a question mark (?) followed by a carriage return (<cr>) to get a list of valid responses to that prompt, or
- 2 an abbreviated response, the system then responds with the nearest match. If there is more than one possible match the system responds with SCH0099 and the input followed by a question mark and a list of possible responses. The user can then enter the valid response.

LD 21

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request (aaa = END, LTM, or PRT)
TYPE	a...a	Type of data block (TYPE responses begin on page 583)
CUST	xx	Customer number associated with this data block
SIZE	0-4000	CLID table entry size
RNGE	aa ... aa	CLID entry or entries to be printed
HOUR	0-23	All routes tested by ATM for this hour
OPR	(NO) YES	Outpulsing Route
ROUT	0-511	Route number
ACOD	x...x	Access Code for route
AACR	(NO) YES	The route (is not)/is acquired by the application
ASID	x...x	Application Service ID from which the acquired request originated
SFNB	1 2 ...	Set Feature Notification Bitmap
USFB	1 2 ...	Unsolicited Status Message (USM) Filter Bitmap
CALB	1 2 ...	Call Filter Bitmap

Alphabetical list of print reports

Application Module Link (AML) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	AML	Application Module Link
CUST	0-99	Customer number

Attendant Console (ATT) data from LD 15

Prompt	Response	Comment
REQ	PRT	Print
TYPE	ATT	Attendant consoles
CUST	0-99	Customer number

Automatic Number Identification (ANI) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	ANI	Automatic Number Identification
CUST	0-99	Customer number
CIS_ANI	(NO) YES	Print (do not print) CIS ANI
R_RANGE	xx yy	ANI entries for set to be printed
CACC	(NO) YES	CAC Conversion Table Option
- MFC_ENT_R 0	(0)-31	CAC Conversion Table (MFC CAC into CIS CAC)
- CIS_ENT_R 0	(0)-31	CAC Conversion Table (CIS CAC into MFC CAC)

LD 21

Automatic Trunk Maintenance (ATM) route data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	ATM	ATM routes
CUST	0-99	Customer number
ROUT	0-511	Route number to be printed

Automatic Trunk Maintenance (ATM) schedule data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	SCH	ATM schedules
CUST	0-99	Customer number
HOUR	0-23	Print all routes tested by ATM for this hour
	<cr>	Print routes tested for all hours

Automatic Wake Up (AWU) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	AWU	Automatic Wake Up
CUST	0-99	Customer number

Call Detail Recording (CDR) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	CDR	CDR and Charge Account
CUST	0-99	Customer number

Call Redirection (RDR) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	RDR	Call Redirection options
CUST	0-99	Customer number

Centralized Attendant Service (CAS) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	CAS	Centralized Attendant Service
CUST	0-99	Customer number

Centralized Attendant Service (CASK) Key

Prompt	Response	Comment
REQ	PRT	Print
TYPE	CASK	Centralized Attendant Service key
CUST	0-99	Customer number

LD 21

Code Restriction (CRB) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	CRB	Code Restriction data
CUST	0-99	Customer number
ROUT	0-511	Route number to be printed
ACOD	xxxx	Access Code

Controlled Class of Service (CCS) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	CCS	Controlled Class of Service
CUST	0-99	Customer number

Customer data block (CDB)

Prompt	Response	Comment
REQ	PRT	Print
TYPE	CDB	Customer data block
		Note: If you need information regarding System Passwords, print PWD_DATA field by itself. PWD_data will not be provided by printing CDB.
CUST	0-99	Customer number

Features and options (FTR) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	FTR	Features and Options
CUST	0-99	Customer number
TBL	(0)-31	Tone Table Number

Flexible Code Restriction (FCR) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	FCR	New Flexible Code restrictions
CUST	0-99	Customer number

Flexible Feature Codes (FFC) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	FFC	Flexible Feature Code
CUST	0-99	Customer number

Hospitality Management (HSP) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	HSP	Hospitality Management options
CUST	0-99	Customer number

LD 21

Integrated Message Service (IMS) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	IMS	Integrated Message Service
CUST	0-99	Customer number

Intercept Computer Update (ICP) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	ICP	Intercept computer options
CUST	0-99	Customer number

Intercept Treatments (INT) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	INT	Intercept treatment options
CUST	0-99	Customer number

ISDN Signaling Link (ISLL) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	ISLL	ISDN Signaling Link trunk TN

Listed Directory Numbers (LDN) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	LDN	Departmental Listed Directory Numbers
CUST	0-99	Customer number

Multi-Party Operations (MPO) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	MPO	Multi-party options
CUST	0-99	Customer number

Networking (NET) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	NET	ISDN and ESN networking options
CUST	0-99	Customer number

Night Service (NIT) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	NIT	Night Service
CUST	0-99	Customer number

LD 21

Off Hook Alarm Security (OAS) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	OAS	Off-Hook Alarm Security
CUST	0-99	Customer number

Password (PWD) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	PWD	Customer Related Passwords
CUST	0-99	Customer number
PWD2	xxxx	Level 2 Password

Periodic Pulse Metering (PPM) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	PPM	Periodic Pulse Metering
CUST	0-99	Customer number

Recorded Overflow Announcement (ROA) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	ROA	Recorded Overflow Announcement options
CUST	0-99	Customer number

Route Data Block (RDB)

Prompt	Response	Comment
REQ	PRT	Print
TYPE	RDB	Route Data Block
CUST	0-99	Customer number
ROUT	0-511	Route number to be printed
	<cr>	Print data for all routes
ACOD	xxxx	Route access code

Set Relocation (SRDT) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	SRDT	Recent Set Relocation activity

Test lines (TST) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	TST	Test lines
CUST	0-99	Customer number

LD 21

Timers (TIM) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	TIM	Timer options
CUST	0-99	Customer number

Trunk Members (LTM) data

Prompt	Response	Comment
REQ	LTM	List Trunk members
CUST	0-99	Customer number
ROUT	0-511	Route number to be printed
ACOD	xxxx	Route Access Code

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
AACR	(NO) YES	The route is not acquired by the application The route is acquired by the application	ngcc-22
ACOD	x...x <cr>	Access Code for route Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Print data for all route access codes This prompt appears when ROUT = <cr>	basic-1
ASID	x...x	Application Service ID from which the aquired request originated ASID is used for sending route status messages. The ASID value is updated based on the application's Acquire message for the route. Since the AML over Ethernet (ELAN) is used to communicate between the Meridian 1 and other applications, the VSID value might be used to uniquely identify the application which has acquired that device.	ngcc-22
CALB	1 2 ...	Call Filter Bitmap CALB applies to messages such as PCI, DN update, etc. This bitmap is downloaded by the application which is used to control the sending of messages on behalf of the acquired TN. A numeric value would only be printed if the corresponding set message is enabled. CALB is printed if AACR = YES.	ngcc-22
CUST	xx xx <cr>	Customer number Print data range from first to last customer Not prompted when: <ul style="list-style-type: none"> • REQ = LUU or LUC • TYPE = SCL, DIG or TEM • a complete TN is entered Print data blocks for all customers	basic-1
HOUR	0-23 <cr>	All routes tested by ATM for this hour Print routes tested by ATM for all hours	

LD 21

Prompt	Response	Comment	Pack/Rel
OPR	(NO) YES	Outpulsing Route This prompt appears when OPOA is equipped. Prompted on TN related data	
REQ	END LTM PRT	Request Exit overlay program Print trunk route by TN and member number Print data block for the TYPE specified.	basic-1
RNGE	aa ... aa	CLID entry to be printed You may print one CLID entry or several CLID entries. If you want to print several CLID entries, separate each entry with a comma. Each CLID entry must be between 0 and the number entered for the prompt SIZE in LD 15.	isdn-22
ROUT	0-511 <cr>	Route number Print data for all routes This prompt appears when TYPE = CRB or RDB	basic-1
SFNB	1 2 ...	Set Feature Notification Bitmap SFNB is used for messages such as: SFN (login), SFN (logout), ... This bitmap is downloaded by the application which is used to control the sending of SFN messages on behalf of the acquired TN. A numeric value is printed only if the corresponding message is enabled. SFNB is printed if AACR = YES.	ngcc-22
SIZE	- - -	CLID table entry size. The SIZE prompt and the SIZE value print out automatically after the CUST prompt.	isdn-22
TYPE		Type of data block	basic-1
	AML_DATA	Application Module Link	
	ANI_DATA	Automatic Number Identification numbers	
	ATM	Automatic Trunk Maintenance (ATM) data block	
	ATT_DATA	QCW3 or QCW4 Attendant Console	

Prompt	Response	Comment	Pack/Rel
	AWU_DATA	Enable Automatic Wake-up	
	CASK	Centralized Attendant Service (CAS) key data block	
	CAS_DATA	Centralized Attendant Service	
	CCS_DATA	Controlled Class of Service options	
	CDB	Customer Data Block Note: If you need information regarding System Passwords, print PWD_DATA field by itself. PWD_data will not be provided by printing CDB.	
	CDR_DATA	Call Detail Recording	
	CLID	Calling Line Identification entry data	
	CRB	Code Restriction data block	
	FCR_DATA	New Flexible Feature code options	
	FFC_DATA	Flexible Feature Codes	
	FTR_DATA	Feature	
	HSP_DATA	Hospitality	
	ICP_DATA	Intercept Positions and interrogation sets. Prompted when REQ = PRT	
	IMS_DATA	Integrated Messaging System	
	INT_DATA	Alarm ring for Internal calls	
	ISLL	IASL ISDN Signaling Link data block. This prompt appears when REQ = PRT.	
	LDN_DATA	Listed Directory Number	
	MPO_DATA	Multi-party options	
	NET_DATA	ISDN and ESN networking options	
	NIT_DATA	Night Service options	

LD 21

Prompt	Response	Comment	Pack/Rel
	NPID	Numbering Plan Digit or Information Digit table	
	OAS_DATA	Off-Hook Alarm Security options	
	PPM_DATA	Periodic Pulse Metering options	
	PWD_DATA	Print the system Passwords	
	RDB	Route Data Block A printout of a route with the Night Key for DID Digit Manipulation (NKDM) active will show * opposite the value for DCNO or NDNO.	
	RDR_DATA	Call Redirection	
	ROA_DATA	Recorded Overflow Announcement	
	SCH	Schedule data block for ATM	
	SDP	Secure data password	
	SRDT	Set Relocation Data block	
	TIM_DATA	System Speed Call	
	TST_DATA	Loop Test trunk data	
USFB	1 2 ...	Unsolicited Status Message (USM) Filter Bitmap USFB applies to messages such as: <ul style="list-style-type: none">• Onhook, Offhook, Ringing, Active, Disconnect, Unringing, Hold, Restore, Ready, Not Ready, Walkaway, Walkaway Return, Reserved, Unreserved, ... This bitmap is downloaded by the application which is used to control the sending of USM messages on behalf of the acquired TN. A numeric value would only be printed if the corresponding message set is enabled. USFB is printed if AACR = YES.	ngcc-22

LD 22: Print Routine 3

Overlay program 22 allows data to be printed for the following:

- Configuration Record
- DN to TN Matrix
- System Password number
- System Loop Limits
- software version
- tape ID
- issue number
- equipped feature packages
- System Incremental Software Management (ISM) parameters

When printing the DN block, “MARF” is output prior to the DES if it is the MARF TN. Refer to X11 features and services for an explanation of the MARF feature.

Audit trail for Limited Access to Overlays (LAPW)

You must be logged in with the PWD1 or PWD2 password in order to print the Audit Trail. Printing of the Audit Trail deletes the Audit Trail information and resets the buffer.

Packages equipped

This prompt sequence prints the equipped software packages. The packages are printed in numerical order by package number, accompanied by the mnemonic. In addition, you can get the status of an individual package.

Issue and release

If the system has a “patch”, then a “+” is printed next to the issue number.

Fiber Network Fabric

The Fiber Network Fabric extends and enhances the 5-group network architecture to 8 non-blocking (inter-group) Network groups, with a resulting expansion in network capacity to 8k timeslots available for Intergroup traffic. This is achieved by using OC-12 SONET rings, and adding additional network and PE shelves, packs and cables and software changes to allow using the expanded network capacity. This expansion increases the number of available loops from 160 to 256. This applies to the Option 81C only.

Prompts and responses

Prompt	Response	Comment
REQ	a...a	Request (a..a = END, ISS, ISSP, PRT, PWD, ROM, SLL, SLT, or TLD)
TYPE	a...a	Type of data block (TYPE responses begin on page 600)
PWD2	xxxx	Password 2
CUST	xx	Customer number associated with this data block
DN	xxxx	Print for Directory Number
CUST	xx	Customer number associated with this data block
DN	xxxx	Print for Directory Number
DATE	dd mmm yyy	ACT Date
PAGE	(NO) YES	Data printed on a per-page basis
- ADJUST PAPER THEN	<cr>	
	<cr>	Adjust paper so that printing starts at top of sheet.
DES	d...d	Designator
NACT	(NO) YES	Next Activity
- VHST	aaa	View History File (aaa = (%ON) or %OFF)

Alarm and Exception Filter (ALARM) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	ALARM	Print Filter and Exception tables. Must have Alarm Filtering (AFTR) package 243.

Audit trail (AUDT) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	AUDT	Audit trail. Must be logged in with the PWD1 or PWD2 password. Printing of the Audit trail deletes the Audit trail information and resets the buffer.

Common Equipment (CEQU) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	CEQU	Common Equipment data

Configuration Record (CFN) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	CFN	Configuration record

Core Inventory (CINV) data for Option 51C/61C/81C

Prompt	Response	Comment
REQ	PRT	Print
TYPE	CINV	Core Inventory list

History File (VHST) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	VHST	View the History File

Input/output device (ADAN) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	ADAN	All I/O devices

Integrated Message Service (IMA) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	IMA	IMS Message Attendant
CUST	0-99	Customer number

Issue and Release (ISS)

Prompt	Response	Comment
REQ	ISS	Print Issue and Release

Meridian Modular Telephone (ATRN) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	ATRN	Meridian Modular Telephone transmission parameters

Overlay area (OVLY) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	OVLY	Overlay area information

Package (PKG) information

Prompt	Response	Comment
REQ	PRT	Print
TYPE	PKG	Software Packages
	PKG xxx	Check equipped/restricted status of package number xxx

Password (PWD) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	PWD	Print System Passwords
PWD2	xxxx	Level 2 Password

Peripheral Software Version (PSWV) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	PSWV	Peripheral Software Versions downloaded to: NT8D01 Controller cards, NT8D04 Network cards and NT8D018 Network/Digitone Receiver cards.

System Limits (SLT) data

Prompt	Response	Comment
REQ	SLT	Print System Limits

System Loop Limit (SLL) data

Prompt	Response	Comment
REQ	SLL	Print System Loop Limits

System Parameters (PARM) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	PARM	System Parameters

System Patch (ISSP) data

Prompt	Response	Comment
REQ	ISSP	Print System and Patch Information

Tape ID (TID) data

Prompt	Response	Comment
REQ	TID	Print Tape ID

LD 22

Value Added Server (VAS) data

Prompt	Response	Comment
REQ	PRT	Print
TYPE	VAS	Print Value Added Server data

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ADJUST PAPER THEN	<cr>	Adjust paper then <cr> to start printing	basic-1
	<cr>	Start printing	
CUST	xx xx	Customer number Print data range from first to last customer. Not prompted when:	basic-1
		1. REQ = LUU or LUC 2. TYPE = SCL, DIG or TEM 3. a complete TN is entered	
	<cr>	Print data blocks for all customers	
DATE	dd mmm yyyy	Print data from date specified. Where:	basic-1
		<ul style="list-style-type: none"> • dd = 1-31 • mmm = JAN-DEC • yyyy = year e.g. 1993 	
		DATE is prompted for TN related data	
	<cr>	Print data and show last activity date	
	ACT	Print data from last activity date	
DES		Designator	odas-1
		DES is prompted on TN related data The printing of data is subject to restrictions imposed by responses to TN and DATE.	
	d...d	Print all units with ODAS designator ddddd	
	d+	Print units starting with ODAS designator d	
	+	Print units with no ODAS designator assigned	
	<cr>	Disregard ODAS designator	
DN		Directory Number	basic-19
	xxxx	Print data block for DN	
	<cr>	Print data blocks for all DN	
	xxxx <space>	If a space is entered after the Directory Number the system will reprompt for DN. A maximum of six DNs can be stacked and printed at one time.	

LD 22

Prompt	Response	Comment	Pack/Rel
	x<cr> xx<cr> xxx<cr>	All DNs starting with first digit x (X000-X999) All DNs starting with first two digits xx (XX00-XX99) All DNs starting with first three digits xxx (XXX0-XXX9)	
	x-<cr> x-y<cr> xx-yy<cr>	All DNs between X000-9999 All DNs between DN X000 through Y999 All DNs between DN XX00 through YYYY	
	xxxx xxxx xxxx-yyyy	Two specific DNs. Up to a maximum of 8 DNs. All DNs between XXXX and YYYY	
NACT	(NO) YES END	Next Activity Return to REQ prompt Print current system data and end overlay End overlay activity	odas-1
PAGE	(NO) YES	Data printed on a per-page basis Prompted only on TN related data	basic-1
PWD2	x...x <cr>	Enter second level administration password (Password 2) to print information relating to all passwords. Valid characters are 0-9, A-Z, a-z. Length is 4-16 characters. To print only the information regarding the Limited Access to Overlay password used to login. PWD2 is prompted when REQ = PWD or TYPE = PWD.	basic-1
REQ	END ISS ISSP PRT PWD SLL SLT	Request Exit overlay program Print generic version and Issue Print System and Patch Information Print data block for TYPE specified Print the system Passwords Print System Loop Limits Print System Limits : Incremental Software Management (ISM parameters and keywords) Note: If an Incremental Software Management (ISM) limit is set to the maximum value 32767, then the information for that ISM will not be printed. This does not apply for the TNs ISM	basic-1

Prompt	Response	Comment	Pack/Rel
	TID	Print the Tape ID. (S/W Cart ID and Site ID for Option 11C).	
TN		Terminal Number	basic-1
		TN is not prompted when TYPE = SCL, HNT, DIG, TEM, or GRP.	
	loop	Print data of the specified TYPE for this loop.	
	l s	Print data of the specified TYPE for this loop and shelf	
	l s c	Print data of the specified TYPE for this loop, shelf and card	
	l s c u	Print data of the specified TYPE for this loop, shelf, card and unit.	
	l s c u, l s c u	List of TNs (up to 6)	
	l s c u, l ch	A TN and a trunk loop/channel can be entered on the same line	
	l s c, l s c	All units within the specified starting and ending cards	
	l s, l s c u	All units, including the specified starting shelf and ending TN	
	l s c u	All TNs starting with the specified TN and ending with the last TN	
	l ch	Print data of the specified TYPE for this loop and channel (format for Digital Trunk and Primary Rate Interfaces).	
	<cr>	Print data for all TNs of the specified TYPE.	
	card	Print data of the specified TYPE for this card (Option 11C).	
	c 0 0 u	For Option 11C	
	c u	Print data of the specified TYPE for this card and unit (Option 11C).	
	c ch	Print data of the specified TYPE for this card and channel (digital trunks only) (Option 11C).	
	n . . . n<space>	System will prompt for TN. A maximum of six TNs can be stacked and printed at one time.	

LD 22

Page 600 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
TYPE		Type of data block	basic-1
	ADAN	All I/O devices	
	ADAN AML	Application Modules	
	ADAN DCH	D-channel and backup D-channels	
	ADAN FDK	Floppy Disk units	
	ADAN HST	History Files	
	ADAN PRT	System Ports	
	ADAN TTY	System Terminals	
	ADM	Add-on Data Module Data port interfacing with a data line card	
	ADM M	Option 11C Model	
	AHST	All History File	
	ALARM	Print Filter and exception tables	
	APL	Auxiliary Processor Links	
	ATRN	Print Meridian Modular Telephone Transmission parameters	
	AUDT	Audit Trail buffer Only system Administrators are allowed to print the Audit Trail. They must first respond to PWD2 in LD 17 to define the password.	
	CARD	Card data block (used for Automatic Set Relocation)	
	CEQU	Common Equipment	
	CFN	Configuration record data block	
	CHID	Channel ID for ISDN Signaling Link (ISL)	
	CINV	Core Inventory list (Option 81C)	
	DCP	Directed Call Pickup	

Prompt	Response	Comment	Pack/Rel
	DSDN	Data Services Directory Number or PTE IS	
	GHT	Group Hunt	
	GRP	Group call	
	IMA	IMS Message Attendant	
	IADN	Individual Attendant Directory Number	
	ISS	Generic version and Issue	
	ISSP	System and Patch Information	
	OVLY	Print Overlay area information	
	PARM	System Parameters	
	PHST	Previous History File All History File records since last request	
	PKG	Packages equipped. For a list of packages, refer to pages page 33 or page 43.	
	PKG xxx	Check equipped/restricted status of package number xxx	
	PSWV	Peripheral Software Version(s) downloaded to: NT8D01 Controller cards NT8D04 Network cards NT8D018 Network/Digitone Receiver cards	
	PWD	Print the system Passwords	
	REF	Loop Reference trunk data	
	RLM RLM M	Release Link Main trunk Option 11C Model	
	RLR RLR M	Release Link Remote trunk Option 11C Model	
	SCI	Station Category Indication data block	
	SFA	Second level Forwarding Allowed	
	SFD	Second level Forwarding Denied	

LD 22

Prompt	Response	Comment	Pack/Rel
	SLL	System Loop Limits	
	VAS	Value Added Server data	vns-21
	VHST	View History File	
VHST		View the History File	hist-19
	(%ON) % OFF	Turn ON display features Turn OFF display features This command is used to enable or disable the following three display features: <ul style="list-style-type: none">• brackets to surround the current index ([])• percent symbol (%) preceding each History File line• relative location within the History File (in percentage) VHST accepts abbreviated responses.	
	BFIND aaaa	Search backward in the History File This command can be used to search backward, starting at the current index location, for the string "aaaa." If necessary, the file will wrap until it returns to the same location. The text string can be up to 12 characters. Special characters like space, slash (/), and colon (:) are accepted. Leading or trailing spaces are ignored unless enclosed in double quotes. For example, the spaces denoted here are ignored: <SP><SP>INI<SP>. The spaces in this string, however, are included in the search: "<SP><SP>INI<SP>". When the string is found, the system displays the current index location. Five text lines are shown, with the middle line containing the sought string. The VHST prompt is re-displayed to allow more command use. If the string is not found, VHST is reprompted to allow more command use.	
	BFIND	Repeats the previous backward search	

Prompt	Response	Comment	Pack/Rel
	DOWN BOT	Moves to the top of the file	
	DOWN	<p>Move forward 6 lines in the History File</p> <p>This command can be used to move forward in the History File, toward the end. If x exceeds the end of the file, the end will be shown.</p> <p>When the move is complete, VHST is reprompted to allow more command use.</p>	
	FIND aaaa	<p>Search Forward in the History File</p> <p>This command can be used to search forward, starting at the current index location, for the string "aaaa." If necessary, the file will wrap until it returns to the same location.</p> <p>The text string can be up to 12 characters. Special characters like space, slash (/), and colon (:) are accepted. Leading or trailing spaces are ignored unless enclosed in double quotes.</p> <p>For example, the spaces denoted here are ignored: <SP><SP>INI<SP>. The spaces in this string, however, are included in the search: "<SP><SP>INI<SP>".</p> <p>When the string is found, the system displays the current index location. Five text line are shown, with the middle line containing the sought string. The VHST prompt is re-displayed to allow more command use. If the string is not found, VHST is reprompted to allow more command use.</p>	
	FIND	Repeats the previous forward search	
	HELP	List valid responses	
	NEXT BOT	Moves to the end of the file	

LD 22

Prompt	Response	Comment	Pack/Rel
	NEXT x	<p>Move forward x lines in the History File, display all lines in between.</p> <p>This command can be used to view lines forward, toward the end of the file. The lines between the current index location, and the new one (x lines down) are displayed.</p> <p>If you enter only NEXT, the default of 20 lines is used for the move. When the move is complete, VHST is reprompted to allow more command use.</p>	
	PREV TOP	Moves to the top of the file	
	PREV x	<p>Move backward x lines in the History File, display all lines in between</p> <p>This command can be used to view lines backward, toward the top of the file. The lines between the current index location, and the new one (x lines up) are displayed.</p> <p>If you enter only PREV, the default of 20 lines is used for the move. When the move is complete, VHST is reprompted to allow more command use.</p>	
	TRF	View the system traffic log file	
	TTYLOG n	View the log file for TTY port n	
	UP TOP	Moves to the top of the file	
	UP	<p>Move backward 6 lines in the History File</p> <p>This command can be used to move backward in the History File, toward the top. If x exceeds the top of the file, the top will be shown. When the move is complete, VHST is reprompted to allow more command use.</p>	

LD 23: Automatic Call Distribution, Management Reports, Message Center

Overlay program 23 allows Automatic Call Distribution (ACD) data, schedules for management reports and Message Center data to be created, modified, or printed.

ACD groups are also used for Meridian Mail and various server applications. When this overlay is loaded the available system memory and disk records are output in a header. Refer to the introduction of this document for details.

Incremental Software Management (ISM) also provides a header to indicate system configuration limits. For LD 23, the header appears as follows:

```
ACD DNS AVAIL: xxxxx USED: xxxxx TOT: xxxxx
```

To prevent Virtual Agent information from appearing on ACD-D reports, do not make changes to Virtual Agents. If a change to a Virtual Agent is required, out the agent and rebuild it with REQ = NEW.

Fiber Network Fabric

The Fiber Network Fabric extends and enhances the 5-group network architecture to 8 non-blocking (inter-group) Network groups, with a resulting expansion in network capacity to 8k timeslots available for Intergroup traffic. This is achieved by using OC-12 SONET rings, and adding additional network and PE shelves, packs and cables and software changes to allow using the expanded network capacity. This expansion increases the number of available loops from 160 to 256. This applies to the Option 81C only.

Prompts and responses

Table of Contents

Section	Page
Prompts and responses	page 606
<i>Prompts and responses by data block:</i>	
ACD or SCB: Automatic Call Distribution (ACD-D) or Schedule data block	page 610
ADS: Auxillary data system data block (includes Multiple Queue Assignment prompts)	page 611
CDN: Control DN data block (covers prompts for Customer Controlled Routing)	page 612
NACD: Network ACD data block	page 613

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request
TYPE	a...a	Type of data block (a...a = ACD, ADS, CDN, NACD, or SCB)
CUST	xx	Customer number associated with this data block
ACDN	x...x	ACD Directory Number
MWC	(NO) YES	Message Waiting Center
- IMS	(NO) YES	Integrated Messaging Service
-- CMS	(NO) YES	Command and Status link
-- IMA	(NO) YES	Integrated Messaging Allowed
-- IVMS	(NO) YES	Integrated Voice Messaging System
-- PCMM	(NO) YES	Periodic Clearing with Meridian Mail
-- DNIS	(NO) YES	Dialed Number Identification Service
-- VSID	0-15	Value Added Server ID
-- EES	(NO) YES	End-to-End Signaling
-- APL	0-15	Auxiliary Processor Link number
-- UST	(NO) YES	User Status update

-- VSID	0-15	VAS ID of VAS providing VMS
-- APL	0-15	Auxiliary Processor Link number
-- UMG	(NO) YES	User-to-User Messaging
-- RAN	0-511	RAN route number
-- UMT	2-(6)-15	Update Message Time
AST	(NO) YES	Associated set
DSAC	(NO) YES	Data Services Access Code
- PRIM	(NO) YES	Primary DSAC
- VSID	0-15	Value Added Server ID
ICP	(NO) YES	Intercept Computer Printer
- ICPS	aaa	Intercept Computer Printer Search (aaa = (CIR) or COM)
- ICPR	0-<NIPN>	Intercept Computer Printer
MAXP	xxxx	Maximum Positions
SDNB	(NO) YES	Secondary DN Blocking
BSCW	(NO) YES	Block Secondary DN Calls on Walkaway
ISAP	(NO) YES	Integrated Services Application Protocol
ASID	16-31 or (00)	Application service identity from which the acquired message originated
AACQ	(NO) YES	Application Acquired Queue
- VSID	0-15	Value Added Server ID
ALOG	(NO) YES	Automatic Log In
RGAI	(NO) YES	Ring Again for Internal calls
ACAA	(NO) YES	ACD Agent while IDN on-hold Allowed
FRRT	0-511	First RAN route number for ACD
- FRT	0-2044	First RAN Time
SRRT	0-511	Second RAN route number for ACD
- SRT	0-2044	Second RAN Time
NRRT	0-127	Night RAN Route
- NRT	(0)-2044	Night RAN Time
FROA	(NO) YES	First RAN On Arrival
NCFW	x...x	Night Call Forward
FNCF	(NO) YES	Force Night Call Forward to busy ACD DN
CWTT	(0)-40-63	Call Waiting Threshold Time
HMSB	(YES) NO	Hold Make Set Busy (allowed) denied

LD 23

ACPQ	(NO) YES	Answer Call Priority Queue
FORC	(NO) YES	Force
- FCFT	0-(2)-30	Flexible Call Force Timer
- FADT	(0)-15	Force Answer Delay Time
- FADR	(0)-15	Force Answer Delay timer for Ringback
RTQT	(0)-50	Return to Queue Timer after no answer in number of ringing cycles
RTQO	(NRD) MSB	Return to Queue Option
SPCP	(NO) YES	Separate Post Call Processing
OBTN	aaa	Observation Tone (aaa = (NO), AGT, or ALL)
RAO	aaa	Restricted Agent Observe (aaa = (NO), YES, or FULL)
HSID	0-15	Host ID
CWTH	0-(1)-2047	Calls Waiting Threshold
NCWL	(NO) YES	New Call Waiting Lamp options
- CWLF	(0)-2047	Call Waiting Lamp Flash threshold
- CWLW	(0)-2047	Call Waiting Lamp Wink (fast flash) threshold
BYTH	(0)-204	Busy Threshold
OVTH	0-(2047)	Overflow Threshold
TOFT	2-1800	Timed Overflow Threshold in seconds
HPQ	(NO) YES	High Priority Queue
- OCN	(NO) YES	Oldest Call in Network
OVDN	x...x x...x x...x	Overflow Directory Number(s)
IFDN	x...x	Interflow Directory Number
- BUSY	aaa bbb ccc ddd	Busy treatment
- AENI	(NO) YES	Automatically Enable Interflow
OVBU	aaa bbb ccc ddd	Overflow Busy
EMRT	0-511	Emergency Route
MURT	0-511	Music Route
RTPC	(NO) YES	Real Time Processing
STIO	0, 1, 2, ...15	Status Input/Output devices
TSFT	0-(20)-510	Telephone Service Factor Threshold in seconds
HOML	(YES) NO	Headset Or MSB key Log Out
RDNA	(NO) YES	Restricted DN Access
ACNT	xxxx	Account

NRAC	(NO) YES	Enable Not Ready Activity Codes
- NDFL	xxxx	Not Ready Default code Must be equipped with ACD-D or NGCC package
DAL	(NO) YES	Data Agent Log In with the MSB key allowed
RPRT	(YES) NO	Management reporting and status display
RAGT	2-(4)-30	Reserve Agent
DURT	15-(30)-45	Duration Timer in minutes
RSND	(4)-16	Resend timer
FCTH	10-(20)-100	Flow Control Threshold
CRQS	0-(100)-255	Call Request Queue Size
DNRT	(NO) YES	Delay Night RAN Treatment
CCBA	(NO) YES	Allow Collect Call Blocking Answer signal to be sent
IVR	(NO) YES	Interactive Voice Response queue
- ALOG	(NO) YES	Provide Automatic Login for agents
- TRDN	xxxx	Treatment DN for IVR queue
CWNT	l s c u	Call Waiting Notification TN
CWNC	NO YES	Call Waiting Notification TN control

Prompts and responses by data block

ACD or SCB: Automatic Call Distribution (ACD-D) or Schedule data block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	aaa	Type of data block = ACD or SCB (Automatic Call Distribution or Schedule data block for ACD management reports)
CUST	xx	Customer number associated with this data block
CPRD	dd mm dd mm	Collection Period
SHR	0-23	Start Hour
EHR	0-23	Hour of day that data reporting ends
DOW	1-7	Days of Week for data collection
RFRQ	0-7	Frequency that Reports are to be generated
SFRQ	x	Status display update Frequency (1 or 2)
ROPT	1-4	Report Options
PRI0	0-15	Printer(s) for Output
PAGE	(NO) YES	Start at the top of a new page for each report
AID	(NO) YES	Agent ID mode
- IDLB	(1)-9999	Agent ID Lower Boundary
- IDUB	<i>IDLB</i> -(9999)	Agent ID Upper Boundary
- LOG	(0)-999	Maximum number of agents that can be logged in at any one time
SRPT	(NO) YES	Short Report option for report 4 (Agent position)
TOT4	(NO) YES	Totals on report 4

ADS: Auxillary data system data block (includes Multiple Queue Assignment prompts)

Prompt	Response	Comment
REQ	aaa	Request
TYPE	ADS	Type of data block = ADS (Auxiliary Data System)
CUST	xx	Customer number associated with this data block
AID	(NO) YES	Agent ID mode
- IDLB	(1)-9999	Agent ID Lower Boundary
- IDUB	<i>IDLB</i> -(9999)	Agent ID Upper Boundary
- MQA	(NO) YES	Multiple Queue Assignment
- - MQAS	(NO) YES	Select a Supervisor ID during login
- - MQAP	(NO) YES	Select Priorities during login
- - MQCF	(NO) YES	Automatic Call Forwarding of Phantom TNs to agent sets at login
- - - MCFD	(0)-3	The MQA Call Forwarding Digits attached to the Agent IDs

CDN: Control DN data block (covers prompts for Customer Controlled Routing)

Caution : Corruption results if a CDN is not configured in this overlay *before* that CDN is associated with or represented in an association table script in the CCR module.

Prompt	Response	Comment
REQ	aaa	Request
TYPE	CDN	Type of data block = CDN (Control DN)
CUST	xx	Customer number associated with this data block
CDN	xxxx	Control DN
FRRT	0-511	First RAN route number for ACD
- FRT	0-2044	First RAN Time
SRRT	0-511	Second RAN Route number for ACD
- SRT	0-2044	Second RAN Time
FROA	(NO) YES	First RAN On Arrival
MURT	0-511	Music Route number
DFDN	x...x	Local Default ACD DN
CEIL	0-(2047)	CDN Ceiling value
OVFL	(NO) YES	Force Overflow Tone to the call when the ceiling threshold has been exceeded
TDNS	(NO) YES	Is DNIS number an original Called Party
RPRT	(YES) NO	Management reporting and status display
CNTL	(NO) YES	Control DN is in control
VSID	0-15	Value Added Server ID
HSID	0-15	Host ID
CWTH	0-(1)-2047	Calls Waiting Threshold
BYTH	(0)-2047	Busy Threshold
OVTH	0-(2047)	Overflow Threshold
STIO	0, 1, 2, ... 15	Status Input/Output devices
TSFT	0-(20)-510	Telephone Service Factor Threshold in seconds
ACNT	xxxx	Account

NACD: Network ACD data block

Network ACD provides ACD capabilities over an Integrated Service Digital Network (ISDN). An NACD system distributes ACD activities between several sites. Connected by ISDN voice and data services, different sites can be physically or geographically separated within the network.

Prompt	Response	Comment
REQ	aaa	Request
TYPE	NACD	Type of data block = NACD (Network ACD)
CUST	xx	Customer number associated with this data block
ACDN	xxxx	ACD Directory Number
TABL	(a) s	Day, Night or Source Table (a = Day or Night, s = Source Table)
- OUTS	xxxx xxxx	Routing Table entries to be removed
- TRGT	xxxx tttt	Target ACD DN and the timer in seconds

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
AACQ	(NO) YES	Application Acquired Queue The ACD DN is not acquired by the application The ACD DN is acquired by the application	nxcc-22
ACAA	(NO) YES	Allow ACD calls to an agent on an Individual DN (IDN) Call On Hold The agent cannot place an IDN Call On Hold, and return to the idle queue. The agent can put an active IDN Call On Hold and press the in-calls to return to the idle agent queue.	bacd-18
ACDN	x...x	ACD Directory Number Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150	acda-1
ACNT	x...x	Account (Default activity code) Maximum 4 digits (0 through 9). The # and * are not allowed. Prompted if the ADS data block is built, and CNTL = YES.	acdc-13
ACPQ	(NO) YES	Answer Call Priority Queue International Supplementary Features (SUPP) package 131 must be equipped.	supp-15
AENI	(NO) YES	Automatically Enable Interflow Prompted when IFDN is defined.	acdb-12
AID	(NO) YES	Customer will operate in Position ID mode. Customer will operate in Agent ID mode.	acdc-2
ALOG	(NO) YES	Provide Automatic Log In for agents on this DN. Set to YES for Meridian Mail applications. ALOG applies only to Command and Status Link (CMS) and Data Service Access Codes (DSAC). Prompted if IMS or ISAP = YES.	csi-8
APL	0-15	Auxiliary Processor Link number Prompted if IMA = YES. The APL is defined in LD 17.	lnk-2
ASID	16-31 or (00)	Application service identity from which the acquired message originated	nxcc-22

Prompt	Response	Comment	Pack/Rel
AST	(NO) YES	Associated set The Associate Set assignments are performed in LD 10 and LD 11 for each ACD telephone.	iap3p-13
BSCW	(NO) YES	Block Calls to the Secondary DN on Walkaway The caller to the source DN hears busy tone.	bacd-13
BUSY	aaa bbb ccc ddd	Interflow Busy Treatment for different originators Prompted if IFDN is defined. The possible options are: <ul style="list-style-type: none"> • BSY = caller hears busy tone • SRC = caller is re-linked to source queue Enter BSY or SRC for each of the four different originators: <ul style="list-style-type: none"> • aaa = Stations • bbb = Attendants • ccc = CO, FEX and WATS trunks • ddd = all other trunk types Defaults if the IFDN is an ACD DN, internal or external DN are: <ul style="list-style-type: none"> • BSY BSY SRC BSY (3rd entry cannot be changed) Default if the IFDN is an attendant console: <ul style="list-style-type: none"> • BSY SRC SRC BSY (only the 4th entry can be changed) 	acdb-12
BYTH	(0)-2047	Busy Threshold at which the Calls Waiting lamp flashes and this queue ceases to accept overflowed calls. When BYTH = 0, overflow calls are not accepted by this target queue unless an agent is available. To delete existing entry, precede entry with X.	acdb-1
CALB	1 2 ...	Call Filter Bitmap CALB applies to messages such as PCI, DN update, etc. This bitmap is downloaded by the application which is used to control the sending of messages on behalf of the acquired TN. A numeric value would only be printed if the corresponding set message is enabled. CALB is printed if AACR = YES.	nxcc-22

LD 23

Prompt	Response	Comment	Pack/Rel
CCBA	(NO) YES	Collect Call Blocking Denied Collect Call Blocking Allowed Collect Call Blocking (CCB) package 290 is required.	ccb-21
CDN	x...x	Control DN Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	ear-17
CEIL	0-(2047)	CDN Ceiling value CEIL limits the number of unanswered calls a CDN can have at its default ACD DN at a time. New calls receive a busy signal once the ceiling is reached (CO trunks do not receive busy).	ear-17
CMS	(NO) YES	Command and Status link If this ACD DN is to use the CSL, enter YES. Set to YES for Meridian Mail applications.	csi-8
CNTL	(NO) YES	Control DN is in control. When CNTL = NO, CDN calls are sent to the Default ACD DN (DFDN).	ear-17
CPRD	sm sd em ed	Collection Period: Month and day data collection is to start and end. Where: <ul style="list-style-type: none">• sm = start month (1-12)• sd = start day of month(1-31)• em = end month (1-12)• ed = end day of month(1-31)	acdc-2
CRQS	0-(100)-255	Call Request Queue Size It is recommended that CRQS be approximately 20% higher than the number of trunks available for networking. If the customer selects the OCN option, set this value at 5% over trunking capacity. This avoids reserving agents for calls on the network when trunking facilities are unavailable. Flow Control (FCTH) is typically set at 25% of the call request queue size. The CRQS must be defined for each ACD DN in the network. CRQS must be greater than FCTH. CRQS = 0 closes the queue.	nacd-15

Prompt	Response	Comment	Pack/Rel
CUST	xx	Customer number associated with this data block as defined in LD 15.	bacd-1
CWLF	(0)-2047	Call Waiting Lamp Flash threshold Prompted if NCWL = YES. CWLF must be greater than or equal to CWTH	acdb-15
CWLW	(0)-2047	Call Waiting Lamp Wink (fast flash) threshold Prompted if NCWL = YES. CWLW must be greater than or equal to CWLF	acdb-15
CWNC	NO YES	Alert rings for all calls Alert rings for only priority calls CWNC appears when a TN has been entered for CWNT. There is no default.	m911-19
CWNT	I s c u	Call Waiting Notification TN <ul style="list-style-type: none"> I = (0-255) Option 81C with Fiber Network Fabric 	m911-19 fnf-25
CWTH	0-(1)-2047 0 X	Calls Waiting Threshold: The number of Calls Waiting in queue that triggers the "calls waiting" indication. To disable To delete existing entry.	acdb-1
CWTT	(0)-40-63	ACD Call Waiting Threshold Time (in 1 second intervals)	acnt-15
DAL	(NO) YES	Data Agent Log In with the MSB key allowed The data agent must be defined with a DTA Class of Service in LD 11. DAL is not prompted when IVMS or DSAC are set to "YES". Prompted if TYPE = SCB or ADS.	acdc-14
DFDN	x...x	Local default ACD DN Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Calls to the CDN are directed to this ACD DN. RAN and Music, if provided, are as defined for the CDN. Any other ACD treatment, such as Night, is applied as if the caller directly dialed the ACD DN.	ear-17
DNIS	(NO) YES	Dialed Number Identification Service Send (do not send) ACD/DNIS information across the link. Not prompted for Virtual Agents.	dnis-12

LD 23

Prompt	Response	Comment	Pack/Rel
DNRT	(NO) YES	Delay Night RAN Treatment When DNRT = YES for an ACD DN there is a delay in routing calls to the night RAN. The call is delayed until the call has reached the end of the Night table and there are no outstanding call requests for the call. Prompted if a NACD Night table and a RAN route have been defined.	nacd-15
DOW	1-7	Days of Week for data collection Where: 1 = Sunday and 7 = Saturday	acdc-2
DSAC	(NO) YES	ACD DN is not an IS/Data Service Access Code ACD DN is an IS/Data Service Access Code Prompted when MWC = NO	csi-8
DURT	15-(30)-45	Duration Timer (in minutes) DURT indicates how long a Target node honors a call request from the Source node. If the timer expires, the call is removed from the call request queue. If this timer is too large, the network call request queues may become overcrowded. If the timer is too small, waiting customers may be cut off from receiving services. This timer must be defined only for Target queues.	nacd-15
EES	YES (NO)	IVMS uses End-to-End Signaling to send tone. IVMS (does not use) End-to-End Signaling to send tone. Prompted when IMA = YES.	ims-2
EHR	0-23	Hour of day that data reporting ends	acdc-2
EMRT	0-511	Emergency Recorder Trunk Route. The route and at least one trunk must exist before defining EMRT. Enter X to remove.	acdb-1
FADR	(0)-15	Force Answer Delay timer for Ringback Cadence Enter delay time, in increments of one second, before call is connected to an agent. This delay timer ensures that a caller, during forced answer, receives at least one ringback cadence before being connected to an agent.	supp-14

Prompt	Response	Comment	Pack/Rel
FADT	(0)-15	Force Answer Delay Time Enter Delay time, in increments of one second, between calls when Call Forcing is enabled. This delay timer offers an agent a few seconds break before having to answer the next call.	supp-14
FCFT	0-(2)-30	Flexible Call Force Timer (the time in seconds before Flexible Call Force is enforced)	acdb-16
FCTH	10-(20)-100	Flow Control Threshold to allow additional calls into the call request queue The Flow Control option opens and closes the ACD DN for network calls. Once the number of Call Requests received over the network meets the call request queue size defined in LD 23, the queue is shut down (INACTIVE) for network calls. For the queue to open for network calls, the pending queue request size must drop to a value equal to the flow calls control. For example, a call request queue size of 50 with a flow control of 10 allows the queue to become inactive after 50 call requests are pending. After 10 calls or 10 Call Requests have been answered or removed, leaving 40 remaining in queue, the queue will reopen.	nacd-15
FNCF	(NO) YES	Force Night Call Forward to busy ACD DN	bacd-15
FORC	(NO) YES	Force Calls are forced to arrive in answered state. When FORC = Yes, the call arrives on Key 0 (in-calls key) in an answered state. Headsets are recommended for this option.	acdb-1
FROA	(NO) YES	First RAN On Arrival (the 1st RAN to be given to incoming calls immediately; FRT time ignored) If FROA = NO, the call is forced to wait FRT time. Recorded Announcement is only given if an idle agent is not found.	acda-1
FRRT	0-511	First RAN Route number for ACD The route and at least one trunk must exist before defining FRRT. Enter X to remove.	acda-1

LD 23

Prompt	Response	Comment	Pack/Rel
FRT	0-2044	First RAN Time (the time in seconds allowed before unanswered incoming ACD calls are connected to the first RAN) Prompted if FRRT is defined. If a value is not entered FRT defaults to blank and there is no connection to the RAN.	acda-1
HMSB	(NO) YES	Agent cannot activate Make Set Busy if an ACD call is on-hold Agent can activate Make Set Busy if ACD call is on-hold	basic-9
HOML	 (NO) YES	Handset Removal or Make Set Busy key (MSB key) log out. The HOML option allows an agent to log out by removing the headset or going on hook without using the Make Set Busy (MSB) key. Logout while on Agent Reserve causes a cancellation message. Log out with only the Make Set Busy key Log out with either handset removal or Make Set Busy key activation HOML is prompted if an Auxiliary Data System (ADS) or Schedule Block (SCB) exists.	bacd-1
HPQ	 (NO) YES	High Priority Queue (preference given to High Priority trunk calls) Calls from the source queue's high priority trunks are presented after another queue's Timed Overflow queue (TOFQ) calls. Calls from the source queue's high priority trunks are presented before another queue's Timed Overflow queue (TOFQ) calls. In an NACD environment, HPQ must be denied to receive the OCN prompt. (HPQ = No)	tof-10
HSID	0-15	VAS ID for the Host Application Module Link. When the CCR and ML applications are both running, this HSID is the VSID assigned to the AML for Meridian Link in LD 17. The VSID prompt in this CDN configuration will match the VSID for the CCR AML port configured in LD 17.	ccr-17

Prompt	Response	Comment	Pack/Rel
ICP	(NO) YES	Intercept Computer Printer (ACD MC used for Intercept Printer)	icp-14
ICPR	0-<NIPN>	Intercept Computer Printer Printer number (for ICPS = COM); NIPN is defined in LD 15	icp-14
ICPS	(CIR) COM	Intercept Computer Printer Search (when more than one console is used) Circular search One Common printer for ACD group	icp-14
IDLB	(1)-9999	Agent ID Lower Boundary This prompt is used with the IDUB prompt to determine the maximum number of agents allowed by the system. The number must be within the parameters set by the IDLB and IDUB prompts. Prompted if TYPE = ADS or SCB and AID = YES	acdc-19
IDUB	<i>IDLB</i> -(9999)	Agent ID Upper Boundary This prompt is used with the IDLB prompt to determine the maximum number of agents allowed by the system. The number must be within the parameters set by the IDLB and IDUB prompts. Prompted if TYPE = ADS or SCB and AID = YES	acdc-19
IFDN	x...x	Interflow Directory Number The Interflow Directory Number serves as the DN to which calls interflow. IFDN can be up to 31 digits. Calls diverted to the IFDN are not routed by NACD. Network calls diverted to an IFDN lose all the network information, so that information cannot be displayed on the terminating telephone. A group hunt pilot DN can be entered. If the OPAO package is equipped, then # can be used in this DN.	acdb-1
	X	To delete existing entry.	

LD 23

Prompt	Response	Comment	Pack/Rel
		IFDN and NFCR are affected by the Outpulsing feature for Japan. Refer to the Feature Description in X11 Features and Services for details. Typing four asterisks (****) at the IFDN prompt will not let the user exit Overlay 23.	
IMA	(NO) YES	Integrated Messaging Allowed (ACD DN assigned to IMS) Set to YES for Meridian Mail applications.	ims-2
IMS	(NO) YES	Integrated Messaging Service Set to YES for Meridian Mail applications. IMA must be set to Yes in LD 15.	ims-2
ISAP	(NO) YES	Integrated Services Application Protocol (ACD messages sent across the ISDN/AP link) Set to YES for Meridian Mail applications.	ani-15
IVMS	(NO) YES	Integrated Voice Messaging System Set to YES for Meridian Mail applications.	ivms-2
IVR	(NO) YES	Interactive Voice Response queue An ACD queue must be defined as an IVR queue before the Treatment Request for IVR command can be used in Customer Controlled Routing (CCR) applications.	ivr-18
	(0)-999	Login maximum (the maximum number of agents that can be logged in at any one time) LOG cannot exceed MAGT value defined in LD 17.	acdc-18
LOG	(0)-999	Login maximum (the maximum number of agents that can be logged in at any one time) LOG cannot exceed the MAGT value defined in LD 17	acdc-18
MAXP	1-1200	Maximum Number of Agent Positions. The value of the MAXP can be increased to the allowed maximum or decreased to the current number agents.	acda-1
MCFD		Multiple Queue Assignment (MQA) Call Forwarding Digits attached to Agent IDs. The digits are used to determine which Phantom TNs are Call Forwarded. MCFD is prompted if MQCF = YES.	mqa-21
	(0)	No digits attached to Agent IDs	
	1-3	Limit of digits attached to Agent IDs. Maximum is 3.	
	X	No digits attached to Agent IDs	

Prompt	Response	Comment	Pack/Rel
MQA	(NO) YES	Multiple Queue Assignment No Multiple Queue Assignment functionality Multiple Queue Assignment functionality MQA is prompted if AID = YES and MQA package 297 is equipped. Warning: The HSL link must be disabled before you configure or change MQA.	mqa-21
MQAP	(NO) YES	MQA Priority option No Priorities selected during login Select Priorities during login Prompted if MQA = YES and Priority Agent package 116 is equipped.	mqa-21
MQAS	(NO) YES	Multiple Queue Assignment Supervisor ID option No Supervisor ID during login Select a Supervisor ID during login Prompted if MQA = YES.	mqa-21
MQCF	(NO) YES	Multiple Queue Assignment Call Forward option No automatic Call Forwarding of Phantom TNs to agent sets at login Automatic Call Forwarding of Phantom TNs to agent sets at login Prompted if MQA = YES and Phantom TN package 254 is equipped.	mqa-21
MURT	0-511	Music Route number The route and at least one trunk must exist before defining MURT. Enter X to remove.	acda-1
MWC	(NO) YES	Message Waiting Center (ACD DN is a message center DN) MWC is set to YES for Meridian Mail applications. Prompted if Message Waiting Center (MWC) package 46 is equipped.	mwc-1

LD 23

Prompt	Response	Comment	Pack/Rel
NCFW	x...x	Night Call Forward DN for ACD calls (up to 23 digits) and Operator Revert DN for Meridian Mail (IMS, IVMS). NCFW is tracked on reports as interflow. NCFW can be up to 31 digits. Precede NCFW entry with X to delete. Typing four asterisks (****) at the NCFW prompt will not let the user exit Overlay 23.	acda-1
NCWL	(NO) YES	New Call Waiting Lamp options When NCWL = YES, the Busy Threshold and Overflow Threshold apply only to Overflow by Number and Interflow conditions, but do not change the lamp states. Calls in the Call Request and Local Flow-in queues are included when adding up the calls in queue for lamp state updates.	acdb-15
NDFL	xxxx	Not Ready Default code Must be equipped with ACD-D or NGCC package	acdd-24
NRAC	(NO) YES	Enable Not Ready Activity Codes	acdd-24
NRRT	0-511	Night RAN Route number assigned as night announcement for ACD calls. If NRRT and NCFW are both defined, then NRRT course first. The route and at least one trunk must exist before defining NRRT. Enter X to remove.	acda-1
NRT	(0)-2044	Night RAN Time This is the time in seconds - in increments of 1 - before RAN is connected to ACD calls. NRT is prompted if NRRT is defined and International Supplementary Features (SUPP) package 131 is equipped.	supp-9
OBTN	(NO) AGT ALL	No Observation Tone given Audible Observe Tone to Agent only Audible Observe Tone to all parties	acdb-1

Prompt	Response	Comment	Pack/Rel
OCN	(NO) YES	<p>Accept Oldest Call in Network</p> <p>This feature determines if the oldest call in the network is answered ahead of calls to the Source location. Use caution with this feature. Because agents are reserved for network calls, agents may remain idle while calls wait in the local queue.</p> <p>To avoid reserving all the agents for network calls, split the ACD group into two areas: one area for all calls and the second area for a group of agents equal to the number of tie lines between the network locations. This solution allows local calls to overflow by time into the area for all calls.</p> <p>The OCN option must be defined only for Target queues.</p> <p>When OCN = YES and HPQ = NO, the system compares calls from queues for that target ACD DN. The highest priority call that has waited the longest is the call presented to the next available agent.</p> <p>When OCN = NO and HPQ = NO, the system selects the oldest call from the ACD DN's own Timed Overflow (TOF) queue. If there are no calls in the Source Timed Overflow queue, the system looks at calls in the Call Request queue and Source Timed Local Flow-in queue.</p> <p>When OCN = NO and HPQ = YES, the system presents calls from the agent's own TOF queue and High-Priority queues before presenting calls from Source TOF queues and Call Request queues.</p> <p>OCN is prompted if Network Automatic Call Distribution (NACD) package 207 equipped.</p>	nacd-15
OUTS	xxxx xxxx	<p>Routing Table entries to be removed</p> <p>Up to 20 entries at a time can be removed from the Enhanced Overflow (EOVF) or Network ACD (NACD) routing tables. Only 5 entries can be entered at OUTS at a time. OUTS is prompted until just <cr> is entered.</p> <p>Prompted if REQ = CHG. Remove routing tables by list entry number, not by ACD DN. Print the NACD data to see the ACD DN associated with each entry number.</p>	nacd-15

LD 23

Prompt	Response	Comment	Pack/Rel
OVBU	aaa bbb ccc ddd	<p>Overflow Busy treatment for specific call originator types when IFDN not defined.</p> <p>Enter the required treatment for Overflow calls:</p> <ul style="list-style-type: none">• LNK = caller is re-linked to source queue (the default value)• BSY = caller hears busy tone <p>Enter all four entries at the same appearance. Enter LNK or BSY for each of the four different originators:</p> <ul style="list-style-type: none">• aaa = Internal calls• bbb = Attendant calls• ccc = LNK• ddd = DID and TIE trunks <p>If busy tone is configured for CO trunk calls, the calling or called party will be billed for the duration of the call, which is from the time the PBX returns answer supervision until the time the calling party disconnects.</p> <p>BSY is not allowed for CO trunks. Prompted if there is no entry for IFDN.</p>	acdb-16
OVDN	x...x x...x x...x X Xxxxx	<p>Overflow ACD Directory Number(s) (maximum of three responses) Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.</p> <p>To remove ALL OVDNs for the ACD DN</p> <p>To delete a specific DN.</p> <p>Any new entry replaces the old data. The Overflow DN cannot be a CDN.</p>	acdb-1
OVFL	(NO) YES	<p>Overflow Tone</p> <p>Busy tone will be given to call</p> <p>Force overflow tone will be given to call by Mobility switch</p> <p>OVFL is prompted when a call arrives at a Controlled DN in default mode and when that call has exceeded the CDN-to-a-default-ACD-DN ceiling threshold.</p>	basic-20

Prompt	Response	Comment	Pack/Rel
OVTH	0-(2047)	<p>Overflow Threshold</p> <p>OVTH represents the value at which the Calls Waiting lamp winks (Fast flashes), causing calls which are entering the queue to overflow.</p> <p>When OVTH = 0 overflow is attempted when all agents are busy. Enter X to delete existing entry.</p>	acdb-1
PAGE	(NO) YES	Start at the top of a new page for each report	acdc-2
PCMM	(NO) YES	Periodic Clearing with Meridian Mail Prompted if OPT = PCMA in LD 15	nas-14
PRIM	(NO) YES	Primary DSAC	csl-8
PRI0	0-15	<p>Printer(s) for Output (establish the number(s) of devices used for output of reports)</p> <p>These output devices must have been defined in LD 17 as ACD printers. Precede with X to remove a device number.</p>	acdc-2
RAGT	2-(4)-30	<p>Number of seconds an agent in a remote target is reserved for an overflow call.</p> <p>The Reserve Agent Timer keeps the agent reserved until call presentation or timeout. The timer also prevents a situation where an agent may be reserved indefinitely.</p> <p>When an agent is reserved with Countdown Allowed (CNTA) CLS as defined in LD 11, the RAGT countdown is shown on the agent's Digit Display.</p> <p>The agent being reserved has a Reserve Agent Timer with countdown display. The countdown display starts when the Reserve Agent Timer (RAGT) starts, and counts down by increments of 2 seconds, to zero. If the call is not presented to the Target agent before the Reserve Agent Timer (RAGT) expires, that call remains at the originating Source queue. The Target agent is returned to the idle agent queue.</p>	nacd-15

LD 23

Prompt	Response	Comment	Pack/Rel
		<p>If the Reserve Agent Timer is set too high, the agent is reserved waiting for calls. If the Reserve Agent Timer is set too low, the agent may be freed before the network facility can set up the call. Different timer settings can be tried through Load Management. Subsequent calls are presented to agents only after the Reserve Agent Timer has expired.</p> <p>The RAGT must be defined only for Target queues.</p>	
RAN	0-511	Recorded Announcement Trunk Route Number for calls entering message queue (default NO RAN)	acda-1
RAO	(NO) YES FULL	Restricted Agent Observe Restricted Agent Observe on logout disabled Restricted Agent Observe on logout enabled Restrict the supervisor from observing any of agents IDN calls even when logged in	
RDNA	(NO) YES	Restricted DN Access Enter NO if use of DN keys is to be allowed without logging in. Enter YES to restrict agents from making outgoing calls when not logged in. Prompted if an Auxiliary Data System (ADS) or Schedule Block (SCB) exists.	acdc-1
REQ		Request	bacd-18
	CHG	Change existing data Select OUT followed by NEW, instead of CHG when switching resources between virtual and actual ACD DN's to avoid unwanted information on ACD-D reports.	
	END	Exit Overlay program	
	LST	List ACD DN's (This includes ACD DN's, CDN's and NACD DN's)	
	NEW	Add new data to the system	
	OUT	Remove data block When removing an ACD DN from the Meridian 1 which is monitored by ACD-MAX, the DN is not automatically deleted from the ACD-MAX configuration.	

Prompt	Response	Comment	Pack/Rel
	PRT	Print the specified data	
RFRQ		Report Frequency. See also ROPT prompt for Report Options.	acdc-2
	0	No reports	
	1	All reports hourly on the hour	
	2	All reports hourly on the half-hour	
	3	All reports half-hourly	
	4	Report 3 every quarter-hour, no other reports.	
	5	Report 3 every quarter-hour, other reports hourly on the hour.	
	6	Report 3 every quarter-hour, other reports hourly on the half-hour.	
	7	Report 3 every quarter-hour, other reports every half-hour	
RGAI	(NO) YES	Ring Again for Internal calls When internal caller dials a queue with no available agents, fast ringback is provided. If RGAI = YES, the caller can activate Ring Again to be presented to the next available agent. Enter YES for Data Service Access Code. (DSAC). RGAI must = YES for DSAC.	acda-8
ROPT		Report Options	acdc-2
	1	Agent group	
	2	Queue	
	3	Trunk routes	
	4	Agent position	
		Precede with X to disable a report. More than one option allowed. Any new entry replaces the old data.	
RPRT	(YES)	Information about this ACD-DN (or CDN) will be included in management reports and status displays	acdc-17
	NO	Information about this ACD-DN (or CDN) will be excluded in management reports and status displays. RPRT is prompted only if a SCB or an ADS block exists for this customer.	

LD 23

Prompt	Response	Comment	Pack/Rel
RSND	(4)-16	<p>Message Resend timer (in seconds)</p> <p>This is the length of time the Source node waits for a response from the Target node after sending a Call Request message.</p> <p>When the Resend Timer expires, another message is sent. If the second Call Request message expires without a response, the Call Request is removed from the network queue. The Resend Timer should be changed only if the network uses multiple hops and ISL with lower baud rates.</p> <p>A single hop typically requires 100 ms of real time to set up the call. When the Resend Timer is too large, the control function of the timer to limit traffic to busy nodes is lost. If the Resend Timer is too small, the access of calls to nodes may be limited unnecessarily.</p> <p>The Resend Timer must be defined for the Source node and the Target nodes.</p>	nacd-15
RTPC	(NO) YES	<p>Real Time Processing</p> <p>The SAGP Load Management command does not take effect in real time.</p> <p>The SAGP Load Management command takes effect in real time.</p>	supp-9
RTQO	(NRD) MSB	<p>Return to Queue Option</p> <p>Not Ready</p> <p>Make Set Busy</p>	acd-23
RTQT	(0)-50	<p>Return to Queue Timer after no answer in number of ringing cycles</p>	acd-23
SDNB	(NO) YES	<p>Secondary DN Blocking</p> <p>Block calls to the Secondary DN while busy on ACD call.</p>	acdb-12
SFNB	1 2 ...	<p>Set Feature Notification Bitmap</p> <p>SFNB is used for messages such as: SFN (login), SFN (logout), ...</p> <p>This bitmap is downloaded by the application which is used to control the sending of SFN messages on behalf of the acquired TN. A numeric value is printed only if the corresponding message is enabled.</p> <p>SFNB is printed if AACR = YES.</p>	nxcc-22

Prompt	Response	Comment	Pack/Rel
SFRQ	1 2	Frequency of Status Display updates 30 seconds 60 seconds	acdc-2
SHR	0-23	Start Hour Hour of day that data reporting starts	acdc-2
SPCP	(NO) YES	<p>Separate Post Call Processing (to enable separate DCP/PCP indication)</p> <p>When SPCP = YES, agents in Post Call Processing (PCP) are separated from agents in Direct Call Processing (DCP). Changing the SPCP option for an ACD DN changes all ACD DNs in the same customer group.</p> <p>Agent (AGT) key lamp states and display (DAG) field on supervisor telephones are affected by SPCP as follows:</p> <p>AGT key lamp steady:</p> <ul style="list-style-type: none"> • SPCP = YES; agent is on an ACD call • SPCP = NO; agent is on an ACD call or not ready (NRD) <p>AGT key lamp fast flash:</p> <ul style="list-style-type: none"> • SPCP = YES; agent is on non-ACD call or NRD • SPCP = NO; agent is on non-ACD call <p>DAG Display ACD DN:</p> <ul style="list-style-type: none"> • SPCP = YES; displays # of agents on ACD calls • SPCP = NO; displays # of agents on ACD calls or NRD <p>DAG Display non-ACD DN:</p> <ul style="list-style-type: none"> • SPCP = YES; displays # of agents on non-ACD calls or NRD • SPCP = NO; displays # of agents on non-ACD calls <p>The SPCP option is a customer-wide option. A change to SPCP for any ACD queues affects all ACD queues for that customer.</p>	acdb-1

LD 23

Prompt	Response	Comment	Pack/Rel
SRPT	(NO) YES	Short Report option for report 4 (Agent position) Use the short report when more than one agent, each with a unique agent ID, logs into the same position ID during a report period.	acdc-2
SRRT	0-511	Second RAN Route number for ACD The route and at least one trunk must exist before defining SRRT. Enter X to remove.	acda-1
SRT	0-2044	Second RAN Time Time in seconds before second RAN is connected to ACD calls. Prompted if SRRT is defined. There is no default for SRT.	acda-1
STIO	0, 1, 2,...15	Status Input/Output devices Enter all Input/Output devices assigned for status displays. The device must be first defined in LD 17. Prompted if a Schedule Block (SCB) exists. Enter X to remove.	acdc-2
TABL	x	Table. Where: x = <ul style="list-style-type: none">• D = Day Table• N = Night Table• S = Source Table The Day Table is mutually exclusive with TOFT. The Night Table is mutually exclusive with NCFW.	nacd-15
TDNS	(NO) YES	DNIS number is not an original Called Party of a defined CDN queue. DNIS number is an original Called Party of a defined CDN queue. TDNS = YES is recommended if a CDN is defined for the Mobility Control Point (MCP) application to control a Personal Communication Service (PCS) call.	basic-20

Prompt	Response	Comment	Pack/Rel
TOFT	2-1800	<p>Timed Overflow Threshold (in seconds)</p> <p>Before defining the TOFT value, first delete that OVDN from its Source ACD DN. Then, enter the time, in seconds, that you want a call to wait in queue before it overflows to an OVDN.</p> <p>When REQ = CHG, and the OVDNs are answering TOF calls, an error message is output indicating the affected Target ACD DNs.</p> <p>Enter X to disable the feature. If no value is entered, NONE is printed.</p>	tof-10
TOT4	(NO) YES	<p>Totals on report 4</p> <p>Averages are output on report 4 (Agent position)</p> <p>Totals are output on report 4 (Agent position)</p> <p>Prompted if ROPT = 4. If TOT4 = YES, HDCP column is output on report 1 and 4. Must have ACD-C enabled.</p>	acdc-10
TRDN	xxxx	<p>Treatment DN for IVR queue</p> <p>A treatment DN does not have to be a valid DN in the switch. If Meridian Mail is to be used for both Voice Messaging and IVR, a Treatment DN should not be the same as any Meridian Mail voice box. Enter X to remove.</p>	ivr-18
TRGT	xxxx tttt	<p>Target. Where:</p> <ul style="list-style-type: none"> • xxxx = Target ACD DN • tttt = time (0-1800) in seconds <p>Up to 20 target ACD DNs can be defined. For each target, tttt is the total time from the call entering the ACD queue until a call request is sent to the target. TRGT rounds up to an even number.</p>	nacd-15
TSFT	0-(20)-510	<p>Telephone Service Factor Threshold (in seconds)</p> <p>Prompted if a Schedule Block (SCB) exits.</p>	acdc-1
TYPE		Type of data block	
	ACD	<p>Automatic Call Distribution data block</p> <p>Requires Basic Automatic Call Distribution (BACD) package 40.</p>	bacd-1
	ADS	<p>Auxiliary Data System data block</p> <p>Requires Automatic Call Distribution Package C (ACDC) package 50. Not valid when REQ = PRT.</p>	acdd-2

LD 23

Prompt	Response	Comment	Pack/Rel
	CDN	Control Directory Number data block This is a special DN created to specify a destination ACD DN to which incoming calls are directed. Multiple CDNs can direct calls to the same ACD DN providing different treatments based on the CDN parameters. Requires Enhanced ACD Routing (EAR) package 214.	ear-17
	NACD	Network ACD data block Requires Network Automatic Call Distribution (NACD) package 207.	nacd-15
	SCB	Schedule data Block for ACD Management Reports Requires Automatic Call Distribution, Package C (ACDC) package 42.	acdc-2
UMG	(NO) YES	User to User Messaging	ims-2
UMT	2-(6)-15	Update Message Time Silence interval in seconds after message queue alert tone.	ims-2
USFB	1 2 ...	Unsolicited Status Message (USM) Filter Bitmap USFB applies to messages such as: <ul style="list-style-type: none">• Onhook, Offhook, Ringing, Active, Disconnect, Unringing, Hold, Restore, Ready, Not Ready, Walkaway, Walkaway Return, Reserved, Unreserved, ... This bitmap is downloaded by the application which is used to control the sending of USM messages on behalf of the acquired TN. A numeric value would only be printed if the corresponding message set is enabled. USFB is printed if AACR = YES.	nxcc-22
UST	(NO) YES	User Status update	ims-2
VSID	0-15	Value Added Server ID of VAS providing VMS VASs are external server equipment facilities such as Meridian Mail. Prompted if IMS or ISAP = YES. Must be defined in LD 17.	csl-8

LD 24: Direct Inward System Access

Overlay program 24 allows data for the Direct Inward System Access (DISA) and the Emergency Services Access feature to be created, modified, and printed.

LD 24

Prompts and responses by gate opener DIS: Direct Inward System Access (DISA)

Prompt	Response	Comment
REQ	aaa	Request
TYPE	DIS	Type of data block = DIS (Direct Inward System)
CUST	xx	Customer number associated with this data block
SPWD	xxxx	Secure data Password
DN	x...x	DISA Directory Number (x...x = 1-7 digit DN)
CCBA	(NO) YES	Allow Collect Call Blocking Answer signal to be sent
SCOD	x...x	Security Code
AUTR	(NO) YES	Authorization Code required
TGAR	0-(1)-15	Trunk Group Access Restriction
NCOS	(0)-31	Network Class of Service
COS	aaa	Class of Service (aaa = (CTD), FR1, FR2, FRE, CUN, SRE, TLD, or UNR)
RANR	0-511, (X)	Route number for DISA RAN (Entering "X" removes the existing route and deactivates DISA RAN)
- RTMR	(0)-10-300	Route timer
DGTS	x...x	Digits for DISA Digit Insertion
- DLNT	(YES) NO	Dial tone needed after digit insertion
CRCS	x	Code Restriction Class of Service

Prompts and responses

ESA: Emergency Services Access Data Block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	ESA	Type of data block = ESA (Emergency Services Access)
CUST	xx	Customer number associated with this data block
ESDN	xxxx	Emergency services Directory Number
ESRT	0-511	Emergency Services Access route number
DDGT	x..x	Directing digits
DFCL	x..x	Default ESA Calling Number
OSDN	x..x	On-Site Notification station DN

LD 24

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
AUTR	(NO) YES	Authorization Code required If YES, the user enters the authorization code but not the special prefix access code.	disa-7
CCBA	(NO) YES	Collect Call Blocking Denied Collect Call Blocking Allowed Collect Call Blocking (CCB) package 290 is required.	ccb-21
COS	(CTD) CUN FR1 FR2 FRE SRE TLD UNR	Conditionally Toll Denied Class of Service Conditionally Unrestricted Class of Service Fully Restricted class 1 Fully Restricted class 2 Fully Restricted Class of Service Semi-Restricted Class of Service Toll Denied Class of Service Unrestricted Class of Service	disa-1
CRCS	x	Code Restriction Class of Service New Flexible Code Restriction (NFCR) must be activated at least once.	
CUST	xx	Customer number associated with this data block as defined in LD 15.	disa-1
DDGT	x..x	Directing digits (e.g. 1, 11, 911, etc.). Up to 4 digits are accepted. The configured digits are outputted as the called number if the outgoing trunk for the ESA call is a CAMA trunk.	esa- 23

Prompt	Response	Comment	Pack/Rel
DFCL	x..x	<p>Default ESA Calling Number. The input must be the following lengths:</p> <p>* On a system that is not FNP packaged, 8 or 11 digits are accepted if the first digit of the input is '1'; otherwise the input must be 7 or 10 digit.</p> <p>* On a system that is FNP packaged, up to 16 digits are allowed to be entered.</p> <p>'X' deletes the data.</p> <p>Note that the prompt does not expect a CLID entry number.</p>	esa- 23
DGTS	x...x	<p>Digits for DISA Digit Insertion.</p> <p>A maximum of 31 digits can be defined.</p>	dpna-21
	X	<p>Removes existing digits and deactivates DISA Digits Insertion.</p> <p>Direct Private Network Access (DPNA) package 250 is required.</p>	
DLNT	(YES) NO	<p>Dial tone needed after digit insertion</p> <p>Dial tone not needed after digit insertion</p>	dpna-21
DN	x...x	<p>DISA Directory Number</p> <p>DN (represented in response by "x...x") can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.</p> <p>All trunk routes terminating in DISA must auto-terminate (LD 16 prompt AUTO = YES) and trunks must have ground start signaling (LD 14 prompt SIGL = GRD). The DN must be the same as prompt ATDN in LD 14.</p>	disa-1
ESDN	xxxx	Emergency services DN. Up to 4 digits are accepted.	esa- 23

LD 24

Prompt	Response	Comment	Pack/Rel
ESRT	0-511	Emergency Services Access route number. Precede with "X" to delete the data. Route number of the following routes types are accepted as valid input: CAM COT DID FEX TIE WAT The route number of an ISA service route (LD16, ISAR = YES) can be entered for ESRT as long as the route type of the ISA service route is one of the above.	esa- 23
NCOS	(0)-99	Network Class of Service	ncos-1
OSDN	x..x	On-Site Notification station DN. The input must be a valid single appearance internal DN. 'X' deletes the data. The On Site Notification function is dependent on the OSDN to locate and alert the OSN set in the event of an ESA call.	esa- 23
RANR	0 - 511 (X)	Route number for DISA RAN Removes existing route and deactivates DISA RAN. This prompt appears with Direct Private Network Access (DPNA) package 250 and Recorded Announcement (RAN) package 7.	dpna-21
REQ	CHG END NEW OUT PRT	Request Change existing data block Exit Overlay program Create a new DISA data block Remove a DISA data block Print DISA data block	disa-1

Prompt	Response	Comment	Pack/Rel
RTMR	(0)-10-300	Route Timer RTMR = the maximum time (in seconds) that a caller can wait for an available RAN trunk before being removed from the RAN queue. A caller that has failed to capture a RAN trunk during the RTMR time limit will proceed with the call as if DISA RAN has completed. Entering "0" clears the timer and deactivates the DISA RAN timer.	dpna-21
SCOD	x...x	Security Code (1-8 digit DISA security access code) The security code can be changed using REQ = CHG, but is only removed by removing the entire DISA data block. Enter X to remove. Entering <cr> = no code or code not changed.	disa-1
SPWD	xxxx	Secure Data Password Prompted only if the password is defined in LD 15. If the password is not entered, the security code will not print when PRT is requested.	disa-1
TGAR	0-(1)-15	Trunk Group Access Restriction	disa-1
TYPE		Type of data block	disa-1
	DIS	Direct Inward System data block	
	ESA	Emergency Services Access data block	esa-23

LD 24

LD 25: Move Data Blocks

Overlay program 25 allows data associated with loops, shelves, or cards to be moved to or interchanged with different loops, shelves, or cards.

The program also allows the data associated with different customers to be moved at the same time as long as all source and destination loops, shelves, and cards are identical for all customers specified.

Move and swap rules

- 1 Before using MOV or SWP the following hardware should be removed from the system and reconstructed after the MOV is completed:
 - Consoles
 - Digitone Receivers
 - Dial Tone Detectors
 - Multifrequency Compelled Signaling (MFC/MFE)
 - PRA loops
 - ACD telephones
 - All lines associated with the loop or card on the destination side
- 2 Loops must be configured in LD 17.
- 3 NT8D17 Conference/TDS loop cannot be moved or swapped with LD 25.
- 4 When moving a card, the units on the source card must match with the the card type on the destination side.

Fiber Network Fabric

The Fiber Network Fabric extends and enhances the 5-group network architecture to 8 non-blocking (inter-group) Network groups, with a resulting expansion in network capacity to 8k timeslots available for Intergroup traffic. This is achieved by using OC-12 SONET rings, and adding additional network and PE shelves, packs and cables and software changes to allow using the expanded network capacity. This expansion increases the number of available loops from 160 to 256. This applies to the Option 81C only.

Prompts and responses

Prompt	Response	Comment
REQ:	aaa	Request (aaa = END, SWP, or MOV)
CUST	xx xx ... xx	Customer number
SRCL	xxx	Source Loop number from which data is to be moved
SRC	1-50	Source Card for Option 11C
DSTL	xxx	Loop number Destination to which data is to be moved
DEST	1-50	Destination Card for Option 11C
SHCD	a...a	Shelf Card (a...a format = ss TO ds or ss c TO ds c)
STUN	xx	Starting destination Unit Number
MVSG	(NO) YES	Move Segment
- SHSG	a...a	Shelf Segment (a...a format = ss sseg TO ds dseg)
STSG	0-3	Starting destination Segment

Move and Swap Rules

Scenario: Move or swap a shelf or card from source loop to destination loop		DESTINATION		
		Single density loop (SD)	Double density loop (DD)	Quadruple density loop (4D)
SOURCE	Single density loop (SD)	all cards are SD	all cards are SD	all cards are SD
	Double density loop (DD)	all cards must be SD	cards can be DD or SD	cards can be DD or SD
	Quadruple density loop (4D)	all cards must be SD	cards can be DD or SD	cards can be 4D, DD or SD

Scenario: Move or swap a whole loop from source loop to destination loop		DESTINATION		
		Single density loop (SD)	Double density loop (DD)	Quadruple density loop (4D)
SOURCE	Single density loop (SD)	shelf 0-3	if only shelf 0 and/or 1 is configured on loop	if only shelf 0 is configured on loop
	Double density loop (DD)	all cards on shelf must be SD	shelf 0-1	if only shelf 0 is configured on loop
	Quadruple density loop (4D)	all cards on loop must be SD	cards can be DD or SD	shelf 0

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
CUST	xx xx ... xx	Customer number Enter the customers affected by the move or swap operation. Customer 0 must be specified to move digitone receivers on the source loop.	basic-1
	<cr>	All customers affected The move/swap superloop data on a customer basis is not supported. Enter a return, (<cr>) when moving or swapping superloop data.	
DEST	1-50	Card number Destination to which data is to be moved (not supported for digital cards). If the loop has D-channel as a backup, REQ = MOV is not supported. For Option 11C, card 0 is not supported.	basic-1
DSTL	xxx	Loop number Destination to which data is to be moved Where: <ul style="list-style-type: none"> • xxx = 0-159 • xxx = 0-255 Option 81C with Fiber Network Fabric • xxx = 0-9 Option 11C • xxx = 1-9 11-19 21-29 31-39 41-49 Option 11C for DTI, DTI2, PRI, PRI2 If the loop has D-channel as a backup, REQ = MOV is not supported.	basic-20 fnf-25 lse-25
MVSG	(NO) YES	Move or swap Superloop Segments	basic-15
REQ		Request	
	END	Exit Overlay program.	basic-1
	MOV	Move data associated with an existing loop to a vacant loop (see Table). CAUTION: Before using MOV, consoles and digitone receivers should be removed from the database and reconstructed after the move is completed.	

Prompt	Response	Comment	Pack/Rel
	SWP	Swap (interchange) data associated with existing loops (See "Move and Swap Rules" on page 645.)	
SHCD	ss TO ds ss c TO ds c	Shelf Card Move or interchange data to or between shelves. Move or interchange data to or between cards. Where: <ul style="list-style-type: none"> • c = card number (0-15) • ss = source shelf • ds = destination shelf Shelf range: <ul style="list-style-type: none"> • SD = 0-3 • DD = 0-1 • 4D = 0 • 8D = 0-1 (superloops only) 	basic-1
SHSG	ss sseg TO ds dseg	Move/Swap source Shelf Segment to destination Shelf Segment, where: <ul style="list-style-type: none"> • ss = source shelf • ds = destination shelf • sseg = source segment • dseg = destination segment. The SHSG command is used to move or swap superloop segments.	basic-15
SRC	1-50	Source Card number from which data is to be moved (not supported for digital cards). If the loop has D-channel as a backup, REQ = MOV is not supported. For Option 11C, card 0 is not supported.	basic-1

LD 25

Prompt	Response	Comment	Pack/Rel
SRCL	xxx	Source Loop number from which data is to be moved Where: <ul style="list-style-type: none">• xxx = 0-159• xxx = 0-255 Option 81C with Fiber Network Fabric• xxx = 0-9 Option 11C• xxx = 1-9 11-19 21-29 31-39 41-49 Option 11C for DTI, DTI2, PRI, PRI2 If the loop has D-channel as a backup, REQ = MOV is not supported.	basic-20 fnf-25 lse-25
STSG	0-3	Starting destination Segment For superloops only, if REQ = MOV, enter the starting destination segment to which the shelf is to be moved.	basic-15
STUN	xx	Starting destination Unit Number Enter the starting destination unit number to which the first source unit is to be moved. The source card must not be on a superloop; the destination card must be on a superloop. The value of xx depends on source loop density. For 500/2500 and digital line cards: <ul style="list-style-type: none">• SD, xx = 0, 4, 8, 12• DD, xx = 0, 8• QD, xx = 0, 8 (8 for digital line cards only) For a Digitone Receiver card the destination density is 8D and the source density is: <ul style="list-style-type: none">• SD, xx = 0, 1, 2, 3, 4, 5, 6, 7• DD, xx = 0, 2, 4, 6• QD, xx = 0, 4 SD, DD trunk cards cannot be moved to Universal or E&M/Dictation Trunk cards. Different source cards cannot be mixed into Superloop cards with one destination. Only ALC, DLC and DTR can be moved to superloops.	basic-15

LD 26: Group Do Not Disturb

Overlay program 26 allows Do Not Disturb groups to be created, modified, and printed.

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request
TYPE	DND	Type of data block = DND (Do Not Disturb Group)
CUST	xx	Customer number associated with this data block
GPNO	0-99	Group Number or new Group Number to be formed
TOGP	0-99	Move to Group number
GRPx	0-99	Number of next Group to be moved
STOR	x...x	DN to be Stored
RMOV	x...x	Remove DN

LD 26

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
CUST	xx	Customer number associated with this data block as defined in LD 15.	dndg-1
GPNO	0-99 <cr>	Group Number or new Group Number to be formed Print all Group Numbers. Prompted when REQ = PRT.	dndg-1
GRPx	0-99 <cr>	Number of next Group to be moved Proceed to next prompt.	dndg-1
REQ	CHG END MOV MRG NEW OUT PRT REM	Action Request Change existing data block. Exit Overlay program. Move a DN from one DND Group data block to another Group data block. Merge existing Group data blocks into a new Group (the old groups will still exist) data block. Create a New data block. Remove data block. Print DND Group data block. Remove an entry from a Group data block.	dndg-1
RMOV	x...x G0-G99	Remove DN Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Remove Group number	dndg-1
STOR	x...x G0-G99	DN to be stored Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Group number to be stored. Numbers may be added when REQ is CHG.	dndg-1
TOGP	0-99	Move To Group number	dndg-1
TYPE	DND	DND Group data block type	dndg-1

LD 27: ISDN Basic Rate Interface (BRI) Administration

Overlay program 27 was introduced to configure ISDN Basic Rate Interface hardware.

If ISDN BRI is being configured for the first time the following sequence must be used:

- 1 Configure Protocol group (PROT) data block, Link Access Protocol on D-channel (LAPD) data block.
- 2 Configure PRI loop, route, and channel data blocks for packet data transmission.
- 3 Configure Multi-purpose ISDN Signaling Processor (MISP) data block.
- 4 Configure Basic Rate Signaling Concentrator.
- 5 Configure S/T Interface Line Card (SILC) or U Interface Line Card (UILC) data block.
- 6 Configure Digital Subscriber Loop (DSL) data block.
- 7 Configure Terminal Service Profile on DSL (TSP) data block.

If changing the existing ISDN BRI service this sequence does not have to be followed, but the relationship of one data block to another must be observed. Due to interactions the changing of one data block may require the changing of other data blocks.

Refer to the *ISDN BRI Administration* NTP for complete details.

Prompts and responses Table of Contents

Section	Page
<i>Prompts and responses by data block:</i>	
BRSC: Basic Rate Signaling Concentrator data block CARD: SILC/UILC card data block	page 653
DNAT: Data Network Address Tables data block DSL: Digital Subscriber Loop data block (APPL = BRI)	page 654
DSL: Digital Subscriber Loop data block (APPL = BRIT or BRIE)	page 656
LAPB: Link Access Procedure - Balanced data block	page 657
MISP: Multipurpose ISDN Signaling Processor data block	page 658
PVC: Permanent virtual circuit connections data block	page 659
PROT or LAPD: Protocol or Link Access Protocol data block	page 660
TSP: Terminal Service Profile data block	page 661
X25P: X25P packet protocol parameters data block	page 662

BRSC: Basic Rate Signaling Concentrator data block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	BRSC	Type of data block = BRSC (Basic Rate Signaling Concentrator)
BRSC	l s c	Basic Rate Signaling Concentrator card
MISP	x...x	MISP loop number for large systems; SISP card slot for small systems (Option 11C)
DPSD	(NO) YES	D-channel Packet Switched Data
- MPHc	(YES) NO	Switch Route D-channel packet data to (Meridian Packet Handler) or public switched packet data network
- MPH	l	Meridian Packet Handler loop
- PRI_CH	l ch	PRI for Packet Handler and BRSC connections

CARD: SILC/UILC card data block

The S/T Interface Line Card (SILC) or U Interface Line Card (UILC) configuration procedures identify the location, the card type, and the MISP network loop for each SILC or UILC installed in the Meridian 1 Intelligent Peripheral Equipment (IPE) and Common Equipment (CE) Modules or card slot for each SILC or UILC installed in the Base or Expansion cabinet of an Option 11C system.

After the card configuration block is created, the dedicated D-channels are automatically assigned if the MISP is enabled. When REQ = PRT, entering <CR> at the TN prompt prints out information for all the cards in the system.

Prompt	Response	Comment
REQ	aaa	Request
TYPE	CARD	Type of data block = CARD (SILC/UILC)
TN	l s c u	Terminal Number of SILC or UILC
MISP	x...x	MISP loop number for large systems; SISP card slot for small systems (Option 11C)
CTYP	aaaa	Card Type (aaaa = SILC or UILC)

DNAT: Data Network Address Tables data block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	DNAT	Type of data block = DNAT (Data Network Address Table)
DNAT	1-32	DNA Table to print
DNIC	xxxx	Data Network Identification Code
NTN	x...x	Network Terminal Number

DSL: Digital Subscriber Loop data block (APPL = BRI)

The Digital Subscriber Loop (DSL) configuration determines the characteristics for each DSL connected to an SILC or UILC. Up to eight DSLs can be assigned to each SILC or UILC. When REQ = PRT, entering <CR> at the DSL prompt prints out all DSLs in the system.

Prompt	Response	Comment
REQ	aaa	Request
TYPE	DSL	Type of data block = DSL (Digital Subscriber Loop)
DSL	l s c dsl	Digital Subscriber Loop address
DES	d...d	DSL Designator
CUST	0-99	Customer number associated with this function
CTYP	aaaa	Card Type (aaaa = SILC or UILC)
OPT	(BRIL)	BRI Line application
APPL	BRI	Basic Rate Interface
MISP	x...x	MISP loop number for large systems; SISP card slot for small systems (Option 11C)
MODE	aaaa	Network Terminal line sampling mode for SILC only (aaaa = NTAS or NTFS)
B1CT	aaa	B-channel 1 Call Type (aaa = (VCE DTA), PMD, or IPD)
- TN	l ch	PRI loop number and B-channel number when B1CT = PMD
- MPH	l	Meridian Packet Handler loop number when B1CT = IPD
- PRI	0-158	Primary Rate Interface loop

- CH	xx	Channel number
B2CT	aaa	B-channel 2 Call Type (aaa = (VCE DTA), PMD, or IPD)
- TN	l s c	PRI loop number and B-channel number when B2CT = PMD
- MPH	l	Meridian Packet Handler loop number
- PRI	0, 2, 4, ...158	Primary Rate Interface loop
- CH	xx	Channel number
LDN	aa	Listed Directory Number (aa = (NO) or 0-5)
XLST	(0)-254	Pretranslation group
MTEI	1-(8)-20	Maximum Terminal Endpoint Identifiers
LTEI	n1 n2, m	Logical Terminal and Terminal Endpoint Identifiers
MCAL	2-(16)-32	Maximum number of Calls on a DSL at one time
MTSP	1-(8)-16	Maximum Terminal Service Profiles
PGPN	0-15	Protocol Group Number
LAPD	0-15	Link Access Protocol on D-channel
PRID	1-4	Protocol ID
- PDCA	1-16	Pad Category table defined in LD 73
FDN	x...x	Flexible Call Forward No Answer Directory Number
EFD	x...x	External Flexible Call Forward No Answer Directory Number
HUNT	x...x	Hunt directory number
EHT	x...x	External Hunt directory number
TGAR	0-(1)-31	Trunk Group Access Restriction number
NCOS	(0)-99	Network Class of Service
SGRP	(0)-999	Scheduled Access Restriction Group number
CAC	(0)-10	Category Code for R2/MFC
CAC_CIS	0-(3)-9	CIS ANI category code
CAC_MFC	(0)-10	MFC CNI Category Code
CLS	a...a	Class of Service (CLS responses begin on page 666)

LD 27

DSL: Digital Subscriber Loop data block (APPL = BRIT or BRIE)

Prompt	Response	Comment
REQ	aaa	Request
TYPE	DSL	Type of data block = DSL (Digital Subscriber Loop)
DSL	l s c dsl	Digital Subscriber Loop address
DES	d...d	DSL Designator (1 to 6 alphanumeric characters)
APPL	aaaa	Basic Rate Interface (aaa = BRIT or BRIE)
- ISDN_MCNT		
	60-(300)-350	Layer 3 call control message count per 5 second time interval.
CUST	0-99	Customer number associated with this function
CTYP	aaaa	Card Type (aaaa = SILC or UILC)
MISP	x...x	MISP loop number for large systems; SISP card slot for small systems (Option 11C)
MODE	aa	Mode for DSL (aa = (TE) or NT)
- MTFM	(NO) YES	Multi-Frame Mode
TKTP	aaa	Trunk Type (aaa = TIE, COT, and DID)
CLOK	(NO) YES	Clock source
- TSET	0-15	Threshold Set for clock errors
PDCA	1-16	Pad Category table (defined in LD 73)
ROUT	0-511	Route number for the Trunk DSL
TIMR	(NO) YES	Change Timer values
- T310	10-(30)-60	T310 Timer value in seconds
	110-(120)	T310 Timer range for PRI, PRI2, and BRI trunks
B1	(NO) YES	Change B-channel 1 configuration
- MEMB	1-510	Member number of BRI route
- TGAR	0-(1)-31	Trunk Group Access Restriction number
- NCOS	(0)-99	Network Class of Service
- CLS	aaa	Class of Service (CLS responses begin on page 666)
B2	(NO) YES	B-channel 2
- MEMB	1-510	Member number of BRI route
- TGAR	0-(1)-31	Trunk Group Access Restriction number
- NCOS	(0)-99	Network Class of Service
- CLS	aaa	Class of Service (CLS responses begin on page 666)

LAPB: Link Access Procedure - Balanced data block

The Link Access Protocol for B-channels defines the B-channel packet data configuration. Meridian 1 Packet Handler (MPH) package 248 must be equipped.

Prompt	Response	Comment
REQ	aaa	Request
TYPE	LAPB	Type of data block = LAPB (Link Access Procedure - Balance)
PGPN	0-15	Protocol Group Number
USER	(NO) YES	Print groups selected at PGPN prompt
LAPB	(NO) YES	Change Link Access Protocol for B-channels
- T1	2-(6)-130	Response Timer in units of 0.5 seconds
- T2	1-(4)-129	Maximum frame delay in units of 0.5 seconds
- T3	xxx	Idle Timer in units of 0.5 seconds (xxx = 0 or 3-(12)-131)
- N1	23-(135)- 263	Maximum I-frame size in octets
- N2	1-(10)-15	Maximum number of retries
- K	(1)-7	Window size

MISP: Multipurpose ISDN Signaling Processor data block

The Multi-purpose ISDN Signaling Processor (MISP) configuration procedures identify each MISP in the system and its packet handling capabilities. After the MISP is configured it can be enabled using LD 32. An MISP can support any combination of SILCs and UILCs up to a total of four, which are assigned to the MISP using the SILC/UILC configuration procedure.

When REQ = PRT, entering <CR> at the LOOP prompt prints out all MISPs in the system. When REQ = CHG, the following applies:

- MISP must be disabled when adding/removing D-channel packet capability
- remove Packet Mode Data call type B-channels before removing the B-channel packet capability
- remove Logical Terminal Identifiers (LTIDs) before removing the D-channel packet capability

Prompt	Response	Comment
REQ	aaa	Request
TYPE	MISP	Type of data block = MISP
LOOP	0, 2, 4...158	MISP/SISP loop number
CARD	1-9	SISP card slot number (valid only for Option 11C)
APPL	a...a	Application (a...a = BRI, BRIE, BRIL, or MPH)
PH	a...a	Packet Handler (a...a = DCH, BCH, or BDCH)
- PRI	0, 2, 4...158	Primary Rate Interface
- CH	xx	Channel number
DPSD	(NO) YES	D-channel Packet Switched Data
- MPH	(YES) NO	Route D-channel packet switched data to the Meridian Packet Handler.
- TN	l s c u	Terminal Number
PRFX	0-9	DNA table Prefix
NTNO	(YES) NO	Public Switched Packet Data Network presentation
DNIC	xxxx	Data Network Identification Code
NWIF	1-3	MPH Network Interface identifier

- TN	l s c u	Terminal Number
- RATE	(64) 56	PSDN communication Rate
- LAPB	(NO) YES	Change LAPB parameters
- X25P	(YES) NO	Change X.25 parameters
- PVC	n1 n2	Permanent Virtual Circuit Logical Channel number range
- IC	n1 n2	Incoming Logical Channel number range
- TC	n1 n2	Two-way Logical Channel number range
- OC	n1 n2	Outgoing Logical Channel number range
- DNAT	1-32	DNA Table to print

PVC: Permanent virtual circuit connections data block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	PVC	Type of data block = PVC (Permanent virtual circuit connections)
MPH	loop	Meridian Packet Handler loop
PVCN	1-4	Permanent Virtual Circuit Number
XPVC	(YES) NO	External or internal PVC connection
- NWIF	1-3	MPH Network Interface identifier
NTN1	x...x	First Permanent Virtual Circuit connection to the NTN
LCN1	1-4095	Permanent Virtual Circuit Logical Channel number for NT1
NTN2	xx . . . xx	Second Permanent Virtual Circuit connection to the NTN
LCN2	1-4095	Permanent Virtual Circuit Logical Channel number for NT2

PROT or LAPD: Protocol or Link Access Protocol data block

The protocol configuration procedures define the protocols used by ISDN BRI DSLs to communicate over ISDN. These protocol groups support various ISDN communication standards used in North America, Europe, and other continents and countries.

Prompt	Response	Comment
REQ	aaa	Request
TYPE	PROT	Type of data block = PROT or LAPD (Protocol group or Link Access Protocol on D-channel)
PGPN	0-15	Protocol Group Number
LAPD	(NO) YES	Change Link Access Protocol for D-channels
USER	(NO) YES	Print groups selected at PGPN prompt
- T200	(2)-40	Retransmission Timer in increments of 0.5 seconds
- T203	4-(20)-80	Maximum Time between transmission frames
- N200	1-(3)-8	Maximum Number of retransmissions
- N201	4-(260)	Maximum Number of contiguous octets or bytes in information element
- K	(1)-32	Maximum number of outstanding Negative Acknowledgment (NAKs)
- N2X4	0-(10)-20	Number of Status Inquiries when Remote Station is in peer busy for 1TR6
PGPN	<cr>	This prompt is repeated until <CR> is entered.

TSP: Terminal Service Profile data block

The Terminal Service Profile (TSP) configuration procedures define the service profiles for ISDN BRI terminals connected to a DSL. A service profile specifies the type of transmission, the call restrictions, and the features the terminal can use.

Prompt	Response	Comment
REQ	aaa	Request
TYPE	TSP	Type of data block = TSP (Terminal Service Profile)
DSL	l s c dsl	Digital Subscriber Loop address
OPT	a...a	Options (a...a = DN, DNS, SPID, SUID, or USID)
USID	(0)-15	User Service Identifier
MPHC	(YES) NO	Route D-channel packet switched data to the Meridian Packet Handler
- SPID	a...a	Service Profile Identifier
TRMT	a	Terminating Type (D or B)
TEI	0-63	Static TEI for addressing terminal
BCH	x	Terminal Service Profile association (x = 1 or 2)
- LAPB	(NO) YES	Change LAPB parameters
- X25P	(YES) NO	Change X.25 Parameters
- NTN	x...x	Network Terminal Number
- PVC	n1 n2	Permanent Virtual Circuit Logical Channel number range
- IC	n1 n2	Incoming Logical Channel number range
- TC	n1 n2	Two-way Logical Channel number range
- OC	n1 n2	Outgoing Logical Channel number range
CDR	(NO) YES	Internal CDR
FEATID	aaa mmm nnn	Feature ID association
SSRV_NI	aaa mmm nnn	NI-1 Supplementary Service
SUPL_SVC	aaa	Supplementary Services (aaa = AO3 or AO6)
DN	x..x yyyy	Directory Number (x..x) and CLID table entry (yyyy)
- CT	aaa	Call Types for the DN (aaa = VCE or DTA)
- MCAL	1-(4)-8	Maximum Calls allowed per DN
- CLIP	(YES) NO	Calling Line Identification Presentation for incoming calls
- PRES	(YES) NO	Presentation of CLID to far-end on outgoing calls
- ANIE	(0)-n	ANI Entry
COLP	(NO) YES	Connected Line Identification Presentation

LD 27

TRANS	(NO) YES	Transparent presentation of COLP, CLID coming from S0 terminal without presentation option
FEAT	a...a	Features (FEAT responses begin on page 669)
SSRV_ETSI	aaa mmm nnn	Supplementary Service
DFDN	x...x	Default Directory Number

X25P: X25P packet protocol parameters data block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	X25P	Type of data block = X25P (X.25 packet protocol parameters)
PGPN	0-15	LAPB Protocol Group Number
X25P	(YES) NO	Change X.25 Parameters
- T10/T20	15-(180)-930	Request restart Timer in 1 second units
- T11/T21	15-(180)-930	Call request Timer in 1 second units
- T12/T22	15-(180)-930	Reset request Timer in 1 second units
- T13/T23	0-15-(180)-930	Clear request Timer in 1 second units
- PSIZ	xxx	Default Packet Transmission Size in octets (xxx = 16, 32, 64, (128), or 256)
- WSIZ	1-(2)-7	Default Transmit Window Size in octets

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ANIE	(0)-n	ANI Entry Where n=S_SIZE in customer data block. If ANIE=0, no entry is associated with the DN key. If ANIE is from 1-N: If ANIC=YES for the outgoing CIS route where the call takes place, then the components of the ANI message are retrieved from the ANI entry in Customer Data Block, if configured.	cist-24
APPL		Application	bri-19

Prompt	Response	Comment	Pack/Rel
	(BRI)	Basic Rate Interface if Integrated Service Digital Network BRI Trunk Access (BRIT) package 233 and Basic Rate Interface Line Application (BRIL) package 235 not equipped.	
	BRIE	Basic Rate Interface protocol engine BRIE supports the QSIG and EURO ISDN interfaces and requires BRIT package 233. Any changes in the DSL route has to match the BRIE loadware application. To configure the appropriate application for the DSL, the required application must be entered here. To add or delete an application, the MISP must be in a disabled state. To delete an application, all associated DSLs must be removed first. Precede with an X to remove.	bri-20
	BRIL	Basic Rate Interface Line APPL will default to BRIL if BRIL package 235 is equipped. Otherwise, BRIT will be the default.	
	BRIT	Basic Rate Interface Trunk BRIT supports SL-1, Numeris and 1TR6 interface. APPL will default to BRIL if BRIL package 235 is equipped. Otherwise BRIT will be the default. BRIT package 233 is required.	
	MOB MPH	Mobility Routing Application Meridian Packet Handler BRIL and MPH cannot operate on the same MISP. MPH can only be deleted if there are none of the following: <ul style="list-style-type: none"> • no D-channel packet data separators • no B-channel or D-channel terminals • no network interface • no PVC connections 	
B1	(NO) YES	Change B-channel 1 configuration When REQ = NEW B1 will not be prompted.	bri-18
B1CT		B-channel 1 Call Type	bri-19

LD 27

Prompt	Response	Comment	Pack/Rel
	(VCE) (DTA) PMD IPD	Circuit switched Voice Circuit switched Data Packet Mode Data B-channel Packet Data with MPH For PMD the B-channel packet data must have been specified at the PH prompt during the MISP configuration procedure. PMD cannot be selected simultaneously with VCE and/or DTA. Precede with X to remove.	
B2	(NO) YES	Change B-channel 2 configuration. When REQ = NEW and B2 = NO, all B1 parameters except for MEMB will be used as default. When REQ = CHG, BS = NO and a change was made to ROUT on B1, all parameters will remain unchanged except for the route member number, which will be an unused member. A message will be output to inform the user of the new member number assigned.	bri-18
B2CT	(VCE) (DTA) PMD IPD	B-channel 2 Call Type Circuit switched Voice Circuit switched Data Packet Mode Data For PMD, the B-channel packet data must have been specified at the PH prompt during the MISP configuration procedure. PMD cannot be selected simultaneously with VCE and/or DTA. B-channel Packet Data with MPH Precede with X to remove.	bri-19
BCH	1 2	TSP associated with the B1 DSL Channel TSP associated with the B2 DSL Channel	bri-19
BRSC	l s c	Basic Rate Signaling Concentrator Only 1 BRSC card can be enabled on a single IPE shelf.	bri-19

Prompt	Response	Comment	Pack/Rel
		<ul style="list-style-type: none"> loop = (0-254) Option 81C with Fiber network Fabric 	fnf-25
CAC	0-(3)-9	Commonwealth of Independent States Automatic Number Information category code Allowed with Commonwealth of Independent States-Three Wire Analog Trunk (CIST) package 221.	cist-21
CAC	(0) - 10	Multifrequency Compelled Signaling (MFC) CNI Category Code Allowed with Multifrequency Compelled Signaling (MFC) package 128.	mfc-9
CAC_CIS	0-(3)-9	CIS ANI category code	cist-24
CAC_MFC	(0)-10	MFC CNI Category Code	cist-24
CARD	1-9	Card slot for Small system ISDN Signalling Processor (SISP). CARD applies exclusively to Option 11C.	qsig-22
CDR	(NO) YES	Turn off Internal Call Detail Recording Turn on Internal Call Detail Recording	bri-19
CH	1-23 1-30	Channel number for PRI Channel number for PRI2 This channel carries D-channel packet data between the MISP and the packet handler. The PRI route and channel must have already been defined in LD 16 and LD 14. Prompted if PH = DCH or BDCH.	bri-18
CLIP	(YES) NO	Calling Line Identification Presentation for incoming calls.	bri-18
CLOK	(NO) YES	Clock source. Prompted if the following conditions are met: <ul style="list-style-type: none"> CTYP = SILC DSL = 0 or 1 (card dsl number) MODE = TE For Option 11C, the SILC must reside in slot 1-10 of the base cabinet.	bri-18

LD 27

Prompt	Response	Comment	Pack/Rel
CLS		Class of Service You can enter more than one Class of Service by separating each entry with a space.	
(ABDD)		Abandoned call record and time to answer Denied	fcd-18
ABDA		Abandoned call record and time to answer Allowed	
(APN)		ACD Priority not allowed	dpnss-16
APY		ACD Priority allowed	
(CDMD)		CDMD denies external station activity records to be generated for the set	mct-20
CDMA		CDMA allows external station activity records to be generated for the set	
(DNAA)		DN of the key that makes the call used in ANI messages.	cist-21
DNAD		Outgoing CDT/CDTI2 ANDN used as DN in ANI messages. Commonwealth of Independent States - Three Wire Analog Trunk (CIST) package 221 is required.	
(ICDD)		Internal Call Detail Recording Denied	bri-20
ICDA		Internal Call Detail Recording Allowed	
(MRD)		Message Restriction Denied	mr-10
MRA		Message Restriction Allowed	
(PGND)		Deny PAGENET access	pagenet-22
PGNA		Allow PAGENET access	
(THFD)		Centrex Switchhook Flash (THF) Denied	ipra-21
THFA		Centrex Switchhook Flash (THF) Allowed	
(UDI)		Unrestricted DID	supp-10
RDI		Restricted DID	

Prompt	Response	Comment	Pack/Rel
	(CTD)	Conditionally Toll Denied (valid for TIE trunks only)	
	CUN	Conditionally Unrestricted (valid for TIE trunks only)	
	FR1	Fully Restricted Class 1 (valid for TIE trunks only)	
	FR2	Fully Restricted Class 2 (valid for TIE trunks only)	
	FRE	Fully Restricted (valid for TIE trunks only)	
	SRE	Semi-Restricted (valid for TIE trunks only)	
	TLD	Toll Denied (valid for TIE trunks only)	
	UNR	Unrestricted	
COLP		Connected Line Identification Presentation	bril-22
	(NO)	Optional CONNECTED NUMBER IE and optional connected subaddress IE are not passed from M1 to S0	
	YES	Optional CONNECTED NUMBER IE and optional CONNECTED SUB-ADDRESS IE are passed from M1 to S0	
CT	VCE	Circuit switched Voice Call Type for the DN	bri-18
	DTA	Circuit switched Data Call Type for the DN	
		One or more call types can be entered by separating each entry with a space. The call types entered must have been specified for the B1CT and B2CT prompts during the DSL configuration procedures. Precede with X to remove.	
CTYP	SILC	S/T Interface Line Card Type	bri-18
	UILC	U Interface Line Card Type	
		This prompt is displayed only if the S/T (SILC) or U(UILC) Interface Line Card has not been previously configured or when configuring another DSL on the same SILC/UILC.	
CUST	xx	Customer number associated with this function as defined in LD 15.	bri-18
DES	d...d	DSL Designator (1 to 6 alphanumeric characters)	bri-18

LD 27

Prompt	Response	Comment	Pack/Rel
DFDN	x...x	<p>Default Directory Number</p> <p>Enter a 1 to 7-digit directory number. This directory number must have been previously defined at the DN prompt. A directory number can be associated with multiple TSPs.</p> <p>Only one default DN can be defined for a TSP. This DN is sent in the outgoing setup if the terminal does not send a calling line identification number with the outgoing call.</p>	bri-18
DMPH	(YES) NO	<p>Meridian Packet Handler supports 8 SAPI 16 separators and 19 B-channels.</p> <p>Meridian Packet Handler supports 3 SAPI 16 separators and 1 B-channels.</p>	bri-19
DN	x..x yyyy	<p>Directory Number (x..x = 1 to 7 digits) and CLID table entry (yyyy).</p> <p>Where yyyy is range for CLID table entry (yyyy) is: [(0) - (value entered for SIZE prompt in LD 15 minus 1)]</p> <p>The Directory Number cannot be shared by a non-BRI terminal. 1-8 DNs may be assigned to a DSL. The DN can be assigned to multiple TSPs on a DSL but cannot be assigned to any other DSL.</p> <p>Precede with X to remove.</p>	bri-18
DNAT	1-32 <cr>	<p>DNA Table to print</p> <p>Prints all Data Network Address (DNA) tables</p>	mph-19
DNIC	xxxx	<p>Data Network Identification Code</p> <p>Enter a 4-digit DNIC for this item</p>	bri-19
DPSD	(NO) YES	<p>Route D-channel Packet Switched Data calls to an external packet handler, or Public Switched Packet Data Network (PSPDN).</p> <p>Do not route D-channel Packet Switched Data calls to an external packet handler, or Public Switched Packet Data Network (PSPDN).</p>	mph-19

Prompt	Response	Comment	Pack/Rel
DSL	l s c dsl	Digital Subscriber Loop address for large system, where: <ul style="list-style-type: none"> l (superloop) = 0-156 (must be 0 or a multiple of 4) s (shelf) = 0-1 c (card) = 0-15 dsl (Digital Subscriber Loop) = 0-7 <p>You can assign 31 DSLs for each MISP if you specified DCH or BDCH at the PH prompt during MISP configuration procedures.</p> <p>When REQ = PRT, entering <cr> at this prompt prints out all DSLs in the system.</p> <ul style="list-style-type: none"> l = (0-255) Option 81C with Fiber Network Fabric 	bri-20
	c dsl	Option 11C Digital Subscriber Loop address, where: <ul style="list-style-type: none"> c (card) = 1-9 c = 1-9 11-19 21-29 31-39 41-49 dsl (Digital Subscriber Loop) = 0-7 	lse-25
EFD	x...x	External Flexible Call Forward No Answer Directory Number (1-13 digits allowed)	bri-18
EHT	x...x	External Hunt directory number (1-13 digits allowed)	bri-18
FDN	x...x	Flexible Call Forward No Answer Directory Number (1-13 digits allowed)	bri-18
FEAT		Features	bri-18
	(CFTD) CFTA	Call Forward by call Type Denied Call Forward by call Type Allowed	
	(CFXD) CFXA	Call Forward to External DN Denied Call Forward to External DN Allowed. CFXA is valid if PRID = 2 or 6 in DSL.	isdn-20
	(DNDY)	Diversion Notification with called party's number and name when available.	qsig ss- 23
	DNDN	Diversion Notification without called party's number and name.	

LD 27

Prompt	Response	Comment	Pack/Rel
	(DNO3)	Diversion Notification Option with diverted-to party's number and name when available.	qsig ss- 23
	DNO1	Diversion Notification Option without notification.	
	DNO2	Diversion Notification Option without diverted-to party's number and name.	
	(FBD)	Call Forward Busy Denied	
	FBA	Call Forward Busy Allowed	
	(FND)	Call Forward No Answer Denied	
	FNA	Call Forward No Answer Allowed	
	(HBTD)	Hunting By call Type Denied	
	HBTA	Hunting By call Type Allowed	
	(HTD)	Hunting Denied	
	HTA	Hunting Allowed Always assign HTA if the terminal does have CWT capability.	
	(MWD)	Message Waiting Denied	
	MWA	Message Waiting Allowed	
	(SFD)	Second level Call Forward No Answer Denied	
	SFA	Second level Call Forward No Answer Allowed	
FEATID	aaa mmm nnn	Feature ID association This is prompted when PRID = 6, to implement the ISDN BRI Conferencing capability. Where: <ul style="list-style-type: none">• aaa = Feature: AO3 = 3-party conference, AO6 = 6 party conference• mmm = Feature activation ID (1-127)• nnn = Feature indication ID (1-127) This is optional. If nothing is entered, the same value as mmm is used. Feature activation and Feature indication ID are the feature key assignments on the terminal. The key numbers must also be configured at the terminal level. Recommended assignments are: M5317TDX: AO6 15 and M5209TDcp: AO6 9.	bri-19
HUNT	x...x	Hunt directory number (1-13 digits allowed)	bri-18

Prompt	Response	Comment	Pack/Rel
IC	n1	Lowest incoming Logical Channel Number range (1-4095)	bri-19
	n2	Highest incoming Logical Channel Number range (1-4095)	
	<cr>	no incoming LCNs	
ISDN_MCNT	60-(300)-350	Layer 3 call control message count per 5 second time interval.	qsig gf-22
K	(1)-7	Window size	bri-19
	(1)-32	Maximum number of outstanding negative acknowledgment (NAKs) frames.	
LAPB	(NO) YES	Change Link Access Protocol for B-channels	mph-19
LAPD	(NO) YES	Change Link Access Protocol for D-channels	bri-18
	0-15	LAPD protocol group number for DSL assignment	bri-19
LCN1	1-4095	Permanent Virtual Circuit Logical Channel Number for NT1	bri-19
LCN2	1-4095	Permanent Virtual Circuit Logical Channel Number for NT2	bri-19
LDN	(NO) 0-5	No LDN assigned to the DSL Departmental Listed Directory Number defined in LD 15	bri-20
LOOP	0, 2, 4,...158	MISP loop (must be an even number and the next odd loop number must be unequipped) When REQ = PRT, enter <cr> to print all MISPs in the system.	bri-18
	xx	SISP loop for Option 11C Where:	
	xxx	<ul style="list-style-type: none"> • xx = 1-9 • xx = 1-9, 11-19, 21-29, 31-39, 41-49 • xxx = (0, 2, 4 ... 254) Option 81C with Fiber Network Fabric 	

LD 27

Prompt	Response	Comment	Pack/Rel
LTEI		Logical Terminal and Terminal Endpoint Identifiers. The Logical Terminal Identifier (LTID) consists of: <ul style="list-style-type: none">• Logical Terminal Group (LTG)• Logical Terminal Number (LTN)• Static Terminal Endpoint Identifier (TEI) pair for D-channel packet data transmission The maximum number of LTID and TEI pairs is defined by MTEI. LTG = 15 and LTN = 1023 is an invalid combination.	bri-18
	n1 n2 m Xm <cr>	Logical Terminal Group (LTG) 1-15 Logical Terminal Number (LTN) 1-1023 TEI (0-63) Deletes LTID and TEI as a pair for the specified TEI Go to the next prompt.	
		LTEI is prompted if D-channel packet data was specified for the associated MISP.	
MCAL	2-(16)-32	Maximum number of calls on a DSL at one time when TYPE = TSP. The maximum number of calls includes Active, Waiting, and On-Hold calls. Warning is received if less than 8 is specified.	bri-18
	1-(4)-8	Maximum Calls allowed per DN when TYPE = DSL. The maximum number of calls allowed for a directory number includes sum total of Active calls, Call Waiting, and calls On-Hold.	bri-18
MEMB	1-254 1-510	Member number of BRI route Member number of BRI route The specified route must match the BRI route type as well as the trunk type specified at the TKTP prompt.	bri-18 bri-24
MISP	0, 2, 4...158	MISP loop number for large systems ISDN BRI applications on the MISP must be disabled when changing the MISP loop or card. The SILC or UILC must be disabled before changing the MISP loop number. Prompted if the MISP has not been assigned to the specified SILC or UILC. Eight BRSC cards can be configured per MISP	bri-19

Prompt	Response	Comment	Pack/Rel
	xx	Small system ISDN signalling processor (SISP) card slot number (Option 11C) Where: <ul style="list-style-type: none"> • xx = 1-9 • xx = 1-9 11-19 21-29 31-39 41-49 	lse-25
MODE		Mode. Prompted when CTYP = SILC. NTAS and NTFS may be input when APPL = BRI, BRIL, or MPH. TE and NE may be input when APPL = BRIT or BRIE.	bri-18
	NTAS	Network Termination Adaptive line Sampling (extended passive bus, branched passive bus Point-to-Point bus, U interface DSL)	
	NTFS	Network Termination Fixed line Sampling (short passive bus)	
	(TE)	Terminal Equipment Mode for DSL	
	NT	Network Termination Mode for DSL. If CTYP = UILC, then MODE = NT.	
MPH	loop	Meridian Packet Handler loop This is the loop with the dedicated connection from the MISP card. Prompted when B2CT = IPD. <ul style="list-style-type: none"> • loop = (0-254) Option 81C with Fiber Network Fabric 	mph-19 fnf-25
MPHC	(YES)	Route D-channel packet switched data to the Meridian Packet Handler	mph-19
	NO	Route D-channel packet data calls to an external packet handler, or Public Switched Packet Data Network (PSPDN)	
MTEI	1-(8)-20	Maximum Terminal Endpoint Identifiers MTEI represents the maximum number of both static and dynamic combined assigned to the logical terminals on a DSL.	bri-18
MTFM	(NO) YES	Multi-Frame Mode Prompted if MODE = TE.	bri-18
MTSP	1-(8)-16	Maximum Terminal Service Profiles	bri-18

LD 27

Prompt	Response	Comment	Pack/Rel
N1	23-(135)- 263	Maximum I-frame size (in octets)	mph-19
N2	1-(10)-15	Maximum Number of retries	mph-19
N200	1-(3)-8	Maximum Number of retransmissions	bri-18
N201	4-(260)	Maximum Number of contiguous octets or bytes in information element	bri-18
N2X4	0-(10)-20	Number of Status Inquiries when Remote Station is in peer busy for 1TR6	ovlp-15
NCOS	(0)-99	Network Class of Service	bri-18
NTN	x...x	Network Terminal Number Add the NTN to the DNA table. The NTN can be up to 10 digits; up to 32 NTN entries are supported for each table. Enter a range of NTN's by separating the numbers with a space. Delete entry by preceding the number with X.	bri-19
NTN1	x...x	First Permanent Virtual Circuit connection to the NTN Up to 10 digits can be entered.	bri-19
NTN2	x...x	Second Permanent Virtual Circuit connection to the NTN Up to 10 digits can be entered.	bri-19
NTNO	(YES) NO	Public Switched Packet Data Network presents only the NTN in the Incoming Call packet's called address field. Public Switched Packet Data Network presents NTN and DNIC in the Incoming Call packet's called address field	bri-19
NWIF	1-3 <CR>	MPH Network Interface Identifier Indicates there is no identifier Delete an identifier by preceding the entry with an X.	bri-19
OC	n1 n2 <cr>	Outgoing Logical Channel number range Lowest Incoming Logical Channel Number range (1-4095) Highest Incoming Logical Channel Number range (1-4095) no incoming LCNs	bri-19

Prompt	Response	Comment	Pack/Rel
OPT	(BRIL)	BRI Line application This information is NOT downloaded to the DSL.	bri-19
		Terminal Service Profile (TSP) print options (when REQ = PRT):	bri-18
	DN	Print TSPs with the requested Directory Number.	
	DNS	Print Directory Number for specified dsl.	
	SPID	Print TSPs with the specified Service Profile Identifier.	
	SUID	Print Service Profile ID and User Service Identifier map.	
	USID	Print TSPs with the specified User Service ID.	
	<cr>	Print all TSPs defined for the specified dsl.	
PDCA	1-16	Pad Category table defined in LD 73 Prompted if PRID = 2 or 4	bri-18
PGPN	0-15 ALL	Protocol Group Number To remove all protocol groups. You cannot remove a protocol group if it is assigned to a DSL.	mph/bri-19
	<cr>	To print all protocol groups and the number of DSLs in each group	
PH		Packet Handler	bri-18
	(X)	No packet data transmission	
	DCH	BRI terminal communicates with the packet handler using multiplexed D-channels over a dedicated BD-channel	
	BCH	BRI terminal communicates with the packet handler using a dedicated B-channel	
	BDCH	Both D-channel and B-channel communicate with packet handler	
		If you select DCH or BDCH, the MISP can support only 31 DSLs because one serial port is dedicated to the packet handler.	
PRES	(YES) NO	Presentation of CLID to far-end on outgoing calls.	bri-18
PRFX	0-9	DNA table Prefix.	bri-19

Prompt	Response	Comment	Pack/Rel
PSIZ	16 32 64 (128) 256	Default packet transmission Size (in octets)	bri-19
PVC	n1 n2	Lowest Permanent Virtual Circuit logical channel number range Highest Permanent Virtual Circuit logical channel number range	bri-19
PVCN	1-4	Permanent Virtual Circuit Number	bri-19
RATE	(64) 56	PSDN communication Rate This establishes the rate at which the PSDN communicates across the PRI channel network interface.	bri-19
REQ	CHG END NEW OUT PRT	Request Change existing data block Exit Overlay program Create a new data block Remove data block Print data block	bri-18
ROUT	0-511	Route number for the Trunk DSL The specified route must match the BRI route type as well as the trunk type specified at the TKTP prompt. The specified route must be on the Network (NET) side if MODE = NT for the DSL.	bri-18
SCPW	xxxxx	Station Control Password The SCPW entry must equal the Station Control Password Length (SCPL) defined in LD 15. SCPW is not prompted if SCPL = 0. Precede entry with "X" to delete.	isdn-20
SGRP	(0)-999	Scheduled Access Restriction Group number	bri-18

Prompt	Response	Comment	Pack/Rel
SUPL_SVC	AO3 AO6	Supplementary Services Three-Party Conference Six-Party Conference Precede with X to remove.	isdn-20
T1	2-(6)-130	Response Timer (in units of 0.5 seconds) Default is 3 seconds.	mph-19
T10/T20	15-(180)-930	Request Restart Timer (in 1 second units)	mph-19
T11/T21	15-(180)-930	Call Request Timer (in 1 second units)	bri-19
T12/T22	15-(180)-930	Reset Request Timer (in 1 second units)	bri-19
T13/T23	0-15-(180)-930	Clear request timer (in 1 second units)	bri-19
T2	1-(4)-129	Maximum frame delay (in units of 0.5 seconds) Default is 2 seconds. T2 must be less than T1.	mph-19
T3	3-(12)- 131 0	Idle Timer (in units of 0.5 seconds) Default is 6 seconds Turns off the timer. If this is not 0, it must be greater than T1.	mph-19
T200	(2)-40	Retransmission Timer Registered in increments of 0.5 seconds to specify the time delay which occurs before the system retransmits the information.	bri-18
T203	4-(20)-80	Maximum Time between transmission frames (in increments of 0.5 seconds)	bri-18
T310	10-(30)-60 110-(120)	Timer used to determine how long SL-1 can wait for the response message when the QSIG outgoing call is in the U3 (outgoing call processing) state. Default = (10) seconds for TCNZ Default = (30) seconds for QSIG This range applies to PRI, PRI2, and BRI trunks	qsig-20
TC	n1 n2	Lowest two-way Logical Channel Number range Highest two-way Logical Channel Number range	mph-19

LD 27

Prompt	Response	Comment	Pack/Rel
	<cr>	No two-way LCNs	
TEI	0-63	Static TEI for addressing terminal This is given in units of 1 second.	mph-19
TGAR	0-(1)-31	Trunk Group Access Restriction number	bri-18
TIMR	(NO) YES	Change Timer values. Not prompted for APISDN AUST.	
TKTP	TIE COT DID	TIE Trunk Type COT Trunk Type DID Trunk Type	
TN	l s c	Terminal Number of SILC or UILC. Prompted when B1CT= PMD. Where: <ul style="list-style-type: none">• l (loop) = 0-156 (must be 0 or a multiple of 4)• s (shelf) = 0-1• c (card) = 1-15	bri-20
		Option 81C with Fiber Network Fabric <ul style="list-style-type: none">• l (loop) = 0-255 (must be 0 or a multiple of 4)	fnf-25
		If REQ = PRT, entering: <ul style="list-style-type: none">• l: prints out information for all cards on this loop• l s: prints out information for all cards on that loop and shelf• <cr>: prints out information for all system cards• card: prints information for this card (Option 11C only)	
	l s c u loop ch 1-20	Terminal Number PRI loop and B-channel number Option 11C	
TRANS	(NO)	Restrict presentation of COLP, CLID coming from S0 terminal without presentation option If TRANS = NO and if the presentation indicator is set to restricted, the number digits are erased from the information element before it is sent to the S0 terminal.	bril-22
	YES	CONNECTED NUMBER IE received from the Meridian 1 is sent transparently to S0 terminal, even if restricted	

Prompt	Response	Comment	Pack/Rel
TRMT	D B	Terminating Type D-channel terminal type configuration used B-channel terminal configuration type used	bri-20
TSET	0-15	Threshold Set for clock errors	tset-7
TYPE		Type of data block	bri-19
	BRSC	BRI Signaling Concentrator	
	CARD	S/T (SILC) or U (UILC) Interface Line Card data block	
	DNAT	Data Network Address Tables	
	DSL	Digital Subscriber Loop data block	
	LAPB	Link Access Protocol on B-channels	
	LAPD	Link Access Protocol on D-channel	
	MISP PROT	Multi-purpose ISDN Signaling Processor data block Protocol group data block	
	PVC	Permanent Virtual Circuit connections	
	TSP	Terminal Service Profile data block	
	X25P	X.25 Packet Protocol Parameters	
USER		Print groups selected at PGPN prompt. USER is prompted when REQ = PRT.	mph-19
	(NO) YES	Do not print LAPB or LAPD group user information Print LAPB or LAPD group user information (LAPB or LAPD groups selected at the PGPN prompt as well as the TSPs or MPH network interfaces which use them)	

LD 27

Prompt	Response	Comment	Pack/Rel
USID	(0)-15	User Service Identifier The total number of TSPs defined for a DSL cannot exceed the maximum number of TSPs allowed for a DSL as specified by the MTSP prompt during the DSL configuration procedures.	bri-18
	ALL	Removes all TSPs defined for the DSL. Use only when REQ = OUT. A default TSP should be configured for non-initializing terminals. This is done by assigning USID = 0 to the TSP.	
WSIZ	1-(2)-7	Default Transmit Window Size (in octets)	bri-19
X25P	(YES) NO	Change X.25 Parameters If these parameters are changed, all active calls associated with the TSPs and network interfaces for the group will be dropped.	bri-19
XLST	(0)-254	Pretranslation group Prompted if PREO = 1 in LD 15	bri-18
XPVC	(YES)	External PVC connection	bri-19
	NO	Internal PVC connection	

LD 28: Route Selection for Automatic Number Identification

Overlay program 28 allows data for Route Selection for Automatic Number Identification (RS-ANI) to be created, modified, and printed.

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request
TYPE	RSA	Type of data block = RSA (Route Selection ANI)
CUST	xx	Customer number associated with this function
RSAC	xxxx	RS-ANI Access Code digits
0-RT	x...x	0- calls, Route access code (calls to Public Network Operator)
0+RT	x...x	0+ calls, Route access code
1RT	x...x	1+ or IDDD (International Direct Distance Dial) calls Route access code
CORT	x...x	Central Office (local calls) Route access code

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
0+RT	x...x	0+ calls Route access code (for toll calls that require Public Network Operator assistance) Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150	ani-1
0-RT	x...x	0- calls, Route access code (calls to Public Network Operator) Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150	ani-1
1RT	x...x	1+ or IDDD (International Direct Distance Dial) calls, Route access code Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150	ani-1
CORT	x...x	Central Office (local calls) Route access code Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150	ani-1
CUST	xx	Customer number associated with this function as defined in LD 15	ani-1
REQ	CHG END NEW OUT PRT	Request Change an existing data block Exit Overlay program Create a New data block Remove data block Print RSA data	ani-1
RSAC	xxxx	RS-ANI Access Code digits	ani-20
TYPE	RSA	Route Selection ANI data block	ani-1

LD 29: Memory Management

Overlay program 29 is used to determine the following:

- determine the amount of unused memory
- determine if sufficient memory is available to accommodate substantial amounts of new data to be added
- respond to messages SCH601 and SCH603 on SL-1 XN & XL

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request
MSG	x...x	SCH Message (x...x = 601 or 603 xx)
NEW DATA PLANNED?	(NO) YES	New data to be added in this program?
TYNM	aaa xx	Type and Number (TYNM responses begin on page 686)
OPT	aaaa	Option (aaaa = FULL or FREE)
MAP	a...a	Active Map or Data Dump (a...a = ACT or DUMP)
DISPLAY NEW MAP?	(NO) YES	Display new map
SAVE NEW MAP?	(NO) YES	Save new map
PWD2	xxxx	Password 2
CHANGE MAP?	(NO) YES	Change Map
CMD	a...a	Command (a...a = ASGN or CHK)
PGMM	xxx yy	Page/Memory Module
PGBY	xxx yyyy	Page/Bytes

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
CHANGE MAP?	(NO) YES	Change map Prompted when SAVE NEW MAP? = NO or automatic map generator fails (message MEM150)	basic-1
CMD	ASGN CHK	Command Assign logical page and memory number Check memory map	basic-1
DISPLAY NEW MAP?	(NO) YES	Display new map Prompted when a new map has been created	basic-1
MAP	ACT DUMP	Map Active map Data dump Prompted when REQ = PRT	basic-1
MSG	601 603 xx	SCH Message. Prompted when REQ = SCH. Enter 601 when SCH message is 601 Enter 603 followed by the parameters printed with the SCH603 message during an attempt to add data.	basic-1
NEW DATA PLANNED?	(NO) YES	New data to be added in this program? Prompted when REQ = SCH	basic-1
OPT	FULL FREE	Option Full map Free space only	basic-1
PGBY	xxx yyyy	Page/Bytes (used to define logical page size). Where: <ul style="list-style-type: none"> • xxx = Logical Page number (0-254, 256-510) • yyyy = size (1-65535) Prompted only if CMD = ASGN.	basic-1

LD 29

Prompt	Response	Comment	Pack/Rel
PGMM	xxx yy	Page/Memory Module (used to determine the Memory Module on which Logical Pages will reside or to which they will be moved). Where: <ul style="list-style-type: none">• xxx = Logical Page number (0-254, 256-510)• yy = Memory Module number (00, 01, 02) Prompted only if CMD = ASGN.	basic-1
PWD2	xxxx	Password 2 (Second level administration password as defined in LD 17)	basic-1
REQ		Request	basic-1
	ADD	Create a new data block	
	CHG	Change existing map (SL-1XN & XL systems only)	
	CLR	Clear map	
	PRT	Print the specified map	
	END	Exit Overlay program	
	GEN	Generate a new map. Do not use this response unless ROMs with memory extensions are in place.	
	SCH	Change map in response to error messages SCH601 and SCH603	
SAVE NEW MAP? (NO) YES		Save new map Prompted when a new map has been created	basic-1
TYNM		Type and Number	basic-1
500 1-12800		Number of new 500/2500 telephones	basic-1
ACD 0-99 1-240 1-240		Customer number, number of ACD DN, maximum number of positions per ACD DN	bacd-1
AGNT 1-12800		Number of Agent positions	bacd-1
ANI xxx yyyy zzzz		Feature Group D ANI data blocks. Where: <ul style="list-style-type: none">• xxx = number of NPAs (1-160)• yyyy = number of ranges of NXXs (0-9999)• zzzzz = number of ranges of XXXXs (0-30,000)	fgd-17

Prompt	Response	Comment	Pack/Rel
	APRT 1-16	Number of ACD Printers	bacd-1
	ATM 1-4096	Number of ATM routes for the system	atm-7
	ATT 1-480	Number of consoles	basic-1
	AUB 1-99 1-5000 1-14	Customer number, number of authcodes, authcode digit length	baut-1
	BGD 1-15 1-99	Number of Background Terminals in the system, and the number of customers in the system	bgd-10
	CDB 1-99	Number of new customers	basic-1
	CDL 1-16	Number of CDR links	clnk-1
	CDP 0-99 1-10000	Customer number, number of steering codes	cdp-1
	CONF xxx	Number of Conference loops	basic-1
	CPG 1-100 1-63	CPG Level services, customers and average size	
	CPND xx yy zz	Calling Party Name Display data xx = number of customers with CPND, 1-99 yy = number of CPND names per customer, 1-1000 zz = average size of name string, 5-27 characters	cpnd-10
	CRB 1-1024	Number of Code Restriction Blocks	basic-1
	DGT 1-99 xx xx	Customer number, number of digit manipulation tables, maximum average number of inserted digits	basic-1
	DIS 0-99 1-240	Customer number, number of DISA DN	disa-1
	DND 1-99 1-100 1-127	Customer number, number of DND groups, average number of numbers per group	dndg-1

LD 29

Prompt	Response	Comment	Pack/Rel
DTR 1-126		Number of Digitone Receivers	basic-1
EBLF xx yy zz		Enhanced Busy Lamp Field Where: <ul style="list-style-type: none">• xx = the number of customers (1-99) to receive the feature• yy = average number of hundreds groups per customer• zz = average DN length (4, 5, 6 or 7 digits)	basic-14
ESN xx		Number of customers with ESN (1-99)	basic-1
FCAS 1-99 xx yy zz		Customer number, number of Free Calling Area tables, maximum average number of FCAS blocks, maximum average number of different first digit of NXX codes	fca-1
FGD xxx yyy		FGD data blocks. Where: <ul style="list-style-type: none">• xxx = number of FGD blocks (1-128)• yyy = average number of II entries	fgd-17
FTC 0-31		Number of Flexible Tone Control tables	ftc10
MFC xx		Number of Multifrequency Compelled Signaling cards	mfc-9
MFE xx		Number of Multifrequency Signaling for Socotel cards	mfe-10
MFR 1-99 0-126 0-126		Automatic Call Distribution routes Number of customers, average number of ACD routes per customer, average largest member number per ACD route	bacd-1
MFRR 1-255		Number of Multifrequency Receivers	fgd-17
MFSD xx		Number of MF Sender loops	basic-1

Prompt	Response	Comment	Pack/Rel
MFT xx yy zz		Multifrequency Compelled Signaling. Where: <ul style="list-style-type: none"> • xx = number of MFC tables • yy = number of levels per table • zz = average number of signals per level 	mfc-9
MFET xx yy zz		Multifrequency Signaling for Socotel. Where: <ul style="list-style-type: none"> • xx = number of MFE tables • yy = number of levels per table • zz = average number of signals per level 	mfe-10
NACD xx yy zz		Network Automatic Call Distribution. Where: <ul style="list-style-type: none"> • xx = the number of NACD customers • yy = average number of source DNs • zz = average number of target ACD DNs 	
NCTL 1-99		Number of customers with NTCL	basic-1
NET 1-99 xx yy		Customer number, number of Network Translation codes, number of LOC codes	esn-1
RDB 1-4064 1-126		Number of Routes, average largest member number	basic-1
REMO xx		Number of RPE loops	rpe-1
RLB 1-99 1-256 1-32		Customer number, number of Route Lists, maximum average number of entries	basic-1
RSA 1-99		Number of customers to get RS-ANI	ani-1
SCL 4-31 1-1000 1-8191		DN size as defined in LD 18, list size as defined in LD 18, number of new lists	optf-1
SDR 1-99 xx yy		Customer number, number of Supplemental Digit Restriction blocks, maximum average number of entries	basic-1

LD 29

Prompt	Response	Comment	Pack/Rel
	SL1 1-12800	Number of new SL-1 telephones	basic-1
	SUP 1-16	Number of ACD Supervisor TTY	bacd-1
	TAP 1-3	Number of new Tape units	basic-1
	TDS 1-80	Number of new TDS loops	basic-1
	TENC 1-99	Number of customers that will have Tenant Service	ten-7
	TENR 0-127	Number of routes that will be shared by Tenants	ten-7
	TENT 0-512	Number of Tenants that will have access to each other	ten-7
	TERM 1-159	Number of new Terminal loops	basic-1
	TRK 1-6400	Number of new Trunks	basic-1
	TTY 1-16	Number of new TTY	basic-1

LD 49: New Flexible Code Restriction and Incoming Digit Conversion

Overlay program 49 allows the building, changing, deleting, moving, and printing of code restriction trees and the cancellation of all New Flexible Code Restriction (NFCR) data.

Overlay program 49 also allows the building, changing, deleting, moving, and printing of Incoming DID Digit Conversion (IDC) data.

LD 49

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request
TYPE	aaa	Type of data block (aaa = FCR or IDC)
FROM	0-99 0-254	Source customer and tree number
TO	0-99 0-254	Destination customer and tree number
CUST	xx	Customer number
DCNO	0-254	Digit Conversion tree Number
FDID	(NO) YES	Flexible DID IDC tree
HOSP	(NO) YES	Hospitality IDC table
XPDN	(NO) YES	Expand DN length by 1-8 (1-5) digits
SDID	(NO) YES	Send calling party DID
IDGT	0-9999 0-9999	Incoming Digits
AUTH	xxxx	Authcode
CRNO	(0)-254	Code Restriction tree Number
INIT	aaaa	Initial (aaaa = ALLOW or DENY) Allow or deny all codes.
- ALLOW	xxxx	Digit sequence to be allowed.
- - UPDT	(YES) NO	Update Tree
- DENY	xxxx	Digit sequence to be denied.
- - UPDT	(YES) NO	Update Tree
FRCE	(NO) YES	Force
BYPS	xxxx	Digit sequence to be bypassed.
- UPDT	(YES) NO	Update Tree

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ALOW	xxxx xxxx y...y	Allow (Digit sequence to be allowed unconditionally) Prompted when INIT = DENY. Digit sequence to be conditionally allowed and maximum number of digits that can follow A maximum of 50 digits may be analyzed. when United Kingdom (UK) package 190 is not equipped. If UK package 190 is equipped a maximum of 5 digits may be analyzed. Enter <cr> to end ALOW prompt.	nfc-2
AUTH	xxxx	Authcode associated with the DID directory number printed directly above the AUTH prompt.	ffc-16
BYPS	xxxx	Bypass (Digit sequence to be bypassed) A maximum of 50 digits may be analyzed. when UK package 190 is not equipped. If UK package 190 is equipped, a maximum of 5 digits may be analyzed. Enter <cr> to end BYPS prompt.	nfc-2
CRNO	(0)-254	Code Restriction tree Number (NFCR tree number) The maximum number of trees allowed for a customer is defined by prompt MAXT in LD 15.	nfc-2
CUST	xx <cr>	Customer number For all customers Prompted when REQ = PRT.	nfc-2
DCNO	0-254	Digit Conversion tree Number (IDC tree number) A HOSP IDC tree number cannot be 0. Its valid range is 1-254.	idc-12
DENY	xxxx	Deny (Digit sequence to be denied) A maximum of 50 digits may be analyzed. when UK package 190 is not equipped. If UK package 190 is equipped a maximum of 5 digits may be analyzed. Prompted when INIT = ALOW.	nfc-2
FDID	(NO) YES	Flexible DID IDC tree	fdid-24

LD 49

Prompt	Response	Comment	Pack/Rel
FRCE	(NO) YES	Force the storage or release of data. If an entry for ALLOW, DENY or BYPS conflicts with existing data, FRCE is prompted. For example, ALLOW = 7 and the existing ALLOW = 7000. In this case enter "NO" to ignore the data, or "YES" to accept the change. A modification of this type may result in the loss of portions of the tree. If REQ = RLS and FRCE = YES, then all the customer's NFCR data is deleted. Prompt NFCR in LD 15 must be set to NO first.	nfc-2
FROM	0-99 0-254	Source customer and tree number	nfc-2
HOSP	(NO) YES	Hospitality IDC table	dnis-16
IDGT	0-9999 0-9999	Incoming Digits (DN or range of DNs to be converted) The external DNs to be converted is output and the users enter the internal DN. For example, to convert the external DN 3440 to 510, enter: Prompt: Response IDGT: 3440 3440: 510 To convert the external DNs in the range 3440 to 3465, enter: Prompt: Response IDGT: 3440 3465 3440: 444 3441: 445 . . 3465: 469 This is not a prompt. This is the DID directory number which delineates the following prompt.	idc-12

Prompt	Response	Comment	Pack/Rel
		To delete a DN or a DN from a range of DNs Prompt: Response IDGT: 3440 3440 x	
INIT	ALLOW DENY	Initial To specify digit strings to be denied To specify digit strings to be allowed Entering DNs may be affected by the Outpulsing feature for Japan.	nfc-2
REQ		Request	nfc-2
	CHG END MOV NEW OUT PRT RLS RPL	Change an existing data block Exit Overlay program Move existing data block to a new customer and/or NFCR tree data block Create a new data block Remove a specified NFCR tree data block Print NFCR tree data block Release all NFCR data blocks for a specified customer Replace data in the specified NFCR tree data block with new data	
SDID	(NO) YES	Send DN of set when calling party number is requested Send DID of set. If no DID for set, then no DN is sent. Prompted when the International Supplementary Features (SUPP) package is equipped and REQ = NEW.	dnis-15
TO	0-99 0-254	Destination customer and tree number	nfc-2
TYPE	FCR IDC	Type of data block NFCR data block Incoming Digit Conversion data block	nfc-2
UPDT	(YES) NO	Update Tree Data is correct and can update the NFCR tree.	nfc-2
XPDN	(NO) YES	Expand DN length by 1-8 (1-5) digits A response of YES requires twice the memory per DN.	basic-14

LD 49

LD 50: Call Park and Modular Telephone Relocation

Overlay program 50 allows the implementation and administration of the Call Park and Meridian Modular Telephone Relocation features.

Fiber Network Fabric

The Fiber Network Fabric extends and enhances the 5-group network architecture to 8 non-blocking (inter-group) Network groups, with a resulting expansion in network capacity to 8k timeslots available for Intergroup traffic. This is achieved by using OC-12 SONET rings, and adding additional network and PE shelves, packs and cables and software changes to allow using the expanded network capacity. This expansion increases the number of available loops from 160 to 256. This applies to the Option 81C only.

Prompts and responses

Call Park data

Prompt	Response	Comment
REQ	aaa	Request
TYPE	CPK	Type of data block = CPK (Call Park)
CUST	xx	Customer number associated with this function
BLOC	1-5	Call Park block number
CPTM	30-(45)-240	Call Park Timer (in seconds)
RECA	(NO) YES	Recall parked call to attendant
SPDN	(0)-50 xxxx	Number of contiguous system park DNs and first DN
MURT	0-511	Music Route

Meridian Modular Telephone ID change during relocation

The serial number, NT code, color code or release information stored in a Meridian Modular Telephone may be changed during the relocation sequence. This can only be done after the set has “relocated out” and before it is “relocated in” to the new location. An application of this occurs when the terminal is being replaced with one of the same type and requires the same key configuration.

See Set Relocation Data in LD 21, and IDU: Print set ID command in LD 32.

Prompt	Response	Comment
REQ	aaa	Request = CHG or OUT
TYPE	MTRT	Type of data block = MTRT (Meridian Modular Telephone Relocation Table)
TN	l s c u	Terminal Number
SER	xxxxxx	Serial number
NTCD	xxxxxxxx	NT (product) Code
COLR	xx	Color
RLS	xx	Release

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
BLOC	1-5	Call Park block number Where:1-5 allows the system administrator to define the subsequent prompts. After subsequent prompts have been defined, the administrator is returned to the BLOC prompt until a carriage return (<cr>) is entered. The Primary Call Data Block (block 1) must be defined before any Secondary Call Park Blocks (2-5) can be added.	cprknet-22
	ALL <cr>	Enter ALL when REQ = OUT to remove all Call Park Blocks Enter <cr> to return to the REQ prompt. BLOC is prompted if CPRKNET package 306 is equipped.	
COLR	xx	Color of Meridian Modular Telephone. The color codes are: <ul style="list-style-type: none"> • 03 is black • 35 is chameleon ash • 93 is dolphin 	arie-18
CPTM	30-(45)-240 30-(45)-480	Call Park Timer (in seconds) Call Park recall time (in seconds) if CPRK package 33 is equipped The amount of time a call is held in the parked state before recalling the parking set or the attendant.	cprk-20
CUST	xx	Customer number associated with this function as defined in LD 15	cprk-2
MURT	0-511 X	Music Route number for parked calls Remove existing music route.	mus-1
NTCD	xxxxxxx	New NT (product) Code of Meridian Modular Telephone	arie-18
RECA	(NO) YES	Recall Attendant Unanswered parked calls recall the parking set Unanswered parked calls recall the attendant	cpk-20

LD 50

Prompt	Response	Comment	Pack/Rel
REQ	CHG END NEW OUT PRT	Request Change existing data block Exit Overlay program. Create a new Call Park data block (not applicable if TYPE = MTRT) Remove data block Print call park data block (not applicable if TYPE = MTRT)	cprk-2
RLS	xx	New Release of Meridian Modular Telephone	asr-18
SER	xxxxxx	New Serial Number of Meridian Modular Telephone	arie-18
SPDN	xx yyyy	System Park DNs Number of contiguous System Park DNs, and first DN Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Where: xx = # of contiguous System Park DNs. The range is: <ul style="list-style-type: none">• (0)-50• (0)-100 when CPRK package 33 is equipped yyyy = First Call Park DN	cprk-2
TN	l s c u c u	Terminal Number Old Terminal Number of set in relocation table Old Terminal Number of set in relocation table (Option 11C format)	arie-18
TYPE	CPK MTRT	Type of data block Call Park data block Meridian Modular Telephone Relocation Table	cprk-2

LD 52: 2.0 Mb/s Remote Peripheral Equipment

Overlay program 52 defines the 2.0 Mb/s Remote Peripheral Equipment (RPE) group data and system thresholds.

Overlay program 52 is not supported on Option 11C systems.

Prompts and responses

Table of Contents

Section	Page
2.0 Mb/s RPE data block (TASK = Counter Threshold)	page 704
2.0 Mb/s RPE data block (TASK = Group Member)	page 705
2.0 Mb/s RPE data block (TASK = Timer Threshold)	page 706
2.0 Mb/s RPE data block (TASK = No New Data call timer)	page 706
Prompts and responses to remove 2.0 Mb/s RPE data block	page 707

2.0 Mb/s RPE data block (TASK = Counter Threshold)

Prompt	Response	Comment
REQ	aaa	Request
TYPE	RPE2	Type of data block = RPE2 (2.0 Mb/s Remote Peripheral Equipment)
GRP	1-31	RPE group number
TASK	CTHS	Counter Threshold
LFAL	0-(5)-255	Loss of Frame Alignment at Local site
FAEL	0-(5)-255	Frame Alignment Error rate at Local site
PCML	0-(5)-255	Pulse Code Modulation (PCM) error rate at Local site
LFAR	0-(5)-255	Loss of Frame Alignment at Remote site
FAER	0-(5)-255	Frame Alignment Error rate at Remote site
PCMR	0-(5)-255	Pulse Code Modulation (PCM) error rate at Remote site
RPF	0-(3)-255	Remote Processor Failure
LINT	0-(2)-255	Local site Initialization of Remote Peripheral Controller
BGTH	0-(3)-7	Background Threshold

2.0 Mb/s RPE data block (TASK = Group Member)

Prompt	Response	Comment
REQ	aaa	Request
TYPE	RPE2	Type of data block = RPE2 (2.0 Mb/s Remote Peripheral Equipment)
GRP	1-31	RPE Group number
TASK	GMBR	Group Member
ID	x...x	Identifier
LM0	xxx	Loop number for Member 0 in the group (first primary loop)
LM1	xxx	Loop number for Member 1 in the group (second primary loop)
LM2	xxx	Loop number for Member 2 in the group (third primary loop)
LM3	xxx	Loop number for Member 3 in the group (fourth primary loop or spare loop if SPAR = YES)
- SPAR	(NO) YES	Spare loop option

LD 52

2.0 Mb/s RPE data block (TASK = Timer Threshold)

Prompt	Response	Comment
REQ	aaa	Request
TYPE	RPE2	Type of data block = RPE2 (2.0 Mb/s Remote Peripheral Equipment)
GRP	1-31	RPE group number
TASK	TTHS	Timer Threshold
LFAL	2-(10)-999	Loss of Frame Alignment at Local site in seconds
FAEL	2-(600)-999	Frame Alignment Error rate at Local site in seconds
PCML	2-(600)-999	Pulse Code Modulation (PCM) error rate at Local site in seconds
LFAR	2-(10)-999	Loss of Frame Alignment at Remote site in seconds
FAER	2-(10)-999	Frame Alignment Error rate at Remote site in seconds
PCMR	2-(600)-999	Pulse Code Modulation (PCM) error rate at Remote site in seconds
RPF	128-(1024)-9999	Remote Processor Failure in milliseconds

2.0 Mb/s RPE data block (TASK = No New Data call timer)

Prompt	Response	Comment
REQ	aaa	Request
TYPE	RPE2	Type of data block = RPE2 (2.0 Mb/s Remote Peripheral Equipment)
GRP	1-31	RPE group number
TASK	NND	No New Data call timer
ERR	10-(14)-30	Error threshold in seconds
NND	0-(56)-1800	No New Data call time in seconds

Prompts and responses to remove 2.0 Mb/s RPE data block

Prompt	Response	Comment
REQ	OUT	Remove
TYPE	RPE2	Type of data block = RPE2 (2.0 Mb/s Remote Peripheral Equipment)
GRP	1-31	RPE Group number
LOOP	x xx x	Loop numbers for loops to be removed.

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
BGTH	0-(3)-7	Background Threshold (Unspacing attempts allowed by background) A response of 0 will deactivate the background processing of LD 53 for this RPE group.	rpe2-15
ERR	10-(14)-30	Error threshold in seconds Time after which the NND state is entered.	rpe2-15
FAEL	2-(600)-999 0-(5)-255	Frame Alignment Error rate at Local site in seconds Prompted when TYPE = TTHS Frame Alignment Error rate at Local site Prompted when TYPE = CTHS	rpe2-15
FAER	2-(10)-999 0-(5)-255	Frame Alignment Error rate at Remote site in seconds Prompted when TYPE = TTHS Frame Alignment Error rate at Remote site Prompted when TYPE = CTHS	rpe2-15
GRP	1-31 <cr>	RPE group number All RPE group numbers, when REQ = PRT	rpe2-15
ID	x...x	Identifier (1-16 character alphanumeric group identification)	rpe2-15
LFAL	2-(10)-999 0-(5)-255	Loss of Frame Alignment at Local site in seconds Prompted when TYPE = TTHS Loss of Frame Alignment at Local site Prompted when TYPE = CHTS	rpe2-15
LFAR	2-(10)-999 0-(5)-255	Loss of Frame Alignment at Remote site in seconds Prompted when TYPE = TTHS Loss of Frame Alignment at Remote site Prompted when TYPE = CHTS	rpe2-15
LINT	0-(2)-255	Local site Initialization of Remote Peripheral Controller (RPC)	rpe2-15
LM0	0-159	Loop number for group member 0 (1st primary loop) Precede with X to delete a loop number	rpe2-15

Prompt	Response	Comment	Pack/Rel
LM1	0-159	Loop number for group member 1 (2nd primary loop) Precede with X to delete a loop number	rpe2-15
LM2	0-159	Loop number for group member 2 (3rd primary loop) Precede with X to delete a loop number	rpe2-15
LM3	0-159	Loop number for group member 3 (4th primary loop or spare loop if SPAR = YES) Precede with X to delete a loop number.	rpe2-15
LOOP	x xx x ALL	Loop numbers for loops to be removed. All loops in the group are removed If accepted, then the whole group is removed.	rpe2-15
NND	0-(56)-1800	No New Data call time in seconds The time to stay in the NND state. Time is stored as nearest lower multiple of 8. A response of 0 will deactivate the NND error handling system on this RPE group.	rpe2-15
PCML	2-(600)-999 0-(5)-255	Pulse Code Modulation (PCM) error rate at Local site in seconds. Prompted when TYPE = TTHS. Pulse Code Modulation (PCM) error rate at Local site Prompted when TYPE = CHTS	rpe2-15 rpe2-15
PCMR	2-(600)-999 0-(5)-255	Pulse Code Modulation (PCM) error rate at Remote site in seconds. Prompted when TYPE = TTHS. Pulse Code Modulation (PCM) error rate at Remote site Prompted when TYPE = CHTS	rpe2-15
REQ		Request CHG Change a data block END Exit Overlay program NEW Create a new data block When an RPE group is created using REQ = NEW, counter and timer thresholds are initialized to their default values.	rpe2-15
	OUT PRT	Remove 2.0 Mb/s RPE data block Print 2.0 Mb/s RPE data block	
RPF	128-(1024)-9999	Remote Processor Failure (milliseconds)	rpe2-15

LD 52

Page 710 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
RPF	0-(3)-255	Remote Processor Failure	rpe2-15
SPAR	(NO) YES	Spare loop option	rpe2-15
TASK	CTHS GMBR NND THRS TTHS	Counter Threshold Group Member No New Data call timer Threshold data (timer/counter) Timer Threshold When REQ = PRT, TASK can only be GMBR or THRS	rpe2-15
TYPE	RPE2	Type of data block 2.0 Mb/s RPE group data	rpe2-15

LD 56: Flexible Tones and Cadences

Flexible Tones and Cadences (FTC) is an optional feature which is used to customize the tones provided to telephone users. FTC is primarily intended for international markets where tones which are different from the North American defaults are required.

Overlay program 56 allows the implementation and administration of tone and ringing parameters for one or more customers. If the FTC feature (package 125) is not equipped, North American tones and cadences are used.

An FTC table number can be entered for each trunk route at prompt TTBL in LD 16. Table 0 is the default for all trunk routes and contains the defaults for North America.

What are tones and cadences?

Tones are used to provide call status to telephone users. A tone is defined by both the frequency and volume of the sound.

Tones are provided in on and off phases. One or more cycles of on/off cycles make up a tone's cadence. For example, the default cadence for normal North American ringing is 2 seconds on, 4 seconds off, 2 seconds on, 4 seconds off, and so on.

Flexible Tone and Cadence (FTC) Tables

FTC tables define the tones and cadences used for various calling features. Up to 31 FTC tables can be created. Each table can be associated with one or more trunk routes by entering the table number in response to prompt TTBL in LD 16.

Master Cadence Table (MCAD)

The Master Cadence Table (MCAD) defines cadences that are controlled by software. These are used for single line sets (500/2500) and digital sets.

The MCAD can have 256 entries (0-255). Each entry can have up to 10 on/off phases each. Entry 0 is reserved for continuous tone and cannot be changed. Entries 1-15 are reserved for ringing cadences.

Most of the software cadences are continuously repetitive unless it is specified that the tone should end after the last phase. There are four exceptions to this rule: prompts ACBT, AOBT, INTU and OVRD cadences repeat the last 8 phases. This allows a special initial tone burst to be defined. To have the first cycle repeat, it must be defined as both the first and last cycle.

A cadence is defined at the CDNC prompt by entering the time for each on and off phase. The time depends on the settings for the TMRK prompt in LD17 which defines the software cadence increments as 96 or 128 ms. For each phase, enter the closest multiple of 5 ms equal to the multiple of 96 or 128 ms which gives the a time \leq the time required.

The range for the first phase is 1-9999. The range for the second phase is 0-9999. Once an MCAD entry has been created, it can be changed but not removed.

For example, given LD 17 TMRK is set to 128 ms, and a repeating 2 seconds on, 4 seconds off cadence is required.

- 1 Determine the ON phase (2 seconds = 2000 ms)
 $2000/128 = 15.625 = 16$ (always round up)
 $128 \times 16 = 2048$ ms
multiple of 5 closet to 2048 ms = 2050
Entry for prompt CDNC = $2050/5 = 0410$
- 2 Determine the OFF phase (4 seconds = 4000 ms). By using the same calculation, the entry for prompt CDNC = 0820.
- 3 To define the cadence, respond to the prompts as follows:

REQ NEW, CHG
TYPE MCAD
WCAD 1-255
CDNC 0410 0820

To define the cadence: 2 s on, 4 s off, 4 s on, 2 s off, repeat cycle 1 and 2, enter:

CDNC 0410 0820 0820 0410

To define the cadence: 2 s on, then steady off, enter:

CDNC 0410, or
CDNC 0410 0000

If an odd number of non-zero phases are entered, software ends the tone after the last ON phase. Once a zero phase has been entered, it cannot be followed by non-zero phases. A carriage return at any phase results in zero for the remaining phases.

Once the cadence is defined, it can be entered in response to the CDNC prompt for a given feature. For example, CDNC is output after the Call Waiting tone prompt.

Firmware Cadence Table (FCAD)

The Firmware Cadence Table (FCAD) defines cadences that are controlled by an NT8D17 Conference/TDS/MFS card.

The FCAD can have 256 entries (0-255). Each entry can have up to 10 on/off phases. Entry 0 is reserved for continuous tone and cannot be changed. Entries 1-15 are reserved for ringing cadences. Each phase is in multiples of 5 ms.

FCAD cadences have the following capabilities:

- Each cadence may be defined to end at the “on” phase, the “off” phase, or repeat after a single pass through the defined on/off cycles. Any or all of the five cycles can be repeated.
- Unique tones can be defined for each “on” phase. These tones are permanently held in the Conference/TDS/MFS firmware.

In order to have the same cadences on 500/2500/digital telephones and SL-1 telephones, the MCAD and FCAD entries 0-15 are identical. Changes to MCAD entries 1-15 automatically change FCAD entries 1-15. The FCAD entries 1-15 can only be changed by changing the MCAD entries 1-15.

The Conference/TDS/MFS card must be disabled and then re-enabled to download changed firmware cadences.

Examples of creating firmware cadences:

1 For a cadence of 2 s on, 4 s off, repeat:

```
REQ NEW, CHG, PRT
TYPE FCAD
WCAD 1-255
CDNC 0410 0820
```

```
END REPT
CYCS 1 (on/off cycles to be repeated)
WTON NO (use default tone for this cadence)
```

2 For a cadence of 2 s on, 4 s off, 3 s on, 5 s off, repeat:

```
REQ NEW, CHG, PRT
TYPE FCAD
WCAD 1-255
CDNC 0410 0820 0614 0998
```

```
END REPT
CYCS 1 2 (on/off cycles to be repeated)
WTON NO (use default tone for this cadence)
```

3 For a cadence of:

```
0.1 s on at 950 Hz, 19 dB below overload A-law, 0.1 off
0.1 s on at 1400 Hz, 20 dB below overload A-law, 0.1 off
0.1 s on at 1800 Hz, 20 dB below overload A-law, steady off
REQ NEW, CHG, PRT
TYPE FCAD
WCAD 1-255
CDNC 0020 0020 0020 0020 0020
```

END OFF

WTON YES (define tones for this cadence)

TONES 134 135 136 (See NT8D17 Conference/TDS tone table)

TDS and NT8D17 Conference/TDS/MFS cards

There are two types of cards providing tones and cadences:

- Tone and Digit Switch (TDS) cards
- NT8D17 Conference, TDS and Multi-Frequency (MF) Sender card

There are a variety of TDS cards. Each card provides a different set of tones and cadences. When a TDS card is used for SL-1 sets, each tone and cadence is identified by a hexadecimal code. The decimal equivalents for these hex codes are entered at the TDSH prompt for each calling feature.

Refer to the *Flexible Tones and Cadences* NTP for the appropriate codes.

When the NT8D17 Conference/TDS/MFS cards are used, the tones and cadences are defined by the following prompts:

- XCAD = 0-255 - entry in the Firmware Cadence Table (FCAD)
- XTON = 0-255 - tone stored in the card firmware
- CDNC = 0-255 - entry in Master Cadence Table (MCAD)

The ringing cadences for all telephones use the Master Cadence Table (MCAD). MCAD entries 1-15 are downloaded to the Peripheral Controller to provide ringing.

Time interval for Call Forward

For Call Forward No Answer (CFNA), the time interval before a call is forwarded is measured by the time interval for one ring cycle (defined at NCAD prompt) times the number of ring cycles (defined at CFNA prompt in LD 15).

All other types of ringing forward a call after this same time interval regardless of cadence. For example, those with a faster cadence will forward after more rings, those with a slower cadence after fewer rings.

Installing FTC

These steps outline the process to install the FTC feature and change the default tones and cadences for one or more calling features.

To assist in fault clearing, it is recommended that you keep a record of all changes.

- Load Overlay 56
- Define new MCAD cadences
- Define new FCAD tones and cadences
- Create one or more FTC tables (one for each trunk route requiring different tones and cadences)
- Define the non-default tones and cadences for each FTC table
- Enter the FTC table number for each trunk route (LD 16 prompt TTBL)
- If a Conference/TDS/MFS card is equipped, then follow these steps:
 - set options in LD 97
 - initialize the system (INIT)
 - disable and enable each Conf/TDS/MFS card (LD 34)
 - disable and enable each Controller (LD 32)

Note 1: The Master Cadence Table (MCAD) defines cadences that are controlled by software. These are used for single line sets (500/2500) and digital sets.

MCAD can have up to 256 entries (0-255). Each entry can have up to 10 on/off phases. Entry 0 is reserved for continuous tone and cannot be changed. Entries are reserved for ringing cadences.

To define an MCAD cadence, enter the time for each on and off phase. Phases are in 5 ms increments. For example, enter 200 to have a phase last 1 second (200 x 5 ms = 1000 ms = 1 second).

The range for the first phase is 1-9999. The range for the second phase is 0-9999. Once an MCAD entry has been created, it can be changed but not removed.

Note 2: Prompts with the response `i bb c tt` are only prompted for systems equipped with Tone and Digit cards.

- `i` = internal (0) or external (1) source
- `bb` = burst
- `cc` = cadence
- `tt` = frequency/level

Prompts with the response `i bb c tt` define the Internal/External source, burst, cadence and frequency/level respectively. Enter the decimal equivalent (0-15) of the TDS Hex code (refer to 553-2711-180).

The first field is usually 0. If an external source is used the entry is 1 and the fourth field is 0-7 for the specified channel.

Note 3: The Firmware Cadence Table (FCAD) defines cadences that are controlled by the NT8D17 Conference/TDS/MFS card. These are used for SL-1 sets.

The FCAD can have up to 256 entries (0-255). Each entry can have up to 10 on-off phases. Entry 0 is reserved for continuous tone and cannot be changed.

FCAD cadences have the following capabilities:

- each cadence may be defined to end on the ON phase, OFF phase or repeat after a single pass through all defined on-off cycles. Any or all of the five on-off cycles can be repeated.
- a unique tone can be defined for each on phase. These tones are permanently held in the Conference/TDS/MFS firmware.

In order to have the same cadences for 500/2500 Digital and SL-1 sets, the MCAD and FCAD entries 0 through 15 are identical. Changes to MCAD entries 1 through 15 automatically change MCAD entries 1 through 15. FCAD entries 1 through 15 cannot be changed without changing the MCAD entries.

Note 4: The cadences for Software Controlled Cadence Tones AOBT (Agent Observe Tone), INTU (Intrusion tone) and OVRD (Override tone) do not repeat in the same manner as the other tones. All other tones repeat all on-off cycles from the first up to the fifth if all ten on and off times are programmed. However, these tones reserve cycle 1 for special use, providing a tone burst of a different length if desired, to emphasize the initial iteration of the tone cycle.

Note 5: A cycle of 200 3200 50 3200 will have a 200 millisecond tone followed by 3.2 seconds of silence. After this initial burst, the tone will repeat in a 50 millisecond on, 3.2 seconds off pattern as long as the time remains valid. However, if the pattern is intended to not have an initial burst, the first two entries must be repeated as the last two entries to obtain the correct sequence.

As an example, if the desired tone is repeating sequence of 50 ms on, 100 ms off, 100 ms on, 50 ms off, 50 ms on, 3500 ms off, the entry must be as follows:

50 100 100 50 50 3500 50 100

Intrusion Tone Note for Option 11C

The following settings are recommended when programming the Intrusion tone on an Option 11C.

Prompt	Response
INTU	
XTON	175
XCAD	19
CDNC	19
MCAD	19 14 25 14 2000
FCAD	19 14 25 14 2000
END	REPL
CYCS	2

Prompts and responses

Table of Contents

Section	Page
<i>Prompts and responses by data block:</i>	
DTAD: Special Dial Tone After Dialed Number data block	page 719
FCAD: Firmware Cadence data block	page 720
FDTD: Flexible Dial Tone Detection data block	page 720
FTC: Flexible Tones and Cadences data block	page 721
MCAD: Master cadence data block	page 731
RART: Route Access Restriction table data block	page 731
RCDT: Route Category Default Table data block	page 732
TBAR: Trunk Barring data block	page 732
Print a customer defined route's ART course	page 732
<i>Other Information:</i>	
Default Firmware Cadence (FCAD) tables	page 734

DTAD: Special Dial Tone After Dialed Number data block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	DTAD	Type of data block = DTAD (Special Dial Tone After Dialed Number)
DDGT	x...x	Dialed digits (1-5 digits)
- TONE	a...a	Tone to be provided after the dialed digits (a...a = (DIAL), SPDT, or SRC-SRC8)

FCAD: Firmware Cadence data block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	FCAD	Type of data block = FCAD (Firmware Cadence)
WCAD	0-225	Cadence Number (0 is reserved for continuous tone and cannot be changed)
CDNC	xxxx xxxx ... xxxx	Cadence
END	a...a	End treatment for cadence (a...a = REPT, ON, or OFF)
- CYCS	x x x x	Cycles
- WTON	(NO) YES	Define Tones associated with the cadence
- - TONES	ttt ttt ...	NT8D17 tones (0-255) to be used with each phase of the cadence

FDTD: Flexible Dial Tone Detection data block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	FDTD	Type of data block = FDTD (Flexible Dial Tone Detection)
TABL	0-31	Table number
ACNO	1-4	Access Code Number
- OACn	x....x	Outgoing Access Code (1-4 digits)
- DTPn	(YES) NO	Dial Tone Post-dial
- CNT	(0)-15	Count
DGTS	x...x	Digits

FTC: Flexible Tones and Cadences data block

An FTC table number can be entered for each trunk route at prompt TTBL in LD16. Table 0 is the default for all trunk routes and contains the defaults for North America.

Prompt	Response	Comment
REQ	aaa	Request
TYPE	FTC	Type of data block = FTC (Flexible Tones and Cadences)
TABL	0-31	FTC Table number
USER	(NO) YES	Print users of this table and tone table values (tone table value only)
DFLT	0-31	Default to existing FTC tone table
RING	(NO) YES	Change the ringing feature definitions
- NCAD	(1)-255	Normal Cadence
- NBCS		Normal BCS (SL-1 set) ringing
- - TDSH	i bb c tt	TDS Hex (Default is 0032)
- - XTON	0-(2)-255	XCT (NT8D17 Conference/TDS) Tone code
- DCAD	0-(2)-255	Distinctive Cadence
- DBCS		Distinctive BCS (SL-1 set) ringing
- - TDSH	i bb c tt	TDS Hex (Default is 0082)
- - XTON	0-(2)-255	XCT (NT8D17 Conference/TDS) Tone code
- ICAD	0-(5)-255	Intercom Cadence
- IBCS		Intercom ringing for BCS (SL-1)sets
- - TDSH	i bb c tt	TDS Hex (Default is 0012)
- - XTON	0-(2)-255	XCT (NT8D17 Conference/TDS) Tone code
- NDR1 PBX	0-255	Network Distinctive Ring 1 cadence for PBX sets
- NDR1 BCS		Network Distinctive Ring 1 for BCS (SL-1) sets
- - TDSH	i bb c tt	TDS Hex (Internal/External, burst, cadence and tone)
- - XTON	0-(2)-255	XCT (NT8D17 Conference/TDS) Tone code
- - XCAD	0-(2)-255	XCT (NT8D17 Conference/TDS) Cadence code

LD 56

- NDR2 PBX	0-255	Network Distinctive Ring 2 cadence for PBX sets
- NDR2 BCS		Network Distinctive Ring 2 for BCS (SL-1) sets
- - TDSH	i bb c tt	TDS Hex (Internal/External, burst, cadence and tone)
- - XTON	0-(2)-255	XCT (NT8D17 Conference/TDS) Tone code
- - XCAD	0-(2)-255	XCT (NT8D17 Conference/TDS) Cadence code
- NDR3 PBX	0-255	Network Distinctive Ring 3 cadence for PBX sets
- NDR3 BCS		Network Distinctive Ring 3 for BCS (SL-1) sets
- - TDSH	i bb c tt	TDS Hex (Internal/External, burst, cadence and tone)
- - XTON	0-(2)-255	XCT (NT8D17 Conference/TDS) Tone code
- - XCAD	0-(2)-255	XCT (NT8D17 Conference/TDS) Cadence code
- NDR4 PBX	0-255	Network Distinctive Ring 4 cadence for PBX sets
- NDR4 BCS		Network Distinctive Ring 4 for BCS (SL-1) sets
- - TDSH	i bb c tt	TDS Hex (Internal/External, burst, cadence and tone)
- - XTON	0-(2)-255	XCT (NT8D17 Conference/TDS) Tone code
- - XCAD	0-(2)-255	XCT (NT8D17 Conference/TDS) Cadence code
- RCAD	0-(1)-255	Recall Cadence
- RBCS		Recall for BCS (SL-1) sets
- - TDSH	i bb c tt	TDS Hex (Default is 0032)
- - XTON	0-(2)-255	XCT (NT8D17 Conference/TDS) Tone code
- GCAD	0-(1)-255	Group Call Cadence
- GBCS		Group Call for BCS (SL-1) sets
- - TDSH	i bb c tt	TDS Hex (Default is 0082)
- - XTON	0-(2)-255	XCT (NT8D17 Conference/TDS) Tone code
- HCAD	0-(1)-255	Held call reminder Cadence
- HBCS		Held call reminder ringing for BCS (SL-1) sets
- - TDSH	i bb c tt	TDS Hex (Default is 0082)
- - XTON	0-(2)-255	XCT (NT8D17 Conference/TDS) Tone code
- PCAD	0-255	Recall or Misoperation Cadence
- PBCS		Recall or Misoperation ringing for BCS
- - TDSH	i bb c tt	TDS Hex (Default is 0032)

-- XTON	0-(4)-255	XCT (NT8D17 Conference/TDS) Tone code
HCCT	(NO) YES	Hardware Controlled Cadences and Tones
- DIAL		Dial tone
- EEST		End-to-End Signaling Feedback Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0004)
-- XTON	0-(4)-255	XCT (NT8D17 Conference/TDS) Tone code
		For EEST, this value is set to 0 no matter what is entered.
-- XCAD	(0)-55	XCT (NT8D17 Conference/TDS) Cadence number (FCAD cadence number)
- CFWT		Conference Warning Tone
-- XTON	0-(3)-255	Conference Warning Tone number. A tone number provided by the tone circuit.
-- XCAD	0-(19)-255	Conference Warning Tone cadence number. The cadence number should be set up under FCAD.
- SPCL		Special dial tone
-- TDSH	0 00 0 tt	TDS Hex (Default is 0004)
-- XTON	0-(4)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number (FCAD Cadence number)
- CDT		Control Dial Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0004)
-- XTON	0-(4)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
- CFDT		Call Forward Dial Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0004)
-- XTON	0-(4)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS)
- MWDT		Message Waiting Dial Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0024)
-- XTON	0-(4)-255	XCT (NT8D17 Conference/TDS) Tone code

LD 56

-- XCAD	0-(17)-255	XCT (NT8D17 Conference/TDS) Cadence number
- CFMW		Call Forward Message Waiting tone
-- TDSH	i bb c tt	TDS Hex (Default is 0024)
-- XTON	0-(4)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	0-(17)-255	XCT (NT8D17 Conference/TDS) Cadence number
- ACTN		Active feature Dial Tone
-- TDSH	i bb c tt	TDS Hex (Default is special dial tone)
-- XTON	0-(4)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
- BUSY		Busy tone
-- TDSH	i bb c tt	TDS Hex (Default is 0017)
-- XTON	0-(7)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	0-(16)-255	XCT (NT8D17 Conference/TDS) Cadence number
- RGBK		Ringback tone
-- TDSH	i bb c tt	TDS Hex (Default is 0035)
-- XTON	0-(5)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	0-(1)-255	XCT (NT8D17 Conference/TDS) Cadence number
- PREM		Preemption tone
-- TDSH	i bb c tt	TDS Hex (Default is 0006)
-- XTON	0-(6)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
- PRBK		Precedence Ringback tone
-- TDSH	i bb c tt	TDS Hex (Default is 0008D)
-- XTON	0-(11)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	0-(2)-255	XCT (NT8D17 Conference/TDS) Cadence number
- ARBK		ACD RGA (Ring Again) Ringback tone
-- TDSH	i bb c tt	TDS Hex (Default is 0008D)
-- XTON	0-(11)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	0-(2)-255	XCT (NT8D17 Conference/TDS) Cadence number

- FFCT		Flexible Feature Code Confirmation Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0004)
-- XTON	0-(4)-255	XCT (NT8D17 Conference/TDS) tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
- LIMT		Log In Mode Tone for 500/2500 ACD sets
-- TDSH	i bb c tt	TDS Hex (Internal/External, burst, cadence and tone)
-- XTON	0-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	0-255	XCT (NT8D17 Conference/TDS) Cadence number
- NRMT		Not Ready (NRDY) Mode Tone for ACD sets
-- TDSH	i bb c tt	TDS Hex (Internal/External, burst, cadence and tone)
-- XTON	0-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	0-255	XCT (NT8D17 Conference/TDS) Cadence number
- AWUT		Automatic Wake Up special error Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0027)
-- XTON	0-(4)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
- OVFL		Overflow tone
-- TDSH	i bb c tt	TDS Hex (Default is 0027)
-- XTON	0-(7)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	0-(17)-255	XCT (NT8D17 Conference/TDS) Cadence number
- TEST		Test tone
-- TDSH	0 0 0 tt	TDS Hex (Default is 0008)
-- XTON	0-(8)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
- HOWL		Howler tone
-- TDSH	i bb c tt	TDS Hex (Default is Overflow tone)
-- XTON	0-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	0-255	XCT (NT8D17 Conference/TDS) Cadence number

LD 56

- ERWT		Expensive Route Warning Tone
-- TDSH	0 0 0 tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
- PCWT		Precedence Call Waiting Tone
-- TDSH	0 0 0 tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number (FCAD Cadence number)
- ACFT		ACD Call Force Tone
-- TDSH	0 0 0 tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
- TLP		Tone to Last Party
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	(0)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
- TLPT	(0)-30	Tone to Last Party Timer in seconds. No tone = 0
- PATI		Patience tone Multi-Party Operations
-- TDSH	i bb c tt	TDS Hex (Default is 0000)
-- XTON	(0)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
CAB	(NO) YES	M911 Call Abandon on Answer tone
- TDSH	i bb cc tt	TDS external, burst, cadence and tone
- XTON	0-255	NT8D17 TDS Tone code
- XCAD	0-255	NT8D17 Cadence code for FCAD
CAST	(NO) YES	Centralized Attendant Service Tones
- LDN		Listed Directory Number tone
-- TDSH	i bb c tt	TDS Hex (Default is 0346)
-- XTON	(0)-255	XCT (NT8D17 Conference/TDS) Tone code

-- XCAD	0-(24)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(16)-255	MCAD software Cadence number
- DI0		Dial 0 Recall tone
-- TDSH	i bb c tt	TDS Hex (Default is 0283)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	0-(22)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(16)-255	MCAD software Cadence number
- HLDC		Hold Confirmation tone
-- TDSH	i bb c tt	TDS Hex (Default is 0346)
-- XTON	(0)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	0-(24)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(16)-255	MCAD software Cadence number
- CPNC		Camp-On Confirmation tone
-- TDSH	i bb c tt	TDS Hex (Default is 0243)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	0-(21)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(17)-255	MCAD software Cadence number
SCCT	(NO) YES	Software Controlled Cadences and Tones
ILIN		NSSC pending agent Login tone
ILOU		NSSC pending agent Logout tone
- CAMP		Camp-On tone
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(17)-255	MCAD software cadence number
- RPAW	x xx xx xx	Radio Paging Warning tone
-- CLN	1-31	Cadence Length
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code

LD 56

-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(19)-255	MCAD software cadence number
- AOBT		Agent Observe Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(18)-255	MCAD software cadence number
- INTU		Intrusion tone (If Option 11C, see note on page 718.)
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(19)-255	MCAD software cadence number
- CWT		Call Waiting Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(20)-255	MCAD software cadence number
- OBKT		Observe Blocking Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(17)-255	MCAD software cadence number
- OVRD		Override tone
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(18)-255	MCAD software cadence number
- OHQ		Off-Hook Queuing tone
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code

-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(3)-255	MCAD software cadence number
- SRT		Set Relocation Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(22)-255	MCAD software cadence number
- TMAT		Telephone Messaging Alert Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(22)-255	MCAD software cadence number
- TMOT		Telephone Messaging OK Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(23)-255	MCAD software cadence number
- TSUT		Telephone Status Update Tone
-- TDSH	i bb c tt	TDS Hex (Default is 0003)
-- XTON	0-(3)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
-- CDNC	0-(23)-255	MCAD software cadence number
ABST		Authorization Code Conditionally Last Enhancement cadence
- XTON	0-(4)-255	NT8D17 TDS Tone code
- XCAD	(0)-255	NT8D17 TDS Cadence code
- CDNC	0-(2)-255	MCAD table entry for this cadence
PNNC		Process Notification for Networked Calls tone
- XTON	(0)-255	NT8D17 TDS Tone code
- XCAD	(0)-255	NT8D17 TDS Cadence code
- CDNC	0-(2)-255	MCAD table entry for this cadence

LD 56

SRC	(NO) YES	Source
- SRC1		Source tone 1
-- TDSH	i bb c tt	TDS Hex (Default is 0000)
-- XTON	(0)-255	XCT (NT8D17 Conference/TDS) Tone code
-- XCAD	(0)-255	XCT (NT8D17 Conference/TDS) Cadence number
- SRC2		Source tone 2
- SRC3		Source tone 3
- SRC4		Source tone 4
- SRC5		Source tone 5
- SRC6		Source tone 6
- SRC7		Source tone 7
- SRC8		Source tone 8
MINT	(NO) YES	Allow tones or announcements
- CFSN	0-255 0-255	Call Forward All Calls active
-- TDSH	i bb c tt	Third parameter
- CPOQ	0-255 0-255	Call is being parked or set is in Off-Hook Queuing state
-- TDSH	i bb c tt	Third parameter
- RGAR	0-255 0-255	Ring Again is applied by another set
-- TDSH	i bb c tt	Third parameter
- RPCT	0-255 0-255	Confirmation Tone replaced by an announcement
-- TDSH	i bb c tt	Third parameter
- RGAB	0-255 0-255	Station Dialed Busy
-- TDSH	i bb c tt	Third parameter
- MWAN	0-255 0-255	Message Waiting
-- TDSH	i bb c tt	Third parameter
- DNDA	0-255 0-255	Do Not Disturb
-- TDSH	i bb c tt	Third parameter
- SSLK	0-255 0-255	Set Status Lockout
-- TDSH	i bb c tt	Third parameter
PULS	(NO) YES	Pulse timers are to be changed
- P10	4 (8)	Codes for make/break ratio for 10 pps

- ID1	256-(768)-1024	Inter-Digit 1
- ID2	256-(512)-1024	Inter-Digit 2
- IDD	256-1024	Inter-Digit DTMF
- IDE	256-(384)	EOS interdigital pause in milliseconds
RVDL	(0) x	Reverse Dial format

MCAD: Master cadence data block

Prompt	Response	Comment
REQ	aaa	Request
TYPE	MCAD	Type of data block = MCAD (Master cadence)
WACD	0-225	Cadence Number (0 is reserved for continuous tone and cannot be changed)
CDNC	xxxx xxxx ... xxxx	Cadence

RART: Route Access Restriction table data block

Prompt	Response	Comment
REQ	CHG	Request. REQ = NEW or OUT is not accepted for RART.
TYPE	RART	Type of data block = RART (Route Access Restriction table)
CUST	(0)-xx	Customer number
ROUT	(0)-127	Route
ART	1-63	Access Restriction Table

LD 56

RCDT: Route Category Default Table data block

Prompt	Response	Comment
REQ	CHG	Request. When TYPE = RCDT, you cannot enter NEW or OUT at the REQ prompt.
TYPE	RCDT	Type of data block = RCDT (Route Category Default table)
COT	(0)-63	COT, FEX, WAT. These route types will be assigned the entered ART when the route is created in LD16.
DID	(0)-63	These route types will be assigned the entered ART when the route is created in LD16
TIE	(0)-63	CAA, CAM, CSA, TIE
OTH	(0)-63	Other

TBAR: Trunk Barring data block

Prompt	Response	Comment
REQ	NEW CHG	Request
TYPE	TBAR	Type of data block = TBAR (Trunk Barring)
ART	1-63	Access Restriction Table
DENY	yyy yyy ...	Enter ART number denied to Originating Trunk Connection (OTC)

Print a customer defined route's ART course

Prompt	Response	Comment
REQ	PRT	Request
TYPE	aaa	Type of data block
CUST	(0)-xx	Customer number
ROUT	(0)-127	Route

Default Master Cadence (MCAD) tables

WCAD =	DEFAULT MCAD TABLE (Master Cadence Table)
000	CDNC = 0000 0000 0000 0000 0000 0000 0000 0000 0000 0000
001	CDNC = 0410 0800 0000 0000 0000 0000 0000 0000 0000 0000
002	CDNC = 0308 0076 0308 0076 0000 0000 0000 0000 0000 0000
003	CDNC = 0205 0000 0000 0000 0000 0000 0000 0000 0000 0000
004	CDNC = 0102 0102 0205 0819 0000 0000 0000 0000 0000 0000
005	CDNC = 0100 0100 0000 0000 0000 0000 0000 0000 0000 0000
016	CDNC = 0128 0000 0000 0000 0000 0000 0000 0000 0000 0000
017	CDNC = 0051 0000 0000 0000 0000 0000 0000 0000 0000 0000
018	CDNC = 0205 3072 0051 3072 0000 0000 0000 0000 0000 0000
019	CDNC = 0205 1229 0051 1229 0000 0000 0000 0000 0000 0000
020	CDNC = 0051 0026 0051 2048 0000 0000 0000 0000 0000 0000
021	CDNC = 0410 0000 0000 0000 0000 0000 0000 0000 0000 0000
022	CDNC = 0102 0000 0000 0000 0000 0000 0000 0000 0000 0000
023	CDNC = 0512 0000 0000 0000 0000 0000 0000 0000 0000 0000

Master Cadence (MCAD) table for Japan

001	CDNC = 0050 0050 0050 0450 0000 0000 0000 0000 0000 0000
002	CDNC = 0200 0400 0000 0000 0000 0000 0000 0000 0000 0000

LD 56

Default Firmware Cadence (FCAD) tables

WCAD =	DEFAULT FCAD TABLE (Firmware Cadence Table)
000	Cadence number in the Master Cadence table (MCAD) CDNC = 0000 0000 0000 0000 0000 0000 0000 0000 0000 0000 END = OFF SPCL = NO
001	Cadence number in the Master Cadence table (MCAD) CDNC = 0410 0800 0000 0000 0000 0000 0000 0000 0000 0000 END = REPT CYCS = 1 SPCL = NO
002	Cadence number in the Master Cadence table (MCAD) CDNC = 0308 0076 0308 0076 0000 0000 0000 0000 0000 0000 END = REPT CYCS = 1 2 SPCL = NO
003	Cadence number in the Master Cadence table (MCAD) CDNC = 0205 0000 0000 0000 0000 0000 0000 0000 0000 0000 END = OFF SPCL = NO
004	Cadence number in the Master Cadence table (MCAD) CDNC = 0102 0102 0205 0819 0000 0000 0000 0000 0000 0000 END = REPT CYCS = 1 2 SPCL = NO
005	Cadence number in the Master Cadence table (MCAD) CDNC = 0100 0100 0000 0000 0000 0000 0000 0000 0000 0000 END = REPT CYCS = 1 SPCL = NO
(Part 1 of 3)	

WCAD =	DEFAULT FCAD TABLE (Firmware Cadence Table)
016	Cadence number in the Master Cadence table (MCAD) CDNC = 0100 0100 0000 0000 0000 0000 0000 0000 0000 0000 END = REPT CYCS = 1 SPCL = NO
017	Cadence number in the Master Cadence table (MCAD) CDNC = 0050 0050 0000 0000 0000 0000 0000 0000 0000 0000 END = REPT CYCS = 1 SPCL = NO
018	Cadence number in the Master Cadence table (MCAD) CDNC = 0010 0010 0000 0000 0000 0000 0000 0000 0000 0000 END = REPT CYCS = 1 SPCL = NO
019	Cadence number in the Master Cadence table (MCAD) CDNC = 0040 0060 0000 0000 0000 0000 0000 0000 0000 0000 END = REPT CYCS = 1 SPCL = NO
020	Cadence number in the Master Cadence table (MCAD) CDNC = 0015 0000 0000 0000 0000 0000 0000 0000 0000 0000 END = OFF SPCL = NO
021	Cadence number in the Master Cadence table (MCAD) CDNC = 0020 0000 0000 0000 0000 0000 0000 0000 0000 0000 END = OFF SPCL = NO
022	Cadence number in the Master Cadence table (MCAD) CDNC = 0020 0020 0020 0000 0000 0000 0000 0000 0000 0000 END = OFF SPCL = NO
(Part 2 of 3)	

LD 56

WCAD =	DEFAULT FCAD TABLE (Firmware Cadence Table)
023	Cadence number in the Master Cadence table (MCAD) CDNC = 0060 0000 0000 0000 0000 0000 0000 0000 0000 0000 END = OFF SPCL = NO
024	Cadence number in the Master Cadence table (MCAD) CDNC = 0020 0000 0020 0000 0020 0000 0000 0000 0000 0000 END = OFF SPCL = YES
025	Cadence number in the Master Cadence table (MCAD) CDNC = 0200 0000 0000 0000 0000 0000 0000 0000 0000 0000 END = OFF SPCL = NO
026	Cadence number in the Master Cadence table (MCAD) CDNC = 0050 0000 0000 0000 0000 0000 0000 0000 0000 0000 END = OFF SPCL = NO
027	Cadence number in the Master Cadence table (MCAD) CDNC = 0400 0000 0000 0000 0000 0000 0000 0000 0000 0000 END = OFF SPCL = NO
028	Cadence number in the Master Cadence table (MCAD) CDNC = 0125 0000 0000 0000 0000 0000 0000 0000 0000 0000 END = OFF SPCL = NO
029	Cadence number in the Master Cadence table (MCAD) CDNC = 0030 0070 0000 0000 0000 0000 0000 0000 0000 0000 END = REPT CYCS = 1 SPCL = NO

(Part 3 of 3)

Firmware Cadence (FCAD) table for Japan

WCAD =	DEFAULT FCAD TABLE (Cadence Table for JAPAN TDS)
001	Cadence number in the Master Cadence table (MCAD) CDNC = 0200 0400 0000 0000 0000 0000 0000 0000 0000 0000 END = REPT CYCS = 1 2 SPCL = NO
002	Cadence number in the Master Cadence table (MCAD) CDNC = 0050 0050 0050 0450 0000 0000 0000 0000 0000 0000 END = REPT CYCS = 1 SPCL = NO
017	Cadence number in the Master Cadence table (MCAD) CDNC = 0100 0050 0000 0000 0000 0000 0000 0000 0000 0000 END = REPT CYCS = 1

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ABST		Authorization Code Conditionally Last Enhancement cadence	nars-24
ACFT		ACD Call Force Tone When defining the hex codes for this tone, only the code for the frequency/level is required as the cadence is provided by software. Enter zero for the other values (e.g., TDSH = 0 0 0 xx, XTON = xxx, XCAD = 000).	ftc-13
ACNO	1-4 <cr>	Access Code Number Outgoing Access Code to be used (4 codes per table) Go to DGTS prompt (REQ = CHG)	ftc-12
ACTN		Active feature dial tone	ftc-12
AOBT		Agent Observe Tone This cadence repeats the last 8 on/off phases to allow for a special tone burst on the first cycle. For example, a cadence is defined as 3 s on, 3 s off, 1 s on, 3 s off. After the initial burst, the tone repeats in a 1 s on, 3 s off pattern. In order to repeat the initial 3 s burst, it must be entered as the first and last cycle because the first cycle is not repeated. In this case the cadence is defined as: 3 s on, 3 s off, 1 s on, 3 s off, 3 s on 3 s off.	ftc-13
ARBK		ACD RGA (Ring Again) Ringback tone	ftc-13
ART	1-63 <cr>	Access Restriction Table Return to REQ prompt ART remains unchanged Printing of the route category default table occurs	ftc-10
AWUT		Automatic Wake Up special error Tone	mlwu-16
BUSY		Busy tone	ftc-13
CAB	(NO) YES	M911 Call Abandon on Answer tone	M911-19
CAMP		Camp-On tone	ftc-13

Prompt	Response	Comment	Pack/Rel
CAST	(NO)YES	<p>Centralized Attendant Service Tones</p> <p>Modification to the CAS (Centralized Attendant Service) tone definition.</p> <p>For systems with XCT (NT8D17 Conference/TDS) cards, each feature requires a firmware cadence (XCAD), a software cadence (CNDN) and tone (XTON).</p> <p>Due to the finer resolution of the firmware cadence (5 ms) compared to the software (96/128 ms), you should allow the software cadence to be long enough to cover the full duration of the XCAD.</p> <p>For example, to define a cadence of 0.1 s on, 0.1 s off, 0.1 s on, steady off</p> <ul style="list-style-type: none"> • CDNC0020 0020 0020 0000 • END OFF • SPCL <p>The software cadence is then 0.3 s (600 ms). If the software precision is 128 ms, the software cadence is calculated as follows:</p> <ul style="list-style-type: none"> • $600 \text{ ms}/128 = 4.6 = 5$ (rounded up) • $128 \times 5 = 640$ <p>Entry to on phase = $640/5 = 0128$, and to define the cadence enter 0128 to prompt CDNC.</p>	ftc-13
CDNC	xxxx xxxx ... xxxx	<p>On-off phases for Cadence (ten on-off cycles)</p> <p>Entries 1 through 15 are reserved for ringing cadences. When defining the cadences in MCAD each phase entry is in 5 millisecond increments.</p> <p>The range for the first phase is 1-9999 increments. The range for the second phase is 0-9999 increments. The default is 0 0 0 0 0 0 0 0 0 0.</p> <p>Table shows the default MCAD Tables.</p>	ftc-14
	0-(16)-255	MCAD software cadence number	ftc-14
	0-(17)-255	MCAD software cadence number	
	0-(19)-255	MCAD software cadence number (see <i>Note 5</i>)	

LD 56

Page 740 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	0-(18)-255	MCAD software cadence number (see <i>Note 5</i>)	
	0-(20)-255	MCAD software cadence number	
	0-(3)-255	MCAD software cadence number	
	0-(22)-255	MCAD software cadence number	
	0-(23)-255	MCAD software cadence number	
CDT		Control Dial Tone	ftc-13
CFDT		Call Forward Dial Tone	ftc-13
CFMW		Call Forward Message Waiting tone	ftc-13
CFWT		Conference Warning Tone (applies only to Option 11C)	basic-21
CFSN	0-255 0-255	Call Forward All Calls active First parameter is the MCAD table cadence entry number. Second parameter is the XCT tone code.	ftc-15
CLN	1-31	Cadence Length (length of the Camp-On tone burst in 96 or 128 millisecond increments) See TMRK prompt in LD17.	ftc-9
CNT	(0)-15	Count Number of digits outputted before dial tone detector reconnection (0 specifies that digit counting is not to be used).	ftc-12
COT	(0)-63	COT, FEX, WAT. These route types will be assigned the entered ART when the route is created in LD 16.	
CPNC		Camp-On Confirmation tone	ftc-13
CPOQ	0-255 0-255	Call is being Parked or set is in Off-Hook Queuing state. First parameter is the MCAD table cadence entry number. Second parameter is the XCT tone code.	ftc-15
CUST	(0)-xx	Customer number as defined in LD15	cust-15
CWT		Call Waiting Tone	ftc-13

Prompt	Response	Comment	Pack/Rel
CYCS	x x x x	On-off Cycles (1 to 5) to be repeated. Default is no repeats. Prompted when END = REPT	ftc-14
DBCS		Distinctive BCS (SL-1 set) ringing	ftc-13
DCAD	0-(2)-255	Distinctive Cadence 500/2500 and Digital set ringing MCAD cadence number. (See <i>Notes 1 and 3</i>) It is recommended that the cadence used matches the cadence provided for SL-1 sets (prompt DBCS). DCAD is also used for SL-1 sets in systems with XCT (NT8D17 Conference/TDS) cards.	ftc-13
DDGT	xxxxx X <cr>	Dialed digits (1-5 digits) To remove To end	pnp-15
DENY	yyy yyy ... ALL xALL Xyyy Xyyy .. <cr>	Enter ART number denied to Originating Trunk Connection (OTC) Deny all ARTs to OTC All ART numbers are allowed to OTC Enter ART numbers allowed to OTC Return to REQ prompt with no table being stored The ART is removed unless it is used as a default when REQ = OUT. REQ = NEW or OUT is disallowed for RART.	ftc-10
DFLT	0-31 <cr>	Default to existing FTC tone table Create tone table without defaulting Prompted when REQ = NEW	ftc-13
DGTS	xxxx Xxxxx <cr>	Digits The system will wait for dial tone after these additional (1-4) digits. Remove digit sequence from table Return to REQ prompt DGTS prompt will repeat until <cr> is pressed.	ftc-12
DIO		Dial 0 recall tone	ftc-13

LD 56

Prompt	Response	Comment	Pack/Rel
DIAL		Dial tone	ftc-13
DID	(0)-63	These route types will be assigned the entered ART when the route is created in LD 16	
DNDA	0-255 0-255	Do Not Disturb First parameter is the MCAD table cadence entry number. Second parameter is the XCT tone code.	ftc-15
DTPn	(YES) NO	Dial Tone Post-dial Dial tone detector is to be reconnected immediately after Outgoing Access (OACn).	ftc-12
EEST		End-to-End Signaling feedback Tone Indicates that the improved EES tone is used. There is actually no cadence. When using the Enhanced Conference/TDS card, the XCAD prompt is not printed, and the cadence is set to 0 no matter what is entered.	ees-19
END	REPT ON OFF	End treatment for cadence Repeating cycles (defined by the CYCS prompt) End cadence on the "on" phase End cadence on the "off" phase	ftc-14
ERWT		Expensive Route Warning Tone When defining the hex codes for this tone, only the code for the frequency/level is required as the cadence is provided by software. Enter zero for the other values (e.g., TDSH = 0 0 0 xx, XTON = xxx, XCAD = 000).	ftc-13

Prompt	Response	Comment	Pack/Rel
FFCT		<p>Flexible Feature Code Confirmation Tone</p> <p>This tone allows users of 500/2500 or multi-line telephone sets to receive a confirmation tone after activating/deactivating the following features:</p> <ul style="list-style-type: none"> • Call Forward activate/deactivate • Ring Again deactivate • Store/erase Stored Number Redial • all Automatic Wake Up codes • Speed Call store • any verification code 	ffc-15
GBCS		Group Call ringing for BCS (SL-1) sets	grp-13
GCAD	0-(1)-255	<p>Group Call Cadence</p> <p>500/2500 and Digital set Group Call Ringing Cadence MCAD cadence number</p> <p>It is recommended that the cadence used matches the cadence provided for SL-1 sets (prompt GBCS). GCAD is also used for SL-1 sets in systems with XCT (NT8D17 Conference/TDS) cards.</p>	grp-14
HBCS		Held call ringing for BCS (SL-1) sets	ftc-13
HCAD	0-(1)-255	<p>Held call reminder Cadence</p> <p>500/2500 and Digital set held call reminder ringing cadence MCAD cadence number</p> <p>It is recommended that the cadence used matches the cadence provided for SL-1 sets (prompt HBCS). HCAD is also used for SL-1 sets in systems with XCT (NT8D17 Conference/TDS) cards.</p>	ftc-13
HCCT	(NO) YES	<p>Hardware Controlled Cadences and Tones</p> <p>Modification of the hardware (TDS card) controlled cadence tone definitions allowed.</p> <p>For systems with XCT (NT8D17 Conference/TDS) cards, each feature requires a firmware cadence (XCAD) and tone (XTON). For other TDS cards, the tone and cadence is defined by prompt TDSH.</p>	ftc-13
HLDC		Hold Confirmation tone	ftc-13

LD 56

Prompt	Response	Comment	Pack/Rel
HOWL		Howler tone	ftc-13
IBCS		Intercom ringing for BCS (SL-1)sets Distinctive Dial Intercom ringing for BCS (SL-1) sets	ftc-13
ICAD	0-(5)-255	Intercom Cadence 500/2500 and Digital set Dial Intercom Distinctive ringing MCAD cadence number It is recommended that the cadence used matches the cadence provided for SL-1 sets (prompt IBCS). ICAD is also used for SL-1 sets in systems with XCT (NT8D17 Conference/TDS) cards.	ftc-13
ID1	256-(768)-1024	Inter-Digit 1(P10 interdigit pause in milliseconds)	ftc-13
ID2	256-(512)-1024	Interdigit 2 (P20 interdigit pause in milliseconds)	ftc-13
IDD	256-1024	Interdigit DTMF pause in milliseconds Default is 512 if 100 is the response to prompt DTRB in LD 17. Otherwise, the default is 384.	ftc-13
IDE	256 - (384)	EOS interdigital pause in ms. Prompted if DDD package is equipped and PULS = YES.	ftc-13
ILIN		Nortel Symposium Call Center (NXCC) pending agent Login tone	nxcc-22
ILOU		Nortel Symposium Call Center (NXCC) pending agent Logout tone	nxcc-22

Prompt	Response	Comment	Pack/Rel
INTU		<p>Intrusion tone</p> <p>This cadence repeats the last 8 on/off phases to allow for a special tone burst on the first cycle.</p> <p>For example, a cadence is defined as 3 s on, 3 s off, 1 s on, 3 s off. After the initial burst, the tone repeats in a 1 s on, 3 s off pattern.</p> <p>In order to repeat the initial 3 s burst, it must be entered as the first and last cycle because the first cycle is not repeated. In this case the cadence is defined as: 3 s on, 3 s off, 1 s on, 3 s off, 3 s on 3 s off.</p>	ftc-13
LDN		Listed Directory Number tone	ftc-13
LIMT		<p>Log In Mode Tone for 500/2500 ACD sets</p> <p>This is the tone setting for ACD services to 500/2500 agent sets. You must have Flexible Tones and Cadences (FTC) supported for this feature to function properly.</p>	bacd-16
MINT	(NO) YES	Allow tones or announcements (NO- tone default values)	mint-15
MWAN	0-255 0-255	<p>Message Waiting</p> <p>The first parameter is the MCAD table cadence entry number. The second parameter is the XCT tone code.</p>	ftc-15
MWDT		Message Waiting Dial Tone	ftc-13
NBCS		Normal BCS (SL-1 set) ringing	ftc-13
NCAD	(1)-255	<p>Normal Cadence</p> <p>500/2500 and Digital set ringing MCAD cadence number. (<i>Notes 1 and 3</i>)</p> <p>It is recommended that the cadence used matches the cadence provided for SL-1 sets (prompt NBCS). NCAD is also used for SL-1 sets in systems with XCT (NT8D17 Conference/TDS) cards.</p>	ftc-13
NDR1 BCS		Network Distinctive Ring 1 for BCS (SL-1) sets	ftc-16

LD 56

Prompt	Response	Comment	Pack/Rel
NDR1 PBX		Network Distinctive Ring 1 cadence for PBX sets	ftc-16
	0-255	500/2500 and Digital set Network Distinctive Ringing cadence 1 MCAD cadence number. It is recommended that the cadence used matches the cadence provided for SL-1 sets (prompt NDR1 BCS). NDR1 PBX is also used for SL-1 sets in systems with XCT (NT8D17 Conference/TDS) cards.	
NDR2 BCS		Network Distinctive Ring 2 for BCS (SL-1) sets	ftc-16
NDR2 PBX		Network Distinctive Ring 2 cadence for PBX sets	ftc-16
	0-255	500/2500 and Digital set Network Distinctive Ringing cadence 2 MCAD cadence number. It is recommended that the cadence used matches the cadence provided for SL-1 sets (prompt NDR2 BCS). NDR2 PBX is also used for SL-1 sets in systems with XCT (NT8D17 Conference/TDS) cards.	
NDR3 BCS		Network Distinctive Ring 3 for BCS (SL-1) sets	ftc-16
NDR3 PBX		Network Distinctive Ring 3 cadence for PBX sets	ftc-16
	0-255	500/2500 and Digital set Network Distinctive Ringing cadence 3 MCAD cadence number. It is recommended that the cadence used matches the cadence provided for SL-1 sets (prompt NDR3 BCS). NDR3 PBX is also used for SL-1 sets in systems with XCT (NT8D17 Conference/TDS) cards.	
NDR4 BCS		Network Distinctive Ring 4 for BCS (SL-1) sets	ftc-16
NDR4 PBX		Network Distinctive Ring 4 cadence for PBX sets	ftc-16
	0-255	500/2500 and Digital set Network Distinctive Ringing cadence 4 MCAD cadence number It is recommended that the cadence used matches the cadence provided for SL-1 sets (prompt NDR4 BCS). NDR4 PBX is also used for SL-1 sets in systems with XCT (NT8D17 Conference/TDS) cards.	

Prompt	Response	Comment	Pack/Rel
NRMT		Not Ready (NRDY) Mode Tone for ACD sets This is the tone setting for the NRDY function within ACD services to 500/2500 agent sets. You must have Flexible Tones and Cadences supported for this feature to function properly.	bacd-16
OACn	xxxx Xxxxx	Outgoing Access Code (1-4 digits) Where: n = ACNO response Remove OACn	ftc-12
OBKT		Observe Blocking Tone	ftc-13
OHQ		Off-Hook Queuing tone	ftc-13
OTH	(0)-63 <cr>	Other (ADM, DIC, MDM, PAG, RCD) These route types will be assigned the entered ART when the route is created in LD 16. Return to REQ prompt.	ftc-10
OVFL		Overflow tone	ftc-13
OVRD		Override tone This cadence repeats the last 8 on/off phases to allow for a special tone burst on the first cycle. For example, a cadence is defined as 3 s on, 3 s off, 1 s on, 3 s off. After the initial burst, the tone repeats in a 1 s on, 3 s off pattern. In order to repeat the initial 3 s burst, it must be entered as the first and last cycle because the first cycle is not repeated. In this case the cadence is defined as: 3 s on, 3 s off, 1 s on, 3 s off, 3 s on 3 s off.	ftc-13
P10	4 (8)	Codes for make/break ratio for 10 pps. Other make/break ratio (Prompt S10P in LD97) North American make/break ratio (Prompt S10P in LD97) (See also CLS P10 in LD 14)	ftc-13
PATI		Patience tone multi-party operations	frta-21
PBCS		Recall or Misoperation ringing for BCS (SL-1) sets (default is SL-1 ringing tone TDS code)	ftc-12

LD 56

Prompt	Response	Comment	Pack/Rel
PCAD	0-255	Recall or Misoperation Cadence 500/2500 and Digital set Recall or Misoperation ringing cadence MCAD cadence number It is recommended that the cadence used matches the cadence provided for SL-1 sets (prompt PBCS). PCAD is also used for SL-1 sets in systems with XCT (NT8D17 Conference/TDS) cards.	ftc-12
PCWT		Precedence Call Waiting Tone When defining the TDS hex codes for this tone, only the code for the frequency/level is required as the cadence is provided by software. Enter zero for the other values (e.g., 0 0 0 xx).	ftc-13
PNNC		Process Notification for Networked Calls tone	mfc-24
PRBK		Precedence Ringback tone	ftc-13
PREM		Preemption tone	ftc-13
PULS	(NO) YES	Pulse timers are to be changed	ftc-13
RBCS		Call Park Recall ringing for BCS (SL-1) sets	ftc-14
RCAD	0-(1)-255	Recall Cadence 500/2500 and digital set Call Park recall ringing cadence MCAD cadence number. RCAD is also used for SL-1 sets in systems with XCT (NT8D17 Conference/TDS) cards.	ftc-14
REQ	CHG END NEW OUT PRT	Request Change existing data block Exit Overlay program Add new data block to the system Remove data block Print data block	ftc-13
RGAB	0-255 0-255	Station Dialed Busy (calling party allowed to apply Ring Again) The first parameter is the MCAD table cadence entry number. The second parameter is the XCT tone code.	ftc-15

Prompt	Response	Comment	Pack/Rel
RGAR	0-255 0-255	Ring Again is applied by another set The first parameter is the MCAD table cadence entry number. The second parameter is the XCT tone code.	ftc-15
RGBK		Ringback tone	ftc-13
RING	(NO) YES	Change the Ringing feature definitions For systems with NT8D17 Conference/TDS cards, all telephones share the same ringing cadence. SL-1 telephones require an NT8D17 tone (XTON).	ftc-13
ROUT	(0)-127 <cr>	Route Print routes with non-zero ART numbers, along with the ART number. Return to REQ prompt. REQ = NEW or OUT is disallowed for RCDT	ftc-10
RPAW	x xx xx xx	Radio Paging Warning tone	ftc-15
RPCT	0-255 0-255	Confirmation Tone Replaced by an announcement The first parameter is the MCAD table cadence entry number. The second parameter is the XCT tone code.	ftc-15
RVDL	(0) 1 2	Reverse Dial format No Reverse Dial format Reverse Dial format 1 Reverse Dial format 2	ftc-10
SCCT	(NO) YES	Software Controlled Cadences and Tones Modification of the Software Controlled Cadence Tone definitions allowed	ftc-13
SPCL		Special dial tone Only the code for the frequency/level is required as the cadence is provided by software. Enter 0 for the other values (e.g., TDSH = 0 0 0 xx, XTON = xxx, XCAD = 000).	ftc-13
SRC	(NO) YES	Source tones (SRC1 through SRC8) are required. Eight intercept Source tones can be defined. These tones are entered in LD 15 in response to the various intercept treatment prompts.	ftc-13

LD 56

Prompt	Response	Comment	Pack/Rel
SRC1		Source tone 1 Prompts and default values for TDSH, XTON and XCAD are the same for all SRC1 through SRC8 prompts.	ftc-13
SRC2		Source tone 2	ftc-13
SRC3		Source tone 3	ftc-13
SRC4		Source tone 4	ftc-13
SRC5		Source tone 5	ftc-13
SRC6		Source tone 6	ftc-13
SRC7		Source tone 7	ftc-13
SRC8		Source tone 8	ftc-13
SRT		Set Relocation Tone	ftc-13
SSLK	0-255 0-255	Set Status Lockout First parameter is the MCAD table cadence entry number. Second parameter is the XCT tone code.	ftc-13
TABL	0-31 <cr>	FTC Table number To associate a FTC table with a trunk route, enter the table number in response to prompt TTBL in LD 16. Prints all tables	ftc-13
TDSH	i bb c tt	Hexadecimal code for TDS. Internal/External, burst, cadence and tone (See <i>Note 2</i>) The default value of a TDSH prompt changes according to the tone-type prompt (e.g. NBCS, IBCS, HOWL, etc.) which precedes it.	ftc-14
TEST		Test tone	ftc-13
TIE	(0)-63	CAA, CAM, CSA, TIE These route types will be assigned the entered ART when the route is created in LD16.	
TLP		Tone to Last Party	
TLPT	(0)-30	Tone to Last Party Timer in seconds. No tone = 0.	

Prompt	Response	Comment	Pack/Rel
TMAT		Telephone Messaging Alert Tone	ftc-13
TMOT		Telephone Messaging OK Tone	ftc-13
TONE	(DIAL) SPDT SRC-SRC8	Tone to be provide after the dialed digits. Dial tone Special Dial Tone Source tones 1-8 (Valid if FTC package [125] is equipped)	pnp-15
TONES	ttt ttt ...	NT8D17 tones (0-255) to be used with each phase of the cadence. Default is no tones (0 0 0 0 0). See "Default Firmware Cadence (FCAD) tables" on page 734.	ftc-14
TSUT		Telephone Status Update Tone	ftc-13
TYPE		Type of data block	ftc-13
	DTAD	Special Dial tone After Dialed number data block	
	FCAD	Firmware Cadence data block	ftc-15
	FDTD	Flexible Dial Tone Detection data block	
	FTC	Flexible Tones and Cadences data block	ftc-13
	MCAD	Master Cadence data block	ftc-14
	RART	Route Access Restriction Table data block REQ = NEW or OUT is disallowed for RART.	
	RCDT	Route Category Default Table data block REQ = NEW or OUT is disallowed for RCDT.	
	TBAR	Trunk Barring data block	
USER	(NO) YES	Print Users of this table and tone table values (tone table value only) Prompted when REQ = PRT	ftc-13
WCAD	0-225	Cadence number in the Firmware Cadence table (FCAD) Cadence number 0 is reserved for continuous tone and is not changeable.	ftc-14

LD 56

Prompt	Response	Comment	Pack/Rel
WTON	(NO) YES	Define tones associated with the cadence. Prompted for systems equipped with Conference /TDS / MF Sender cards.	ftc-14
XCAD	0-(2)-255	XCT (NT8D17 Conference/TDS) Cadence number (FCAD cadence number) The default range of a XCAD prompt changes according to the tone-type prompt (e.g. DBCS, HOWL, etc.) which precedes it.	ftc-19
XTON	0-(2)-255	XCT (NT8D17 Conference/TDS) Tone code	ftc-19

LD 57: Flexible Feature Codes

Overlay program 57 allows the implementation and administration of the Flexible Feature Codes (FFC) software and hardware.

Up to 100 user access codes may be entered at a time for one or more different codes. After entering 100 user access codes, SCH8891 is output.

If the Directory Number Expansion (DNXP) package 150 is equipped, up to 7 digits are allowed for Flexible Feature Codes. Otherwise, a maximum of 4 digits can be entered.

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request
TYPE	FFC	Type of data block
CUST	xx	Customer number associated with this function
FFCT	(NO) YES	Flexible Feature Confirmation Tone
CEPT	(NO) YES	Conference European Des Postes Tel defaults
- REP*	0-9	Replacement for the * in the CEPT default codes
ALL	(NO) YES	Remove all Flexible Feature Codes
CODE	aaaa	Specific Flexible Feature Code type
- ADMN	ADMN xxxx	Set-based Administration sequence code Enter Flexible Feature Code
- AREM	AREM xxxx	Automatic Set Removal code Enter Flexible Feature Code
- ASRC	ASRC xxxx	Automatic Set Relocation code Enter Flexible Feature Code
- ATDA	ATDA xxxx	Autodial Activated Enter Flexible Feature Code
- ATDD	ATDD xxxx	Autodial Deactivated code Enter Flexible Feature Code
- AUTH	AUTH xxxx	Authorization code Enter Flexible Feature Code
- AWUA	AWUA xxxx	Automatic Wake Up Activate code Enter Flexible Feature Code
- AWUD	AWUD xxxx	Automatic Wake Up Deactivate code Enter Flexible Feature Code
- AWUV	AWUV xxxx	Automatic Wake Up Verify code Enter Flexible Feature Code
- BNRA	BNRA xxxx	Busy Number Redial code Enter Flexible Feature Code
- BNRD	BNRD xxxx	Busy Number Redial Deactivate code Enter Flexible Feature Code

- CCFA	CCFA xxxx	Customer Call Forward code Enter Flexible Feature Code
- CCFD	CCFD xxxx	Customer Call Forward Deactivate code Enter Flexible Feature Code
- CDRC	CDRC xxxx	CDR Charge Account code Enter Flexible Feature Code
- CFDD	CFDD xxxx	Call forward destination deactivation Enter Flexible Feature Code
- CFHO	CFHO xxxx	Call Forward/HUNT Override via FFC code Enter Flexible Feature Code
- CFWA	CFWA xxxx	Call Forward All Calls Activate code Enter Flexible Feature Code
- CFWD	CFWD xxxx	Call Forward All Calls Deactivate code Enter Flexible Feature Code
- CFWV	CFWV xxxx	Call Forward All Calls Verify code Enter Flexible Feature Code
- COND	COND xxxx	Conference Diagnostics code Enter Flexible Feature Code
- CPAC	CPAC xxxx	Call Park Access Code Enter Flexible Feature Code
- CPP	CPP xxxx	Calling Party Privacy code Enter Flexible Feature Code
- CPPO	CPPO (*82) xxxx	Calling Party Privacy Override code Enter Flexible Feature Code
- CPRK	CPRK xxxx	Call Park code Enter Flexible Feature Code
- CSHF	CSHF xxxx	Centrex Switchhook Flash code Enter Flexible Feature Code
- CWGA	CWGA xxxx	Call Waiting Activated code Enter Flexible Feature Code
- CWGD	CWGD xxxx	Call Waiting Deactivated code Enter Flexible Feature Code

LD 57

- C6DS	C6DS xxxx	Six-Party Conference code Enter Flexible Feature Code
- DEAF	DEAF xxxx	Deactivate Feature code Enter Flexible Feature Code
- DPVS	DPVS xxxx	Data Port Verification code Enter Flexible Feature Code
- ELKA	ELKA xxxx	Electronic Lock Activate code Enter Flexible Feature Code
- ELKD	ELKD xxxx	Electronic Lock Deactivate code Enter Flexible Feature Code
- EOVR	EOVR xxxx	Enhanced Override code Enter Flexible Feature Code
- GHTA	GHTA xxxx	Group Hunt Termination Allowed code Enter Flexible Feature Code
- GHTD	GHTD xxxx	Group Hunt Termination Disallowed code Enter Flexible Feature Code
- GRHP	xxxx	Group Hunt Pilot DN
- - USE	(GPHT)	Initiate Group Hunting
- - LSNO	nnn	List Number
- - HTYP	aaa	Hunting Type
- - CFBA	(NO) YES	Call Forward Busy Activate
- GRPF	GRPF xxxx	Group Call code Enter Flexible Feature Code
- GRCL	GRCL xxxx	Group Call List number code Enter Flexible Feature Code
- HIDN	HIDN xxxx	Hospitality Identification (Hospitality Management) code Enter Flexible Feature Code
- HOLD	HOLD xxxx	Permanent Hold code Enter Flexible Feature Code
- ICFA	ICFA xxxx	Internal Call Forward Activate code Enter Flexible Feature Code

- ICFD	ICFD xxxx	Internal Call Forward Deactivate code Enter Flexible Feature Code
- ICFV	ICFV xxxx	Internal Call Forward Verify code Enter Flexible Feature Code
- INST	INST xxxx	Set based administration Installer code Enter Flexible Feature Code
- HREL	HREL xxxx	Hospitality Relocation (Hospitality Management) code Enter Flexible Feature Code
- ICPA	ICPA xxxx	Intercept Computer Interface Activate code Enter Flexible Feature Code
- ICPD	ICPD xxxx	Intercept Computer Interface Deactivate code Enter Flexible Feature Code
- ICPO	ICPO xxxx	Intercept Computer Interface Override code Enter Flexible Feature Code
- ICPP	ICPP xxxx	Intercept Computer Interface Print code Enter Flexible Feature Code
- IMS	IMS xxxx	Integrated Message System access code Enter Flexible Feature Code
- ITXX	xxxx	For "1xx" Special Services (up to 4 digits) CO route number for the "1xx" service
- - RTXX	xxxx	
- LILO	LILO xxxx	Log In-Log Out for 500/2500 ACD sets code Enter Flexible Feature Code
- MLIO	MLIO xxxx	Multi-Language I O code Enter Flexible Feature Code
- MNT	MNT xxxx	Enter set-based Maintenance sequence code Enter Flexible Feature Code
- MNTC	MNTC xxxx	Maintenance Access code Enter Flexible Feature Code
- MSBA	MSBA xxxx	Make Set Busy Activated code Enter Flexible Feature Code
- MSBD	MSBD xxxx	Make Set Busy Deactivated code Enter Flexible Feature Code

LD 57

- MTRC	MTRC xxxx	Malicious Call Trace code Enter Flexible Feature Code
- MWRA	MWRA xxxx	Repeat Multiple Wake Up Activated code Enter Flexible Feature Code
- MWUA	MWUA xxxx	Multiple Wake Up Activated code Enter Flexible Feature Code
- MWUD	MWUD xxxx	Multiple Wake Up Deactivated code Enter Flexible Feature Code
- NRDY	NRDY xxxx	Not Ready Activation/Deactivation for 500/2500 ACD sets code Enter Flexible Feature Code
- OVRD	OVRD xxxx	Override and Priority Override code Enter Flexible Feature Code
- OCBA	OCBA xxxx	Outgoing Call Barring feature code Outgoing Call Barring feature
- OCBD	OCBD xxxx	Outgoing Call Barring Deactivate code Enter Flexible Feature Code
- OCBV	OCBV xxxx	Verify the Outgoing Call Barring feature code Enter Flexible Feature Code
- PGAP	PGAP xxxx	Answer Parallel Paging code Enter Flexible Feature Code
- PGIP	PGIP xxxx	Initiate Parallel Paging code Enter Flexible Feature Code
- PGSP	PGSP xxxx	Initiate Serial Paging code Enter Flexible Feature Code
- PLDN	PLDN xxxx	Pilot DN code Enter Flexible Feature Code
-- USE	aaaa	Use (aaaa = GPHT, SCLU, or SCLC)
-- LSNO	nnnn	List Number
-- HTYP	aaa	Hunting Type (aaa = (LIN) or RRB)
-- CFWI	(NO) YES	Call Forward All Calls have priority over Group Hunting
-- MQUE	aaaa	Limit to calls Queued against pilot DN (aaa = (ALL), 0, 1, or ACTM)

- PUDN	PUDN xxxx	Pick Up DN code Enter Flexible Feature Code
- PUGR	PUGR xxxx	Pick Up Group code Enter Flexible Feature Code
- PURN	PURN xxxx	Pick Up Ringing Number code Enter Flexible Feature Code
- RCFA	RCFA xxxx	Remote Call Forward Activate code Enter Flexible Feature Code
- RCFD	RCFD xxxx	Remote Call Forward Deactivate code Enter Flexible Feature Code
- RCFV	RCFV xxxx	Remote Call Forward Verify code Enter Flexible Feature Code
- RDLN	RDLN xxxx	Redial Last Number code Enter Flexible Feature Code
- RDNE	RDNE xxxx	Redial Number Erase code Enter Flexible Feature Code
- RDSN	RDSN xxxx	Redial Saved Number code Enter Flexible Feature Code
- RDST	RDST xxxx	Redial Store code Enter Flexible Feature Code
- RGAA	RGAA xxxx	Ring Again Activate code Enter Flexible Feature Code
- RGAD	RGAD xxxx	Ring Again Deactivate code Enter Flexible Feature Code
- RGAV	RGAV xxxx	Ring Again Verify code Enter Flexible Feature Code
- RMST	RMST xxxx	Room Status code Enter Flexible Feature Code
- RPAN	RPAN xxxx	Radio Paging Answer call code Enter Flexible Feature Code
- RPAX	RPAX xxxx	Radio Paging Access code Enter Flexible Feature Code

LD 57

- SADS	SADS xxxx	SAR Disable code Enter Flexible Feature Code
- SAEN	SAEN xxxx	SAR Enable code Enter Flexible Feature Code
- SALK	SALK xxxx	SAR Lock code Enter Flexible Feature Code
- SAUN	SAUN xxxx	SAR Unlock code Enter Flexible Feature Code
- SCPC	SCPC xxxx	Station Control Password Change code Enter Flexible Feature Code
- SFAC	SFAC xxxx	Secretarial Filtering Access code Enter Flexible Feature Code
- SPCC	SPCC xxxx	Speed Call Controller code Enter Flexible Feature Code
- SPCE	SPCE xxxx	Speed Call Erase code Enter Flexible Feature Code
- SPCU	SPCU xxxx	Speed Call User code Enter Flexible Feature Code
- SSPU	SSPU xxxx	System Speed Call User code Enter Flexible Feature Code
- TFAS	TFAS xxxx	Trunk Answer From Any Station code Enter Flexible Feature Code
- TNDN	TNDN xxxx	Enter the DN-to-TN conversion utility code Enter Flexible Feature Code
- TRMD	TRMD xxxx	Terminal Diagnostics code Enter Flexible Feature Code
- TRVS	TRVS xxxx	Trunk Verification code Enter Flexible Feature Code
- USER	USER xxxx	Set based administration User code Enter Flexible Feature Code
- USCR	USCR xxxx	User Selectable Call Redirection code Enter Flexible Feature Code

- USTA	USTA xxxx	User Status code Enter Flexible Feature Code
- VTLF	VTLF xxxx	Virtual Office Terminal Login Enter Flexible Feature Code
- VTLN	VTLN xxxx	Virtual Terminal Logoff Enter Flexible Feature Code

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ADMN	xxxx	Enter set-based administration sequence (used to configure trunks)	supp-16
ALL	(NO) YES	Remove all Flexible Feature Codes Prompted when REQ = OUT	ffc-15
AREM	xxxx	Automatic Set Removal code	supp-16
ASRC	xxxx	Automatic Set Relocation Code	sr-15
ATDA	xxxx	Autodial Activated	ffc-20
ATDD	xxxx	Autodial Deactivated	ffc-20
AUTH	xxxx	Authorization code	baut-15
AWUA	xxxx	Auto Wake Up Activate code	awu-15
AWUD	xxxx	Auto Wake Up Deactivate code	awu-15
AWUV	xxxx	Auto Wake Up Verify	awu-15
BNRA	xxxx	Activate the Busy Number Redial feature	ffc-21
BNRD	xxxx	Deactivate the Busy Number Redial feature	ffc-21
C6DS	xxxx	Six-Party Conference code	awu-15
CCFA	xxxx	Activate the Customer Call Forward feature	ffc-21
CCFD	xxxx	Deactivate the Customer Call Forward feature	ffc-21
CDRC	xxxx	CDR Charge Account code	chg-15
CEPT	(NO) YES	Conference European Des Postes Tel defaults are to be used. CEPT is prompted when REQ = NEW. If CEPT = YES, then all CEPT defaults will be set up. The default value for CPP is *67 if Calling Party Privacy (CPP) package 301 is equipped.	basic-15

Prompt	Response	Comment	Pack/Rel
CFBA	(NO) YES	Call Forward Busy Activated Call Forward to attendant	pldn-15
CFDD		Call forward destination deactivation code	chfc/ffc-22
CFHO	xxxx	Call Forward/HUNT Override via FFC	optf-15
CFWA	xxxx	Call Forward All Calls Activate code	optf-15
CFWD	xxxx	Call Forward All Calls Deactivate code	optf-15
CFWI	(NO) YES	Call Forward All Calls have priority over Group Hunting Skip idle station with CFW active Terminate on idle station with CFW active Prompted when USE = GPHT	optf-15
CFWV	xxxx	Call Forward All Calls Verify code	optf-15
CODE	aaaa	Specific Flexible Feature Code (FFC) type. Where: aaa = FFC type to be changed. (e.g., AUTH, CPP, etc.) Two entries are required to change a specific FFC. First enter the mnemonic of the FFC to be changed and then carriage return <cr>. The switch will then prompt the mnemonic just entered. Respond to this second prompt by entering the numeric value desired for that Flexible Feature Code. See example below. The Flexible Feature Code may be up to 4 digits, or up to 7 digits with Directory Number Expansion (DNXP) package (150). CODE is prompted when ALL = NO. Example: to change the Flexible Feature Code for Call Park to 88, respond to CODE as follows: <u>PromptResponse</u> CODE CPRK <cr> CPRK88 <cr> CODE <cr> (No further prompts, return to REQ)	ffc-15
	ALL	All feature mnemonics that may have a Flexible Feature Code will be prompted.	
	<cr>	No further prompts, return to REQ.	

LD 57

Prompt	Response	Comment	Pack/Rel
COND	xxxx	Conference Diagnostics code	basic-15
CPAC	xxxx	Call Park Access Code	cpk-15
CPP	xxxx	Calling Party Privacy	cpp-21
CPPO	(*82) xxxx	Calling Party Privacy Override code	cpp-23
CPRK	xxxx	Call Park code	cpk-15
CSHF	xxxx	Centrex Switchhook Flash code	thf-15
CUST	xx	Customer number associated with this function as defined in LD 15	cust-15
CWGA	xxxx	Call Waiting Activated	ffc-20
CWGD	xxxx	Call Waiting Deactivated	ffc-20
DEAF	xxxx	Deactivate Feature (deactivates RDLN, RGA, CFW, GHD and SNA codes. Same operation as ATDD, CFWD, MSBD, CWGD and RGAD	optf-15
DPVS	xxxx	Data port verifications code	basic-15
ELKA	xxxx	Electronic Lock Activate code	basic-15
ELKD	xxxx	Electronic Lock Deactivate code	basic-15
EOVR	xxxx	Enhanced Override (manual Forced Camp-On followed by Priority Override)	povr-20
FFCT	(NO) YES	Flexible Feature Confirmation Tone This tone allows users of 500/2500 or multi-line telephone sets to receive a confirmation tone after activating/deactivating the following features: <ul style="list-style-type: none">• Call Forward activate, deactivate• Ring Again deactivate• Store/erase Stored Number Redial• all Automatic Wake Up codes• Speed Call store• any verification code	ffc-15

Prompt	Response	Comment	Pack/Rel
GHTA	xxxx	Group Hunt Termination Allowed	pldn-15
GHTD	xxxx	Group Hunt Termination Disallowed	pldn-15
GRCL	xxxx	Group Call List number	ffc-20
GRHP	xxxx	Group Hunt Pilot DN	ffc-14
GRPF	xxxx	Group Call	ffc-20
HIDN	xxxx	Hospitality Identification	hosp-16
HOLD	xxxx	Permanent Hold code	basic-15
HREL	xxxx	Hospitality Relocation	hosp-16
HTYP	(LIN) RRB	Hunting Type Linear Hunting Round Robin Hunting Prompted when USE = GPHT	pldn-15
ICFA	xxxx	Internal Call Forward Activate code	icf-19
ICFD	xxxx	Internal Call Forward Deactivate code	icf-19
ICFV	xxxx	Internal Call Forward Verify code	icf-19
ICPA	xxxx	Intercept Computer Interface Activate code	icp-10
ICPD	xxxx	Intercept Computer Interface Deactivate code	icp-10
ICPO	xxxx	Intercept Computer Interface Override code	icp-10
ICPP	xxxx	Intercept Computer Interface Print code	icp-10
IMS	xxxx	Integrated Message System Access code	ims-15
INST	xxxx	Set based administration Installer	adminset-21
ITXX	xxxx	For "1xx" Special Services (up to 4 digits)	ees-18
LILO	xxxx	Login-Logout for 500/2500 ACD sets Dialing the number programmed here allows an ACD Agent on a 500/2500 telephone set to toggle between Login and Logout. There is no confirmation tone.	bacd-16

LD 57

Prompt	Response	Comment	Pack/Rel
LSNO	nnnn	List Number SCL/SSC/GHT list number LSNO is prompted when the PLDN response has not been defined as a GPHT pilot DN.	pldn-15
MLIO	xxxx	Multi-Language I O	mlio-16
MNT	xxxx	Enter set-based maintenance sequence (used to enable or disable trunks).	mlio-16
MNTC	xxxx	Maintenance Access code	basic-15
MQUE	(All) 0 1 ACTM	Limit to calls queued against pilot DN No limit to the number of queued calls No calls to be queued One call can be queued. Active Members (Allowed with French Type Approval (FRTA) package 197)	supp-16
MSBA	xxxx	Make Set Busy Activated.	ffc-20
MSBD	xxxx	Make Set Busy Deactivated.	ffc-20
MTRC	xxxx	Malicious Call Trace code	mct-15
MWRA	xxxx	Multiple Wake Up Activated Automatic Wake Up (AWU) package 102 must be equipped for the MWU FFC codes to be available.	ffc-20
MWUA	xxxx	Repeat Multiple Wake Up Activated.	ffc-20
MWUD	xxxx	Multiple Wake Up Deactivated	ffc-20
NRDY	xxxx	Not Ready activation/deactivation for 500/2500 ACD sets Dialing the number programmed here allows an ACD Agent on a 500/2500 telephone set to toggle in and out of the Not Ready state like other ACD Agents. There is no confirmation tone returned.	bacd-16
OCBA	xxxx	Activate the Outgoing Call Barring feature	ffc-21
OCBD	xxxx	Deactivate the Outgoing Call Barring feature	ffc-21
OCBV	xxxx	Verify the Outgoing Call Barring feature	ffc-21

Prompt	Response	Comment	Pack/Rel
OVRD	xxxx	Override and Priority Override	povr-20
PGAP	xxxx	Answer Parallel Paging code.	ffc-14
PGIP	xxxx	Initiate Parallel Paging code.	ffc-14
PGSP	xxxx	Initiate Serial Paging code.	ffc-14
PLDN	xxxx	Pilot DN	supp-15
PUDN	xxxx	Pick Up DN code.	grp-15
PUGR	xxxx	Pick Up Group code.	grp-15
PURN	xxxx	Pick Up Ringing Number code.	grp-15
RCFA	xxxx	Remote Call Forward Activate code.	optf-15
RCFD	xxxx	Remote Call Forward Deactivate code.	optf-15
RCFV	xxxx	Remote Call Forward Verify code.	optf-15
RDLN	xxxx	Redial Last Number code.	Inr-15
RDNE	xxxx	Redial Number Erase code.	snr-15
RDSN	xxxx	Redial Saved Number code.	snr-15
RDST	xxxx	Redial Store code.	snr-15
REP*	0-9	One digit replacement for the * in the CEPT default codes. The CEPT defaults will be defined again with this digit used in place of the “*”. In addition, the trailing # will be omitted. REP* is prompted only when REQ = NEW and CEPT = YES. Use <cr> to create only CEPT defaults. Note that digit replacement is blocked for CPP defaults. No change to defaults	ffc-15
REQ	CHG END	Request Change existing data. Exit Overlay program.	ffc-15

LD 57

Prompt	Response	Comment	Pack/Rel
	NEW OUT PRT	Create a new data block. Remove Data Block. Print Data Block.	
RGAA	xxxx	Ring Again Activate code.	optf-15
RGAD	xxxx	Ring Again Deactivate code.	optf-15
RGAV	xxxx	Ring Again Verify code.	optf-15
RMST	xxxx	Room Status code	rms-15
RPAN	xxxx	Radio Paging Answer call code	rpa-20
RPAX	xxxx	Radio Paging Access code	rpa-20
RTXX	0-511	CO route number for the "1xx" service	ees-18
SADS	xxxx	SAR Enable code	sar-20
SAEN	xxxx	SAR Lock code	sar-20
SALK	xxxx	Ring Again Activate code	sar-20
SAUN	xxxx	SAR Unlock code	sar-20
SCPC	xxxx	Station Control Password Change code	basic-15
SFAC	xxxx	Secretarial Filtering Access code	ffcsf-15
SPCC	xxxx	Speed Call Controller code	optf-15
SPCE	xxxx	Speed Call Erase code	ffc-14
SPCU	xxxx	Speed Call User code	optf-15
SSPU	xxxx	System Speed Call User code	optf-15
TFAS	xxxx	Trunk Answer From Any Station code	basic-15
TNDN	xxxx	Enter the DN-to-TN conversion utility.	supp-16
TRMD	xxxx	Terminal Diagnostics code	basic-15
TRVS	xxxx	Trunk Verification code	tvS-15

Prompt	Response	Comment	Pack/Rel
TYPE	FFC	Flexible Feature Codes data block	ffc-15
USCR	xxxx	User Selectable Call Redirection	uscr-19
USE	GPHT SCLU SCLC	Initiate Group Hunting SCL/SSC List User SCL/SSC List Controller Prompted when the PLDN response has not already been defined.	pldn-15
USER	xxxx	Set based administration User	adminset-21
USTA	xxxx	User Status code	basic-15
VTLF	xxxx	Virtual Terminal Login	arie-25
VTLN	xxxx	Virtual Terminal Logoff	arie-25

LD 57

LD 58: Radio Paging

Overlay program 58 allows the definition of options on a Radio Paging Access Code (RPAX) basis per customer.

Prompts and responses

Table of Contents

Section	Page
<i>Prompts and responses by data block:</i>	
RPAX: Radio Paging Access Code data block	page 772
RPCD: Radio Paging Customer Data block	page 773
RPS: Radio Paging System data block	page 774
TBL: Translation Table access data block	page 774

RPAX: Radio Paging Access Code data block

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	RPAX	Radio Paging Access Code data block
CUST	xx	Customer number associated with this function
SNUM	0-15	System Number
RPAX	nnnn	Radio Paging Access code
- ROUT	0-511	Route number
- PANN	(NO) YES	Recorded Paging Announcement
- - RPAR	0-511	Route number that provides the recorded announcement
- INTR	xxxx	Treatment for internal calls to pager which is in the rack
- RANR	0 - 511	Route number that provides the recorded announcement, prompted if INTR = RAN
- MMDN	xxxx	Meridian Mail DN which provides the recorded announcement or the defined function, prompted if INTR or EXTR = MAIL
- EXTR		Treatment for external calls to pager which is in the rack
- RANR	0 - 511	Route number that provides the recorded announcement, prompted if EXTR = RAN
- BYPS	(NO) YES	Bypass the DN-PSA translation
- OPER	aaaa	Operation (aaaa = (AUTO) or MANU)
- - INTM	(0)-1-9	Internal Mode digit for this RPAX
- - TRDN	(0)-7	Transmit this number of digits of caller's DN to paging equipment

	(0)- 16	Number of digits of caller's DN to paging equipment
- PATH	aaaa	Type of path to be provided (aaaa = (NONE), SPCH, or RNGB)
- - TWSP	aaaa	Two-way Speech Path with a mobile pager allowed (aaaa = (BOTH) or INT)
- - ACPS	(YES) NO	Radio Paging System to provide call-in-progress signals
- - - ACPT	(YES) NO	Call Accepted is to be detected
- DCHR	xxxx	Display Characters

RPCD: Radio Paging Customer Data block

Prompt	Response	Comment
REQ	aaa	Request (CHG, END, NEW, OUT, or PRT)
TYPE	RPCD	Radio Paging Customer Data block
CUST	xx	Customer number associated with this function
RPTO	a...a	Radio Paging Tone (a...a = (SPCL), DIAL, or NONE)
MRPS	(NO) YES	Multiple Radio Paging Systems
TRAN	aaa	Translation type (aaa = (TAB), TWO, THR, FOR, or NO)
DNLN	1-(4)-16	DN Length
PRET	(YES) NO	Pretranslation for Radio Paging
RCRG	0-(6)-20	Number of Ring Cycles when recall to transferring set, before reroute to attendant
RCTI	0-(30)-120	Time to wait for a "BUSY" transferring set to become idle
RCAL	(NO) YES	Recall if busy from RPA
TBTR	4-(10)-30	Time between two recall attempts (to an SL-1 set)

LD 58

RPS: Radio Paging System data block

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	RPS	Radio Paging System data block
CUST	xx	Customer number associated with this function
SNUM	0-15	System Number
PSAL	1-7	Paging System Access code Length
RTIM	0-(60)-630	Length of the Recall Timer
STO	10-(30)-630	Length of time required for Speech Path to be maintained in seconds
NSTO	10-(30)-630	Length of time required for paging when No Speech Path is required
MTO	0-(150)-630	Length of the Meet-Me Timeout timer in seconds.

TBL: Translation Table access data block

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	TBL	Translation Table access
CUST	xx	Customer number associated with this function
SNUM	0-15	System Number
DNPS	xxxx yyyy	The DN to be translated and the number of the paging equipment to which the DN is assigned.
TABT	aaa	Table Type (aaa = DNP, NPS, or UPS)
RANG	xxxx...xxxx	Print DN Range from the first DN to the second DN

Alphabetical List of Prompts

Prompt	Response	Comment	Pack/Rel
ACPS	(YES) NO	Radio Paging System to provide the call-in-progress signals	rpa-15
ACPT	(YES) NO	<p>Call Accepted is to be detected.</p> <p>Prompted when PATH = RNGB or SPCH.</p> <p>If PATH = RNGB or SPCH and ACPT = YES, then ringback is provided only when the call accepted signal is received. Speech path opens when Start-talk signal is received.</p> <p>If PATH = RNGB and ACPT = NO, then ringback is provided when all the paging information has been entered.</p> <p>If PATH = SPCH and ACPT = NO, then speech path is provided when all paging information has been sent (number processed).</p>	
BYPS	(NO) YES	<p>By-pass the DN-PSA translation</p> <p>YES means that meet-me is not available and that the trunk is accessed directly; the next prompt is RPAX. Prompted when MRPS = NO.</p>	rpa-15
CUST	xx	Customer number associated with this function as defined in LD 15.	rpa-15
DCHR	xxxx (PAGE)	<p>Display Characters. Enter X to remove all characters</p> <p>Characters to be displayed on sets with Call Party Name Display (CPND) activated (replaces the FFC) (one per page).</p>	rpa-15
DNLN	0 - (4) - 16	<p>DN Length</p> <p>Prompted if TRAN = NO, TWO, THR, or FOR</p>	rpa-15
DNPS	xxxx yyyy Xxxxx <cr>	<p>The DN to be translated and the number of the paging equipment to which the DN is assigned. This prompt is repeated to allow multiple entries.</p> <p>The DN to be deleted from the entry</p> <p>Stops the DNPS prompt</p>	rpa-15
EXTR		Treatment for external calls to pager which is in the rack.	rpa- 23

LD 58

Prompt	Response	Comment	Pack/Rel
	(BUSY) ATT SRC1 - SRC8 RAN MAIL	Caller gets busy tone. Call is routed to the Attendant Tones or announcement delivered from the TDS card, programmed in Overlay 56. Call is routed to the RAN machine Call is routed to Meridian Mail.	
INTR	(BUSY) ATT SRC1- SRC8 RAN MAIL	Treatment for internal calls to pager which is in the rack. Caller gets busy tone. Call is routed to the attendant. Tones or announcement delivered from the TDS card, programmed in Overlay 56. Call is routed to the RAN machine. Call is routed to Meridian Mail.	rpa-23
INTM	1-9-(0) <cr>	Internal Mode digit for this RPAX Default is the mode digit defined in EXTM	rpa-15
MMDN	xxxx	Meridian Mail DN which provides the recorded announcement or the defined function, prompted if INTR = MAIL. Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	rpa-23
MRPS	(NO) YES	Multiple Radio Paging Systems	rpa-15
MTO	0-(150)-630	Length of the Meet-Me Timeout timer in seconds, after the STO or NSTO timer has expired Where: 0 = no meet-me after STO or NSTO has expired. 10 second resolution.	rpa-15
NSTO	10-(30)-630	Length of time required for paging when No Speech Path is required. 10 second resolution.	rpa-15
OPER	(AUTO) MANU	Automatic Operation Manual Operation	rpa-15
PANN	(NO) YES	Recorded Paging Announcement allowed (denied) for this route	rpa-15
PATH	(NONE) SPCH RNGB	No speech path or ringback provided Speech path provided Ringback to the calling party provided	rpa-15

Prompt	Response	Comment	Pack/Rel
PRET	(YES) NO	Pretranslation for Radio Paging calls Allowed. Pretranslation for Radio Paging calls Denied.	rpa- 23
PSAL	1-7	Paging System Access code length Number of digits that are to be used to identify individual paging devices	rpa-15
RANG	xxxx xxxx xxxx <cr>	Print DN Range from the first DN to the second DN. Print this DN. Print all DNs. DNs are those listed in the Radio Paging (RPA) translation table. Prompted when TABT = DNP	rpa-15
RANR	0 - 511	Route number that provides the recorded announcement, prompted if EXTR = RAN. Route number that provides the recorded announcement, prompted if INTR = RAN.	rpa- 23
RCAL	(NO) YES	Recall if busy from RPA.	rpa-15
RCRG	0-(6)-20	Number of ring cycles when recall to transferring set, before reroute to attendant. Where: 0 = use value entered in response to CFNA prompt in LD 15	rpa-15
	X	Reroute to attendant (that is, no recall attempts to transferring set).	
RCTI	0-(30)-120	Time to wait for a "BUSY" transferring set to become idle. After this time the call is routed to the attendant.	rpa-15
REQ	CHG END NEW OUT PRT	Request Change existing data block. Exit Overlay program. Create a new data block. Remove data block. Print data block.	rpa-15
ROUT	0-511	Route number of the trunk route connected to this paging system. Route must be defined as PRA in LD 14 and 16.	rpa-15
RPAR	0-511	The route number where the recorded announcement is provided from.	rpa-15

LD 58

Prompt	Response	Comment	Pack/Rel
		Route must be defined as RAN in LD 16.	
RPAX	nnnn <cr>	Radio Paging Access Code This prompt is repeated to allow multiple entries. Stop RPAX prompt. Access Codes must previously be defined in LD 57.	rpa-15
RPTO	(SPCL) DIAL NONE	Radio Paging Tone, which is to be provided after the RPAX/RPAN Special dial tone Normal Dial tone No tone	rpa-15
RTIM	0-(60)-630	Length of the Recall Timer (in seconds) after the STO or NSTO timer has expired Where: 0 = no timeout limit. 10 second resolution	rpa-15
SNUM	0-15	System Number Prompted when MPRS = YES	rpa-15
STO	10-(30)-630	Length of time required for Speech Path to be maintained in seconds. 10 second resolution.	rpa-15
TABT	DNP NPS UPS	Table Type Print the DN-Paging System Access (PSA) entries Print the unused PSA codes Print the used PSA codes Prompted when TYPE = TBL	rpa-15
TBTR	4-(10)-30	Time between two recall attempts (to an SL-1 set)	rpa-15
TRAN	(TAB) TWO THR FOR NO	Translation type Translation lookup table Last two digits of DN Last three digits of DN Last four digits of DN No translation (DN sent as PSA code) Prompt is not given if MRPS = YES. TRAN is then forced to TAB.	rpa-15
TRDN	(0)-16	Transmit this number of digits of the caller's DN to the paging equipment	rpa-15
TWSP	(BOTH)	Two-way speech path with a mobile pager allowed Both internal and external calls	rpa-15

Prompt	Response	Comment	Pack/Rel
	INT	Internal calls Prompted when PATH = SPCH	
TYPE		Type of data block	rpa-15
	RPAX	Radio Paging Access Code data block	
	RPCD	Radio Paging Customer Data block	
	RPS	Radio Paging System data block	
	TBL	Translation Table access data block	

LD 58

LD 73: Digital Trunk Interface

Overlay program 73 allows the implementation and administration of the Digital Trunk Interface (DTI) and Primary Rate Interface (PRI) software and hardware.

Fiber Network Fabric

The Fiber Network Fabric extends and enhances the 5-group network architecture to 8 non-blocking (inter-group) Network groups, with a resulting expansion in network capacity to 8k timeslots available for Intergroup traffic. This is achieved by using OC-12 SONET rings, and adding additional network and PE shelves, packs and cables and software changes to allow using the expanded network capacity. This expansion increases the number of available loops from 160 to 256. This applies to the Option 81C only.

Table of Contents

Section	Page
DDB: Digital data block	page 783
PRI2 data block (FEAT = LPTI)	page 784
DTI2 / JDMI data block (FEAT = LPTI)	page 785
Prompts and responses DTI / PRI data blocks (with GPRI package 167)	page 786
Prompts and responses DTI / PRI data blocks (with GPRI package 167)	page 786
Table 6 Pad codes & corresponding dB values for DTI/PRI/BRIT/BRIL/PRI2/DTI2/JDMI	page 788
Table 7 Default Pad Category 1 values (PDCA 1) (DTI/PRI with GPRI pkg 167)	page 789
Table 8 Default Pad Category 1 values (PDCA 1) (BRIL/BRIT/DTI2/PRI2)	page 790
Table 9 Default Pad Category 16 values (PDCA 16) (JDMI)	page 791
Table 10 Default pad values for TOLL prompt	page 792
Signaling category assignment and modification	page 793
Prompts and responses for ABCD signaling category	page 795
Table 11 Default values for Signaling Categories 1 & 16 (In/Out Calls)	page 800
Table 12 Default values for Signaling Categories 1 & 16 (Incoming Calls)	page 800
Table 13 Default values for Signaling Categories 1 & 16 (Outgoing Calls)	page 801

DDB: Digital data block

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	DDB	Type of data block = DDB (Digital data block)
CEQP	(NO) YES	Clock Controller Equipped
CLKN	xx	Card number for Clock Controller (Option 11C)
- PREF	xxx	Primary Reference
- - SREF	xxx	Secondary Reference
TRSH	0-15	Threshold set
RALM	1-(3)-128	Remote (yellow) Alarm clear threshold
BIPC	0-(2)-128	Bipolar violation Count threshold
LFAC	0-(3)-128	Loss of Frame Alignment Counter
BIPV	1-(3)-4 1-(2)-4	Bipolar Violation maintenance and out-of-service threshold
SRTK	1-(5)-24 1-(30)-3600	Slip Rate Tracking mode maintenance
SRNT	1-(15)-1024 1-(3)-1024	Slip Rate Non-Tracking
LFAL	1-(17)-10240	Loss of Frame Alignment maintenance and out-of-service thresholds
AUTO	(NO) YES	Automatic recovery for frame slippage
SRAR	(NO) YES	Slip Rate Automatic Recovery
SRGT	1-(15)-127	Slip Rate Guard Time in minutes
SRIM	(1)-127	Slip Rate Improvement Monitoring time in minutes
SRMM	1-(2)-127	Slip Rate Maintenance Maximum
ICS	0-159	Multi Purpose Serial Data Link Idle Code Selection

PRI2 data block (FEAT = LPTI)

The following prompts and associated responses define the grade of service timers for the DTI card. Group I problems are treated individually. They are bipolar violations, bit error rate (frame alignment) problems and slips.

Group II problems are treated as a group. They are bit 3 of TS0 (far-end out-of-service), bit 6 of TS16 (far-end lost multiframe alignment), Alarm Indication Signal (AIS), loss of frame alignment and loss of multiframe alignment.

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	PRI2	Type of data block = PRI2
FEAT	LPTI	Feature = LPTI (Loop timer)
LOOP	loop	Loop number for PRI2
MFF	aaa	Multiframe Format (aaa = (AFF) or CRC)
ACRC	(NO) YES	Automatic reporting of CRC-4 error
ALRM	aaa	Default alarm handler selected (aaa = (REG) or ALT)
RAIE	(NO) YES	RAIE Group II alarm state enabled or disabled
SLP	mc mt oc ot	Slip count
NOOS	(NO) YES	The grade-of-service feat
BPV	1-(128) or (122)-255	Bipolar Violation thresholds
RATS	1-(10)-15	The number of consecutive seconds the firmware has to check and validate error rate condition
CRC	x...x	Cyclic Redundancy Check threshold [x...x = 1-(201) or (97)-255]
FAP	1-(28)-255 (1)-255	Frame Alignment thresholds
GP2	T2 mt dt ct ot	Group 2 error thresholds
MNG1	nnnM	Maintenance Guard time Group 1
NCG1	nnnM	No New Calls Guard time Group 1
OSG1	nnnM	Out-of-Service Guard time Group 1
MNG2	nnnS	Maintenance Guard time Group 2
NCG2	nnnS	No New Calls Guard time Group 2
OSG2	nnnS	Out-of-Service Guard time Group 2
PERS	0-(50)-254	Group 2 Persistence timer and clearance timer
CLEA	0-(100)-256	Clearance timer for Group II problems in 2 ms increments
OOSC	0-(5)-127	Out -of-Service Counter

DTI2 / JDMI data block (FEAT = LPTI)

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	aaaa	Type of data block = DTI2 or JDMI
FEAT	LPTI	Feature = LPTI (Loop timer)
LOOP	loop	Loop number for DTI2
CDTI2	(NO) YES	CDTI2/CSDTI2 Card
P DIGT (S)	abcd	Digit pulse timing from TDS (Bits P, X or U are selectable)
P METR (R)	abcd	Metering (Bits P, X or U are selectable)
- EDGE	x	Edge of pulse (0 or 1)
- TIME	40-(240)-480	Maximum time METR signal can be on
- MINP	(8)-256	Minimum Pulse length for a Meter Pulse
- PPM	(NO) YES	PPM Parameter Download required
- ITTP	(NO) YES	Italian PPM option allowed
-MINP	8-(72)-248	Minimum time a PPM pulse is active
-ITBP	8-(72)-248	Idle time between PPM pulses
SASU	0-8064	Seize Acknowledge Supervision period
MFAO	YES NO	Multiframe Alignment Option
SZNI	(NO) YES	PSTN incoming seizure during lockout of MFAS and far-end fault states allowed
LCLB	(NO) YES	Lockout Clear Back option for DID trunks
UCFS	xxxx	Unequipped Channel Fault Signal
TGLR	(NO) YES	Toggle Reserve bits in Frame 0
MFF	aaa	Multiframe Format (aaa = (AFF) or CRC)
CRC	NC mt dt ct ot	Cyclic Redundancy Check error counts
BPV	NB mt dt ct ot	Bipolar Violation error counts
FAP	NF mt dt ct ot	Frame Alignment Problem thresholds
SLP	NS mt dt ct ot	Slip count maintenance threshold
GP2	T2 mt dt ct ot	Group 2 error thresholds
FRFW	(NO) YES	DTI2 loop is equipped with special Firmware for France
CISFW	aaa	Defines the CDTI2/CSDTI2 card's FW option to be used
-MFSL	(0)-3	The MFS signals transmission level.
-500L	(0)-1	ANI request tone (500 Hz) transmission level

Prompts and responses for setting pad values

Prompts and responses DTI / PRI data blocks (with GPRI package 167)

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	aaa	Type of data block = DTI or PRI
FEAT	PAD	Pad Category
PDCA	1-16	Pad Category table. PDCA 1 and PDCA 16 are preconfigured. See the Note below for further details.
TNLS	(NO) YES	Terminal Number List
DFLT	1-16	Use default codes from this pad category table for the following prompts if <cr> is entered at the prompt

Note: For the following prompts, **x = Rx code (receive) and y = Tx code (transmit)**. You may assign receive and transmit dB values to the following prompts by entering a code which corresponds to a dB value. Code options and their corresponding dB values are listed in Table 6 on page 788. The codes listed in Table 6 apply for both Rx codes and Tx codes.

To find the default values for Pad Category 1 when TYPE = DTI or PRI, refer to Table 7 on page 789. To find default values for Pad Category 1 when TYPE = BRIL, BRIT, DTI2, or PRI2, refer to Table 8 on page 790. To find default values for Pad Category 16 when TYPE = JDMI, refer to Table 9 on page 791.

ONP	x y	On-Premises Extension
DSET	x y	Meridian Digital Set
OPX	x y	Off-Premises Extension
DTT	x y	Digital TIE Trunks
SDTT	x y	Satellite Digital TIE Trunks
DCO	x y	Digital COT, FEX, WAT, and DID trunks
DTO	x y	1.5 Mb/s DTI/PRI Digital TOLL Office trunks
VNL	x y	Via Net Loss (Analog TIE)
SATT	x y	Satellite Analog TIE Trunks
ACO	x y	Analog COT and WATS trunks
ATO	x y	Analog TOLL Office trunks
PRI	x y	1.5 Mb/s PRI/DTI trunk

PRI2	x y	2.0 Mb/s PRI/DTI trunk
XUT	x y	Extended Peripheral Equipment Universal Trunk
XEM	x y	Extended Peripheral Equipment E&M Trunk
BRIL	x y	Basic Rate Interface Line
BRIT	x y	Basic Rate Interface Trunk
MCM	x y	M1 CT2 mobility pad value
TOLT	x y	Toll call pad data on DTI2 card
TOLL	x y	Toll call pad data on line card (Do not refer to Table 6 for TOLL values. Refer instead to Table 10).

LD 73

Table 6
Pad codes & corresponding dB values for DTI/PRI/BRIT/BRIL/PRI2/DTI2/JDMI

Code	Value (dB)	Code	Value (dB)	Code	Value (dB)
0	0.0 †	9	+9.0	18	-4.0 †
1	+1.0 †	10	+10.0 †	19	-5.0
2	+2.0 †	11	+11.0	20	-6.0 †
3	+3.0 †	12	+12.0 †	21	-7.0
4	+4.0 †	13	+13.0	22	-8.0
5	+5.0 †	14	+14.0	23	-9.0
6	+6.0 †	15	-1.0 †	24	-10.0
7	+7.0	16	-2.0 †	25	Idle †
8	+8.0 †	17	-3.0 †	26	+0.6 †

Note 1: PRI/DTI pad category prompts require GPRI package 167.

Note 2: † Represents pad values supported by DTI2 for all systems except Option 11C.

Note 3: Option 11C supports all pad values for DTI2.

Note 4: Positive dB represents loss and negative dB represents gain.

Note 5: Code 0, pad value 0.0, is equivalent to no pad. It is used for DTA (Data only) and VOD (Voice or Data) call types and supported by DTI2.

Note 6: “Idle” means that PCM signals are converted to silence.

Table 7
Default Pad Category 1 values (PDCA 1) (DTI/PRI with GPRI pkg 167)

Connection type	Rx code	Rx PAD (dB)	Tx code	Rx PAD (dB)
ONP	6	+6.0	0	0.0
DSET	6	+6.0	0	0.0
OPX	6	+6.0	0	0.0
DTT	0	0.0	0	0.0
SDTT	3	+3.0	0	0.0
DCO	3	+3.0	0	0.0
DTO	0	0.0	0	0.0
VNL	6	+6.0	0	0.0
SATT	6	+6.0	0	0.0
ACO	6	+6.0	0	0.0
ATO	6	+6.0	0	0.0
PRI	0	0.0	0	0.0
PRI2	0	0.0	0	0.0
XUT	6	+6.0	0	0.0
XEM	3	+3.0	0	0.0
BRIL	0	0.0	0	0.0
BRIT	0	0.0	0	0.0
MCM	0	0.0000	0	0.0

LD 73

Table 8
Default Pad Category 1 values (PDCA 1) (BRIL/BRIT/DTI2/PRI2)

Connection type	Rx code	Rx PAD (dB)	Tx code	Rx PAD (dB)
ONP	17	-3.0	0	0.0
OPX	17	-3.0	0	0.0
DTT	0	0.0	0	0.0
DCO	0	0.0	0	0.0
NTC	4	+4.0	1	+1.0
TRC	4	+4.0	1	+1.0
DTR	17	-3.0		
VNL	4	+4.0	1	+1.0
ACO	4	+4.0	1	+1.0
AFX	4	+4.0	1	+1.0
ADD	4	+4.0	1	+1.0
PRI	0	0.0	0	0.0
DSET	6	+6.0	0	0.0
BRIL	0	0.0	0	0.0
BRIT	0	0.0	0	0.0
MCM	0	0.0	0	0.0
TOLT	0	0.0	0	0.0
TOLL	16	0.0	30	-7.0

Table 9
Default Pad Category 16 values (PDCA 16) (JDMI)

Connection type	Rx code	Rx PAD (dB)	Tx code	Rx PAD (dB)
ONP	15	-1.0	8	+8.0
OPX	17	-3.0	0	0.0
DTT	0	0.0	0	0.0
DCO	0	0.0	0	0.0
NTC	4	+4.0	1	+1.0
TRC	4	+4.0	1	+1.0
DTR	0	0.0	---	---
VNL	4	+4.0	1	+1.0
ACO	4	+4.0	1	+1.0
AFX	4	+4.0	1	+1.0
ADD	4	+4.0	1	+1.0
PRI	0	0.0	0	0.0
DSET	6	+6.0	0	0.0
BRIL	0	0.0	0	0.0
BRIT	0	0.0	0	0.0
MCM	0	0.0	0	0.0
TOLT	0	0.0	0	0.0
TOLL	16	0.0	30	-7.0

LD 73

Table 10
Default pad values for TOLL prompt

Code	dB Value	Code	dB Value	Code	dB Value
0	>= +8.0	14	+1.0	28	-6.0
1	+7.5	15	+0.5	29	-6.5
2	+7.0	16	0.0	30	-7.0
3	+6.5	17	-0.5	31	-7.5
4	+6.0	18	-1.0	32	-8.0
5	+5.5	19	-1.5	33	-8.5
6	+5.0	20	-2.0	34	-9.0
7	+4.5	21	-2.5	35	-9.5
8	+4.0	22	-3.0	36	-10.0
9	+3.5	23	-3.5	37	-10.5
10	+3.0	24	-4.0	38	-11.0
11	+2.5	25	-4.5	39	<= -11.5
12	+2.0	26	-5.0		
13	+1.5	27	-5.5		

Signaling category assignment and modification

What can be entered for the abcd response?

Prompts which show the response abcd, such as IDLE (S), require a four field response to indicate the status of four bits: a, b, c and d. The abcd response represents a trunk supervisory message. The bit states within the message are determined by using the appropriate input. Allowable inputs for each bit are: 0, 1, C, P, U, X, N. These input options are explained as follows:

- 0 - Bit is a steady state 0 (LOW) e.g. 0000 bits abcd are all steady state 0.
- 1 - Bit is a steady state 1 (HIGH) e.g. 0101 bits b and d are steady state 1 while bits a and c are steady state 0.
- C - Bit is pulsed and present continuously (Continuous pulsing of two or more bits is not allowed.).
 - “C” can only be entered for signals that have “C” in front of them when the signal is prompted; the signals are: “C CLR B (S), C CLR B (R) and C SUPO (S) UNUSED”
 - “C” cannot be mixed with 0 or 1 or P in the ABCD pattern. Therefore, the entry must look like CXXX, XCXX, etc
 - “C” can only be entered once in the ABCD pattern
- C cannot be entered for the CLR B (R) or CLR B (S) prompts if the pulsed E&M package (232) PEMD is equipped P - Bit is pulsed. e.g. PC10 bit a is pulsed, bit b is pulsed and sent continuously, bit c is steady state 1 and bit d is steady state 0.
- U - Bit is a don't-care bit (for received signals only) e.g. U10U bits a and d are don't-care bits, bit b is steady state 1 and bit c is steady state 0.
- X - Bit is not to be changed (used in conjunction with Pulsed or Continuously pulsed bit) e.g. XPXX bits a, c and d are unchanged, bit b is set to steady state 1 and bit c is set to steady state 0.

Another input to the signal name prompt is allowed. The other allowable input is:

- N - The signal is not required.

How to tell if the signal is pulsing, pulsed or steady?

The signal type is identified by a single character followed by a blank space preceding the signal name. For example, the prompt E SEZ(R) indicates that the Seize signal may be either Pulsed or steady state. The signal type identifiers are:

- C - Continuous Pulsing, Pulsed or steady state
- E - Pulsed or steady state
- P - Pulsed (single pulse unless otherwise indicated)
- No preceding character indicates the signal is steady state only

Pulsed signals will output the TIME prompt. This prompt is described for each of the signals that may prompt it.

How to determine signal direction?

The direction of the signal is indicated by a single character in brackets at the end of the signal name:

- (R) - Indicates that the signal is to be received by the switch
- (S) - Indicates that the signal is to be sent by the switch

For example, E SEZ (R) indicates that the Seize signal may be either Pulsed or steady state and that the signal is to be received by the switch.

How to tell if the prompt incoming or outgoing, or both

ABCD prompts correspond to incoming calls, outgoing calls or both incoming and outgoing calls. Prompts IDLE (S) to P RRC correspond to incoming/outgoing calls. Prompts E SEZ (R) to P FRLS (R) correspond to incoming calls. Prompts E SEZ (S) to C SUPO (S) correspond to outgoing calls.

A note about JDMI

For Japan Digital Multiplex Interface (JDMI), the signal requires only a bit signaling. All four bits will be allowed to be programmed as the software uses all four bits for call processing. The JDMI hardware defaults the bcd bits to 101 for sending signaling changes. Therefore, if any changes are made to received signals, the bcd bits must be set to 101; otherwise, these signals will not be recognized.

Prompts and responses for ABCD signaling category

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	aaa	Type of data block
FEAT	ABCD	Feature = ABCD
SICA	2-16	Signaling Category
TNLS	(NO) YES	Terminal Number List
DFLT	(1)-16	Default signaling category to be used for Default values

Note: The following prompts have default values for Signalling Category 1 and 16 which may be found in Table 8 on page 790.

Prompts for Incoming/Outgoing Calls

IDLE (S)	abcd	Idle
IDLE (R)	abcd	Idle
FALT (S)	abcd	Fault (DTI out-of-service)
FALT (R)	abcd	Fault (DTI out-of-service)
P RRC (S)	abcd	Register Recall
- TIME	10-(100)-630	Time of RRC (S) in milliseconds
TIME	(0)-1920	Persistence Time required before signal is accepted

Prompts for Incoming Calls

E SEZ (R)	abcd	Seize for voice or data calls from a non-SL-1
- TIME	16-(56)-1000	16-(296)-1000 Minimum and maximum acceptable pulse duration

LD 73

SEZD (R)	abcd	Seize for data calls between SL-1s
- SEZV (R)	abcd	Seize for voice calls
P CALL (R)	abcd	Signal sent during seize by an incoming CO trunk
- TIME	1-(2)-15 1-(8)-15	Pulse on time, pulse off time
SEZA (S)	abcd	Seize Acknowledgment
- TIME	50-80-90	Time delay prior to sending SEZA
PRCS (S)	abcd	PRCS
WNKS (S)	abcd	Wink Start
P WNKS (S)	abcd	Wink Start
- TIME	10-(220)-630	Time for P WNKS (S)
P DIGT (R)	abcd	Decadic pulses
NRCV (S)	abcd	Number Received
P EOSF (S)	abcd	End of Selection Free
- TIME	(100)-150	Time for EOSF (S)
- P EOSB (S)	abcd	End of Selection Busy
- - TIME	(100)-150	Time for EOSB (S)
P OPC (R)	abcd	Operator Calling
- TIME	64-(128)-192	Time of OPCA (R) pulse
- TIME	16-(96)-1000 16-(160)-1000	Minimum and maximum acceptable pulse duration
- REPT	(1)-5	Number of OPCA (R) pulses
CONN (S)	abcd	Connect
E CON (S)	abcd	Connect
- TIME	10-(150) 630	Time of pulse length in 10 ms increments
CONN (R)	abcd	Connect
P BURS (S)	abcd	Bring Up Receiver for L1 networking
P BURS (R)	abcd	Bring Up Receiver for L1 networking

- TIME	64-(128)-192	Time for BURS (R) pulse
CLRB (S)	abcd	Clear Back
C CLRB (S)	abcd	Clear Back
- TIME	10-(600)-2000	Time of pulse length in 10 ms increments
- P RCT (S)	abcd	Release Control
-- TIME	100-(150) 300	Time value is stored in 10 ms increments
-- P RCOD (S)	abcd	Release Control Originating party Disconnect
--- TIME	150	Timer value in milliseconds is fixed
P OPRS (R)	abcd	Operator manual recall
- TIME	xxxx yyyy	Minimum and maximum time range for OPRS (R)
P NXFR (S)	abcd	Network Transfer
P ESNW (S)	abcd	ESN Wink
P CAS (S)	abcd	Centralized Attendant
CLRF (R)	abcd	Clear Forward
- SOS	abcd	Special Operator Signal
P BRLS (S)	abcd	Backward Release
- TIME	10-(600)-2000	Time of pulse length in 10 ms increments
P FRLS (R)	abcd	Forward Release
- TIME	16-(296)-2000	16-(960)-2000
		Minimum and maximum acceptable pulse duration

Prompts for Outgoing Calls

E SEZ (S)	abcd	Seize for voice or data calls to a non-SL-1
- TIME	10-(150)-630	Time of pulse length in 10 ms increments
SEZD (S)	abcd	Seize for Data calls
- SEZV (S)	abcd	Seize for Voice calls
SEZA (R)	abcd	Seize Acknowledgment
- TIME	xxx	Delay time for the SEZA signal (xxx = 50, 80, 90, (150), or 800)

LD 73

WNKS (R)	abcd	Wink Start
- TIME	20-(140)-500 20-(290)-500	Minimum and maximum length of WNKS (R) pulse
P WNKS (R)	abcd	Wink Start
- TIME	16-(136)-504 16-(288)-504	Minimum and maximum length of P WNKS (R) pulse
P EOS (R)	abcd	End of Selection
- TIME	(64)-320 64-(256)-320	Length of EOS (R) pulse
CONN (S)	abcd	Connect
CONN (R)	abcd	Connect
E CONN (R)	abcd	Connect
- TIME	16-(56)-1000 16-(296)-1000	Time of pulse length in 8 ms increments
P OPRC (R)	abcd	Operator Recall for special services
P BURS (S)	abcd	Bring Up Receiver for L1 networking
P BURS (R)	abcd	Bring Up Receiver for L1 networking
- TIME	64-(128)-192	Time for BURS (R) pulse
CLRB (R)	abcd	Clear Back
C CLRB (R)	abcd	Clear Back
- TIME	16-(296)-2000 16-(960)-2000	Time of pulse length in 8 ms increments
- P RCTL (R)	abcd	Release Control
-- TIME	96-(128)-320 96-(256)-320	Time stored in 8 ms increments
P NXFR (R)	abcd	Network Transfer
P ESNW (R)	abcd	ESN Wink
P CAS (R)	abcd	Centralized Attendant Service

CLRF (S)	abcd	Clear Forward
- TIME	(0)-800	Time in milliseconds
- SOS	abcd	Special Operator Signal
P FRLS (S)	abcd	Forward Release
- TIME	10-(600)-2000	Only prompted for pulsed signals
P BRLS (R)	abcd	Backward Release
- TIME	16-(296)-2000	16-(960)-2000 Time of pulse length in 8 ms increments
C SUPO (S)	abcd	Complex Supervision to Operator Signal used for KD3 signaling. Note that the input for a must be C.

Table 11
Default values for Signaling Categories 1 & 16 (In/Out Calls)

In/Out Calls	SICA 1	SICA 16
IDLE (S)	1001	1101
IDLE (R)	1001	1101
FALT (S)	1101	0101
FALT (R)	1101	0101
TIME	0	0
P RRC (S)	UNUSED	UNUSED

Table 12
Default values for Signaling Categories 1 & 16 (Incoming Calls)

Incoming Calls	SICA 1	SICA 16	Incoming Calls	SICA 1	SICA 16
E SEZ (R)	0001	0101	CONN (R)	0001	0101
SEZD (R)	UNUSED	UNUSED	P BURS (S)	UNUSED	UNUSED
SEZV (R)	UNUSED	UNUSED	P BURS (R)	UNUSED	UNUSED
P CALL (R)	UNUSED	UNUSED	C CLRB (S)	1101	1101
SEZA (S)	1101	UNUSED	P RCTL (S)	UNUSED	UNUSED
TIME	150		P RCOD (S)	UNUSED	UNUSED
PRCS (S)	UNUSED	UNUSED	P OPRS (R)	UNUSED	UNUSED
P WNKS (S)	UNUSED	PXXX	P NXFR (S)	UNUSED	UNUSED
TIME		220	P ESNW (S)	UNUSED	UNUSED
P DIGT (R)	UNUSED	PXXX	P CAS (S)	UNUSED	UNUSED
NRCV (S)	UNUSED	UNUSED	CLRF (R)	UNUSED	UNUSED
P EOSF (S)	UNUSED	UNUSED	SOS (R)	UNUSED	UNUSED
P EOSB (S)	UNUSED	UNUSED	P BRLS (S)	UNUSED	UNUSED
P OPCA (R)	UNUSED	UNUSED	P FRLS (R)	UNUSED	UNUSED
E CONN (S)	0101	0101			

Table 13
Default values for Signaling Categories 1 & 16 (Outgoing Calls)

Outgoing Calls	SICA 1	SICA 16
E SEZ (S)	0001	0101
SEZD (S)	UNUSED	UNUSED
SEZV (S)	UNUSED	UNUSED
SEZA (R)	1101	UNUSED
P WNKS (R)	UNUSED	PXXX
TIME		136 288
P EOS (R)	UNUSED	UNUSED
CONN (S)	0001	0101
E CONN (R)	0101	0101
P OPRC (R)	UNUSED	UNUSED
P BURS (S)	UNUSED	UNUSED
P BURS (R)	UNUSED	UNUSED
C CLRB (R)	1101	1101
P RCTL (R)	UNUSED	UNUSED
P NXFR (R)	UNUSED	UNUSED
P ESNW (R)	UNUSED	UNUSED
P CAS (R)	UNUSED	UNUSED
CLRF (S)	UNUSED	UNUSED
SOS (R)	UNUSED	UNUSED
P FRLS (S)	UNUSED	UNUSED
P BRLS (R)	UNUSED	UNUSED

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
500L	(0)-1	ANI request tone (500 Hz) transmission level. The prompt appears only when CISFW is set to MFA. The transmission level may be set to the following values: 0 (default) = -7.3 DB 1 = -3.5 DB	
ACO	x y <cr>	Analog COT and WATS trunks. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	dti/pr-14
ACRC	(NO) YES	No reporting of CRC-4 error Automatic reporting of CRC-4 error during transmission ACRC is only printed for PRI2 loops and if MFF = CRC.	euro-20
ADD	x y <cr>	Analog Direct Inward Dial trunks. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	dti/pr-14
AFX	x y <cr>	Analog Foreign Exchange trunks. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	dti/pr-14
ALRM	(REG) ALT	Regular firmware alarm handler (RAI transmission is controlled by software) Alternate firmware alarm handles (Immediate transmission of RAI by firmware) An error rate less than 10 is reported as a Group 1 alarm message.	dti/pr-14

Prompt	Response	Comment	Pack/Rel
ATO	x y <cr>	Analog Toll Office trunks. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	gpri-18
BIPC	0-(2)-128	Bipolar violation Count threshold This is the maximum number of times a DTI/PRI loop can be taken out of service in 24 hours. If this threshold is reached the DTI/PRI must be restored to service manually. Refer to the <i>Digital Trunk Interface maintenance</i> NTP or the <i>PRI and DCHI maintenance</i> NTP for details. If "0" is entered, there is no limit on number of times trunks can be taken out and automatically restored to service. The method of bit rate monitoring depends on the loop configuration: <ol style="list-style-type: none"> 1. For DTI mode: bipolar violation threshold 2. For PRI mode with D2, D3, or D4 framing format: bipolar violation threshold 3. For PRI mode with Extended Superframe Format (ESF): Cyclic Redundancy Check (CRC) threshold 	dti/pri-14
BIPV	1-(3)-4 1-(2)-4	Bipolar Violation maintenance and Out-of-Service threshold The BIPV values determine the sensitivity of the loop to errors, where BIPV = 1 is the least tolerant to errors, and BIPV = 4 is the most tolerant. The maintenance threshold must be greater than the out-of-service threshold.	dti/pri-14

Prompt	Response	Comment	Pack/Rel
		<p>The method of bit rate monitoring depends on the loop configuration:</p> <ol style="list-style-type: none"> 1. For DTI mode: bipolar violation thresholds 2. For PRI mode with D2, D3, or D4 framing format: bipolar violation thresholds 3. For PRI mode with Extended Superframe Format (ESF): Cyclic Redundancy Check (CRC) thresholds 	
BPV	1-(128)-255	<p>1-(122)-255 Bipolar Violation Maintenance and Out-of-Service thresholds. The values entered are multiplied by 16 to obtain the actual count, giving an actual range of 16-4080.</p>	dti/pr-14
BPV	NB mt dt ct ot	<p>Bipolar Violation error counts. Where:</p> <ul style="list-style-type: none"> • NB = Error count values are in the range 1-(205)-255 • mt = Maintenance threshold time (MNT) (default = 10S) • dt = No new data calls threshold time (NNDC) (default = 3S) • ct = No new calls threshold time (NNC) (default = 3S) • ot = Out-of-service threshold time (OOS) (default = 1S) <p>Response options for mt, dt, ct, ot:</p> <p>Threshold time entries end in one of the following letters: T, S, M, H. These letters indicate the time increment to be used. Response options for mt, dt, ct and ot are as follows:</p> <ul style="list-style-type: none"> • 20T–5000T = 20 millisecond increments • 1S–240S = 1 second increments • 1M–240M = 1 minute increments • 1H–24H = 1 hour increments 	dti/pr-14

Prompt	Response	Comment	Pack/Rel
		<p>Important note: The following requirements must be met:</p> <ul style="list-style-type: none"> • mt = >dt = >ct = >ot 	
BRIL	x y	Basic Rate Interface Line. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes.	gpri-18
	<cr>	Initial values	
BRIT	x y	Basic Rate Interface Trunk. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes.	gpri-18
	<cr>	Initial values	
C CLRB (R)	abcd	Clear Back. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-18
	N	If C CLRB (R) not required, when IDLE would be used	
C CLRB (S)	abcd	Clear Back. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-18
	N	If Clear Back is configured as continuous pulsing then a 100 ms pulse is sent very 333 ms. If CLRB (S) not required (IDLE signal is used)	
CCAR	0-(15)	Clock Controller Audit Rate	supp-15
		The time, in minutes, between normal CC audits. Only programmable on units equipped with 2.0 Mb/s DTI/PRI.	
		Before programming clock controller references, the QPC775 clock controller pack(s) must be plugged in, and the switches on the system's QPC441 3 Port Extender appropriately set.	
		Unless this is done, the PREF and SREF prompts are not given.	
CCGD	0-(15)-1440	Clock Controller free run Guard time (in minutes)	supp-15

LD 73

Prompt	Response	Comment	Pack/Rel
CDTI2	(NO)	No CDTI2/CSDTI2 Card	dti/pra-14
	YES	CDTI2/CSDTI2 Card	
CEQP	(NO) YES	Clock Controller Equipped Prompted only for SL-1 M, MS or S.	dti/pra-14
CISFW		CISFW defines the CDTI2/CSDTI2 card's FW option to be used.	cist-21
	YES	YES means that this loop is CIS DTI trunk. NO means that the given loop must be considered as DTI2. Prompted with CIST package 221 and CDTI2 = YES.	
	(NO)	Non CIS DTI2 signalling protocols on the NTCG01AA/NTCG02AA or NTCG01AB/NTCG02AB card.	cismfs-23
	DP	Dial Pulse CIS signalling protocol on the NTCG01AA/NTCG02AA card.	
MFS	Both the CIS Dial Pulse and the CIS MFS signalling protocols on the NTCG01AB/NTCG02AB. Minimum card vintages are specified.		
MFA	CIS Firmware type is MFA - which means that the Multifrequency Shuttle protocol handling + ANI Reception + Firmware Dial Tone Detection capabilities are supported		cist-24
CLEA	0-(100)-256	Clearance timer for Group II problems in 2 millisecond increments. CLEA is only printed for PRI2 loops.	euro-20
CLKN	xx	Card number for Clock Controller (Option 11C) Where: <ul style="list-style-type: none">• xx = 1-9	supp-18
CLRB (R)	abcd	Clear Back. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-14
	N	If CLRB (R) not required, when IDLE would be used	
CLRB (S)	abcd	Clear Back. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-14
	N	If CLRB (S) not required (IDLE signal is used)	

Prompt	Response	Comment	Pack/Rel
CLRF (R)	abcd N	Clear Forward. For information about your response options, refer to "Signaling category assignment and modification" on page 793. If CLRF (R) not required	abcd-18
CLRF (S)	abcd N	Clear Forward. For information about your response options, refer to "Signaling category assignment and modification" on page 793. If CLRF (S) not required	abcd-18
CONN (R)	abcd	Connect. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-14
CONN (S)	abcd	Connect. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-14
CRC	1-(201)-255	1-(97)-255 Cyclic Redundancy Check threshold	pri2-14
CRC	NC mt dt ct ot	Cyclic Redundancy Check error counts. Where: <ul style="list-style-type: none"> • NC = Error count values are in the range • 1 - 255 - error count value • mt = Maintenance threshold time (MNT) (default = 10S) • dt = No new data calls threshold time (NNDC) (default = 3S) • ct = No new calls threshold time (NNC) (default = 3S) • ot = Out-of-service threshold time (OOS) (default = 1S) 	pri2-14

LD 73

Prompt	Response	Comment	Pack/Rel
		<p>Response options for mt, dt, ct, ot:</p> <p>Threshold time entries end in one of the following letters: T, S, M, H. These letters indicate the time increment to be used. Response options for mt, dt, ct and ot are as follows:</p> <ul style="list-style-type: none">• 20T–5000T = 20 millisecond increments• 1S–240S = 1 second increments• 1M–240M = 1 minute increments• 1H–24H = 1 hour increments <p>Important note: The following requirements must be met:</p> <ul style="list-style-type: none">• mt = >dt = >ct = >ot	
C SUPO(S)	abcd N	<p>Complex Supervision to Operator signal used for KD3 signalling calls to Special Services with Hold. For information about your response options, refer to “Signaling category assignment and modification” on page 793.</p> <p>Note that the input for the a field must be C. If SUPO not required</p>	kd3-20
DBNC	(10)-32	<p>Debounce timer (in milliseconds) For DTI2 only.</p>	pedm-18
DCO	x y <cr>	<p>Digital COT, FEX, WAT, and DID trunks. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See “Prompts and responses for setting pad values” on page 786 for more information about x and y codes.</p> <p>Initial values</p>	dti/pr-14

Prompt	Response	Comment	Pack/Rel
DFLT	(1)-16 <cr>	Default signaling category to be used for default values. When REQ = NEW, default is SICA 1 for DTI2 and SICA 16 for JDMI. Table 7 on page 789 shows the default values for both Signaling Categories 1 & 16. A carriage return configures default values, according to your configuration: DTI/PRI - default pad codes from Table 7 on page 789. (PDCA 1). Must be equipped with GPRI package 167. BRIL/BRIT/DTI2/PRI2 - default pad codes from Table 8 on page 789. (PDCA 1) JDMI - default pad codes from Table 9 on page 792. (PDCA 16)	dti/pri-14
DSET	x y <cr>	Meridian Digital Set. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	gpri-18
DTO	x y <cr>	1.5 Mb/s DTI/PRI Digital TOLL Office trunks. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	gpri-18
DTT	x y <cr>	Digital TIE Trunks. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	gpri-18
E CONN (R)	abcd	Connect. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-14
E CONN (S)	abcd	Connect. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-14

LD 73

Prompt	Response	Comment	Pack/Rel
E SEZ (R)	abcd	Seize for voice or data calls to a non-SL-1. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-18
E SEZ (S)	abcd	Seize for voice or data calls to a non-SL-1. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-18
EDGE	0 1	Edge of pulse PPM bit counted when changed from 1 to 0 PPM bit counted when changed from 0 to 1	dti/pr-14
EFCS	(NO) YES	Enable Fast Clock Switching EREF option in LD 60 must be chosen to enable this prompt.	dti/pr-18
FALT (R)	abcd N	Fault (DTI out-of-service). For information about your response options, refer to "Signaling category assignment and modification" on page 793. If FALT not required	abcd-14
FALT (S)	abcd N	Fault (DTI out-of-service). For information about your response options, refer to "Signaling category assignment and modification" on page 793. If FALT not required	abcd-14
FAP	1-(28)-255 (1)-255	Frame Alignment thresholds	dti/pr-14
	NF mt dt ct ot	Frame Alignment Problem thresholds	dti/pr-14

Prompt	Response	Comment	Pack/Rel
		<p>Where:</p> <ul style="list-style-type: none"> NF = Error count values are in the range: 1-(32)-255 mt = Maintenance threshold time (MNT) (default = 4S) dt = No new data calls threshold time (NNDC) (default = 1S) ct = No new calls threshold time (NNC) (default = 1S) ot = Out-of-service threshold time (OOS) (default = 100T) <p>Response options for mt, dt, ct, ot:</p> <p>Threshold time entries end in one of the following letters: T, S, M, H. These letters indicate the time increment to be used. Response options for mt, dt, ct and ot are as follows:</p> <ul style="list-style-type: none"> 20T–5000T = 20 millisecond increments 1S–240S = 1 second increments 1M–240M = 1 minute increments 1H–24H = 1 hour increments <p>Important note: The following requirements must be met: mt = >dt = >ct = >ot</p>	
FEAT		Feature	dti/pr-14
	ABCD	ABCD bit signaling category Valid response when TYPE = DTI2 or JDMI. Refer to NTP 553-2911-200 for default ABCD table with suggested values.	
	PAD	Pad category	

LD 73

Prompt	Response	Comment	Pack/Rel
		Valid response for all types. This prompt is not applicable for DPNSS and DASS2 applications. For DPNSS, the pad values are automatically set to zero (0) for both transmit and receive. For DASS2, the loss pad values are set to zero (0) for transmit and four (4) for receive. If TYPE = BRIL or BRIT, then FEAT = PAD is the only response allowed.	
	LPTI	Loop Timers Valid response when TYPE = DTI2, JDMI or PRI2.	
	SYTI	System Timers and counter (only one set per system) Valid response when TYPE = DTI2, JDMI or PRI2.	
FRFW	(NO) YES	This DTI2 loop is (is not) equipped with special Firmware for France.	dti/pa-18
GP2	T2 mt dt ct ot	Group 2 error thresholds Where: <ul style="list-style-type: none">• T2 = Error count values in range: 1-(20)-255. The T2 entry defines the maximum time that can occur before software checks the associated thresholds of 120 to 32,640 msec and rounds them to the closest multiple of 128 msec.• mt = Maintenance threshold time (MNT) (default = 100S)• dt = No new data calls threshold time (NNDC) (default = 12S)• ct = No new calls threshold time (NNC) (default = 12S)• ot = Out-of-service threshold time (OOS) (default = 4S)	dti/pa-14

Prompt	Response	Comment	Pack/Rel
		<p>Response options for mt, dt, ct, ot:</p> <p>Threshold time entries end in one of the following letters: T, S, M, H. These letters indicate the time increment to be used. Response options for mt, dt, ct and ot are as follows:</p> <ul style="list-style-type: none"> • 20T–5000T = 20 millisecond increments • 1S–240S = 1 second increments • 1M–240M = 1 minute increments • 1H–24H = 1 hour increments <p>Important note: The following requirements must be met:</p> <ul style="list-style-type: none"> • mt = >dt = >ct = >ot 	
ICS	0-159	Multi Purpose Serial Data Link Idle Code Selection Loop number for which IDLE PCM code has to be sent Precede loop number with X to remove	pra-24
IDLE (R)	abcd	Idle. For information about your response options, refer to “Signaling category assignment and modification” on page 793.	abcd-14
IDLE (S)	abcd	Idle. For information about your response options, refer to “Signaling category assignment and modification” on page 793.	abcd-14
ITBP	8-(72)-248	Idle Time between PPM pulses in milliseconds	kd3-20
ITPP	(NO) YES	Italian PPM option denied Italian PPM option allowed	kd3-20
LCLB	(NO) YES	Lockout Clear Back option for DID trunks	
LFAC	0-(3)-128	Loss-of-Frame-Alignment Counter This is the maximum number of times a DTI/PRI loop can be taken out-of-service in 24 hours. If this threshold is reached the DTI/PRI must be restored to service manually. If “0” is entered, there is no limit on number of times that trunks can be taken out and automatically restored to service.	dti/pra-14

LD 73

Prompt	Response	Comment	Pack/Rel
LFAL	1-(17)-10240	1-(511)-10240 Loss-of-Frame-Alignment maintenance and out-of-service thresholds for a 24 hour period The maintenance threshold must be greater than the out-of-service threshold.	dti/pra-14
LOOP	loop card	PRI2 Loop number PRI2 or DTI2 card slot for Option 11C only	dti/pra-14
LOOP	loop	DTI Loop number Must be defined in LD 17.	dti/pra-14
MAND	0-(15)-1440	Maintenance guard time (in minutes). For DTI2 only.	dti2-14
MCM	x y <cr>	M1 CT2 Mobility Pad value. . Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	mcmo-20
MFAO	YES NO <cr>	Multiframe Alignment Option DTI card will set bit 3 of timeslot 0 if loss of Multiframe Alignment Signal (MFAS) occurs (JDMI default) DTI card will not set bit 3 of timeslot 0 if loss of Multiframe Alignment Signal (MFAS) occurs (DTI2 default) No change is required.	dti/pra
MFF	(AFF) CRC	Multiframe Format The prompt appears only if CDTI2 = YES. CRC4 or Alternate Frame Format may be chosen. In the previous design, this prompt was issued for SDC2 (Option 11C DTI2) loops. Alternative Frame Format Cyclic Redundancy Check (CRC 4). CRC is prompted for Option 11C. For non-Option 11C, only AFF is supported.	dti/pra-14

Prompt	Response	Comment	Pack/Rel
MFSL	(0)-3	The MFS signals transmission level. The prompt appears when CISFW is set to MFS or MFA and the CISMFS package is equipped. The transmission level may be set to the following values: (0) = -7.3 db 1 = -5.0 db 2 = -3.5 db 3 = 0 DB	
MINP	8-(72)-248	Idle time between PPM pulses (in milliseconds)	kd3-20
MNG1	nnnM	Maintenance Guard time Group 1, where nnn = 1-(15)-240. Default = 15M.	dti/pa-14
MNG2	nnnM	Out-of-Service Guard time Group 1, where nnn = 1-(15)-240. Default = 15M.	dti/pa-14
NCG1	nnnM	No New Calls Guard time Group 1, where nnn = 1-(15)-240. Default = 15M.	dti/pa-14
NCG2	nnnS	No New Calls Guard time Group 2, where nnn = 1-(15)-240. Default = 15S.	dti/pa-14
NCSD	0-(15)-1440	1S-59S New Call Suppression Guard time in minutes and seconds. For DTI2 only.	dti2-14
NOOS	(NO) YES	The grade of service feat Enable current grade of service feat Alternate grade of service feat	dti/pa-18
NRCV (S)	abcd N	Number Received. For information about your response options, refer to "Signaling category assignment and modification" on page 793. If NRCV (S) not required	abcd-14
NTC	x y <cr>	Non-Transmission Compensated (Analog TIE). Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	dti/pa-14

LD 73

Prompt	Response	Comment	Pack/Rel
ONP	x y <cr>	On-Premises extension. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	dti/pa-14
OOSC	0-(5)-127	Out-of-Service Counter (Counts out-of-service occurrences since midnight) (DTI disabled) For DTI2 only.	dti2-14
OPX	x y <cr>	Off-Premises Extension. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	dti/pa-14
OSG1	nnnM	Out-of-Service Guard time Group 1, where nnn = 1-(15)-240.	dti2-14
OSG2	nnnS	Out-of-Service Guard time Group 2, where nnn = 1-(15)-240. Default = 15S.	dti2-14
OSGD	0-(15)-1440	Out-of-Service Guard time (in minutes). For DTI2 only.	dti2-14
P BRLS (R)	abcd N	Backward Release. For information about your response options, refer to "Signaling category assignment and modification" on page 793. This signal is mutually exclusive with the P RCTL (R) signal. If P BRLS (R) not required	abcd-18
P BRLS (S)	abcd N	Backward Release. For information about your response options, refer to "Signaling category assignment and modification" on page 793. This signal is mutually exclusive with P RCTL (S) and RCOD (S) signals. If P BRLS (S) not required	abcd-18
P BURS (R)	abcd N	Bring Up Receiver for L1 networking. For information about your response options, refer to "Signaling category assignment and modification" on page 793. If BURS (R) not required	abcd-14

Prompt	Response	Comment	Pack/Rel
P BURS (S)	abcd N	Bring Up Receiver for L1 networking. For information about your response options, refer to "Signaling category assignment and modification" on page 793. Uses switchhook flash timer for pulse duration time. If BURS (S) not required	abcd-14
P CALL (R)	abcd	Signal sent during seize by an incoming CO trunk. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-14
P CAS (R)	abcd N	Centralized Attendant Service (DTI2 only). For information about your response options, refer to "Signaling category assignment and modification" on page 793. If CAS (R) not required	abcd-14
P CAS (S)	abcd N	Centralized Attendant. For information about your response options, refer to "Signaling category assignment and modification" on page 793. Pulse time not variable. Prompted for DTI2 only. If CAS (S) not required	abcd-14
P DIGT (R)	abcd N	Decadic pulses. For information about your response options, refer to "Signaling category assignment and modification" on page 793. If DIGT (R) not required	abcd-14
P DIGT (S)	abcd N	Digit pulse timing from TDS (Bits P, X or U). For information about your response options, refer to "Signaling category assignment and modification" on page 793. JDMI default = PXXX If DIGT (S) signal not required	abcd-14
P EOS (R)	abcd N	End of Selection. For information about your response options, refer to "Signaling category assignment and modification" on page 793. If EOS (R) not required	abcd-14
P EOSB (S)	abcd N	End of Selection Busy. For information about your response options, refer to "Signaling category assignment and modification" on page 793. If EOSB (S) not required	abcd-14

LD 73

Prompt	Response	Comment	Pack/Rel
P EOSF (S)	abcd N	End Of Selection Free. For information about your response options, refer to "Signaling category assignment and modification" on page 793. If EOSF (S) not required	abcd-14
P ESNW (R)	abcd N	ESN Wink. For information about your response options, refer to "Signaling category assignment and modification" on page 793. If ESNW (R) not required	abcd-14
P ESNW (S)	abcd N	ESN Wink. For information about your response options, refer to "Signaling category assignment and modification" on page 793. Pulse time not variable. If ESNW (S) not required	abcd-14
P FRLS (R)	abcd N	Forward Release. For information about your response options, refer to "Signaling category assignment and modification" on page 793. This signal is mutually exclusive with CLRF (R) the signal. If P FRLS (R) not required	abcd-18
P FRLS (S)	abcd N	Forward Release. For information about your response options, refer to "Signaling category assignment and modification" on page 793. This signal is mutually exclusive with the CLRF (S) signal. If P FRLS (S) not required	abcd-18
P METR (R)	abcd N	ABCD bits value for received metering pulses. For information about your response options, refer to "Signaling category assignment and modification" on page 793. Bits P, X or U are selectable. Only two P bits may be selected. P METR (R) is prompted only when COT and DID trunks are equipped. Periodic Pulse Metering (PPM) package 101 is required. If METR (R) signal not required N must be selected when either a CDTI2 or a CSDTI2 cards is equipped. These cards do not support PPM.	ppm-14

Prompt	Response	Comment	Pack/Rel
P NXFR (R)	abcd N	Network Transfer. For information about your response options, refer to “Signaling category assignment and modification” on page 793. If not required	abcd-14
P NXFR (S)	abcd N	Network Transfer. For information about your response options, refer to “Signaling category assignment and modification” on page 793. Pulse time not variable. If NXFR (S) not required	abcd-14
P OPCA (R)	abcd N	Operator Calling. For information about your response options, refer to “Signaling category assignment and modification” on page 793. If OPCA (R) not required	abcd-14
P OPRC (R)	abcd N	Operator Recall for special services. For information about your response options, refer to “Signaling category assignment and modification” on page 793. Minimum three pulses of 160 milliseconds each. If OPRC (R) not required	abcd-14
P OPRS (R)	abcd N	Operator manual recall. For information about your response options, refer to “Signaling category assignment and modification” on page 793. If OPRS (R) not required	abcd-14
P RCOD (S)	abcd N	Release Control Originating party Disconnect. For information about your response options, refer to “Signaling category assignment and modification” on page 793. This signal is another pulsed SL-1 signal sent on incoming trunks when the originating party disconnects first. If RCOD (S) not required	abcd-15
P RCTL (R)	abcd N	Release Control. For information about your response options, refer to “Signaling category assignment and modification” on page 793. If RCTL (R) not required	abcd-14
P RCTL (S)	abcd N	Release Control. For information about your response options, refer to “Signaling category assignment and modification” on page 793. If RCTL (S) not required	abcd-14

LD 73

Prompt	Response	Comment	Pack/Rel
		Prompted when CLRB is unused or is defined the same as IDLE.	
P RRC (S)	abcd N	Register Recall (activated by Malicious Call Trace). For information about your response options, refer to "Signaling category assignment and modification" on page 793. If RRC(S) not required	abcd-14
P WNKS (R)	abcd N	Wink Start. For information about your response options, refer to "Signaling category assignment and modification" on page 793. If P WNKS (R) not required	abcd-18
P WNKS (S)	abcd N	Wink Start (corresponds to a pulsed seize. For information about your response options, refer to "Signaling category assignment and modification" on page 793. acknowledgment). If P WNKS (S) not required P WNKS (S) is prompted when SEZA (S) is not required.	abcd-18
PDCA	1-16 <cr>	Pad Category table (Pad Category Table1 cannot be changed or deleted) Print all the pad category tables	dti/pr-14
PERS	0-(100)-254 0-(50)-254	Persistence timer in milliseconds for far-end problems For DTI2 only. Group 2 Persistence timer and clearance timer (in 2 millisecond increments)	dti2-14
PPMD	(NO) YES	PPM Parameter Download not required PPM Parameter Download required	kd3-20
PRCS (S)	abcd N	PRCS. For information about your response options, refer to "Signaling category assignment and modification" on page 793. If PRCS (S) not required	abcd-14

Prompt	Response	Comment	Pack/Rel
PREF	0-159	Primary Reference Source loop for clock controller (non-Option 11C format)	dti/pa-14
	l s c	Source from a Basic Rate Interface Trunk (BRIT) S/T Interface Line Card (SILC) (non-Option 11C format) Where: <ul style="list-style-type: none"> • l = 0-156 (loop number must be zero or a multiple of four) • s = 0-1 • cc = 0-15 The SILC must have DSL 0 defined as a trunk and CLOK = YES in LD 27.	
	1-9	Source card for clock controller (Option 11C format) The response must be the same as CLKN above, or <cr> for free run. If source is a Basic Rate Interface Trunk (BRIT) S/T Interface Line Card (SILC) then the SILC must have DSL 0 defined as a trunk and CLOK = YES in LD 27.	
	<cr>	If REQ = NEW and carriage return is entered, then Primary Reference is free-run mode. If REQ = CHG, then Primary Reference is not changed. The loop or card must already be defined in LD 17 (prompt DLOP). Use <cr> for free-running mode. If <cr> is used, you are not prompted for the Secondary Reference (SREF). Precede with X to remove With Fiber Network Fabric:	fnf-25
PREF CK0	loop	Primary Reference DTI/PRI loop for Clock controller zero (non-Option 11C). The clock controller will derive its primary clock pulses from the loop selected here.	dti/pa-14
	1-9	Card number containing the primary clock reference for the Main cabinet (Option 11C) If a BRI trunk (BRIT) is the reference source then the SILC must have DSL 0 defined as a trunk and CLOK = YES in LD 27.	
	<cr>	Primary Reference remains at current setting	

LD 73

Prompt	Response	Comment	Pack/Rel
	X	Primary Reference reverts to the free-run mode	
PREF CK1	loop	Primary Reference DTI/PRI loop for Clock controller one. The response is the loop from which the clock controller will be deriving its primary clock pulses. (non-Option 11C)	dti/pri-14
	<cr>	Primary Reference remains at current setting	
	X	Primary Reference reverts to the free-run mode	
PRI	x y	1.5 Mb/s PRI/DTI trunk. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes.	gpri-18
	<cr>	Initial values	
PRI2	x y	2.0 Mb/s PRI/DTI trunk. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes.	gpri-18
	<cr>	Initial values	
RAIE	(NO)	Disable reporting of RAIE Group II alarm state with continuous CRC error information reporting	euro-20
	YES	Enable reporting of RAIE Group II alarm state with continuous CRC error information reporting	
RALM	1-(3)-128	Remote (yellow) Alarm clear threshold This is the number of "remote alarm clear" signals received in 24 hours. If the threshold is reached the DTI/PRI must be restored to service manually.	dti/pri-14
RATS	1-(10)-15	The number of consecutive seconds the firmware has to check and validate error rate condition.	dti/pri-18
REPT	(1)-5	Number of OPCA (R) pulses	dti/pri-14
REQ		Request	dti/pri-14
	CHG	Change existing data block	
	END	Exit Overlay program	
	NEW	Create a new data block	
	OUT	Remove data block	
	PRT	Print the specified data block	
SASU	0-32256	Seize Acknowledge Supervision period (in milliseconds)	sasu-18

Prompt	Response	Comment	Pack/Rel
		DTI2 default = 1920; JDMI default = 4992	
SATT	x y	Satellite Analog TIE Trunks. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes.	gpri-18
	<cr>	Initial values	
SDTT	x y	Satellite Digital TIE Trunks. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes.	gpri-18
	<cr>	Initial values	
SEZA (R)	abcd	Seize Acknowledgment. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-14
	N	If SEZA (R) not required	
SEZA (S)	abcd	Seize Acknowledgment. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-14
	N	If SEZA (S) not required	
SEZD (R)	abcd	Seize for voice or data calls from a non-SL-1. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-18
SEZD (R)	abcd	Seize for data calls between SL-1s. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-18
	N	If SEZD (R) signal not required	
SEZD (S)	abcd	Seize for data calls (only recommended for SL-1 to SL-1 applications). For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-14
	N	If SEZD (S) not required	
SEZV (R)	abcd	Seize for voice calls. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-14

LD 73

Prompt	Response	Comment	Pack/Rel
	N	If SEZV (R) signals not required	
SEZV (S)	abcd	Seize for voice calls (only recommended for SL-1 to SL-1 applications). For information about your response options, refer to "Signaling category assignment and modification" on page 793.	abcd-14
	N	If SEZV (S) not required	
SICA	2-16 1 <cr>	Signaling Category If REQ = PRT, then 1 must be input to print default table If REQ = PRT, all signaling tables are printed	abcd-14
SLP	mc mt oc ot	Slip count. Where: <ul style="list-style-type: none">• mc = Maintenance threshold slip count 1-(5)-255• mt = Maintenance threshold time default = 24H• oc = Out-of-service threshold slip count 1-(30)-255• ot = Out-of-service threshold time default = 1H Threshold times must be one of the following: <ul style="list-style-type: none">• nnnnT, nnnS, nnnM, or nnH Where: <ul style="list-style-type: none">• nnnn is an integer• T,S,M, or H show the increments of use The time values are as follows: <ul style="list-style-type: none">• nnnnT = 20 millisecond increments (nnnn = 20-5000)• nnnS = 1 second increments (nnn = 1-240)• nnnM = 1 minute increments (nnn = 1-240)• nnH = 1 hour increments (nn = 1-24)	dtp/pra-14

Prompt	Response	Comment	Pack/Rel
	NS mt dt ct ot	<p>Slip count maintenance threshold. Where:</p> <ul style="list-style-type: none"> • NS = Error count values are in the range: 1-(20)-255 • mt = Maintenance threshold time (MNT) (default = 30S) • dt = No new data calls threshold time (NNDC) (default = 10S) • ct = No new calls threshold time (NNC) (default = 10S) • ot = Out-of-service threshold time (OOS) (default = 6S) <p>Response options for mt, dt, ct, ot:</p> <p>Threshold time entries end in one of the following letters: T, S, M, H. These letters indicate the time increment to be used. Response options for mt, dt, ct and ot are as follows:</p> <ul style="list-style-type: none"> • 20T–5000T = 20 millisecond increments • 1S–240S = 1 second increments • 1M–240M = 1 minute increments • 1H–24H = 1 hour increments <p>Important note: The following requirements must be met:</p> <ul style="list-style-type: none"> • mt = >dt = >ct = >ot 	dti/prs-14
SOS	abcd	Special Operator Signal. For information about your response options, refer to “Signaling category assignment and modification” on page 793.	abcd-14
	N	Undefined Prompted when OPRC = N.	

LD 73

Prompt	Response	Comment	Pack/Rel
SREF		Secondary Reference. Prompted when PREF is not free-run.	dti/pr-14
	0-159	Source loop for clock controller (non-Option 11C format)	
	l s c	Source from a Basic Rate Interface Trunk (BRIT) S/T Interface Line Card (SILC) (non-Option 11C format) Where: <ul style="list-style-type: none">• l = 0-156 (loop # must be 0 or a multiple of 4)• s = 0-1• cc = 0-15 The SILC must have DSL 0 defined as a trunk and CLOK = YES in LD 27.	
	1-9	Source card for clock controller (Option 11C format) If source is a Basic Rate Interface Trunk (BRIT) S/T Interface Line Card (SILC) then the SILC must have DSL 0 defined as a trunk and CLOK = YES in LD 27. The loop or card must already be defined in LD 17 at the DLOP prompt. Precede with X to remove.	
	<cr>	Free-running mode With Fiber Network Fabric: <ul style="list-style-type: none">• l = (0-255) Option 81C	fnf-25
SREF CK0	loop	Secondary Reference DTI/PRI loop for Clock controller zero (non-Option 11C). The response is the loop from which the clock controller will be deriving its secondary clock pulses.	dti/pr-14
	1-9	Card number of DTI2/PRI2/SILC containing the secondary clock reference for the main cabinet (Option 11C) If a BRI trunk (BRIT) is the reference source then the SILC must have DSL 0 defined as a trunk and CLOK = YES in LD 27.	basic-24
	<cr>	Secondary Reference remains at current setting	
	X	Secondary Reference reverts to the free-run mode	

Prompt	Response	Comment	Pack/Rel
SREF CK1	loop <cr> X	<p>Secondary Reference DTI/PRI loop for Clock controller one. The response is the loop from which the clock controller will be deriving its secondary clock pulses. (non-Option 11C)</p> <p>Secondary Reference remains at current setting</p> <p>Secondary Reference reverts to the free-run mode</p> <p>The clock controller prompts will only appear for clocks which are valid for the machine type being configured.</p> <p>The prompts will only appear if the system is in a valid state for the definition of the DTI2/PRI2/BRIT clock controller data (i.e., the 1.5 Mb/s DTI clock references must be unused or in a free-run mode).</p>	dti/pra-14
SRIM	(1)-127	<p>Slip Rate Improvement Monitoring time (the amount of time in minutes before returning trunks either to service or to the SRGT state)</p> <p>After the tracking or non-tracking mode frame slippage out-of-service threshold is exceeded, the slip rate is monitored for improvement.</p> <p>If the non-tracking maintenance threshold exceeds SRMM or fewer times in the duration of this timer, then the trunks are returned to service. Otherwise, this timer is reset and monitoring continues.</p>	dti/pra-15
SRMM	1-(2)-127	<p>Slip Rate Maintenance Maximum</p> <p>Number of times the Slip Rate exceeds the maintenance limit while waiting for Slip Rate improvement during the time window specified at the SRIM prompt.</p>	dti/pra-14
SRNT	1-(15)-1024 1-(3)-1024	<p>Slip Rate Non-Tracking mode maintenance and out-of-service thresholds</p> <p>These are frame slip rate thresholds for the non-tracking mode.</p> <p>The first value is the maintenance threshold in seconds. The second value is the out-of-service threshold in seconds, the amount of time in which 10 slips occur.</p>	dti/pra-14

LD 73

Prompt	Response	Comment	Pack/Rel
SRTK	1-(5)-24 1-(30)-3600	Slip Rate Tracking mode maintenance (in hours) and out-of-service thresholds (per hour) These are frame slip rate thresholds for the tracking mode. The first value is the maintenance threshold or the elapsed time (in hours) between frame slips. The default is 1 slip in 5 hours. The second value is the out-of-service threshold or the number of slips per hour. The default is 30 slips in 1 hour.	dti/pr-14
SZNI	(NO) YES	PSTN incoming seizure during lockout of MFAS and far-end fault states allowed	
TGLR	(NO) YES	Toggle reserves bits in Frame 0, Timeslot 0. Prompted for JDMI loops.	jdmi-14
TIME	1-(2)-15	Pulse on time	
	1-(8)-15	Pulse off time	
	(100)-150	Time for EOSF (S) (in milliseconds)	abcd-14
	64-(128)-192	Time of OPCA (R) pulse (in milliseconds)	abcd-14
	10-(100)-630	Time of Register Recall signal timer {RRC (S)} in milliseconds. This defines the flash duration for 2.0 Mbit DTI trunks.	emct-20
	64-(128)-192	Length of BURS (R) pulse (in milliseconds)	abcd-14
	xxxx yyyy	abcd-14 Minimum and maximum time range for OPRS (R) (in milliseconds). Where: <ul style="list-style-type: none">• xxxx = 8-(48)-2040• yyyy = xxx-(128)-2040	abcd-14
	50 80 90 (150) 800	Delay time for the SEZA signal (in milliseconds)	abcd-14

Prompt	Response	Comment	Pack/Rel
	20-(140)-500	20-(290)-500 Minimum and maximum length of WNKS (R) pulse (in milliseconds).	abcd-14
	64-(128)-192	Length of BURS (R) pulse (in milliseconds)	abcd-14
	40-(240)-480	Maximum time METR signal can be on (in milliseconds)	
	(0)-800	Milliseconds Prompted when the abcd bits entered in response to the CLFR (S) prompt are different from the abcd bits of the IDLE signal	abcd-14
	100-(150) 300	Time value is stored (in multiples of 10 milliseconds)	
	150 (64)-320	Timer value in milliseconds is fixed 64-(256)-320 Length of EOS (R) pulse (in increments of 8 milliseconds)	
	96-(128)-320	96-(256)-320 Time (stored in multiples of 8 milliseconds)	
	10-(220)-630	Time for P WNKS (S) (in increments of 10ms)	abcd-18
	16-(96)-1000	16-(160)-1000 Minimum and maximum acceptable pulse duration (in increments of 8 ms)	
	10-(150) 630	Prompted for pulsed signals (in increments of 10 ms)	
	10-(600)-2000	Prompted for pulsed signals (in increments of 10 ms)	
	10-(600)-2000	Pulse length (in increments of 10 milliseconds)	
	16-(296)-2000	16-(960)-2000 Minimum and maximum acceptable pulse duration (in increments of 8 milliseconds)	

LD 73

Prompt	Response	Comment	Pack/Rel
		10-(150)-630 Only prompted for pulsed signals. Pulse length (in increments of 10 milliseconds)	
		16-(136)-504 16-(288)-504 Minimum and maximum length of P WNKS (R) pulse (in increments of 8 milliseconds)	abcd-18
		16-(56)-1000 16-(296)-1000 Only prompted for pulsed signals. Pulse length (in increments of 8 milliseconds)	
		16-(296)-2000 16-(960)-2000 Only prompted for pulsed signals. Pulse length (in increments of 8 milliseconds)	
		10-(600)-2000 Only prompted for pulsed signals. Pulse length (in increments of 10 milliseconds)	
		16-(296)-2000 16-(960)-2000 Only prompted for pulsed signals. Pulse length (in increments of 8 milliseconds)	
TNLS		Terminal Number List (for the PRT command)	dtp/pra-14
	(NO)	Will not print the list of trunk TNs using the requested table (pad category or SICA) following the table number.	
	YES	Will print the list of trunk TNs using the requested table (pad category or SICA) following the table number.	
TOLL	x y	Toll call pad data on line card. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x = 0 - 31 and y = 8-39. The values entered are pad values to be used for the 500/2500 TN on the line card connected to the DTI2 call. Valid codes and their corresponding dB values are listed in Table 10 on page 792.	chtl-21
TOLT	x y	Toll call pad data on DTI2 card. Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes.	chtl-21

Prompt	Response	Comment	Pack/Rel
TRC	x y <cr>	Transmission Compensated (Analog TIE). Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	dti/pa-14
TRSH	0-15	Threshold set Enter this number in LD 17 when defining a DTI/PRI loop. Use X0-15 to remove TRSH. Note: The LD 17 DLOP/TRSH associated with this LD 73 TRSH must be removed first. Precede with X to remove.	dti/pa-19
TYPE		Type of data block	dti/pa-14
	BRIL	Basic Rate Interface Line data block with Basic Rate Interface Line Application (BRIL) package 235	
	BRIT	Basic Rate Interface Trunk data block with Integrated Service Digital Network BRI Trunk Access (BRIT) package 233.	
	DDB	1.5 Mb/s DTI data block	dti/pa-14
	DTI	1.5 Mb/s DTI with International 1.5/ 2.0 Mb/S Gateway (GPRI) package 167 data block	grpi-18
	DTI2	2.0 Mb/s DTI data block	
	JDMI	Japan Digital Multiplex Interface data block (not supported on Option 11C)	jdmi-12
	PRI	1.5 Mb/s PRI data block with International 1.5/ 2.0 Mb/s Gateway (GPRI) package 167	grpi-18
	PRI2	2.0 Mb/s PRI data block	
UCFS	abcd	Unequipped Channel Fault Signal - ABCD bits to be sent on unequipped channel. The default is 1101. Allowable input for each of the four fields is 0 or 1. For information about your response options, refer to "Signaling category assignment and modification" on page 793.	

LD 73

Prompt	Response	Comment	Pack/Rel
VNL	x y <cr>	Via Net Loss (Analog TIE). Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	dti/pri-14
XEM	x y <cr>	Extended Peripheral Equipment E&M Trunk (Analog TIE trunk). Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Prompts and responses for setting pad values" on page 786 for more information about x and y codes. Initial values	gpri-18
XUT	x y	Extended Peripheral Equipment Universal Trunk (Analog CO trunk). Where x = Rx code (receive) and y = Tx code (transmit). Response range for x and y is: 0-26. See "Default Pad Category 1 values (PDCA 1) (DTI/PRI with GPRI pkg 167)" on page 789 for more information about x and y codes.	gpri-18

LD 74: Digital Private Network Signaling System Link

Overlay program 74 allows data blocks for Digital Private Network Signaling System Number 1 (DPNSS1) and Digital Access Signaling System Number 2 (DASS2) protocols to be created or modified.

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	aaaa	Type of data block (aaaa = DDSL, DTSL, LSSL, LSRC, or LSVC)
LSSL	xx	Low Speed Signaling Link
RATE	a...a	Baud rate for Low Speed Signaling Link (aaaa = (EXT), 110, 150, 300, 600, 1200, 2400, 4800, 9600, 19K, 56K, or 64K)
S2	(0)-1	Switch 2 mode
HTYP	aaaa	Hardware Type (aaaa = DCHI, DCHX, or MSDL)
DDSL	0-n	DPNSS link number
DTSL	0-159	Digital Trunk Signaling Link number
SIGL	DA	Level 2 Signaling (DASS2)
DDCS	0-159	Loop for DPNSS Channel Switch
DTCS	0-159	Digital Trunk Channel Switch loop number
PRIV	(YES) NO	Private link
- SIDE	aaa	Side for Termination (aaa = (AET) or BNT)
- MWIF	a...a	Message Waiting Interface (a...a = (STD) or ISDM]
- SAT	(NO) YES	Satellite
- - NT2	1-(26)-100	Post retransmission acknowledgment delay.
L2_RST	(YES) NO	Indicates if Layer 2 could be reset during a system initialize.
FLOW CNTL	(NO) YES	Flow Control
- BRST PARM	xx	Burst Parameter set on public network (xx = (0) 4, 8, 16, or 32)
- - REPL PARM	x	Replenishment Parameter set on public network (x = 1, 2, 4, or 8)
CNTL	(NO) YES	Change Control timers and counters
- ALRM	aaa pp mm cc	Alarm timers (aaa = AIS, DAI, FAE, HER, LOI, TBF, or TSF; pp = persistence time; mm = monitor time; cc = repeat threshold time)
- CNTR	aaa x	Counter threshold (aaa = CRT, TMT, or SCT; x = threshold value)

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ALRM		Alarm timers. For the following response alternatives, pp = Persistence time, mm = Monitor time and cc = Repeat count threshold.	dpnss1/dass2-16
	AIS pp mm cc	Alarm Indication Signal Where: pp = 0-(1)-15 minutes, mm = 0-(1)-24 hours and cc = 0-(4)-15.	
	DAI pp mm cc	Distant Alarm Indication Where: pp = 0-(1)-15 minutes, mm = 0-(1)-24 hours and cc = 0-(5)-15.	
	FAE pp mm cc	Frame Alignment Error Where: pp = 0-(2)-15 seconds, mm = 0-(1)-24 hours and cc = 0-(4)-15.	
	HER pp mm cc	High Error Where: pp = 0-(1)-15 minutes, mm = 0-(1)-24 hours and cc = 0-(10)-15.	
	LOI pp mm cc	Loss Of Input Where: pp = (0)-15 seconds, mm = (0)-24 hours and cc = (0)-15.	
	TBF pp mm cc	Transmit Buffer Full Where: pp = 0-(5)-15 seconds, mm = (0)-24 hours and cc = 0-(1)-15.	
	TSF pp mm cc	Transmit Signaling Failure Where: pp = (0)-15 seconds, mm = (0)-24 hours and cc = (0)-15.	
BRST PARM xx		Burst Parameter set on public network. You may respond with: (0), 4, 8, 16, or 32.	dpnss1/dass2-16
CNTL	(NO) YES	Do not change Control timers and counters Change Control timers and counters	dpnss1/dass2-16

LD 74

Prompt	Response	Comment	Pack/Rel
CNTR	CRT 0-(120)-255 TMT 0-(50)-255 SCT 0-(20)-255	Counter threshold Channel Reset Threshold Test Message Threshold Stop Count Threshold If 255 is entered, the threshold is set to infinity.	dpnss1/dass2-16
DDCS	xxx	Loop for DPNSS Channel Switch Where: <ul style="list-style-type: none">• xxx = 0-159• xxx = 1-9, 11-19, 21-29, 31-39, 41-49 (Option 11C) DDCS is prompted when TYPE = DDSL.	dpnss1/dass2-16
DDSL	0-n	DPNSS link number. Where: <ul style="list-style-type: none">• n = 15 for NT5K35AA or NT5K75AA in standard mode (S2 = 0)• n = 159 for NT5K75AA in expanded mode (S2 = 1) DDSL: is prompted when TYPE = DDSL.	dpnss1/dass2-16
DTCS	0-159	Digital Trunk Channel Switch loop number Prompted when TYPE = DTSL. (Not for Option 11C)	dass2-16
DTSL	0-159	Digital Trunk Signaling Link number. Prompted when TYPE = DTSL. (Not for Option 11C)	dass2-16
FLOW CNTL	(NO) YES	Flow Control FLOW CNTL is prompted if PRIV = NO.	dpnss1/dass2-16
HTYP		Hardware Type	dpnss_es-21
	DCHI	DPNSS1, DASS2 or APNSS link configured with the NT5K35 DCHI card or on the NT5K75 DCHI card in standard mode.	
	DCHX	DPNSS1 or DASS2 link configured with the NT5K75 DCHI card in the expanded mode.	
	MSDL	DPNSS1, DASS2 or APNSS link configured with the MSDL card.	

Prompt	Response	Comment	Pack/Rel
L2_RST	(YES) NO	Indicates if Layer 2 could be reset during a system initialize. On certain systems, for example System Y and SX2000, established calls would be released if the Layer 2 is reset during an initialize. This prompt should only be set to NO when using NTAG54AA type Dual DCH Daughter board on a NTCK43AB DCH PRI pack. Note: If this Option is set to NO on an NT6D11 type pack, the pack would be left disabled after the initialize.	ida- 23
LSSL	xx	Low Speed Signaling Link Link number identifying the D-channel to be used for APNSS.	dpnss1-18
MWIF	(STD) ISDM	Message Waiting Interface Standard message waiting interface Plessey ISDX switch with remote message notification	samm-20
NT2	1-(26)-100	Minimum post retransmission acknowledgment delay. This is the minimum period of time after the expiry of NL and NTI that the system will wait for acknowledgment before reporting a retransmission failure to level 3 in 20 ms units.	dpnss_es-21
PRIV	(YES) NO	For a Private link to another PBX For a link to the public exchange Not prompted for APNSS.	dpnss1/dass2-16
RATE	(EXT) 110 150 300 600 1200 2400 4800 9600 19K 56K	Baud Rate for Low Speed Signaling Link 110 bits per second 150 bits per second 300 bits per second 600 bits per second 1200 bits per second 2400 bits per second 4800 bits per second 9600 bits per second 19 kilobits per second 56 kilobits per second	dpnss1/dass2-18

LD 74

Prompt	Response	Comment	Pack/Rel
	64K	64 kilobits per second	
REPL PARM		Replenishment Parameter set on public network.	dpnss1/dass2-16
	x	You may enter: 1, 2, 4, or 8.	
REQ		Request	basic-1
	CHG	Change existing data block.	
	END	Exit Overlay program	
	NEW	Create a new data block	
	OUT	Remove data block	
	PRT	Print data block	
S2		Switch 2 mode (the mode selected with the switch S2 located on the NT5K75AA DCHI pack)	dpnss1/dass2-16
	(0)	NT5K35AA DCHI pack or NT5K75AA DCHI pack operating in standard mode	
	1	NT5K75AA DCHI pack operating in expanded mode	
SAT	(NO) YES	Satellite	dpnss_es-21
SIDE	(AET) BNT	A Side (Exchange Termination) B Side - PBX Termination	dpnss1/dass2-16
SIGL	DA	Level 2 Signaling (DASS2)	dpnss1/dass2-16
TYPE		Type of data block	dpnss1/dass2-16
	DDSL	DPNSS Link (NT hardware) data block	
	DTSL	Digital Trunk Signaling Link (GPT hardware) data block. Not supported on Option 11C.	
	LSSL	Low Speed Signaling Link data block. Required for APNSS.	
	LSRC	Low Speed Channel data block. Accepted when REQ=PRT.	
	LSVC	Low Speed Virtual Channel data block. Accepted when REQ=PRT.	

LD 79: Virtual Network Service

Overlay program 79 allows the implementation of Virtual Network Services feature.

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request
TYPE	aaa	Type of data block
CUST	xx	Customer number
VNDN	1-4000 n...n	Number of contiguous VNS Directory Numbers
<p>When REQ = OUT and VNDN = XALLVNDNS., the switch outputs the following: REMOVE ALL VDN BLOCKS? The following prompt then appears:</p>		
CONF	(NO) YES	(Deny) Confirm intent to remove all VDN blocks

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
CONF	(NO) YES	Confirm Deny intent to remove all VDN blocks Confirm intent to remove all VDN blocks CONF is prompted if REQ = OUT and VNDN = XALLVNDNS.	vns-22
CUST	0-99 0-31	Customer number associated with this function as defined in LD 15 Option 11C	basic-1
REQ	CHG DIS END ENL NEW OUT PRT	Request Change existing data block Disable a block of contiguous VDN to prevent the use of a VDN in this block Exit Overlay program Enable a block of contiguous VDN Create Virtual Network Service data block Remove Virtual Network Service data block Print Virtual Network Service data block	basic-1
TYPE	VNS	Type of data block Virtual Network Service data block	basic-1
VNDN	1-100 n...n x...x 1-4000 xxxxxxxx XALLVDNS	Number of contiguous VNS Directory Numbers, and first VNS DN Individual VDN. This entry is accepted if REQ = NEW, OUT, DIS or ENL. Number of contiguous VDNs and first VDN. This entry is accepted if REQ = NEW. Remove all VNS data blocks. This entry is accepted if REQ = OUT. VNDN is reprompted until a carriage return is entered.	vns-16

LD 81: Features and Station Print

Overlay program 81 is used to print a list or count of telephones with selected features. It also allows last service change date information to be printed.

A TN which is the Multiple Appearance Redirection Prime (MARP) is indicated by an “M” following FEAT (when TYPE = MCN, SCN, MCR, or SCR).

LD 81

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request (aaa = LST, CNT, or END)
CUST	xx xx	One Customer or a range of Customer numbers
DATE	a...a	Print data from activity date specified (You may enter: dd mmm yyyy or ACT)
PAGE	(NO) YES	Data printed on a per page basis
DES	d...d	1-6 alphanumeric character Office Data Administration System
FEAT	aaaa	Features requested (FEAT responses begin on page 843)
- HMDN	x..x	Home Directory Number
SGRP	0-999 0-999	Station Group
RNPG	xx yy	Ringling Number Pick Up Group
LSNO	xx yy	List Number
NCOS	xx yy	Network Class of Service
- ADJUST PAPER THEN <cr>	<cr>	Starts printing
NACT	(NO) YES	Next Activity

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ADJUST PAPER THEN	<cr>	Starts printing Prompted when PAGE = YES	basic-1
CUST	xx xx <cr>	One Customer or a range of Customer numbers associated with this function as defined in LD 15 All Customers	basic-1
DATE	dd mmm yyyy	Print data from activity date specified. Where: <ul style="list-style-type: none"> • dd = day (0-31) • mmm = month (JAN-DEC) • yyyy = year 	basic-1
	ACT <cr>	Print data from last Activity date. Disregard date restrictions.	
DES	d...d dddd d+ + <cr>	1-6 alphanumeric character Office Data Administration System (ODAS) Station Designator Print data for stations with specific DES. Print data for stations with a DES starting with d. Print data for all stations with no DES. Print data for all stations.	odas-1
FEAT		Features requested Enter a specific feature mnemonic or one the following for groups of features: ALL, COS, DNK, SETS, SCL, RNP or 500. FEAT is repeated until <cr> is entered.	basic-1
	2000 3000 4020 500 3900	All M2000 telephones M3000 Touchphone M4020 telephone (no longer supported) 500/2500 type telephone M3901, M3902, M3903, M3904, M3905 Print both MNL and DIP telephones. 2500 type telephones are requested by DTN entry.	dset-7 tset-7 basic-8 basic-1 basic-24

LD 81

Prompt	Response	Comment	Pack/Rel
AAA		Automatic Answerback Allowed	aab-1
AAD		Automatic Answerback Denied	
AAG		Answer call from Agent key	
AAK		Automatic Answerback Key	aab-1
ABDA		Abandoned call record and time to answer Allowed	supp-18
ABDD		Abandoned call record and time to answer Denied	
ACD		ACD in calls key	bacd-1
ACNT		Assignment of activity codes allowed	bacd-13
ADD		Automatic Digit Display equipped	ddsp-1
ADL		Autodial key	optf-1
ADV		Data port Verification allowed	bacd-5
AGN		ACD Agent	bacd-1
AGT		ACD Agent's key	
AGTA		ACD services for 500/2500 telephone Allowed	bacd-16
AGTD		ACD services for 500/2500 telephone Denied	
AHA		Automatic Hold Allowed	supp-10
AHD		Automatic Hold Denied	
ALL		All features When REQ = LST, only the features actually programmed on telephones are listed along with the associated TN. Features not listed are RNPk, DIP and MNL. When REQ = CNT, features available in the system software are listed even if they are not programmed on any telephone. Not listed are RNPk, 500, 2500, SL-1, 2000, and 3000.	basic-1
AMG		ACD Answer/Monitor Emergency call key	supp-14
AO3		Three-party conference key	basic-1
AO6		Six-party conference key	
ARC		Attendant Recall key	basic-1

Prompt	Response	Comment	Pack/Rel
	ARHA	Audible Reminder of Held Call Allowed	basic-14
	ARHD	Audible Reminder of Held Call Denied	
	ASCA	Alarm Security Allowed	ohas-18
	ASCD	Alarm Security Denied	
	ASP	ACD Answer Supervisor call key	iani-14
	ATW	ACD Call Waiting time indication key	
	AUTD	Authorization Code Denied	ssau-19
	AUTR	Authorization Code Restricted	
	AUTU	Authorization Code Unrestricted	
	AWC	ACD Calls Waiting display key	
	BFEA	Boss Secretary Filtering Enhancement Allowed	ffcsf-24
	BFED	Boss Secretary Filtering Enhancement Denied	
	BFS	Busy Forward Status key	bfs-20
	BNRA	Busy Number Redial Allowed	ffc-21
	BNRD	Busy Number Redial Denied	
	BRCA	Recall to boss Allowed	ffcsf-24
	BRCD	Recall to boss Denied	
	C6A	Six-Party Conference Allowed	basic-10
	C6D	Six-Party Conference Denied	
	CA	Combined No Hold Conference and Autodial	basic-14
	CAS	Centralized Attendant Service	casm-1
	CCBA	Collect Call Blocking Allowed	ccb-21
	CCBD	Collect Call Blocking Denied	
	CCOS	Controlled Class of Service key	ccos-7
	CCSA	Controlled Class of Service Allowed	
	CCSD	Controlled Class of Service Denied	
	CDCA	Conferee Display Count Allowed	basic-23
	CDCD	Conferee Display Count Denied	
	CDMA	Station Activity Records Allowed	mct-20
	CDMD	Station Activity Records Denied	

LD 81

Prompt	Response	Comment	Pack/Rel
	CFHA	List/count sets with CFHA CLS	cfho-20
	CFHD	List/count sets with CFHD CLS	
	CFTA	Call Forward by Call Type Allowed	basic-10
	CFTD	Call Forward by Call Type Denied	
	CFW	Call Forward key	basic-1
	CFXA	Call Forward number to External DN Allowed	basic-10
	CFXD	Call Forward number to External DN Denied	
	CHD	Combined No Hold Conference and Direct Hot Line	basic-14
	CHG	Charge Account key	fca-1
	CHL	Combined No Hold Conference and Hot Line list	basic-14
	CLTA	Network Call Trace Allowed	basic-17
	CLTD	Network Call Trace Denied	
	CMSA	Command and Status link Allowed	csi-8
	CNAA	CLASS Calling Name Multiple Data Format Allowed.	cname- 23
	CNAD	CLASS Calling Name Denied.	cname- 23
	CNDA	Call Party Name Display Allowed	cpnd-10
	CNDD	Call Party Name Display Denied	
	CNIA	Call Number Identification Allowed	pra-12
	CNID	Call Number Identification Denied	
	CNTA	Network ACD Countdown Allowed	nacd-15
	CNTD	Network ACD Countdown Denied	
	CNUA	CLASS Calling Number Multiple Data Format Allowed.	cnumb- 23
	CNUD	CLASS Calling Number Denied.	cnumb- 23
	CNUS	CLASS Calling Number Single Data Format Allowed.	cnumb- 23
	COS	Print stations with Class of Service restrictions. These are telephones with equipped with C6A, C6D, CMSA, CNDA, CNDD, CTD, CUN, DSI, FRE, FR1, FR2, NCOS, SFA, SFD, SRE, TLD, TTA, TTD, UNR and VMA.	basic-1

Prompt	Response	Comment	Pack/Rel
CPFA		Forced Camp-On from another set Allowed	povr-15
CPFD		Forced Camp-On from another set Denied	
CPN		Display Calling Party Number key	cpnd-10
CPTA		Forced Camp-On to another set Allowed	ffc-15
CPTD		Forced Camp-On to another set Denied	
CRA		Continuous Ring Allowed	basic-14
CRD		Continuous Ring Denied	
CS		Combined No Hold Conference and Speed Call	
CSD		Conferee Selectable Display key	basic- 23
CTD		Conditionally Toll Denied	basic-1
CUN		Conditionally Unrestricted	
CWA		Call Waiting Allowed	basic-1
CWD		Call Waiting Denied	
CWT		Call Waiting key	
DAG		ACD Display Agents key	bacd-1
DAPA		Display of Access Prefix Allowed	isdn-24
DAPD		Display of Access Prefix Denied	
DCFW		Default call forward for Phantom TNs Report includes Virtual and Host terminals	phtn-20 arie-25
DDGA		DN Display on other set Allowed	sdd-21
DDGD		DN Display on other set Denied	
DDS		Digit Display allowed	ddsp-1
DDV		Data port Verification denied	amp-5
DELA		Dealer Allowed	ohol-20
DELD		Dealer Denied	
DIG		Dial Intercom Group	di-1
DIP		Dial Pulse telephone (500 type)	bssic-1
DLO		Digital Long line COS	ffc-16

LD 81

Prompt	Response	Comment	Pack/Rel
	DNAA	ANI DN used as the customer Listed Directory number	cist-21
	DNAD	Outgoing CDTI2/CSDTI2 route used as DN in ANI message	
	DNDA	Dialed Name Display Allowed	cpnd-13
	DNDD	Dialed Name Display Denied	
	DNK	Telephones with MCN, MCR, SCN, and SCR keys	basic-1
	DPU	DN Pickup key	grp-1
	DPUA	DN Pickup Allowed	dcp-12
	DPUD	DN Pickup Denied	
	DRC	DID Route Control	basic-14
	DRDA	Distinctive Ringing by Directory Number Allowed.	edrg-24
	DRDD	Distinctive Ringing by Directory Number Denied.	
	DRG1	Digital telephone Distinctive Ringing (high/fast)	drng-7
	DRG2	Digital telephone Distinctive Ringing (high/slow)	
	DRG3	Digital telephone Distinctive Ringing (low/fast)	
	DRG4	Digital telephone Distinctive Ringing (low/slow)	
	DSH	Digital Short line COS	ftc-16
	DSI	Data Service access or IS Server TN allowed	xcti-16
	DSP	Digit Display key	ddsp-1
	DTA	Data set	basic-5
	DTN	Digitone dial telephone (2500 type)	basic-1
	DWC	ACD Display Waiting Calls key	bacd-1
	ENG	English language display for M2317	dlt2-12
	EOVR	Enhanced Override key	povr-15
	FAXS	Facsimile servers	faxs-18

Prompt	Response	Comment	Pack/Rel
	FBA FBD	Call Forward Busy Allowed Call Forward Busy Denied	optf-1
	FITA FITD	Flexible Incoming Tones Allowed Flexible Incoming Tones Denied	basic-14
	FLXA FLXD	Flexible voice/data TN allowed Flexible voice/data TN denied	digital_set-22
	FNA FND	Call Forward No Answer Allowed Call Forward No Answer Denied	basic-1
	FR1 FR2 FRE	Fully Restricted class 1 Fully Restricted class 2 Fully Restricted	basic-1
	FRN	French language display for M2317	dlt2-12
	FTTC FTTR FTTU	Flexible Trunk to Trunk Connections Conditional Flexible Trunk to Trunk Connections Restricted Flexible Trunk to Trunk Connections Unrestricted	basic-23 basic-23 basic-23
	GHD	Group Hunt Denied key	grp-1
	GPU	Group Call Pickup key	dcp-12
	GPUA GPUD	Group call Pickup Allowed Group call Pickup Denied	dcp-12
	GRC	Group Recall key	grp-1
	HBTA HBTD	Hunt by call Type Allowed Hunt by call Type Denied	supp-10
	HFA HFD	Handsfree Allowed M2616 Handsfree Denied M2616	arie-14
	HLD	LOGIVOX Telephone Hold key	supp-10
	HOTD HOTL	Enhanced Hot Line, Direct entry method Enhanced Hot Line, List entry method	hot-10
	HPR	High Priority station	basic-1

LD 81

Page 850 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	HSPA HSPD	Hospitality Management Allowed Hospitality Management Denied	hosp-16
	HSTA HSTD	Host Terminal Allowed Host Terminal Denied	arie-25
	HTA HTD	Hunting Allowed Hunting Denied	basic-1
	HTL	Hot Line	hot-10
	i2004	Internet Telephone	mit-25
	IAMA	ICP Answering Machine Denied/Allowed	icp-16
	ICDA ICDD	Internal CDR Allowed Internal CDR Denied	icdr-10
	ICF	Internal Call Forward key	icf-19
	IMA	IMS or IVMS Allowed	ims-2
	IMM	Immediate	xct1-16
	IPNA	Intercept Position Allowed	icp-14
	IRA IRD	Incoming Ringing line preference Allowed Incoming Ringing line preference Denied	1sel-4
	IRGA	Interrogation Set Allowed	icp-14
	ITGE	Incoming Trunk Group Exclusion	baut-10
	KLS	Key/lamp Strip	basic-1
	LDN	Listed Directory Number (DN)	dldn-12
	LDTA LDTD	Line Disconnect Tone allowed Line Disconnect Tone denied	basic-17
	LED	LED state for ACD agents	supp-10
	LLC1 LLC2 LLC3	Line Load Control level 1 Line Load Control level 2 Line Load Control level 3	11c-10

Prompt	Response	Comment	Pack/Rel
LLCA		Line Load Control Allowed	
LLCN		Line Load Control off	
LMPN		Red LED on Meridian Modular Telephone reflects the status of the mailbox associated with the PDN	vmba-24
LMPX		Red LED on Meridian Modular Telephone reflects the status of the mailbox associated with the PDN and non-PDNs	
LNA		Last Number Redial Allowed	1nr-8
LND		Last Number Redial Denied	
LNK		Last Number Redial Key	
LOL		Long Line Class of Service	xops-20
LPA		Message Waiting lamp Allowed	mwc-1
LPD		Message Waiting lamp Denied	mwc-1
LPR		Low Priority station	basic-1
LSPK		Loudspeaker key	ohol-20
LVXA		LOGIVOX Telephone Allowed	supp-10
LVXD		LOGIVOX Telephone Denied	
MBXD		Multi-Party Operation (MPO) Blind Transfer Denied.	mpo-21
MBXA		Multi-Party Operation (MPO) Blind Transfer Allowed. Multi-Party Operations (MPO) package 141 must be equipped to enter MBXD or MBXA.	
MCD		Message Center DN	mwc-1
MCK		Message Cancellation Key	
MCN		Multiple Call Non-Ringing DN A TN which is the Multiple Appearance Redirection Prime (MARP) for the DN is indicated by an "M" in the output (MCN M).	basic-1
MCR		Multiple Call Ringing DN A TN which is the Multiple Appearance Redirection Prime (MARP) for the DN is indicated by an "M" in the output (MCN M).	basic-1
MCRA		Multiple Call Arrangement Allowed	supp-15
MCRD		Multiple Call Arrangement Denied	

LD 81

Page 852 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
MCTA		Malicious Call Trace Allowed	mct-10
MCTD		Malicious Call Trace Denied	mct-19
MIK		Message Indication Key	mwc-1
MINA		Message Intercept Allowed	mint-15
MIND		Message Intercept Denied	
MISA		Make Set Busy Improvement Allowed	msb-24
MISD		Make Set Busy Improvement Denied	msb-24
MMA		Multimedia Allowed	ngen-24
MMD		Multimedia Denied	ngen-24
MNL		Manual service	basic-1
MMA		Multimedia Messaging Allowed	
MMD		Multimedia Messaging Denied	
MON		TN(s) Monitored by at least one BFS key	bfs-20
MRA		Message Registration Allowed	mr-10
MRD		Message Registration Denied	
MSB		Make Set Busy key	msb-1
MSID		Make Set Busy Improvement Denied	msb-24
MSIA		Make Set Busy Improvement Allowed	
MTA		Maintenance set Allowed	basic-1
MWA		Message Waiting Allowed	mwc-1
MWD		Message Waiting Denied	
MWK		Message Waiting key	
NAMA		Name display on other set Allowed	sdd-21
NAMD		Name display on other set Denied	
NCOS		Network Class of Service (COS)	ncos-1
NDD		No Digit Display	ddsp-1
NHC		No Hold Conference	basic-14
NIA		Incoming non-ringing line preference Allowed	1se1-4

Prompt	Response	Comment	Pack/Rel
	NID	Incoming non-ringing line preference Denied	1se1-4
	NKL	Notification Key Lamps	drng-7
	NRCA NRCD	Forced Camp-On night class restriction Allowed Forced Campon night class restriction Denied	supp-16
	NRD	ACD Not Ready key	bacd-1
	NROA NROD	Priority override night class restriction Allowed Priority override night class restriction Denied	supp-16
	NRWA NRWD	Call Waiting Night class restriction Allowed Call Waiting Night class restriction Denied	supp-16
	NSVC	ACD Night Service key for Supervisor Control	bacd-12
	OBV	ACD Observe agent key	
	OCBA OCBD	Outgoing Call Barring Allowed Outgoing Call Barring Denied	ccb-21
	OLA OLD	Outgoing Line preference Allowed Outgoing Line preference Denied	1se1-4
	ONS OPS OSN	On Premise Station Off Premise Station On Site Notification key. OSN is accepted as valid input only if the system is ESA and ESA_SUPP package equipped.	xops-20 xops-20 esa- 23
	OVB	Attendant Overflow position	aop-1
	OVDA OVDD	Override Allowed (500/2500 telephone) Override Denied (500/2500 telephone)	ffc-15
	OVR	Override key	basic-1
	PDN	Prime Directory Numberlease 22.	pra-12
	(PGND) PGNA	Deny PAGENET access Allow PAGENET access	pagenet-22
	PHD	Permanent Hold	basic-4

LD 81

Prompt	Response	Comment	Pack/Rel
	POA POD	Optional Privacy Allowed Optional Privacy Denied	basic-1
	PRK	Park key	cprk-2
	PRS	Privacy Release key	basic-1
	PRSA PRSD	Priority Call Pickup Allowed Priority Call Pickup Denied	supp-15
	PUA PUD	Call Pickup Allowed Call Pickup Denied	grp-1
	PVN PVR	Private Line Non-ringing phantom DN Private Line Ringing phantom DN	basic-1
	RAG RBDA RBDD	ACD Call Agent key Redirection By Day Allowed Redirection By Day Denied	basic-24
	RBHA RBHD	Redirection By Holiday Allowed Redirection By Holiday Denied	basic-24
	RCC	Restricted from Receiving Collect Calls	supp-10
	RCK	Ringing Change Key	rck-15
	RDI	Restricted from receiving DID calls	supp-10
	RDL	Stored Number Redial	basic-14
	RDLA RDLD	Automatic Redial call Allowed Automatic Redial call Denied	ardl-22
	RGA	Ring Again key	optf-1
	RLFA RLFD	Reversed Lamp Flash Allowed Reversed Lamp Flash Denied	supp-10
	RLS	Release key	basic-1
	RMMA RMMD RMMO	Remote Monitoring of Messages Allowed Remote Monitoring of Messages Denied Allow Remote Monitoring of Messages and to Override, if it is being already monitored	vmba-24

Prompt	Response	Comment	Pack/Rel
	RMWK	Remote Message Waiting indication key	vmba-24
	RNP	Ringin Number Pickup (includes PUA, PUD and RNPk)	grp-1
	RNPk	Ringin Number Pickup key	grp-1
	RPA	Radio Paging Allowed	rpa-15
	RTDA RTDD	Call Redirection by Time of day allowed Call Redirection by Time of day denied	basic-22
	SAR	Scheduled Access Restriction	sar-20
	SCC	Speed Call Controller	optf-1
	SCI	Station Category Indication Priority Level	sci-7
	SCL	Speed Call (includes SCU and SCC)	optf-1
	SCN	Single Call Non-ringin DN A TN which is the Multiple Appearance Redirection Prime (MARP) for the DN is indicated by an "M" in the output (MCN M).	basic-1
	SCR	Single Call Ringin DN A TN which is the Multiple Appearance Redirection Prime (MARP) for the DN is indicated by an "M" in the output (MCN M).	basic-1
	SCU	Speed Call User	optf-1
	SETS	All telephones	basic-1
	SFA SFD	Second level Forwarding Allowed Second level Forwarding Denied	optf-10
	SHL	Short Line Class of Service	xops-20
	SIG	Buzz key to phantom DN	basic-1
	SL1	SL-1 stations	basic-1
	SMSA	Standalone Mail Server Allowed	samm-20

LD 81

Page 856 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
	SMSD	Standalone Mail Server Denied	
	SMWD SMWA	Extended message waiting indication denied. Extended message waiting indication allowed.	mw-24
	SNR	Stored Number Redial	ffc-15
	SPKA SPKD	Speaker Class of Service Allowed Speaker Class of Service Denied	ohol-20
	SPV	ACD Supervisor	acdb-1
	SRE	Semi-Restricted	basic-1
	SSC SSU	System Speed Call Controller System Speed Call User	optf-1
	SWA SWD	Station-to-Station Call Waiting Allowed Station-to-Station Call Waiting Denied	basic-8
	TAD	Time And Date key	ddsp-1
	TDD	Touchphone Display	tset-7
	THF THFA	Centrex Trunk Switchhook Flash Centrex Trunk Switchhook Flash Allowed (500/2500 telephones)	thf-14
	THFD	Centrex Trunk Switchhook Flash Denied (500/2500 telephones)	
	TLD	Toll Denied	basic-1
	TRC	Malicious Call Trace key	mct-10
	TRN	Call Transfer key	basic-1
	TSA	Three-Party Service Allowed	mpo-21
	TVA TVD	Trunk Verification Allowed Trunk Verification Denied	basic-1 basic-1
	UCC UDI	Unrestricted from Receiving Collect Calls Unrestricted from receiving DID calls	supp-10

Prompt	Response	Comment	Pack/Rel
	ULAA	User Level Access Allowed for set based administration	adminset-21
	ULAD	User Level Access Denied for set based administration	
	UNR	Unrestricted	basic-1
	USR	User Selectable Call Redirection key	uscr-19
	USRA	User Selectable Call Redirection allowed	
	USRD	User Selectable Call Redirection denied	
	UST	Telephone Status feature	iap3p-13
	VCC	Voice Call to phantom DN	basic-1
	VCE	Voice set	basic-5
	VDN	LOGIVOX telephone Volume Down	supp-10
	VMA	Server Voice Messaging Allowed	csi-8
	VSIT	DECT visitors	msmn-25
	VUP	LOGIVOX telephone Volume Up	supp-10
	WTA	Warning Tone Allowed	basic-1
	WTD	Warning Tone Denied	
	WUK	Guest entry of Automatic Wake Up key	gewu-16
	XFA	Call Transfer Allowed	basic-1
	XFD	Call Transfer Denied	
	XHA	Exclusive Hold Allowed	dhld-4
	XHD	Exclusive Hold Denied	
	XMWD	Extended Message Waiting indication Denied	vmba-24
	XMWI	Extended Message Waiting indication Allowed	
	XMWK	Extended Message Waiting indication key	vmba-24
	XRA	Ring Again Allowed	optf-1
	XRD	Ring Again Denied	
HMDN	x..x	Home Directory Number	msmn-25

LD 81

Prompt	Response	Comment	Pack/Rel
LSNO	0-8190 0-8190	List Number. One Speed Call List Number or a range of list numbers	basic-1
	<cr>	Print all lists. LSNO is prompted when FEAT is SCL, SCU, SCC, SSC, SSU or CS.	
NACT	(NO) YES END	Next Activity Return to REQ prompt. Print current system data and exit overlay. Exit Overlay program.	odas-1
NCOS	0-3 0-3	Network Class of Service. NCOS is prompted when FEAT = COS or NCOS. One NCOS group number or a range of group numbers when CDP equipped	basic-1
	0-7 0-7	One NCOS group number or a range of group numbers when BARS or NFCR equipped	
	0-15 0-15	One NCOS group number or a range of group numbers when NARS equipped	
	0-99 0-99	One NCOS group number, or a range of group numbers for all features	
PAGE	(NO) YES	Data printed on a per page basis	basic-1
REQ	CNT END LST	Request Print a count of telephones equipped with the features specified in response to the FEAT prompt. Exit Overlay program. List telephones equipped with the features specified in response to the FEAT prompt.	basic-1
RNPG	0-255 0-255	Ringling Number Pickup Group. One Ringling Number Pickup Group number or a range of group numbers	basic-1
	0-4095 0-4095	Ringling Number Pickup Group:	

Prompt	Response	Comment	Pack/Rel
	<cr>	Print all groups. RPNG is prompted when FEAT = RNP, RNPK, PUA, PUD, DPU, DPUA, DPUD, GPU, GPUA or GPUD.	
SGRP	0-999 0-999	Station Group One station group number or a range of station group numbers	sar-20

LD 81

LD 82: Print Hunt Chain, Multiple Appearance Group

Overlay program 82 allows the printing of hunting patterns and Multiple Appearance groups for system stations.

Refer to the Office Data Administration System NTP (553-2721-100) for detailed information regarding printouts for multiple appearance DN, single appearance DN appearing on telephones with multiple appearance DN, and hunting patterns.

A TN which is the Multiple Appearance Redirection Prime (MARP) is indicated by an “M” preceding the TN in the output.

LD 82

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request (aaa = EHT, END, HNT, MAG, MAP)
CUST	xx xx	Customer number or range of customer numbers
DATE	a...a	Print data from activity date specified or last activity date (You may enter: dd mmm yyyy or ACT)
PAGE	(NO) YES	Data printed on a per-page basis
DES	a...a	Print all telephones with DES "dddddd"
DN	xxxx	Print specific DN
- ADJUST PAPER THEN	<cr>	
	<cr>	Starts printing
NACT	(NO) YES	Next Activity

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ADJUST PAPER THEN	<cr> <cr>	Starts printing. Prompted when PAGE = YES	basic-1
CUST	xx xx <cr>	Customer number or range of customer numbers Print data for all customers.	basic-1
DATE	dd mmm yyyy	Print data from activity date specified. Where: <ul style="list-style-type: none"> • dd = day (0-31) • mmm = month (JAN-DEC) • yyyy = year 	basic-1
	ACT <cr>	Print data from last activity date. Disregard date restrictions.	
DES	dddddd d+ + <cr>	Print all telephones with DES "dddddd" Print all telephones with DES "d" Print all telephones with no DES assignment Disregard DES	odas-1
DN	xxxx xxxx xxxx ALL <cr>	Print specific DN Print range of DNs Print data when REQ = MAG or MAP Print data for all DNs DN may be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150.	basic-1
NACT	(NO) YES END	Next Activity Return to REQ prompt Print current system data and exit Overlay Exit Overlay program	odas-1
PAGE	(NO) YES	Data printed on a per-page basis	basic-1
REQ	EHT END HNT	Request External Hunting pattern (except regular and short hunting) Exit Overlay program Hunting pattern (except short hunting and EHT)	basic-1

LD 82

Prompt	Response	Comment	Pack/Rel
	MAG	Multiple Appearance Groups Print Multiple Appearance Groups including all Single Appearance DNs assigned on telephones having Multiple Call Assignments.	
	MAP	Multiple Appearance Print Multiple Appearance DN and associated TNs. The hunt pattern displayed shows only the first TN in a MADN hunt group.	

LD 83: Terminal Number Sort and Print

Overlay program 83 allows the printing of a list of TNs and of TN blocks in Designation (DES) order.

“MARF” is output after the DN when printing the TN block (NOT when using the LST command) if the TN is the Multiple Appearance Redirection Prime.

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request (aaa = END, LST, TNB)
CUST	xx xx	Customer number or range of customer numbers
DATE	a...a	Print data from activity date specified or last activity date (You may enter: dd mmm yyyy or ACT)
PAGE	(NO) YES	Data printed on a per-page basis
- ADJUST PAPER THEN <cr>	<cr>	Starts printing
NACT	(NO) YES	Next Activity

LD 83

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ADJUST PAPER THEN	<cr> <cr>	Starts printing	odas-1
CUST	xx xx <cr>	Customer number or range of customer numbers Print data date for all customers	odas-1
DATE	dd mmm yyyy	Print data from activity date specified. Where: <ul style="list-style-type: none">• dd = day (0-31)• mmm = month (JAN-DEC)• yyyy = year	odas-1
	ACT <cr>	Print data from last activity date Disregard date restrictions	
NACT	(NO) YES END	Next Activity Return to REQ prompt Print current system data and exit overlay Exit Overlay program	odas-1
PAGE	(NO) YES	Data printed on a per-page basis	odas-1
REQ	END LST TNB	Request Exit Overlay program Print List of TNs in designator order Print list of TN blocks in designator order	odas-1

LD 84, 85: Set Designation Entry (ODAS)

Overlay program 84 allows the addition of line designators to existing single line (500/2500) sets.

Overlay program 85 allows the addition of line designators to existing multi-line (SL-1, M2000, etc.) sets.

If currently active on a call, the station will be disconnected after the last <cr>.

Prompts and responses

Prompt	Response	Comment
TN	l s c u	Terminal Number
DES	d...d	1-6 character alphanumeric designator

LD 84, 85

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
DES	d...d	1-6 character alphanumeric Office Data Administration System (ODAS) Station Designator.	odas-1
TN	l s c u c u END	Terminal Number Option 11C Exit Overlay program	basic-1

LD 86: Electronic Switched Network 1

Overlay program 86 allows data defining the NARS/BARS/CDP features to be created, modified, and printed.

Prompts and responses

Table of Contents

Section	Page
<i>Prompts and responses by feature :</i>	
FEAT = DGT (Digit Manipulation)	page 870
FEAT = ESN (Electronic Switched Network)	page 871
FEAT = ITGE (Incoming Trunk Exclusion)	page 872
FEAT = NAS (Network Attendant Service)	page 872
FEAT = RLB (Route List)	page 873
FEAT = SCC (Special Common Carrier)	page 874

FEAT = DGT (Digit Manipulation)

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	DGT	Feature = DGT (Digit manipulation)
DMI	(0)-999	Digit Manipulation Index numbers
DEL	(0)-19	Number of leading digits to be Deleted
INST	x...x	Insert
SCCI	(0)-7	Special Common Carrier Index into the SCC data table
CTYP	a...a	Call Type to be used by the manipulated digits (a...a = (NCHG), INTL, NPA, NXX, LOC, CDP, SPN, or UKWN)

FEAT = ESN (Electronic Switched Network)

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	ESN	Feature = ESN (Electronic switched network)
MXLC	0-1000	Maximum number of LOC codes (NARS only)
MXSD	xxx	Maximum number of Supplemental Digit restriction blocks
MXIX	xxx	Maximum number of Incoming Trunk Group exclusion tables
MXDM	0-256	Maximum number of Digit Manipulation tables
MXRL	xxx	Maximum number of Route Lists
MXFC	0-256	Maximum number of Free Calling area screening tables
MXFS	0-255	Maximum number of Free Special number screening tables
CDP	(YES) NO	Coordinated Dialing Plan feature for this customer
- MXSC	0-5000	Maximum number of Steering Codes
- NCDP	3-7	Number of digits in CDP DN (DSC + DN or LSC + DN)
MSCC	0-7	Maximum number of Special Common Carrier entries
AC1	xx	One or two digit NARS/BARS Access Code 1
AC2	xx	One or two digit NARS Access Code 2
DLTN	(YES) NO	NARS/BARS Dial Tone after dialing AC1 or AC2 access codes
ERWT	(YES) NO	Expensive Route Warning Tone
- ERDT	0-(6)-10	Expensive Route Delay Time
TODS	aa-aa	Time of Day Schedules
RTCL	(DIS) YES	Routing Controls
NMAP	xx yy	NCOS Map
ETOD	1-7	Extended Time of Day schedule
TGAR	(NO) YES	Check for Trunk Group Access Restrictions

FEAT = ITGE (Incoming Trunk Exclusion)

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	ITGE	Feature = ITGE (Incoming Trunk Exclusion)
ITEI	1-127	Incoming Trunk group Exclusion Index number
RTNO	0-127	Route Number associated with index

FEAT = NAS (Network Attendant Service)

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	NAS	Feature = NAS (Network Attendant Service)
TBL	(0)-63	NAS routing Table 0 is the customer routing table
ALT	1-7	Attendant Alternative number
ID	x...x	Digits (up to 16) dialed to reach a remote attendant
TODS	1-31	Schedule period to be changed
- PER	hh mm hh mm	The start and stop times for the schedule period
- DAYS	1-7	Days assigned to the currently defined schedule period.
ALST	1-7	Alternatives List
DBK	(N) Y	Drop Back busy option
QUE	(N) Y	Queuing to a route

FEAT = RLB (Route List)

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	RLB	Feature = RLB (Route list)
RLI	xxx	Route List Index to be accessed
ENTR	xxx	Entry number for NARS/BARS Route list
LTER	(NO) YES	Local Termination entry
ROUT	0-511	Route number
SCNV	(NO) YES	Skip Conventional signaling
TDET	(NO) YES	Tone Detector used
- TYPE	aaa	Type of tone detector application (aaa = TIE, CC1, or CC2)
- TONE	a...a	Tone type expected from SCC (a...a = DIAL or SCC)
TOD	0-7	Time of Day schedule
VNS	(NO) YES	Entry is a VNS route
- VDCH	1-15	VNS D-channel number
- VDMI	xxx	VNS Digit Manipulation Index
- VTRK	1-(20)-254	VNS Trunks
CNV	(NO) YES	Conversion to LDN
EXP	(NO) YES	Expensive route
FRL	(0)-7	Facility Restriction Level
DMI	(0)-999	Digit Manipulation Index
ISDM	(0)-255	ISL D-channel Down Digit Manipulation index
FCI	(0)-255	Free Calling Area Screening Index number
FSNI	(0)-1-255	Free Special Number Screening Index
BNE	(NO) YES	Business Network Extension Route
SBOC	aaa	Step Back on Congestion (aaa = (NRR), RRO, or ROA)
- COPT	(1) 2	QSIG Alternate Routing is supported for (1), 2
IDBB	aaa	ISDN Drop Back Busy (aaa = (DBD), DBA, or DBI)
IOHQ	(NO) YES	ISDN Off-Hook Queuing option
OHQ	(NO) YES	Off-Hook Queuing allowed
CBQ	(NO) YES	Call Back Queuing
ISET	(0)-8	Initial Set

LD 86

NALT	1-(5)-10	Number of alternate routing attempts
MFRL	aaa	Set Minimum Facility Restriction Level (aaa = (MIN) or 0-7)
OVLL	(0)-24	Overlap Length

FEAT = SCC (Special Common Carrier)

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	SCC	Feature = SCC (Special Common Carrier)
MXLC	0-1000	Maximum number of LOC codes (NARS only)
SCCI	(0)-7	Special Common Carrier Index
LDN2	(0)-10	Number of digits in SCC type 2 LDN
RBTD	(0)-30	Ringback Tone Delay time

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
AC1	xx xxxx	One or two digit NARS/BARS Access Code 1 One to four digit Flexible Numbering Plan Access Code 1 The access code cannot conflict with the numbering plan.	b/nars-1
AC2	xx xxxx	One or two digit NARS Access Code 2 One to four digit Flexible Numbering Plan Access Code 2 The access code cannot conflict with the numbering plan.	nars-1
ALST	1-7	Attendant Alternatives List (up to 4 for each schedule period) If no attendants are placed on the list, local attendant service is given. Precede with X to remove an alternative attendant. The order of the input determines which entry in the alternative list is being changed. For example, to change the third alternative, both the first and second alternatives must be entered.	nas-15
ALT	1-7 X1-X7 <cr>	Attendant Alternative number Clear the alternative number (zero ID store); allowed only if there is no schedule period associated with it. Stop ALT prompt, go to TODS prompt.	nas-15
BNE	(NO) YES	Business Networking Express/Name Display, Private CLID and COLP allowed/denied. Note: BNE is output only if the route of the RLI entry is EuroISDN.	bne-25
CBQ	(NO) YES	Call-Back Queuing not allowed Call-Back Queuing allowed This prompt should not be used with NARS DPNSS1. CBQ is not prompted if LTER = YES.	fc bq-1
CDP	(YES) NO	Coordinated Dialing Plan feature for this customer	c dp-1
CNV	(NO) YES	Conversion to LDN required (NARS). Not prompted if route is TKTP = ADM or LTER = YES	nars-1

LD 86

Prompt	Response	Comment	Pack/Rel
COPT	(1)	QSIG Alternate Routing is supported for the following causes: — cause 34 "No channel / circuit available" — cause 38 "Network out of order" — cause 42 "Congestion"	
	2	QSIG Alternate Routing is supported for the following causes: — cause 3 "No route to destination" — cause 27 "Destination is out of service" — cause 34 "No channel / circuit available" — cause 38 "Network out of order" — cause 41 "Temporary failure" — cause 42 "Congestion"	
CTYP	(NCHG) INTL NPA NXX LOC CDP SPN UKWN	Call Type to be used by the manipulated digits. This call type must be recognized by the far-end switch. Call type will not be changed Special number in International format NPA NXX Location Code Coordinated Dialing Plan Special Number other than International Unknown call type	pra-15
CUST	xx	Customer number associated with this function as defined in LD 15	basic-1
DAYS	1-7	Days assigned to the currently defined schedule period To remove days from the schedule period precede the number representing the day with X. Up to 7 entries, separated with a space, may be input (Where: 1 = Monday, 7 = Sunday).	nas-15

Prompt	Response	Comment	Pack/Rel
DBK	(NO) YES	Drop Back busy option disabled Drop Back busy option enabled Up to four entries one for each of the attendant alternatives in this schedule period. If both sides of the ISDN trunk are set to N the remote node accepts the call and reroutes it, thus one side of the trunk must be set to Y. If a node has all the NAS routes with DBK = Y it will be considered by the network as "Centralized Night DN Node". This permits all other nodes in night to reject all attempts of this specific node, even in night, thus the call can only be inserted in this local night DN que. The order of the response to this prompt must correspond to the order of response to the ALST prompt.	nas-15
DEL	(0)-19	Number of leading digits to be Deleted	b/nars-1
DLTN	(YES) NO	NARS/BARS Dial Tone after dialing AC1 or AC2 access codes	b/nars-1
DMI	(0) (0)-31 (0)-255 (0)-999	Digit Manipulation Index numbers No digit manipulation required CDP NARS/BARS NARS/BARS with Flexible Numbering Plan (FNP) package 160 The maximum number of Digit Manipulation tables is defined by prompt MXDM. DMI is not prompted if route TKTP = ADM.	b/nars-20
ENTR	0-63 0-6 X	Entry number for NARS/BARS Route List Route list entry number for CDP Precede with x to remove	esn-1

LD 86

Prompt	Response	Comment	Pack/Rel
ERDT	0-(6)-10	Expensive Route Delay Time (in 2 second intervals)	b/nars-1
ERWT	(YES) NO	Expensive Route Warning Tone Note: ERWT is not supported on TIE trunks. ERWT defaults to of three bursts of tone, but may be modified in LD 56 if Flexible Tones and Cadences (FTC) package 125 is equipped, to indicate that the call will be placed over an expensive route. The user has 3 choices: <ol style="list-style-type: none">1. go On-Hook and abort the call2. remain On-Hook and accept the call3. activate Ring Again	b/nars-1
ETOD	1-7 X1-X7	Extended Time of Day schedule (day(s) of the week for special TOD schedule) Where:1 = Sunday and 7 = Saturday. To remove a day	b/nars-1
EXP	(NO) YES	Expensive route Not prompted if route TKTP = ADM or LTER = YES	b/nars-1
FCI	(0)-127 (0)-255	Free Calling area screening Index number BARS NARS Use 0 if no FCAS is required. Not prompted if route TKTP = ADM.	b/nars-1
FEAT	DGT ESN ITGE NAS RLB SCC	Feature Digit manipulation data block ESN data block Incoming Trunk Group Exclusion data block Network Attendant Service data block Route List data Block Special Common Carrier data block	esn-1
FRL	(0)-7	Facility Restriction Level	b/nars-1
FSNI	(0)-1-255	Free Special Number screening Index	fnp-20
ID	x...x <cr>	Digits (up to 16) dialed to reach a remote attendant Leave ID unchanged, go to ALT prompt.	nas-15

Prompt	Response	Comment	Pack/Rel
IDBB	(DBD) DBA DBI	ISDN Drop Back Busy Drop Back Disabled Drop Back if All routes busy Drop Back if Initial set busy. IDBB appears if ISDN=YES in LD 15	orc/orq-16
INST	x...x x...x y...y	Insert. Where x...x is: <ul style="list-style-type: none"> up to 31 leading digits may be inserted For Specialized Common Carriers (SCC), up to 23 leading digits may be inserted including: access number, delimiter*, and authorization code.	b/nars-1
IOHQ	(NO) YES	ISDN Off-Hook Queuing option Prompted if ISDN = YES in LD 15.	ohq-16
ISDM	(0)-255 (0) (0)-31 (0)-127 (0)-999	ISL D-channel Down Digit Manipulation Index number. Not prompted if route TKTP = ADM or LTER = YES No digit manipulation required CDP NARS/BARS NARS/BARS with Flexible Numbering Plan (FNP) package 160. When the ISL D-channel goes down, this Digit Manipulation Index is used to perform the Digit Manipulation which includes the ESN access code insertion capability. This is only used when the ISL reverts back to conventional signaling. When the D-channel is up the existing DMI is used to perform digit manipulation. This DMI is only used when the ISL D-channel is down. Any valid DMI can be entered. The ISDM is intended to be a DMI which inserts an ESN access code.	is1-17
ISET	(0)-64	Initial Set. Number of entries in Initial Set for route list block.	b/nars-1
ITEI	1-127 1-255	Incoming Trunk group Exclusion Index BARS NARS	b/nars-5
LDN2	(0)-10	Number of digits in SCC type 2 LDN	b/nars-1

LD 86

Prompt	Response	Comment	Pack/Rel
LTER	(NO) YES	Local Termination entry	fgd-17
MFRL	(MIN) 0-7	Set Minimum Facility Restriction Level used to determine autocode prompting. Use default of MIN to set to the minimum FRL value.	b/nars-1
MSCC	0-7	Maximum number of Special Common Carrier (SCC) entries	nars-1
MXDM	0-32 0-256 0-1000	Maximum number of Digit Manipulation tables (you must count Table 0 for the system) CDP NARS/BARS NARS/BARS with Flexible Numbering Plan (FNP) package 160 equipped	esn-1
MXFC	0-127 0-255	Maximum Free Calling area screening tables BARS NARS Prompted when NARS/BARS equipped	b/nars-1
MXFS	0-255	Maximum number of Free Special Number Screening tables	b/nars-1
MXIX	0-127 0-255	Maximum number of Incoming Trunk Group Exclusion tables (use "0" if not required) BARS NARS	b/nars-5
MXLC	0-999	Maximum number of LOC codes (NARS only)	nars-1
MXRL	0-128 0-128 0-256 0-1000	Maximum number of Route Lists If MXRL = 0, the system will not allow the creation of any route lists. CDP BARS NARS NARS with Flexible Numbering Plan (FNP) package 160 equipped	esn-1
MXSC	0-8000 0-10000 0-32000	Maximum number of Steering Codes for Option 11C Maximum number of Steering Codes in North America Maximum number of Steering Codes outside North America	cdp-1

Prompt	Response	Comment	Pack/Rel
MXSD	(0)-1500	Maximum Supplemental Digit restriction blocks	b/nars-1
NALT	1-(5)-10	Number of alternate routing attempts. Prompt appears once per RLI.	brte-24
NCDP		Define DN length for CDP A Coordinated Dialing Plan (CDP) consists of the CDP code and the Directory Number (DN). This dialing plan does not need an access code because the CDP code is part of the internal dialing plan. The CDP code is one of the following: the Distant Steering Code (DSC) or the Local Steering Code (LSC)	cdp-1
	3-7 3-10	Number of digits in CDP DN (DSC + DN or LSC + DN) Number of digits in CDP DN with Directory Number Expansion (DNXP) package 150	
NMAP	xx yy	NCOS Map (NCOS numbers to be applied for routing controls). Where: <ul style="list-style-type: none">• xx = current NCOS number• yy = NCOS number to be applied for BARS/CDP or NARS when routing control is in effect. NCOS ranges: <ul style="list-style-type: none">• 0-99	ncos-1
OHQ	(NO) YES	Off-Hook Queuing not allowed Off-Hook Queuing allowed This prompt should not be used with NARS DPNSS1. OHQ is not prompted if LTER = YES.	bars-1
OVLL	(0)-24	Overlap Length Number of digits dialed (after the ESN access code) before SETUP message is sent or outpulsing begins. If OVLL = 0, Overlap Sending is controlled by the number of digits in the ESN or CDP steering codes (e.g. FLEN).	ovlp-16
PER	hh mm hh mm	The start and stop times for the schedule period (the start time must be less than the stop time)	

LD 86

Prompt	Response	Comment	Pack/Rel
QUE	(NO) YES	Queuing to a route disabled Queuing to a route enabled	
		Up to four entries one for each of the attendant alternatives in this schedule period. The order of the response to this prompt must correspond to the order of response to the ALST prompt.	
RTD	(0)-30	Ringback Tone Delay time in seconds for SCC (only even numbers will be accepted)	nars-1
REQ	CHG END LCHG NEW OUT PRT	Request Change existing data block. Exit Overlay program. Print date and time that each data group was last changed (data groups include: ESN, DGT, NAS, RLB, SCC, and ITGE) Create new data block. Remove data block. Print data block.	esn-1
RLI	0-127 0-255 0-999	Route List Index to be accessed CDP and BARS NARS FNP	esn-20
ROUT	0-511	Route number Not prompted if LTER = YES.	esn-1
RTCL	(DIS) YES	Disable Routing Controls. Enable or modify Routing Controls.	esn-1
RTNO	0-511	Route Number associated with index Precede with X to delete an existing route.	b/nars-5
SBOC	(NRR) RRO RRA	Step Back on Congestion No Reroute Reroute if originating node, step back if transit node. Reroute all.	dpnss1-16
SCCI	(0)-7	Special Common Carrier Index into the SCC data table Use "0" if not required.	nars-1
SCNV	(NO) YES	Skip Conventional Signaling.	

Prompt	Response	Comment	Pack/Rel
TBL	(0)-63	NAS routing table. 0 is the customer routing table. It is also associated with Attendant Console Group 0.	nars-16
TDET	(NO) YES	Tone Detector used Not prompted if route TKTP = ADM or LTER = YES.	nars-1
TGAR	(NO) YES	Check for Trunk Group Access Restrictions Ignore TGAR/TARG when call is placed through BARS. Examine TGAR/TARG when call is placed through BARS.	esn-1
TOD	0-1 0-7	Time of Day schedule CDP NARS/BARS Precede with X to turn off schedule.	esn-1
TODS	1-31 0 0-1 0-7 0-7 hh mm hh mm 0-1 hh mm hh mm X1-X31 X0 <cr>	Time of Day schedule Schedule period to be changed. Catch-all period. Start and stop times are not relevant for this period. The next prompt is ALST. CDP NARS/BARS Schedule number, start hour, start minute, end hour, end minute for NARS/BARS. Schedule number, start hour, start minute, end hour, end minute for CDP. Remove the schedule period Remove/clear all alternatives associated with period 0. This leaves the catch-all treatment as local attendant treatment. End NAS feature data setup and return to REQ prompt.	esn-1
TONE	SCC DIAL	SCC dial tone type expected Normal dial tone type expected	nars-1
TYPE	CC1 CC2 TIE	SCC Type 1 tone detector application SCC type 2 tone detector application On-network call tone detector application	
VDCH	1-15	VNS D-channel number	vns-16
VDMI	(0)	VNS Digit Manipulation Index number for the D-channel (ESN routing) No digit manipulation required	vns-16

LD 86

Prompt	Response	Comment	Pack/Rel
	1-31 1-255 0-999	CDP NARS/BARS With Flexible Numbering Plan (FNP) package 160	
VNS	(NO) YES	Entry is a VNS route Prompted for DID,TIE and CO.	vns-16
VTRK	1-(20)-254	VNS Trunks (maximum number of VNS Trunks to be used by this route list entry)	vns-16

LD 87: Electronic Switched Network 2

Overlay program 87 allows data which define the NARS/BARS/CDP features to be created, modified and printed.

Prompts and responses

Table of Contents

Section	Page
<i>Prompts and responses by feature :</i>	
FEAT = CDP (Coordinated Dialing Plan)	page 886
FEAT = FCAS (Free Calling Area Screening)	page 887
FEAT = FSNS (Free Special Number Screening)	page 887
FEAT = NCTL (Network Control)	page 888

FEAT = CDP (Coordinated Dialing Plan)

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	CDP	Feature = CDP (Coordinated Dialing Plan)
TYPE	aaa	Type of steering code (aaa = LSC, DSC, or TSC)
LSC	x...x	Local Steering Code
- DMI	0-31	Digit Manipulation Index for LSC
- DEL	0-4	Number of digits to be deleted
DSC	x...x	Distant Steering Code
- FLEN	(0)-24	Flexible Length number of digits
- DSP	aaa	Display (aaa = LSC, LOC, or DN)
- RRPA	(NO) YES	Remote Radio Paging Access
- RLI	xxx	Route List to be accessed for Distant Steering Code
- CCBA	(NO) YES	Collect Call Blocking
- NPA	xxxxxxx	maximum 7 digit NPA code allowed
- NXX	xxxxxxx	maximum 7 digit NXX code allowed
TSC	x...x	Trunk Steering Code
- FLEN	(0)-24	Flexible Length number of digits

- ITOH	(NO) YES	Inhibit Time-out option
- CCBA	(NO) YES	Collect Call Blocking
- RLI	0-999	Route List to be accessed for trunk steering code

FEAT = FCAS (Free Calling Area Screening)

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	FCAS	Feature = FCAS (Free Calling Area Screening)
FCI	xxx	Free Calling Area Screening Index number
NPA	xxx	Three-digit NPA code to be screened
NXX	aaaa	NXX codes for NPA (aaaa = DENY or ALLOW)
- DENY	xxx xxx	NXX code or range of codes to be Denied
- ALLOW	xxx xxx	NXX code or range of codes to be Allowed

FEAT = FSNS (Free Special Number Screening)

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	FSNS	Feature = FSNS (Free Special Number Screening)
FSNI	1-255	Free Special Number screening Index
SPN	x...x	Special Number code to be screened
XXX	aaaa	Routing codes (aaaa = DENY or ALLOW)
- DENY	xxx xxx	Routing code or range of codes to be Denied
- ALLOW	xxx xxx	Routing code or range of codes to be Allowed

FEAT = NCTL (Network Control)

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	NCTL	Feature = NCTL (Network Control)
SOHQ	(NO) YES	Off-Hook Queuing option
- OHTL	2-(10)-60	Off-Hook Queue Time Limit
SCBQ	(NO) YES	Call-Back Queuing option
- CBTL	10-(20)-30	Call-Back Queue Time Limit
- RANE	0-511	RAN route number for CBQ offer to ESN stations
- RANC	0-511	RAN route number for CBQ offer to Conventional main
NRNG	0-99 1-99	NCOS Range
NCOS	(0)-99	Network Class of Service group number
ARDL	a	ARDL network route selection is allowed from both initial and extended route sets or only the initial route set (a = (A) or I)
- MPL	aaaa	Maximum Precedence Level
- EQA	(NO) YES	Equal Access associated with this NCOS group
- FRL	(0)-7	Facility Restriction Level
- RWTA	(NO) YES	Expensive Route Warning Tone
- NSC	(NO) YES	Network Speed Call access allowed
- - LIST	0-253	List numbers to which System Speed Call has access
- OHQ	(YES) NO	Off-Hook Queuing eligibility
- CBQ	(NO) YES	Call Back Queuing eligibility
- RETT	2-(10)-30	Remote Virtual Queuing Retry Timer
- RETC	4-(5)-16	Remote Virtual Queuing Retry Counter
- - ROUT	a	Call Back Queuing on Initial or All Routes (a = (I) or A)
- - RADT	(0)-30	Route Advance Timer
- SPRI	(0)-3	Starting Priority in CBQ
- MPRI	(0)-3	Maximum Priority attainable in CBQ
- PROM	(0)-30	Priority Promotion timer
TOHQ	0-7	TCOS OHQ eligibility

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ALOW	xxx xxx <cr>	Routing code (NXX) code or range of codes to be allowed Stop ALOW prompt	b/nars-20
ARDL	(A) I	ARDL network route selection is allowed from ALL (both initial and extended) route sets ARDL network route selection is only allowed from initial route set	ardl-22
CBQ	(NO) YES	Call Back Queuing eligibility	bque-1
CBTL	10-(20)-30	Call Back Queue Time Limit (in 2 second increments) This is the time in which the user must respond to Ring Again feature to accept the CBQ call. Applies to multi-line sets only.	b/nars-1
CCBA	(NO) YES	Collect Call Blocking (CCB) Denied Collect Call Blocking Allowed CCBA is prompted when TYPE =TSC or DSC. CCBA is prompted with CCB package 290.	ccb-21
CUST	0-99	Customer number associated with this function as defined in LD 15	esn-1
DEL	0-4 0-7	Number of digits to be Deleted Up to 7 digits with Directory Number Expansion (DNXP) package 150	cdp-1
DENY	xxx xxx <cr>	Routing (NXX) code or range of codes to be denied Stop DENY prompt.	b/nars-20
DMI	0-31 0-999	Digit Manipulation Index for LSC With Flexible Numbering Plan (FNP) package 160	b/nars-20
DSC	xxxx	Distant Steering Code Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Prompted until <CR> is entered.	cdp-19

LD 87

Prompt	Response	Comment	Pack/Rel
DSP	(LSC) HLOC DN	Display Local Steering Code Home Location code Directory Number to be used for CLID Prompted with Flexible Numbering Plan (FNP) package 160 and ISDN are equipped.	fnp-20
EQA	(NO) YES	Equal Access associated with this NCOS group	eqa-18
FCI	1-127 1-255	Free Calling area screening Index number BARS NARS Table 0 is network reserved to indicate that no FCAS is applied.	b/nars-1
FEAT	CDP FCAS FSNS NCTL	Feature Coordinated Dialing Plan Free Calling Area Screening Free Special Number Screening (allowed with Flexible Numbering Plan (FNP) package 160) Network Control	esn-1
FLEN	(0)-24	Flexible Length number of digits Prompted with Flexible Numbering Plan (FNP) package 160.	fnp-20
FRL	(0)-7	Facility Restriction Level FRL is assigned to each NCOS. It determines the entries in a Route List (RLI) to which it has access. 0 is the most restrictive, 7 is the least restrictive and can access more entries.	b/nars-1
FSNI	1-255	Free Special Number screening Index	fnp-20
ITOH	(NO) YES	Inhibit Time-out option	fnp-20
LIST	0-4095 <cr>	List numbers to which System Speed Call has access All lists Precede with X to remove SSC list.	ssc-2
LSC	xxxx	Local Steering Code Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Prompted until <CR> is entered.	cdp-19

Prompt	Response	Comment	Pack/Rel
MPL	aaaa	Maximum Precedence Level	
MPRI	(0)-3	Maximum Priority attainable in CBQ	bque-1
NCOS	(0)-99	Network Class of Service group number	ncos-1
NPA	xxx	Three-digit NPA code to be screened (the first digit must be 2-9; the second and third digits can be 0-9). Omit the "1" in 1 + NPA format. <ul style="list-style-type: none"> xxx = 200-999. Only 3 digits are allowed, even when using 1 + dialing. <p>BARS allows up to 15 NPA codes per table.</p> <p>NARS allows up to 15 NPA codes per table with a maximum of 800 NXX codes each.</p>	nanp-19
	xxx yyy	Area code or extended NPA code translation Where: <ul style="list-style-type: none"> xxx & yyy = 200 - 999. FCAS accepts only three digits for the NPA, even if 1 + dialing in use. 	
	xxxxxxx	Numbering Plan Area Code <ul style="list-style-type: none"> 7 digits are allowed when TYPE = DSC 	basic-25
NRNG	0-99 1-99 <cr>	NCOS Range (starting and ending number for NCOS printing) Pressed without defining the ending number, then only the NCOS with the starting number defined is printed. Prompted when REQ = PRT.	ncos-14
NSC	(NO) YES	Network Speed Call access allowed	nsc-2
NXX	DENY ALOW	NXX codes to be denied for NPA NXX codes to be allowed for NPA	b/nars-1
	xxxxxxx	Public Network Exchange Code <ul style="list-style-type: none"> 7 digits are allowed when TYPE = DSC 	basic-25
OHQ	(YES) NO	Off-Hook Queuing eligibility	ohq-1

LD 87

Prompt	Response	Comment	Pack/Rel
OHTL	2-(10)-60	Off-Hook Queue Time Limit (in 2 second increments) This is the maximum amount of time a user will remain off-hook for OHQ before it times out. After timeout the system searches once before going to Network Blocking Intercept treatment. If an odd number is entered, it is rounded up to the next even number.	b/nars-1
PROM	(0)-30	Priority Promotion timer (in 30 second increments, where: 1 = 30 seconds and 30 = 15 minutes)	pque-1
RADT	(0)-30	Route Advance Timer (in 30 second increments, where: 1 = 30 seconds and 30 = 15 minutes)	bque-1
RANC	0-511	RAN route number for CBQ offer to Conventional main Enter X to remove RAN route.	nars-1
RANE	0-511	RAN route number for CBQ offer to ESN stations Enter X to remove RAN route.	nars-1
REQ	CHG END LCHG NEW OUT PRT	Request Change existing data block Exit Overlay program Print date and time that each data group level was last changed (data groups include: NCTL, FCAS, FSNS, LSC, DSC, and TSC) Create new data block Delete existing data block Print data block	esn-1
RETC	4-(5)-16	Remote Virtual Queuing Retry Counter. This is the number of times the initial set should be searched before the scanning includes the extended set. Once the retry counter threshold is met, each node in the network searches its extended set.	rvq-18
RETT	2-(10)-30	Remote Virtual Queuing Retry Timer in seconds. This is the number of seconds between forward scanning attempts.	rvq-18

Prompt	Response	Comment	Pack/Rel
RLI	0-31 0-127 0-255 0-999	Route List accessed for trunk or distant steering code CDP BARS NARS Flexible Numbering Plan (FNP) (X11 Rel 20 & later)	cdp-20
ROUT	(I) A	Call Back Queuing on Initial routes The system offers queuing only after examining ISET (Initial Set) entries. Call Back Queuing on All routes The system examines all entries in the route list, both ISET (Initial Set) and ESET (Extended Set) before offering queuing.	bque-2
RRPA	(NO) YES	Remote Radio Paging Access (Remote Radio Paging FFC is being used). Prompted if a CDP, TSC or DSC is being added or changed.	rpa-20
RWTA	(NO) YES	Expensive Route Warning Tone	b/nars-1
SCBQ	(NO) YES	Call Back Queuing option	b/nars-1
SOHQ	(NO) YES	Off-Hook Queuing option	b/nars-1
SPN	x...x	Special Number code to be screened. <ul style="list-style-type: none">• xxx = 1-19 digits	fnp-20
SPRI	(0)-3	Starting Priority in CBQ	pque-2
TOHQ	0-7 <cr>	TCOS OHQ eligibility Which TCOS (i.e., FRL) are OHQ eligible (Up to 8 entries). No TCOS are OHQ eligible Precede with X to remove OHQ eligibility from a TCOS.	b/nars-1
TSC	xxxx	Trunk Steering Code Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Prompted until <CR> is entered.	cdp-19

LD 87

Prompt	Response	Comment	Pack/Rel
TYPE	LSC	Local Steering Code	fnp/ cdp-20
	DSC	Distant Steering Code	
	TSC	Trunk Steering Code	
	FSNS	Free Special Number Screening Index	
	ALL	All steering codes	
XXX	DENY	Routing codes to be denied	fnp-20
	ALLOW	Routing codes to be allowed	

LD 88: Authorization Code

Overlay program 88 allows data for Basic Authorization Code (BAUT) and Network Authorization Code (NAUT) to be created, modified and printed.

Prompts and responses

Table of Contents

Section	Page
<i>Prompts and responses by data block :</i>	
AUB or RAUB: Authcode or Room Authcode data block	page 896
AUT : Authcode entries data block	page 897
SAR: Scheduled Access Restriction data block	page 897

AUB or RAUB: Authcode or Room Authcode data block

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	aaaa	Type = AUB (Authcode) or RAUB (Room Authcode)
CUST	xx	Customer number associated with this function
SPWD	xxxx	Secure Data Password
ALEN	1-14	Authcode Length
ACDR	NO YES	Activate CDR for authcodes
AUTHCOD_ALARM	(OFF) ON	Authcode Alarm
RANR	0-511	RAN Route number
ACLE	(NO) YES	Authorization Code Conditionally Last Enhancement
BRST	0-(10)	Number of initial bursts of tone to be given
RTRY	(NO) YES	(Disable) Enable Authcode - last Retry
- RAN2	0-511	Route number for Authcode - last Retry RAN
CLAS	(0)-115	Class code value assigned to authcode
- COS	a...a	Class of Service
- TGAR	0-(1)-31	Trunk Group Access Restriction
- NCOS	(0)-99	Network Class of Service
CAC	0-(3)-9	ANI Category for 3WT calls
CAC_CIS	0-(3)-9	CIS ANI category code
AUTO	YES NO	Automatically generate authcodes
- SECR	0000-9999	Security password (NAUT)
- NMBR	1-20000	Number of authcodes to be generated automatically
- CLAS	(0)-115	Class code to be automatically assigned

AUT : Authcode entries data block

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	AUT	Type = AUT (Authcode entries)
CUST	xx	Customer number associated with this function
SPWD	xxxx	Secure Data Password
CODE	xxxx	Authcode
SARC	NO YES	Scheduled Access Restriction (SAR) Code
- SERV	nnn...nnn	SAR Service functions for SARC
- SGRP	0-999	SGRP number
CLAS	(0)-115	Class code
SECR	0000-9999	Security password

SAR: Scheduled Access Restriction data block

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	SAR	Type = SAR (Scheduled Access Restriction)
CUST	xx	Customer number associated with this function
SPWD	xxxx	Secure Data Password
SGRP	0-999	SAR Group number
SCDR	(NO) YES	Activate CDR for the SAR code feature
OFFP	1-8	Off-hour Period number
- STAR	hh mm	Start time
- STOP	hh mm	Stop time
- DAYS	d ... d	Respond with a new set of days to be used
- COS	a...a	Class of Service
- TGAR	0-(1)-31	Trunk Group Access Restriction
- NCOS	(0)-99	Network Class of Service
ICR	(NO) YES	Incoming Calls are Restricted.
LOCK	(1)-8	Lock period

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ACDR	(NO) YES	Activate CDR for authcodes. There is no default.	cdr-1
ACLE	(NO) YES	Authorization Code Conditionally Last Enhancement	nars-24
ALEN	1-4 1-7 1-14	Authcode Length (all authcodes are the same length). Room Authcode NAUT BAUT	baut-1
AUTHCOD_ALARM	(OFF) ON	Disable Authcode Alarm Enable Authcode Alarm	basic-21
AUTO	YES NO	Automatically generate authcodes. Prompted when Network Authorization Code (NAUT) package 63 is equipped and REQ = "NEW". ALEN must be a minimum of four digits.	naut-1
BRST	0-(10)	Number of initial bursts of tone to be given	nars-24
CAC	0 -(3)- 9	ANI category for 3WT calls Prompted with Commonwealth of Independent States - Three Wire Analog Trunk (CIST) package 221.	cist-21
CAC_CIS	0-(3)-9	CIS ANI category code	cist-24
CLAS	(0)-115	Class code value assigned to authcode. Cycle continues with CODE. Prompted when SARC = NO. When TYPE = "AUT", enter X to have authcode be an exempt code. When this data is printed, the month in which authcode was deactivated is output. Default is "0" when adding authcode entries.	baut-1
	X <cr>	Exempt authcode End of input	

Prompt	Response	Comment	Pack/Rel
CODE	xxxx ALL	Authcode (number of digits must equal the ALEN response). May be used to delete Authcodes if Network Authorization Code (NAUT) package 63 is equipped and codes were automatically generated.	baut-1
COS	(CTD) CUN FR1 FR2 FRE IPNA IRGA SRE TLD UNR	Class of Service Conditionally Toll Denied Conditionally Unrestricted Fully Restricted class 1 Fully Restricted class 2 Fully Restricted Intercept Position Interrogation set Semi-Restricted Toll Denied Unrestricted	baut-1
CUST	xx	Customer number associated with this function as defined in LD 15	esn-1
DAYS	d...d	Respond with a new set of days to be used d...d = maximum of seven entries in range of 1-7	sar-20
ICR	(NO) YES	Incoming Calls are Restricted.	sar-20
LOCK	(1)-8	Lock period	sar-20
NCOS	0-99	Network Class of Service (enter the new NCOS that will replace the NCOS of the station).	baut-1
NMBR	1-50000	Number of authcodes to be generated automatically To generate up to 50,000 authcodes, the maximum entry at NMBR is 5000 each time it is prompted.	baut-1
OFFP	1-8 <cr>	Off-hour Period number Go to ICR prompt.	sar-20
RANR	0-511 0-127 X	RAN route number for "Authcode Last" prompt (NAUT) Option 11C No RAN route	naut-1
RAN2	0 - 511 0-127 X	Route number for Authcode - last Retry RAN Option 11C Removes and deactivates Authcode-last Retry RAN	dpna-21

LD 88

Prompt	Response	Comment	Pack/Rel
REQ	CHG END NEW OUT PRT	Request Change existing data block Exit Overlay program Create new data block Delete existing data block Print data block	baut-1
RTRY	(NO) YES	Disable authcode - last Retry. Enable authcode - last Retry. Prompted with Direct Private Network Access (DPNA) package 250.	dpna-21
SARC	NO YES	Scheduled Access Restriction (SAR) Code is to be a Scheduled Access Restriction (SAR) authorization code.	sar-20
SCDR	(NO) YES	Activate CDR for the SAR code feature.	sar-20
SECR	0000-9999	Security password as entered during AUTO sequence Prompted when CODE = ALL. Cycle continues with CODE.	baut-1
SERV	(END) ENA (LKD) LKA (DSD) DSA (UND) UNA	SAR Service functions for SARC Enable Denied Enable Allowed Lock Denied Lock Allowed Disable Denied Disable Allowed Unlock Denied Unlock Allowed	sar-20
SGRP	0-999 ALL <cr>	Up to four entries can be made at once. Scheduled Access Restriction group (SGRP) number Authorization code is to be a customer SARC. End of SAR changes, return to REQ.	sar-20
SPWD	xxxx	Secure Data Password (same password as defined for DISA on a per customer basis in LD 15). Prompt will not appear to user with a LAO password.	baut-1

Prompt	Response	Comment	Pack/Rel
STAR	hh mm	Start time The current start time (hours and minutes) is printed individually after the prompt. Respond with the new start time.	sar-20
	X	Remove value and return to OFFP.	
STOP	hh mm	Stop time The current stop time (hours and minutes) is printed individually after the prompt. Respond with the new stop time.	sar-20
	X	Remove value and return to OFFP.	
TGAR	0-(1)-31	Trunk Group Access Restriction range	baut-1
TYPE		Type of data block	baut-1
	AUB	Authcode data block	
	AUT	Authcode entries data block	
	RAUB	Room Authcode data block (Hospitality Management)	
	RAUT	Room Authcode entries (Hospitality Management) data block	
	SAR	Scheduled Access Restriction data block	

LD 88

LD 90: Electronic Switched Network 3

Overlay program 90 allows data for network translation tables to be generated and administered.

Prompts and responses

Table of Contents

Section	Page
<i>Prompts and responses by data block :</i>	
HLOC: Home Location data block (NARS only)	page 904
HNPA: Home Number Plan area code data block	page 905
LOC: Location code data block (NARS only)	page 905
NPA: Number Plan area code data block	page 906
NSCL: Network Speed Call List data block	page 907
NXX : Central Office Code Translation data block	page 908
SPN: Special Number Translation data block	page 909

HLOC: Home Location data block (NARS only)

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	NET	Feature = NET
TRAN	aaa	Translator (aaa = AC1, AC2, or SUM)
TYPE	HLOC	Type = HLOC (Home Location code)
HLOC	xxx y..y	Home Location code, where xxx = home location code and y...y = extended code of 1-4 digits. The extended code is optional.
- DMI	1-255	Digit Manipulation Index

HNPA: Home Number Plan area code data block

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	NET	Feature = NET
TRAN	aaa	Translator (aaa = AC1, AC2, or SUM)
TYPE	HNPA	Type = HNPA (Home Number plan area code transmission)
HNPA	xxx	Home Numbering Plan Area code where xxx = 200 - 999
	1xxx	Home Numbering Plan Area code using 1+ dialing, where xxx = 200 - 999.

LOC: Location code data block (NARS only)

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	NET	Feature = NET
TRAN	aaa	Translator (aaa = AC1, AC2, or SUM)
TYPE	LOC	Type = LOC (Location code)
LOC	xxx y..y	Location code, where xxx = home location code and y..y = extended code of 1-4 digits. The extended code is optional.
- FLEN	(0)-24	Flexible Length
- RLI	xxx	Route List Index
- NPA	xxxxxxx	maximum 7 digit NPA code allowed
- NXX	xxxxxxx	maximum 7 digit NXX code allowed
- ITOH	(NO) YES	Inhibit Time Out Handler
- ITEI	xxx	Incoming Trunk group Exclusion Index
- LDN	xx...xx	Listed Directory Number
- DID	(NO) YES	Direct Inward Dial (DID)
- - MNXX	(NO) YES	Multiple NXX
- - SAVE	1-4	Saved digits
- - - OFFC	xxx	Office
- - RNGE	0-9999 0-9999	Range

NPA: Number Plan area code data block

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	NET	Feature = NET
TRAN	aaa	Translator (aaa = AC1, AC2, or SUM)
TYPE	NPA	Type = NPA (Number plan area code transmission)
NPA	xxx y..y z..z	Numbering Plan Area code translation, where xxx = 3 digits, y..y = 1-3 digits, and z..z = 1-4 digits. the y..y and z..z entries are optional. Precede the xxx entry with the character "1" when using 1+ dialing.
- RLI	xxx	Route List Index
- SDRR	a...a	Supplemental Digit Restriction or Recognition (a...a = ALLOW, DDD, DENY, DID, ITED, LDDD, LDID, or STRK)
-- DENY	x...x	Number to be denied within the NPA
-- DMI	1-255	Digit Manipulation Index
--- LDID	x...x	Local DID number to be recognized
-- LDDD	x...x	Local DDD number to be recognized
-- DID	x...x	Remote DID number to be recognized
-- DDD	x...x	Remote DDD number to be recognized
-- ITED	x...x	Incoming Trunk group Exclusion Digits
-- ALLOW	x...x	Allowed codes
- ITEI	xxx	Incoming Trunk group Exclusion Index

NSCL: Network Speed Call List data block

Prompt	Response	Comment
--------	----------	---------

REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	NET	Feature = NET
TRAN	aaa	Translator (aaa = AC1, AC2, or SUM)
TYPE	NSCL	Type = NSCL (Network Speed Call List)
- ITEI	xxx	Incoming Trunk group Exclusion Index
NSSC	xxx	Network Speed Call access Code
- SSCL	0-253	System Speed Call List number

NXX : Central Office Code Translation data block

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	NET	Feature = NET
TRAN	aaa	Translator (aaa = AC1, AC2, or SUM)
TYPE	NXX	Type = NXX (Central Office Code Translation)
NXX	xxx y..y	Numbering Plan Exchange (Central Office)
- RLI	xxx	Route List Index
- SDRR	a...a	Supplemental Digit Restriction or Recognition (a...a = ALOW, DDD, DENY, DID, ITED, LDDD, LDID, or STRK)
-- DENY	x...x	Number to be denied within the NXX
-- DMI	1-255	Digit Manipulation Index
-- - LDID	x...x	Local DID number to be recognized
- LDDD	x...x	Local DDD number to be recognized
-- DID	x...x	Remote DID number to be recognized
-- DDD	x...x	Remote DDD number to be recognized
-- ITED	x...x	Incoming Trunk group Exclusion Digits
-- ALOW	x...x	Allowed codes
- ITEI	xxx	Incoming Trunk group Exclusion index

SPN: Special Number Translation data block

Prompt	Response	Comment
REQ	a...a	Request (a...a = CHG, END, LCHG, NEW, OUT, or PRT)
CUST	xx	Customer number associated with this function
FEAT	NET	Feature = NET
TRAN	aaa	Translator (aaa = AC1, AC2, or SUM)
TYPE	SPN	Type = SPN (Special Number Translation)
SPN	x..x	Special Number translation
- FLEN	(0)-24	Flexible Length
-- INPL	(NO) YES	International Dialing Plan
- ITOH	(NO) YES	Inhibit Time-out Handler
- RLI	xxx	Route List Index
- CLTP	a...a	Type of call that is defined by the special number (a...a = (NONE), LOCL, NATL, INTL, SSER, or SERH)
- SDRR	a...a	Supplemental Digit Restriction or Recognition (a...a = ALLOW, ARRN, DDD, DENY, DID, ITED, LDDD, LDID, or STRK)
-- DENY	x...x	Number to be Denied
-- DMI	1-255	Digit Manipulation Index
--- LDID	x...x	Local DID number to be recognized
-- LDDD	x...x	Local DDD number to be recognized
-- DID	x...x	Remote DID number to be recognized
-- DDD	x...x	Remote DDD number to be recognized
-- ITED	x...x	Incoming Trunk group Exclusion Digits
-- ARRN	x...x	Alternate Routing Remote Number
-- STRK	x...x	Allowed codes for ADM/MDM
-- ALLOW	x...x	Allowed codes
--- ARLI	0-255 0-999	Alternative Route List Index

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ALLOW	x...x	<p>Allowed codes for ADM/MDM to be recognized within the NXX, NPA or SPN</p> <p>The maximum number of digits to be entered must be the lesser of 10 or:</p> <ul style="list-style-type: none"> • 7-m (8-m for 1 + dialing) for NXX • 10-m (11-m for 1 + dialing) for NPA • 19-m for SPN <p>Where: m = number of digits entered for NPA, NXX, or SPN.</p> <p>These numbers do not have to be leftwise unique. For non leftwise unique numbers, the longer number takes precedence over the shorter number. However, the exact same numbers (not leftwise unique and the same length) are still blocked.</p>	basic-22
ARLI	0-255 0-999	<p>Alternative Route List Index</p> <p>Alternative Route List Index with Flexible Numbering Plan (FNP) package 160.</p> <p>The ARRAN prompt is repeated after the ARLI prompt until <cr> is entered (in response to ARRAN).</p>	fnp-16
ARRN	x...x	<p>Alternate Routing Remote Number to be recognized within SPN.</p> <p>The maximum number of digits to be entered must be the lesser of 10 or 19-m for SPN.</p> <p>Where: m = number of digits entered for SPN.</p> <p>These numbers do not have to be leftwise unique. For non leftwise unique numbers, the longer number takes precedence over the shorter number. However, the exact same numbers (not leftwise unique and the same length) are still blocked.</p>	fnp-16
CLTP	(NONE) LOCL NATL INTL SSER SERH	<p>Type of call that is defined by the special number.</p> <p>No call type</p> <p>Local</p> <p>National</p> <p>International</p> <p>Special Service</p> <p>Special Service Hold</p>	kd3-20

Prompt	Response	Comment	Pack/Rel
CUST	xx	Customer number associated with this function as defined in LD 15.	b/nars-1
DDD	x...x	Remote DDD number to be recognized within the NPA, NXX or SPN. The maximum number of digits to be entered must be the lesser of 10 or: <ul style="list-style-type: none"> • 7-m (8-m for 1 + dialing) for NXX • 10-m (11-m for 1 + dialing) for NPA • 19-m for SPN Where: m = number of digits entered for NPA, NXX, or SPN. These numbers do not have to be leftwise unique. For non leftwise unique numbers, the longer number takes precedence over the shorter number. However, the exact same numbers (not leftwise unique and the same length) are still blocked.	b/nars-5
	<cr>	Return to SDRR prompt.	
DENY	x...x	Number to be denied within the NPA,NXX,SPN, or SDR. The maximum number of digits to be entered must be the lesser of 10 or: <ul style="list-style-type: none"> • 7-m (8-m for 1 + dialing) for NXX • 10-m (11-m for 1 + dialing) for NPA • 19-m for SPN Where: m = number of digits entered for NPA, NXX, or SPN. These numbers do not have to be leftwise unique. For non leftwise unique numbers, the longer number takes precedence over the shorter number. However, the exact same numbers (not leftwise unique and the same length) are still blocked.	b/nars-1
	<cr>	Return to SDRR prompt.	
DID	(NO) YES	Direct Inward Dial (DID) This location arranged for DID	

LD 90

Prompt	Response	Comment	Pack/Rel
	x...x	Remote DID number to be recognized within the NPA,NXX or SPN. The maximum number of digits to be entered must be the lesser of 10 or: <ul style="list-style-type: none">• 7-m (8-m for 1 + dialing) for NXX• 10-m (11-m for 1 + dialing) for NPA• 19-m for SPN Where: m = number of digits entered for NPA, NXX, or SPN. These numbers do not have to be leftwise unique. For non leftwise unique numbers, the longer number takes precedence over the shorter number. However, the exact same numbers (not leftwise unique and the same length) are still blocked.	bnars-1
	<cr>	Precede with X to remove. Return to SDRR prompt.	
DMI	1-255 1-999	Digit Manipulation Index Digit Manipulation Index with Flexible Numbering Plan (FNP) package 160 DMI is only prompted when the Directory Number Expansion (DNXP) package 150 is equipped and SDRR = LDID.	dnxp-13
FEAT	NET	Feature Network translation tables	nars-1
FLEN	(0)-24	Flexible Length (the number of digits the system expects to receive before accessing a trunk and outpulsing these digits) Flexible Length range	fnp-20
HLOC	xxx xxx y..y	Home Location code xxx = 3 digits Extended Home Location code, where xxx = 3 digits and y..y = 1-4 digits. Separate the xxx and y..y with a space.	nars-1
HNPA	xxx	Home Numbering Plan Area code (a leading zero is not allowed) Response for Home Numbering Plan Area code, where xxx = 200-999. A leading zero is not allowed.	nanp-19

Prompt	Response	Comment	Pack/Rel
	1xxx	Response for Home Numbering Plan Area code using 1+ dialing, where xxx = 200-999. Note that the xxx entry must be preceded with the character "1".	
INPL	(NO) YES	International Dialing Plan for special number Default to North American operation when FLEN = 0. Prompted with Flexible Numbering Plan (FNP) package 160, FLEN = 0 and SPN = 0, 00, 01, 011, 411, 611, 911, 800, 1800.	
ITED	x...x	Incoming Trunk group Exclusion Digits (number to be restricted within the NPA for the excluded trunk group) The maximum number of digits to be entered must be the lesser of 10 or: <ul style="list-style-type: none"> • 7-m (8-m for 1 + dialing) for NXX • 10-m (11-m for 1 + dialing) for NPA • 19-m for SPN Where: m = number of digits entered for NPA, NXX, or SPN. These numbers do not have to be leftwise unique. For non leftwise unique numbers, the longer number takes precedence over the shorter number. However, the exact same numbers (not leftwise unique and the same length) are still blocked.	b/nars-1
	<cr>	Return to SDRR prompt	
ITEI	(0)-127 (0)-255	BARS Incoming Trunk group Exclusion Index NARS Incoming Trunk group Exclusion Index	b/nars-5
ITOH	(NO) YES	Inhibit Time-Out Handler	fnp-16

LD 90

Prompt	Response	Comment	Pack/Rel
LDDD	x...x	<p>Local DDD number to be recognized within the NPA, NXX, or SPN</p> <p>The maximum number of digits to be entered must be the lesser of 10 or:</p> <ul style="list-style-type: none">• 7-m (8-m for 1 + dialing) for NXX• 10-m (11-m for 1 + dialing) for NPA• 19-m for SPN <p>Where: m = number of digits entered for NPA, NXX, or SPN.</p> <p>These numbers do not have to be leftwise unique. For non leftwise unique numbers, the longer number takes precedence over the shorter number. However, the exact same numbers (not leftwise unique and the same length) are still blocked.</p>	b/nars-5
	<cr>	Return to SDRR prompt	
LDID	x...x	<p>Local DID number to be recognized within the NXX, NPA or SPN</p> <p>The maximum number of digits to be entered must be the lesser of 10 or:</p> <ul style="list-style-type: none">• 7-m (8-m for 1 + dialing) for NXX• 10-m (11-m for 1 + dialing) for NPA• 19-m for SPN <p>Where: m = number of digits entered for NPA, NXX, or SPN.</p> <p>These numbers do not have to be leftwise unique. For non leftwise unique numbers, the longer number takes precedence over the shorter number. However, the exact same numbers (not leftwise unique and the same length) are still blocked.</p>	b/nars-5
	<cr>	Return to SDRR prompt	
LDN	xx...xx	<p>Listed Directory Number</p> <p>Up to 10 digit listed directory number, including NPA.</p>	
LOC	x...x xxx y..y	<p>Location code , where xxx = 3 digits</p> <p>Extended Location code, where xxx = 3 digits and y..y = 1-4 digits. Separate xxx and y..y entries with a space.</p>	nars-1

Prompt	Response	Comment	Pack/Rel
MNXX	(NO) YES	Multiple NXX codes and ranges This prompt should not be used with NARS DPNSS1.	b/nars-5
NPA	xxx	Numbering Plan Area code translation Area code translation, where xxx = 3 digits. A leading zero is not allowed.	nanp-19
	xxx y..y z..z	Extended NPA code translation. An extended NPA code can be from 4 to 10 digits, where xxx = 3 digits, y..y = 1-3 digits and z..z = 1-4 digits. Separate xxx, y..y and z..z entries with a space.	
	1xxx	Area code translation using 1+ dialing, where xxx = 3 digits. Note that the xxx entry must be preceded with the character "1".	
	1xxx y..y z..z	Extended NPA code translation 1+ dialing. An extended NPA code using 1+ dialing can be from 5 to 11 digits, where xxx = 3 digits, y..y = 1-3 digits and z..z = 1-4 digits. Separate xxx, y..y and z..z entries with a space. Note that the xxx entry must be preceded with the character "1".	
	xxxxxxx	Numbering Plan Area Code <ul style="list-style-type: none"> up to 7 digits are allowed when TYPE = LOC 	basic-25
NSSC	xxx	One to three-digit Network Speed Call access Code	nars-1
NXX		Numbering Plan Exchange	b/nars-1
	xxx	Office code translation, where xxx = 3 digits. A leading zero is not allowed.	
	1xxx	Office code translation using 1+ dialing, where: xxx = 3 digits. The xxx entry must be preceded with the digit "1".	
	xxx y..y	Extended NXX code, where xxx = 3 digits and y..y = 1-4 digits. Separate the NXX code (xxx) and the extended	
	1xxx y..y	Extended NXX code using 1+ dialing, where xxx = 3 digits and y..y = 1-4 digits. Separate the NXX code (xxx) and the extended code (y..y) with a space. The xxx entry must be preceded with the digit "1".	
	<cr>	Return to REQ.	
	xxxxxxx	Public Network Exchange Code <ul style="list-style-type: none"> up to 7 digits are allowed when TYPE = LOC 	basic-25

LD 90

Page 916 of 1030 Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
OFFC	xxx	Office (NXX of the DID number) Prompted if MNXX = YES.	b/nars-5
REQ	CHG END LCHG NEW OUT PRT	Request. Change existing data block. Exit Overlay program. Print date and time that each data group was last changed (data groups include: LOC, HLOC, NPA, HNPA, NXX, SPN and NSCL) Create new data block. Delete existing data block. Print data block.	esn-1
RLI	0-127 0-255 0-999	BARS Route List Index NARS Route List Index Flexible Numbering Plan (FNP) Route List Index Must be in the range specified by prompt MXRL in LD 86, (i.e., 0 ≤ RLI < MXRL).	esn-20
RNGE	0-9999 0-9999	Range (upper and lower limit for DID number range) Inputs must be the same number of digits as the number of trailing digits to be saved.	b/nars-1
SAVE	1-4	Saved digits (number of trailing digits to be saved in dialed extension number - DID only) Must be 4 if MNXX = YES.	b/nars-1
SDRR	ALLOW ARRN DDD DENY DID ITED LDDD LDID STRK <cr>	Supplemental Digit Restriction or Recognition Allowed codes Alternate Routing Remote Number Recognized remote Direct Distance Dial codes Restricted codes Recognized remote Direct Inward Dial codes Incoming Trunk group Exclusion Digits Recognized Local Direct Distance Dial codes Recognized Local Direct Inward Dial codes For ADM/MDM trunk groups Return to SPN	b/nars-5

Prompt	Response	Comment	Pack/Rel
SPN		Special Number. Enter a carriage return or <cr> to return to the REQ prompt.	b/nars-1
	x...x	Special Number translation Enter the SPN digits in groups of 3 or 4 digits, separated by a space (e.g., xxxx xxx xxxx). The SPN can be up to 19 digits long. The maximum length no longer depends on whether or not the first digit of the SPN is a "1". That restriction has been removed. The maximum number of groups allowed is 5.	
SSCL	0-4095	System Speed Call List number	nars-1
STRK	x...x	Allowed codes for ADM/MDM to be recognized within the NXX, NPA or SPN The maximum number of digits to be entered must be the lesser of 10 or: <ul style="list-style-type: none"> • 7-m (8-m for 1 + dialing) for NXX • 10-m (11-m for 1 + dialing) for NPA • 19-m for SPN Where: m = number of digits entered for NPA, NXX, or SPN. These numbers do not have to be leftwise unique. For non leftwise unique numbers, the longer number takes precedence over the shorter number. However, the exact same numbers (not leftwise unique and the same length) are still blocked.	
TRAN	AC1 AC2 SUM	Translator Access Code 1 (NARS/BARS) Access Code 2 (NARS) Summary of Network Translations (allowed when REQ = PRT)	b/nars-1

LD 90

Prompt	Response	Comment	Pack/Rel
TYPE		Type of data block	esn-1
	ALL	If REQ = PRT, all of the following types will be printed	
	HLOC	ESN Home Location Code translation data block (NARS only)	
	HNPA	Home NPA translation code (Should not be used on DPNSS1)	
	LOC	ESN Location Code translation data block (NARS only)	
	NPA	Numbering Plan Area code translation data block (Should not be used on DPNSS1)	
	NSCL	Network Speed Call List data block	
	NXX	Central Office Code Translation data block (Should not be used on DPNSS1)	
	SPN	Special code translation data block	

LD 93: Multi-Tenant Service

Overlay program 93 is used to enable and administer the Multi-Tenant Service feature. It is used to configure or change assignments and print data for Attendant Console groups, Tenant-to-Tenant groups, Tenant-to-Route groups, Tenant-to-Attendant Console groups, and Route-to-Attendant Console groups.

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	a...a	Type of data block (a...a = ACG, CPG, CPGP, RACC, RACG, RCPG, TACC, TACG, TCPG, TENS, or TGEN)
CUST	xx	Customer number associated with this function
CPG	1-63	Console Presentation Group number
CPGS	(NO) YES	Customer Presentation Group Services
ROUT	0-511	Route number
TEN	1-511	Tenant number
MBGS	(0)-65535	Multi-location Business Group Subgroup
SGRP	(0)-999	Scheduled Access Restriction Group number
ECDN	x...x	External Call DN
ICDN	x...x	Internal Call DN
ICPS	aaa	Intercept Computer Printer Search [(CIR) or COM]
- ICPR	0-<NIPN>	Intercept Computer Printer number
ACC	aaaa	Access (aaaa = ALLOW or DENY)
DENY	1-511 1-511	Access denied tenant numbers
ALLOW	1-511 1-511	Access allowed tenant numbers
AGNO	0-63	Attendant Console Group Number
NTBL	(0)-63	NAS routing Table
ANUM	1-63 1-63	Add Attendant Console Numbers
NAGN	0-63	Night Attendant Console Group Number
LDN0	x...x	Listed DN 0
LDN1	x...x	Listed DN 1
LDN2	x...x	Listed DN 2
LDN3	x...x	Listed DN 3
LDN4	x...x	Listed DN 4
LDN5	x...x	Listed DN 5
NIT1	x...x	First Night Service by Time of Day (NTOD) DN

TIM1	hh mm	Time for first NTOD DN
NIT2	x...x	Second NTOD DN
TIM2	hh mm	Time for second NTOD DN
NIT3	x...x	Third NTOD DN
TIM3	hh mm	Time for third NTOD DN
NIT4	x...x	Fourth NTOD DN
TIM4	hh mm	Time for fourth NTOD DN
ICI	xx aaa	Incoming Call Indicators (ICI)
AQTT	1-(30)-255	Attendant Queuing Threshold
AODN	xxxx	Attendant Overflow DN
CWCL	(0)-255 (0)-255	Call Waiting Call Limit
CWTM	(0)-511 (0)-511	Call Waiting Time
CWBZ	(NO) YES	Call Waiting Buzz
EFLL	(0)-8064	Efficiency Factor Loading Level
FRRT	0-511	First RAN Route number
- FRT	0-(20)-2044	First RAN Time threshold
SRRT	0-511	Second RAN Route number
- SRT	0-(20)-2044	Second RAN Time threshold
WAIT	aaa	Wait time treatment (aaa = (RGB), MUS, or SIL)
- MURT	0-511	Music Route number if WAIT = MUS
RICI	(NO) xx	Recorded overflow announcement on ICI keys

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ACC		Access	tens-7
	DENY	Denied tenants are to be entered. Sets with TEND Class of Service can access all routes. Sets with TENA can only access routes if tenant to route access is allowed for that set's tenant. When REQ = PRT, print access denied tenants.	
	ALLOW	Allowed tenants are to be entered. Sets with TEND Class of Service can access all routes. Sets with TENA can only access routes if tenant to route access is allowed for that set's tenant. When REQ = PRT, print access allowed tenants.	
AGNO	0-63	Attendant Console Group Number AGNO 0 always exists and contains all Attendant Consoles that are configured for the customer. AGNO is initially specified for all tenants. When TYPE = CPG, AGNO cannot be zero.	tens-7
ALLOW	1-511 1-511 ALL <cr>	Access allowed tenant numbers Prompted when ACC = ALLOW. Access allowed all tenants Stop ALLOW prompt.	tens-7
ANUM	1-63 1-63 <cr>	Add Attendant Console Numbers. Stop prompt. Precede with X to remove.	tens-7
AODN	xxxx	Attendant Overflow DN Precede with X to remove.	aop/ cpg-15
AQTT	1-(30)-255	Attendant Queuing Threshold	aop/ cpg-15
CPG	1-63	Console Presentation Group number Use <cr> to print all configured CPG data blocks for the customer.	cpg-15
CPGS	(NO) YES	Disable Customer Presentation Group level Services Enable Customer Presentation Group level Services	cpg-15

Prompt	Response	Comment	Pack/Rel
		Prompted with Console Presentation Group (CPG) package 172.	
CUST	0-99 <cr>	Customer number associated with this function as defined in LD 15 Print specified data for all customers when REQ = PRT	tens-7
CWBZ	(NO) YES (NO) YES	Call Waiting Buzz First field: Provide 2 second buzz on exceeding upper CWCL or CWTM threshold. Second field: Buzz on first call entering queue.	cpg-15
CWCL	(0)-255 (0)-255 (0)-1000 (0)-1000	Lower and upper thresholds for Call Waiting Call Limit The call waiting lamp starts flashing when number of calls in the queue meets or exceeds the upper threshold. The lamp continues to flash until the number of calls in queue is less than the lower threshold. Enter 0 0 to disable this feature. Lower and upper thresholds defined as a percentage of the active consoles when OPT = FACA in LD 15. When the FACA/FACD option is changed in LD 15, a new value for CWCL must be set or the default values are used. The CWCL values for the tenant-level are set equal to the customer-level values. (CWCL is also given in LD 15).	cpg-15
CWTM	(0)-511 (0)-511	Lower and upper thresholds (in seconds) for Call Waiting Time The Call Waiting lamp starts flashing when the call in the queue meets or exceeds the upper threshold. The lamp continues to flash until the wait time is less than the lower threshold. Enter 0 0 to disable this feature.	cpg-15
DENY	1-511 1-511 ALL	Access denied tenant numbers Prompted when ACC = DENY. Access denied all other tenants	tens-7

LD 93

Prompt	Response	Comment	Pack/Rel
	<cr>	Stop DENY prompt.	
ECDN	x...x	External Call DN, where: <ul style="list-style-type: none">• x...x = up to 13 digits DN used for intercept transfer when the FDN and multi-tenant is not on intercept position. The DN is used for intercept treatment for external calls. Prompted with Intercept Computer Interface (ICP) package 143.	icp-16
EFLL	(0)-8064	Efficiency Factor Loading Level Prompted with Network Attendant Service (NAS) package 159.	nas-18
FRRT	0-511	First RAN Route number Precede with X to remove.	roa/cpg-15
FRT	0-(20)-2044	First RAN Time threshold	roa/cpg-15
ICDN	xxxx	Internal Call DN, where: <ul style="list-style-type: none">• x...x = up to 13 digits DN used for intercept transfer when the FDN and multi-tenant is not on intercept position. The DN is used for intercept treatment for internal calls.	

Prompt	Response	Comment	Pack/Rel
ICI	xx aaa	<p>Incoming Call Indicators (ICI). Where:</p> <ul style="list-style-type: none"> • xx = key number (0-19) • aaa = Call type <p>aaa may be any of the following:</p> <ul style="list-style-type: none"> • CAx = Station Category (x = 1-7) • CFB = Call Forward Busy • CFN = Call Forward No Answer • DF0 = Dial 0 Fully Restricted • DL0 = Dial 0 • IAT = Inter-Attendant call • IEN = Idle Extension Notification • INT = Intercept • LCT = Lockout intercept • LD0 = Listed DN 0 • LD1 = Listed DN 1 • LD2 = Listed DN 2 • LD3 = Listed DN 3 • LD4 = Listed DN 4 • LD5 = Listed DN 5 • MWC = Message Waiting Calls • NUL = remove ICI appearances • RLL = Recall • Rxxx Rxxx = Routes (0-511). Enter one or more routes. 	cpg-20
ICPR	0-<NIPN>	Intercept Computer Printer number NIPN is defined in LD 15. Prompted when ICPS = COM.	icp-10
ICPS	(CIR) COM	Intercept Computer Printer Search (when more than one console is used) Circular search One common printer for all consoles	icp-10
LDN0	xxxx	Listed DN 0 Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove.	cpg-15

LD 93

Prompt	Response	Comment	Pack/Rel
LDN1	xxxx	Listed DN 1 Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove.	cpg-15
LDN2	xxxx	Listed DN 2 Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove.	cpg-15
LDN3	xxxx	Listed DN 3 Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove.	cpg-15
LDN4	xxxx	Listed DN 4 Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove.	nldn-20
LDN5	xxxx	Listed DN 5 Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove.	nldn-20
MBGS	(0)-65535	Multi-location Business Group Subgroup for tenant. Where: <ul style="list-style-type: none">• 0 = no indication• 1-65535 = Subgroup (tenant) identifier As with the ISDN Private Network Identifier (PNI), the entries to this prompt must be coordinated with the far-end to ensure all features function correctly within a network.	tens-16
MURT	0-511	Music Route number if WAIT = MUS Precede with X to remove.	roa/ cpg-15
NAGN	0-63	Night Attendant Console Group Number	

Prompt	Response	Comment	Pack/Rel
NIT1	xxxx	First Night Service by Time of Day (NTOD) DN Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove.	cp-g-15
NIT2	xxxx	Second NTOD DN Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove.	cp-g-15
NIT3	xxxx	Third NTOD DN Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove.	cp-g-15
NIT4	xxxx	Fourth NTOD DN Up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Precede with X to remove.	cp-g-15
NTBL	(0)-63	NAS routing Table to be used for calls directed to this Attendant Console Group (ACG)/Console Presentation Group (CPG).	nas-16
REQ	CHG END NEW	Request Change existing data block Exit Overlay program Create the Multi-Tenant Service data block. If REQ = NEW and <cr> is entered for all prompts, then all parameters default to the customer data block (LD 15) values except LDN0-3, ICI, RIC1 and AQT1.	tens-7
	OUT PRT	Remove the Multi-Tenant Service data block. Print the data block specified by TYPE.	
RIC1	(NO) xx ... xx	Recorded overflow announcement on ICI keys 0-19 Precede with X to remove.	roa/ cp-g-15
ROUT	0-511 <cr>	Route number Print all routes for the specified type when REQ = PRT.	tens-7

LD 93

Prompt	Response	Comment	Pack/Rel
SGRP	(0)-999	Scheduled Access Restriction Group number. Prompted when TYPE = TGEN	sar-20
SRRT	0-511	Second RAN Route number Precede with X to remove.	roa/ cpg-15
SRT	0-(20)-2044	Second RAN Time threshold	roa/ cpg-15
TEN	1-511 <cr>	Tenant number Print specified data for all tenants of CUST when REQ = PRT.	tens-7
TIM1	hh mm	Time for first NTOD DN. Where: <ul style="list-style-type: none">• hh = 0-23• mm = 0-59	cpg-15
TIM2	hh mm	Time for second NTOD DN	cpg-15
TIM3	hh mm	Time for third NTOD DN	cpg-15
TIM4	hh mm	Time for fourth NTOD DN	cpg-15
TYPE		Type of data block	tens-7
	CPG	Console Presentation Group data block. If REQ = NEW and <cr> is entered for all prompts, then all parameters default to the customer data block (LD 15) values except LDN0-LDN3, ICI, and RICI which are cleared. Use <cr> to print all configured CPG data blocks for the customer.	
	CPGP	Console Presentation Group level parameters	
	RACC	Tenant-to-Route Access data block	
	RCPG	Route-to-Attendant Presentation Group data block	
	TACC	Tenant-to-Tenant Access data block	
	TCPG	Tenant-to-Attendant Console Group data block	
	TENS	Multi-Tenant Service data block	

Prompt	Response	Comment	Pack/Rel
	TGEN	Tenant SAR data block	
WAIT	(RGB)	Wait time treatment	roa/ cpg -15
	MUS	Ring Back	
	SIL	Music	
		Silence	

LD 93

Page 930 of 1030 Alphabetical list of prompts

LD 94: Multifrequency Signaling

Overlay program 94 allows the implementation and administration of R2 and L1 Multifrequency Compelled Signaling (MFC) and Multifrequency Signaling for Socotel (MFE) tables.

Prompts and responses Table of Contents

Section	Page
Prompts and responses	page 933
<i>MFC Information :</i>	
MFC DID/TIE signal functions; Incoming and outgoing route tables	page 934
MFC DID/TIE default (standard) incoming table	page 936
MFC DID/TIE default (standard) outgoing table	page 938
<i>MFE Information :</i>	
MFE signal functions ; Incoming and outgoing route tables	page 939
MFE DID default incoming table	page 940
MFE DOD default outgoing table	page 941
<i>2 of 5 and 2 Of 6 Information :</i>	
2 of 5 MFK signal functions ; Incoming and outgoing route tables	page 942
2 of 6 MFK signal functions ; Incoming and outgoing route tables	page 943
<i>L1 Signaling information :</i>	
Programmable signals for all 6 L1 signaling levels	page 944
MFC default (standard) incoming tables for L1 signaling	page 947
MFC default (standard) outgoing tables for L1 signaling	page 951

Prompts and responses

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, NEW, OUT, or PRT)
TYPE	aaaa	Type of data block (aaaa = L1MF, MFET, MFK5, MFK6, R2MF or R2MFC)
ICOG	aaa	Incoming/Outgoing (aaa = ICT or OGT)
MAXT	(1)-127	Maximum Number of Tables
TBNO	1-127 <cr>	Table Number
CACD	(NO) YES	Category Code Default
- SET	(1)-10	Set category code
- ATT	(1)-10	Attendant category code
- TIE	1-(6)-10	TIE category code
- NTT	1-(6)-10	Non-TIE category code
EECD	1-127 <cr>	End-to-End Signaling Code
SMFC	(NO) YES	Send MFC
SCNT	(NO) YES	Switch CNI on Next
CNDR	(NO) YES	Calling Number Display Restriction
LVNO	1-6	Level Number
DFLT	0-127	Default Table number
RECV	1-15 mmmm	Receive signal number and mnemonic (MFC or, MFE, MFK5 or MFK6)
	1-15 NUL	Remove signal number and mnemonic (MFC or, MFE, MFK5 or MFK6)
XMIT	mmmm 1-15	Transmit signal mnemonic and number (MFC, MFE or MFK)
	mmmm 0	Remove signal mnemonic and number (MFC, MFE or MFK)
	IDCT n	Idle Call Trace Signal number

Table 14
MFC DID/TIE signal functions; Incoming and outgoing route tables

Group	Function mnemonic	Description of mnemonic
Forward Level 1 Group I	DGT1 -	Digit 1 -
	DGT9	Digit 9
	DGT0	Digit 0
	HTDM	H tandem signal. Sent before the called party DN if DN is in the Special Service List (SSL). The International Supplementary Features (SUPP) package 131 must be equipped.
	ECNI	CNI (Calling Number Identification) not available
	EODL	End of Dialing End of CPN (Calling Party Number) Request not accepted.
	Backward Level 1 Group A	CCNI
COMP		Address Complete, next group
CONG		Congestion
FAIL		Call Failure
NEXT		Send Next digit (fixed value)
SCAT		Send Category
SCNI		Send first CNI digit; send next CNI digit
TERM		Terminated
TFST *		Tandem, send first digit
TNM1 *		Send last but one digit
TNM2 *		Send last but two digits
TNM3 *		Send last but three digits
TNXT *		Tandem, send next digit

Group	Function mnemonic	Description of mnemonic
	VACO *	Vacant Office
Forward Level 2 Group II	OPER	Operator/attendant
	NOPR	Subscriber No Priority
	PRIO *	Subscriber with Priority
	REST	Restricted Station
	RICA *	Route Incoming Call to Attendant
	TOBI *	Toll Operator Break-In
	TOLL	Toll call
Backward Level 2 Group B	BUBA **	Busy (break in allowed after TOBI)
	BUBN **	Busy (break in not allowed after TOBI)
	BUSY	Station Busy
	CONG	Congestion
	FAIL	Failure
	IDCT	Idle Call Trace
	IDLE	Station Idle
	OUTT	Station Out-of-Order
	VACC	Vacant number

* Function will not be transmitted (Receive only)

** Function will not be received (Transmit only)

Note: Signal numbers not listed in Table 14 default to NUL (no assigned function).

LD 94

Table 15
MFC DID/TIE default (standard) incoming table

Group	Signal number	Function mnemonic
Receive Level 1 Group I	1 -	DGT1 -
	9	DGT9
	10	DGT0
	11	11 ASTX (CNRD)
	12	ECNI
	12	12 DPAL (CNRD)
	13	13 POND (CNRD)
	15	EODL
	15	15 DPDN (CNRD)
Transmit Level 1 Group A	1	NEXT
	3	COMP
	4	CONG
	5	SCAT
	6	TERM
	9	SCNI
	11	ASTX 11 (CNRD)
	12	DPAL 12 (CNRD)
	13	POND 13 (CNRD)
	15	FAIL
15	DPDN 15 (CNRD)	
Receive Level 2 Group II	1	NOPR
	2	PRIO
	3	NOPR
	5	OPER
	6	NOPR
	7	REST
	8	NOPR
	9	PRIO
	10	OPER
	11	NOPR
	12	NOPR
	13	NOPR

Group	Signal number	Function mnemonic
Transmit Level 2 Group B	2	IDLE
	3	BUSY
	4	CONG
	5	VACC
	8	OUTT
	9	FAIL

Note: Signal numbers not listed in Table 15 default to NUL (no assigned function.)

LD 94

Table 16
MFC DID/TIE default (standard) outgoing table

Group	Signal number	Function mnemonic
Transmit Level 1 Group I	1 -	DGT1 -
	9	DGT9
	10	DGT0
	12	ECNI
	15	EODL
Receive Level 1 Group A	1	NEXT
	2	TNM1
	3	COMP
	4	CONG
	5	SCAT
	6	TERM
	7	TMN2
	8	TNM3
	9	SCNI
	10	TFST
	11	TNXT
15	FAIL	
Transmit Level 2 Group II; Receive Level 2 Group B	1	NOPR
	5	OPER
	7	REST
	2	IDLE
	3	BUSY
	4	CONG
	5	VACC
	8	OUTT
	9	FAIL

Note 1: In Table 17, for incoming tables the signals which are received are forwarded signals, MFE tables have no Level 2 forward signals. Level 1 values for function xxxx range from DGT0 to DGT9 (Digits 0 - 9).

Note 2: Multiple function assignment allowed (same function to different signals).

Note 3: Signals transmitted in the case of incoming tables, are backward signals.

Table 17
MFE signal functions ; Incoming and outgoing route tables

Group I	Function mnemonic	Description of mnemonic
Forward Level 1	DGT1-9	Digits 1-9
	DGT0	Digit 0
	ACOC	Access code for a call to other installation
	ACSS	Access code for a call to special services
Backward Level 1	SACD	Send Access Code and Digits
	SEND	Send remaining digits (plus last digits if preceded by TRAN)
	COMP	Address Complete, change to Level 2 congestion
	TRAN	Transit connection
	FAIL	Failure, new attempt
	CONG	Congestion
Backward: Level 2	IDLE	Station Idle, charge call
	BUSY	Station Busy
	CONG	Congestion
	OUTT	Out-of-Order
	VACC	Vacant number

LD 94

Table 18
MFE DID default incoming table

Group I	Signal number	Function mnemonic
Receive Level 1	1-9	DGT1-DGT9
	10	DGT0
Transmit Level 1	2	SEND
	3	COMP
	-	CONG
Transmit Level 2	1	IDLE
	3	BUSY
	3	CONG
	3	OUTT
	3	VACC

Table 19
MFE DOD default outgoing table

Group I	Signal number	Function mnemonic
Transmit Level 1	1-9	DGT1-DGT9
	10	DGT0
	1	ACOC
	5	ACSS
Receive Level 1	1	SACD
	2	SEND
	3	COMP
	6	TRAN
	8	FAIL
	9	CONG
Receive Level 2	1	IDLE
	2	IDLE
	3	BUSY
	4	IDLE
	5	IDLE
	6	IDLE
	7	BUSY
	8	BUSY
	9	BUSY
	10	BUSY

LD 94

Table 20
2 of 5 MFK signal functions ; Incoming and outgoing route tables

Group	Function mnemonic	Description of mnemonic
Forward Group I	DGT0-9	Digits 0-9
Forward Group II	LOCB	Regular subscriber
	SERB	Special Services inside the province
	NATB	National
	INTB	International
Backward Code A	GRPA	Send Group a digits
	CCAL	Send Class of Call
	GRBC	Send Group bc digits
	SALL	Send All the digits
	GRPC	Send Group c digits
	COMP	Change to code "b"
	CONG	Congestion
Backward Code B	FMTR	Subscriber free with Metering
	CONG	Congestion
	BUSY	Subscriber Busy
	OUTT	Line dead
	EOSL	End of Selection without line state reached

Table 21
2 of 6 MFK signal functions ; Incoming and outgoing route tables

Group	Function mnemonic	Description of mnemonic
Forward Group I	DGT0-15	Digits 0-15
Forward Group II	LOCB	Provincial-regular subscriber (charging by block)
	LOCL	Provincial-regular subscriber (charging by line)
	NATB	National-regular subscriber (charging by block)
	NATL	National-regular subscriber (charging by line)
	INTB	International-regular subscriber (charging by block)
	INTL	International-regular subscriber (charging by line)
	SERB	Special services (charging by block)
	SERL	Special services (charging by line)
Backward Code A	GRBC	Send Group BC digits
	SALL	Send All the digits
	SORG	Send Origination subscribers number - All Digits
	CCAL	Send Class of Call
	CONG	Congestion
	COMP	Change to code "B"
Backward Code B	FMTR	Subscriber free with Metering
	CONG	Congestion
	BUSY	Subscriber Busy
	OUTT	Line dead
	EOSL	End of Selection without line state reached

Table 22
Programmable signals for all 6 L1 signaling levels

Group	Function mnemonic	Description of mnemonic
Forward Level 1	DGT1 -	Digit 1 -
	DGT9	Digit 9
	DGT0	Digit 0
	UREJ	Level 1 signal rejected (Abort call)
	GOEN	Change to a Supplementary Service (SS) level. New level is Level 6 when terminator has a Backward Supplementary Service (BSS). Otherwise, the new level is Level 5.
	EODL	End of Dialing. No more digits to send. Aborts call when no digits have been received.
Backward Level 1	NEXT	Send Next digit in destination address
	TNFS	Tandem encountered. Send digits again starting from the first digit.
	COMP	Address Complete (Terminate signaling)
	FAIL	Call Failure (Abort call)
	SCAT	Send calling party category (always rejected)
	TERM	Address complete (Terminate signaling)
	CONG	Congestion (Abort call)
	EINF	Request change from Level 1 to Level 6 for BSS activity. Enhanced signal set is implied.
	ELV2	Address complete. Change to Level 2. Signaling will also use Level 3 or higher.
	ENO1	Request next digit in destination address. Implies using at least Level 3 signaling.
	TNTX	Tandem encountered (Send next digit)

Group	Function mnemonic	Description of mnemonic
Forward Level 2	OLNE	Originator is a subscriber without priority
	OPER	Originator is an attendant
	NETW	Network call for Ring Again (RGA). Call is not intended for termination at a station.
	LSIG*	Restricted circuit
Backward Level 2	BUSY	Destination is busy
	FAIL	Call has failed. Abort.
	VCOT	Call has terminated on a vacant DN
	IDLE	Destination is idle
	CONG	Congestion (Abort call)
	SOTI	State of Termination undetermined
Forward Level 3	SIIN	Simple call (No restrictions)
	SUPL	Request a Forward Supplementary Service (FSS)
	NOSS	No further SS activity
Backward Level 3	TERM	Call complete (Terminate signaling)
	FAIL	Call has failed (Abort)
	SUPL	Request BSS activity
	SCNI**	Request Call Number Indicator (CNI)
	NEXT	Send FSS digit
Forward Level 4	DGT1 -	CNI digit 1 -
	DGT9	CNI digit 9
	DGT0	CNI digit 0
	LFSS	Change to Level 1 when CNI is complete.
	EODG	No more CNI digits.

LD 94

Group	Function mnemonic	Description of mnemonic
Backward Level 4	DGT1 -	CNI digit 1 -
	DGT9	CNI digit 9
	DGT0	CNI digit 0
	KEND	Changing to Level 6. Preceded by a LFSS signal.
	NEXT	Send next CNI digit
Forward Level 5 and Backward Level 6		
	DGT1	FSS digit 1
	DGT2	FSS digit 2
	DGT3*	FSS digit 3
	DGT4**	FSS Digit 4
	DGT5**	FSS Digit 5
	DGT6*	FSS Digit 6
	DGT7*	FSS Digit 7
	DGT8*	FSS Digit 8
	DGT9*	FSS Digit 9
	DGT10*	FSS Digit 10
	DGT11**	FSS Digit 11
	DGT12**	FSS Digit 12
	DGT13*	FSS Digit 13
	DGT14*	FSS Digit 14
	DGT15*	FSS Digit 15
Backward Level 5 and Forward Level 6		
	KEND	SS successful (Terminate signaling)
	FEND	SS failed (Terminate signaling)
	KMFC	SS successful (Signaling continues at a slower rate)

Group	Function mnemonic	Description of mnemonic
	FMFC	SS failed (Signaling continues at a slower rate)
	NEXT	Request next SS digit

* Function will not be transmitted (Receive only)

** Used for Ring Again (RGA)

Table 23
MFC default (standard) incoming tables for L1 signaling

This table indicates the default signal tables for L1 signaling. The transmit sets indicate only those signals that can be sent. The receive sets must have duplicate signals in order to be able to accept signals that must be mapped to another signal for processing.

Group	Signal number	Function mnemonic
Receive Level 1 Group I	1 -	DGT1 -
	9	DGT9
	10	DGT0
	12	UREJ
	13	GOEN
	15	EODL
Transmit Level 1 Group A	1	NEXT
	2	TNFS
	3	COMP
	4	FAIL
	5	SCAT
	6	TERM

LD 94

Group	Signal number	Function mnemonic
	9	CONG
	10	EINF
	11	ELV2
	12	ENOI
	14	TNXT
Receive Level 2 Group II	1	OLNE
	2	LSIG
	4	OLNE
	5	OPER
	7	OPER
	8	OPER
	9	OPER
	10	NETW*
	11	OLNE
	12	UREJ
	13	OLNE
Transmit Level 2 Group B	3	BUSY
	4	FAIL
	5	VCOT
	6	IDLE
	9	CONG
	14	SOTI
Receive Level 3 Group III	1	SIIN
	2	SIIN
	3	SIIN

Group	Signal number	Function mnemonic
	4	SIIN
	5	SUPL
	6	SUPL
	7	SUPL
	8	SUPL
	9	SIIN
	10	SIIN
	11	SUPL
	12	SUPL
	15	NOSS
Transmit Level 3 Group C	1	TERM
	4	FAIL
	8	SUPL
	9	SCNI*
	15	NEXT
Receive Level 4 Group IV	1 -	DGT1 -
	9	DGT9
	10	DGT0
	11	LFSS
	15	EODG
Transmit Level 4 Group D	1 -	DGT1 -
	9	DGT9
	10	DGT0
	11	KEND
	15	NEXT

LD 94

Group	Signal number	Function mnemonic
Receive Level 5 Group V	1 -	DGT1 -
	9	DGT9
	10 -	DG10 -
	15	DG15
Transmit Level 5 Group E	11	KEND
	12	FEND
	13	KMFC
	14	FMFC
	15	NEXT
Receive Level 6 Group VI	11	KEND
	12	FEND
	13	KMFC
	14	FMFC
	15	NEXT
Transmit Level 6 Group F	1	DGT1
	2	DGT2
	4	DGT4
	13	DG13

* Not included unless Ring Again (RGA) is included for L1 signaling.

Table 24
MFC default (standard) outgoing tables for L1 signaling

This table indicates the default signal tables for L1 signaling. The transmit sets indicate only those signals that can be sent. The receive sets must have duplicate signals in order to be able to accept signals that must be mapped to another signal for processing.

Group	Signal number	Function mnemonic
Transmit Level 1 Group I	1 -	DGT1 -
	9	DGT9
	10	DGT0
	12	UREJ
	13	GOEN
	15	EODL
Receive Level 1 Group A	1	NEXT
	2	TNFS
	3	COMP
	4	FAIL
	5	SCAT
	6	TERM
	7	RUID
	8	ALFS
	9	CONG
	10	EINF
	11	ELV2
	12	ENOI
	13	PSNX
	14	TNXT

LD 94

Group	Signal number	Function mnemonic
Transmit Level 2 Group II	1	OLNE
	2	LSIG
	5	OPER
	10	NETW*
Receive Level 2 Group B	3	BUSY
	4	FAIL
	5	VCOT
	6	IDLE
	9	CONG
	10	BUSY
	11	IDLE
	12	BUSY
	13	IDLE
	14	SOTI
Transmit Level 3 Group III; Receive Level 3 Group C		
	1	SIIN
	5	SUPL
	15	NOSS
	1	TERM
	2	TERM
	3	TERM
	4	FAIL
	5	TERM
	7	SUPL
	8	SUPL
	9	SCNI*
	10	SUPL

Group	Signal number	Function mnemonic
	11	SCNI*
	12	SCNI*
	13	SUPL
	14	SCNI*
	15	NEXT
Transmit Level 4 Group IV	1 -	DGT 1 -
	9	DGT9
	10	DGT0
	11	LFSS
	15	EODG
Receive Level 4 Group D	1 -	DGT 1 -
	9	DGT9
	10	DGT0
	11	KEND
	15	NEXT
Transmit Level 5 Group V	1 -	DGT1 -
	3	DGT3
	4	DGT4*
	5	DGT5*
	6 -	DGT6 -
	9	DGT9
	10	DGT0
	11	DG11*
	12	DG12*
Receive Level 5 Group E	11	KEND

LD 94

Group	Signal number	Function mnemonic
	12	FEND
	13	KMFC
	14	FMFC
	15	NEXT
Transmit Level 6 Group VI	11	KEND
	12	FEND
	13	KMFC
	14	FMFC
	15	NEXT
Receive Level 6 Group F	1 -	DGT 1 -
	9	DGT9
	10	DGT0
	11 -	DG11 -
	15	DG15

* Not included unless Ring Again (RGA) is included for L1 signaling.

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
ATT	(1)-10	Attendant category code Category code for attendants	mfc-10
CACD	(NO) YES	Category Code Default Change category code default. Prompted when TYPE = R2MF	opcb-14
CNDR	(NO) YES	Calling Number Display Restriction Set the table for CNDR CLID feature	basic-24
DFLT	0-127	Default table number	mfc-10
EECD	1-127 <cr>	End-to-End Signaling code Default to TBNO response when REQ = NEW otherwise leave TBNO as assigned.	mfc-18
ICOG	ICT OGT	Incoming/Outgoing Incoming table Outgoing table	mfc-10
LVNO	1-6	Level Number <ul style="list-style-type: none"> • 1-2 for TYPE = R2MF, MFK5, MFK6 • 1-6 for TYPE = L1MF Precede with X to remove.	mfc-10
MAXT	(1)-127	Maximum number of Tables Prompted when REQ = NEW	mfc-10
NTT	1-(6)-10	Non-TIE category code Category code for non-TIE trunks	mfc-14
RECV	1-15 mmmm 1-15 NUL <cr>	Receive signal number and mnemonic (MFC or, MFE, MFK5 or MFK6) Signal number range is: <ul style="list-style-type: none"> • 1 - 10 if TYPE = MFK5 • 1 - 15 if TYPE = MFK6 Remove signal number and associated function mnemonic. Stop RECV prompts	mfc-10

LD 94

Prompt	Response	Comment	Pack/Rel
		Refer to Tables 14 through 24 for function mnemonics.	
REQ	CHG END NEW OUT PRT	Request Change existing data. Exit Overlay program. Add new data to the system. Remove data block. Print data.	mfc-10
SCNT	(NO) YES	Switch CNI on Next. When the NEXT signal is received during CNI transmission on Level 1, the system will continue with sending the calling number. When the NEXT signal is received during CNI transmission on Level 1, the system will switch to called number and then send the next called number digit.	mfc-18
SET	(1)-10	Set category code. Category code for SL-1 and 500/2500 sets.	mfc-10
SMFC	(NO) YES	Send MFC Backward signals are stopped when the forward signal is recognized as having stopped. Backward signals are sent (incoming calls) pulsed for 150 ms or received (outgoing calls) pulsed 150 ms +/- 20%.	mfc-18
TBNO	1-127 <cr>	Table Number MFC or, MFE, MFK5 or MFK6 table number Print all MFC, MFE, MFK5 or MFK6 tables.	mfc-10
TIE	1-(6)-10	TIE category code Category code for TIE trunks	mfc-10
TYPE	L1MF MFET MFK5 MFK6 R2MF	Type of data block. L1 MFC data block Must have X08 to X11 Gateway (L1MF) package 188. MFE data block 2/5 Spanish KD3 MF Signaling 2/6 Spanish KD3 MF Signaling R2 MFC data block	mfc-10

Prompt	Response	Comment	Pack/Rel
XMIT	m m m m 1-15	Transmit signal mnemonic and number (MFC, MFE or MFK) <ul style="list-style-type: none"> • 1 - 10 if TYPE = MFK5 • 1 - 15 if TYPE = MFK6 	mfe-10
	m m m m 0	Remove function mnemonic m m m m and associated signal number Any undesired function in the default transmit tables should not be removed, but instead assigned a different signal number. LNVO is prompted following a null entry for XMIT. If nothing is entered in response to LVNO then, provided that there is a level one, the table is stored.	
	IDCT n	Idle Call Trace signal number (Default is the same as the IDLE signal) Where: n = signal number and 0 = close	
	<cr>	Stop XMIT prompts. Refer to Tables 18 through 28 for the function mnemonics.	

LD 94

LD 95: Call Party Name Display

Overlay program 95 is used to define, change, remove or print information for the Call Party Name Display (CPND) data block and name assignment, on a per customer basis.

Prompts and responses

Table of Contents

Section	Page
<i>Prompts and responses by task :</i>	
Create or Change Calling Party Name Display (CPND)	page 960
Add Calling Party Name Display name	page 961
Change Calling Party Name Display name	page 962
Remove Calling Party Name Display name	page 962
Print Calling Party Name Display data and names	page 963

Create or Change Calling Party Name Display (CPND)

Prompt	Response	Comment
REQ	aaa	Req = NEW or CHG
TYPE	CPND	Type = CPND (Calling Party Name Display)
CUST	xx	Customer number associated with this function
CNFG	aaaa	Configuration (aaaa = (ALON), REMO, or LOCL)
MXLN	5-(17)-27	Maximum Length
STAL	(NO) YES	Static Allocation of name storage
- DFLN	5-(13)-27	Default Length
DES	(NO) YES	Designator for Multiple Appearance DNs allowed
RESN	(NO) YES	Display of Reason for redirecting calls allowed
- CFWD	(F) aaaa	Mnemonic for Call Forward All Calls display
- CFNA	(N) aaaa	Mnemonic for Call Forward No Answer display
- HUNT	(B) aaaa	Mnemonic for Call Forward No Answer display
- NITC	(NI) aaaa	Mnemonic for Call Forward Non Intercom Call
- PKUP	(P) aaaa	Mnemonic for Call Pickup display
- XFER	(T) aaaa	Mnemonic for Call Transfer display
- AAA	(A) aaaa	Mnemonic for Attendant Alternative Answering display

Add Calling Party Name Display name

Prompt	Response	Comment
REQ	NEW	Req = NEW
TYPE	NAME	Type = NAME (CPND Name)
CUST	xx	Customer number associated with this function
CPND_LANG	aaa	CPND Language (aaa = (ROM) or KAT)
DIG	0-253 0-99	Dial Intercom Group
- LANG	aaa	Language (aaa = (ROM), KAT, or ALL)
- NAME	a...a	CPND Name in ASCII characters
- XPLN	xx	Expected Length
DISPLAY_FMT	aaaa	Display Format (aaaa = (LAST) or FIRST)
DN	x...x	Directory Number
- LANG	aaa	Language (aaa = (ROM), KAT, or ALL)
- NAME	a...a	CPND Name in ASCII characters
- XPLN	xx	Expected Length
DCNO	0-254	Digit Conversion table Number
- IDC	0-254	Incoming DID Digit Conversion number
- NAME	a...a	CPND Name in ASCII characters

LD 95

Change Calling Party Name Display name

Prompt	Response	Comment
REQ	CHG	Req = CHG
TYPE	NAME	Type = NAME (CPND Name)
CUST	xx	Customer number associated with this function
CPND_LANG	aaa	CPND Language (aaa = (ROM) or KAT)
DIG	0-253 0-99	Dial Intercom Group
- NAME	a...a	CPND Name using ASCII characters
- DN	x...x	Directory Number
- NAME	a...a	CPND Name in ASCII characters
DCNO	0-254	Digit Conversion table Number
- IDC	0-254	Incoming DID Digit Conversion number
- NAME	a...a	CPND Name in ASCII characters

Remove Calling Party Name Display name

Prompt	Response	Comment
REQ	OUT	Req = OUT
TYPE	NAME	Type = NAME (CPND Name)
CUST	xx	Customer number associated with this function
CPND_LANG	aaa	CPND Language (aaa = (ROM) or KAT)
DIG	0-253 0-99	Dial Intercom Group
DN	x...x	Remove Directory Number x...x
	x...x y...y	Remove range of DN-defined names
	ALL	Remove all DN-defined names
DCNO	0-254	Digit Conversion table Number
- IDC	0-254	Incoming DID Digit Conversion number
ARE YOU SURE?	(YES) NO	(Confirm) or remove operation

Print Calling Party Name Display data and names

Prompt	Response	Comment
REQ	PRT	Req = PRT
TYPE	NAME	Type = NAME (CPND Name)
CUST	xx	Customer number associated with this function
CPND_LANG	aaa	CPND Language (aaa = (ROM) or KAT)
LANG	aaa	Language choice for name display (aaa = ROM or KAT)
PAGE	(NO) YES	Page headers and numbers printed (or not) if the Multiple DN/DIG is specified.
DIG	0-2045 0-99	Dial Intercom Group
SHRT	(NO) YES	Short form
- DN	x...x	Print single Directory Number x...x
	x...x y...y	Print range of Directory Numbers
	x/xx/xxx	Print all DNs starting with x, xx, or xxx
	ALL	Print all DNs
SHRT	(NO) YES	Short form
DCNO	0-254	Digit Conversion table Number
- IDC	nnn	Incoming DID Digit Conversion number
	ALL	All names defined are printed
SHRT	(NO) YES	Short form

LD 95

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
AAA	aaa	Attendant Alternative Answering display mnemonic Default = A	cpnd-10
ARE YOU SURE?	(YES) NO	(Confirm) or remove operation. The default response is YES.	cpnd-1
CFNA	xxxx	Call Forward No Answer display mnemonic Default = N	cpnd-10
CFWD	xxxx	Call Forward All Calls display mnemonic Default = F	cpnd-10
CNFG	(ALON) REMO LOCL	Configuration Standalone CPND configuration Interwork with a remote directory system Interwork with a local (inboard) system	cpnd-10
CPND_LANG	(ROM) KAT	CPND language. Prompted when FTR = CPND. Roman CPND language Katakana CPND language	cpnd-19
CUST	xx	Customer number associated with this function as defined in LD 15	cpnd-10
DCNO	0-254	Digit Conversion table Number	dnis-17
DES	(NO) YES	Designator for Multiple Appearance DN's allowed Prompted when ODAS is equipped.	odas-10
DFLN	5-(13)-27	Default character string Length Default to 13 or MXLN, whichever is less. Prompted when STAL = YES	cpnd-10
DIG	0-2045 0-99 <cr>	Existing Dial Intercom Group number followed by member number To prompt DN If CPND Name already exists, an error message is returned. Prompted when DIG is equipped.	di-10

Prompt	Response	Comment	Pack/Rel
DIG	gg mm	Existing Dial Intercom Group number followed by member number (optional), where: <ul style="list-style-type: none"> • gg = 0-2045 • mm = 0-99 	di-10
	gg	Existing DIG Group number Without member number specified, ALL members within this Group are printed.	
	ALL	Print all Dial Intercom Groups.	
	<cr>	Prompts DN	
DISPLAY_FMT	(LAST) FIRST	Display format for CPND name Last name, First name (Doe, John) First name, Last name (John Doe)	cpnd-19
DN	xxxx	Directory Number (Existing eligible DN or Partial DN). The DN can be up to 4 digits, up to 7 digits with Directory Number Expansion (DNXP) package 150. Valid DN types are Single or Multiple line prime DN, trunk DN, attendant DN or ACD DN. If Partial DN, all possible DNs are printed.	cpnd-10
	x...x y...y	Range of DN-defined names are deleted/printed. This entry is valid when REQ = OUT/PRT.	
	ALL	All names defined are deleted/printed. ALL is a valid entry when REQ = OUT/PRT.	
	x/xx/xxx	DNs starting with x, xx, or xxx are printed. This entry is valid when REQ = PRT.	
	<cr>	To re-prompt DCNO If the CPND name is already defined, an error message is returned.	
HUNT	xxxx	Call Forward No Answer display mnemonic Default = B	cpnd-10
IDC	0-254	Incoming DID Digit Conversion number Existing complete or partial IDC number	dnis-17
	ALL	All Names defined	

LD 95

Prompt	Response	Comment	Pack/Rel
LANG	(ROM) KAT ALL <cr>	Language choice for name for CPND screen and set display. Allowed only if REQ = OUT. English display (Roman characters) Non-English display (Katakana characters) Remove ALL names from CPND data block for the DN or DIG selected. Roman (English) display	cpnd-16
MXLN	5-(17)-27	Maximum allowable CPND character string Length Once an MXLN is entered, it cannot be changed to a lower value via the CHG prompt.	cpnd-10
NAME	a...a <cr>	CPND Name using ASCII characters If STAL = YES, then Name size < XPLN If STAL = NO, then Name size = number of characters entered. DIG is reprompted. to DN prompt	cpnd-19
NITC	(NI) aaaa	Non intercom call NITC indicates that an intercom call terminated as a normal call.	
PAGE	(NO) YES	Page headers and numbers not printed if the Multiple DN/DIG is specified. Page headers and numbers printed if the Multiple DN/DIG is specified. Page headers (date and page number) are not printed if a single DN/DIG is specified.	cpnd-10
PKUP	xxxx	Call Pickup display mnemonic. Default = P.	cpnd-10
REQ	CHG END NEW OUT PRT	Request. Change existing data block Exit Overlay program Create CPND data blocks and/or name strings Remove existing name or data block Print an existing Name or data block from the data base	cpnd-10
RESN	(NO) YES	Display of Reason for redirecting calls allowed	cpnd-19

LD 95

Page 968 of 1030 Alphabetical list of prompts

LD 97: Configuration Record 2

Overlay program 97 is used to specify several system parameters for XPE and other related equipment. These parameters include the minimum flash timing to download to the XPE packs when required.

Loss and Level Plan information may also be specified. Refer to the *International Loss and Level Plan planning and engineering* NTP for information regarding Loss and Level Plans prior to making any changes to the parameters defined in this Overlay.

Prompts and responses Table of Contents

Section	Page
<i>Prompts and responses by data block :</i>	
BTD: Busy Tone Detection data block	page 971
DTD: Dial Tone Detection parameters data block	page 971
DTR: Digitone Receiver parameters data block	page 972
FIRP: Fibre Remote Parameters Data Block	page 974
LOSP: Loss Plan Tables data block	page 975
LOSP: Loss Plan Tables data block (STYP or DTYP = PRED)	page 975
LOSP: Loss Plan Tables data block (STYP or DTYP = DISL)	page 976
LOSP: Loss Plan Tables data block (DTYP or STYP = CSTM)	page 977
SUPL: Superloop parameters data block	page 978
SYSM: System Parameters for MSDL/MISP card	page 978
SYSP: System parameters for Peripheral Equipment	page 979
XCTP: Conference/TDS/MF Sender card parameters data block	page 980
XPE: Extended Peripheral Equipment shelf data block	page 981
<i>Other Information:</i>	
Print information on Superloop or Extended PE shelves	page 981

BTD: Busy Tone Detection data block

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, PRT)
TYPE	BTD	Type = BTD (Busy Tone Detection)
BTDT	(0)-7	Busy Tone Detection Table
BCAD	x...x x...x	Busy Tone Cadence (ON and OFF cycles)
BTDD	a...a	Busy Tone Detection Direction (a...a = (BOTH) or INC)
FREQ_0	350 - 655	Frequency of Busy Tone for Frequency 0
FREQ_1	350 - 655	Frequency of Busy Tone for Frequency 1
FDLT	10 - 315	Frequency delta
FLVL_MAX	0 - 15	Maximum Frequency Tone level to be detected.
FLVL_MIN	20 - 35	Minimum Frequency Tone level to be detected.

DTD: Dial Tone Detection parameters data block

For all DTD parameters, if a value is entered between two valid responses, the lowest valid response is stored for downloading to the XTD card. The stored value is also echoed to the craftsperson.

The type for the DTMF parameters is DTR.

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, PRT)
TYPE	DTD	Type = DTD (Dial Tone Detection)
XTDT	(0)-7	Extended Tone Detection Table
DFQ	0-(4)-15	Dial Tone Frequency band for 1st dial tone
MDL	10-(20)-40	Minimum Detect Level for 1st Dial Tone
MVT	100-(400)-1600	Minimum Validation Time for 1st Dial Tone
BRK	(0)-240	Break Duration (maximum) for 1st Dial Tone
CAD	(0)-15	Cadence type for 1st Dial Tone
SSC	(0)-15	Second Stage Configuration

DTR: Digitone Receiver parameters data block

For all DTR parameters, if a value is entered between two valid responses, the lowest valid response is stored for downloading to the XTD/DTR card. The stored value is also echoed to the craftsperson.

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, PRT)
TYPE	DTR	Type = DTR (Digitone Receiver)
MINL	3-(42)-48	Minimum accept Level for Digitone receiver

FDL: Flash Download for M3900 sets

Prompt	Response	Comment
REQ	CHG PRT	Change or Print
TYPE	FDL	Flash Download for M3900 sets.
FDTP	t	M3900 set selected for download. Where t = (NONE) No M3900 flash download 3902 - M3902 sets 3903 - M3903 sets 3904 - M3904 sets 3905 - M3905 sets ALL - all M3900 sets
FDTM		Time interval restriction for Flash Download.
	(NO)	No change to time intervals
	YES	Change time intervals Note: Flash download is automatically paused one hour before virtual midnight (refer to TODR in Ovl 17) to allow midnight routines to run. This option is not applicable to reporting.

- FDAY	d n	Day and number of time intervals for download. Prompted only if FDTM = YES. d = (0-6) Day of week, Sunday to Saturday n = (0-4) Number of time intervals where 0 = no download for that day. Note: If two or more intervals are specified, they must be non overlapping, non consecutive and in increasing order. Day is re-prompted until <CR> is entered.
-- FINT	s l	Starting hour and length for a time interval. Prompted n times if n>0. Where: s = (0-23) Starting hour using 24 hour format l = (1-24) Length of interval in hours
FTNR	(NO) YES	TN range restriction option for Flash Download. No TN restriction Specify TN range
- FSTN	l s c u c u	Starting Terminal Number for Flash Download. Prompted only if FTNR = YES General TN format: l s c u = loop, shelf, card, unit Option 11C TN format: c u = card, unit
- FETN	l s c u c u	Ending Terminal Number for Flash Download. Prompted only if FTNR = YES General TN format: l s c u = loop, shelf, card, unit Option 11C TN format: c u = card, unit
FDNR	(NO) YES	DN range or list restriction option for Flash Download. No DN or list restriction Specify DN range
- FDDN	c d1 d2	Flash Download Prime Directory Number range. Prompted only if FDNR = YES Where: c = Customer number d1 = starting prime DN d2 = ending prime DN

LD 97

FRCE		System-wide flash download control option.
	(NO)	Conditional. System-wide flash download (via FDLS in OVL 32) applies only to a M3900 set whose flash firmware version is different from version currently found on the system disk.
	YES	Forced. Force system-wide flash download to all the specified M3900 sets regardless of their current flash firmware versions. Note: Use this option with caution! Once the download tree is built (after FDLS in OVL 32) this option is automatically reverted to NO (conditional). Not applicable to reporting.
FVER		Flash firmware version specified for full report.
	(0)-99	Where: (0) = Report all Flash firmware version 1-99 = Selected Flash firmware version

FIRP: Fibre Remote Parameters Data Block

Prompt	Response	Comment
REQ	CHG PRT	Change or Print
TYPE	FIRP	Fibre Remote Parameters
SUPL	0-156	Superloop number associated with the Remote IPE shelf
	0-252	Option 81C with Fiber Network Fabric
NNDC	5-(7)-8	No-New-Data -Calls condition Threshold
XSMN	(0)-63	XSM address on the remote shelf

LOSP: Loss Plan Tables data block

Loss and Level Plan information may also be specified. Please refer to *International Loss and Level Plan* NTP for information regarding Loss and Level Plans prior to making any changes to the parameters defined in this Overlay.

Prompt	Response	Comment
REQ	aaa	Request (CHG, END, PRT)
TYPE	LOSP	Type = LOSP (Loss Plan Tables)
NATP	(NO) YES	North American Transmission Plan for generic XFCOT
TTYP	aaaa	Table Type (aaaa = (STAT) or DYNM)
- STYP	aaaa	Static Loss Plan table type (aaaa = (PRED), CSTM, or DISL)
- DTYP	aaaa	Dynamic Loss Switching alternate table type (aaaa = (PRED), CSTM, or DISL)

LOSP: Loss Plan Tables data block (STYP or DTYP = PRED)

Prompt	Response	Comment
REQ	aaa	Request (CHG, END, PRT)
TYPE	LOSP	Loss Plan Tables
NATP	(NO) YES	North American Transmission Plan for generic XFCOT
TTYP	aaaa	Table Type (aaaa = (STAT) or DYNM)
- STYP	aaaa	Static Loss Plan table type (aaaa = (PRED), CSTM, or DISL)
- DTYP	aaaa	Dynamic Loss Switching alternate table type (aaaa = (PRED), CSTM, or DISL)
- - TNUM	xx	Table Number

LOSP: Loss Plan Tables data block (STYP or DTYP = DISL)

Prompt	Response	Comment
REQ	aaa	Request (CHG, END, PRT)
TYPE	LOSP	Type = LOSP (Loss Plan Tables)
NATP	(NO) YES	North American Transmission Plan for generic XFCOT
TTYP	aaaa	Table Type (aaaa = (STAT) or DYNM)
- STYP	aaaa	Static Loss Plan table type (aaaa = (PRED), CSTM, or DISL)
- DTYP	aaaa	Dynamic Loss Switching alternate table type (aaaa = (PRED), CSTM, or DISL)
PWD2	xxxx	Password 2

LOSP: Loss Plan Tables data block (DTYP or STYP = CSTM)

Prompt	Response	Comment
REQ	aaa	Request (CHG, END, PRT)
TYPE	LOSP	Type = LOSP (Loss Plan Tables)
NATP	(NO) YES	North American Transmission Plan for generic XFCOT
TTYP	aaaa	Table Type (aaaa = (STAT) or DYNM)
- STYP	aaaa	Static Loss Plan table type (aaaa = (PRED), CSTM, or DISL)
- DTYP	aaaa	Dynamic Loss Switching alternate table type (aaaa = (PRED), CSTM, or DISL)
PWD2	xxxx	Password 2
- COTS	8-39 0-31	Central Office Trunk Short line Class of Service
- COTL	8-39 0-31	Central Office Trunk Long line Class of Service
- DIDS	8-39 0-31	Direct Inward Dial trunk Short line Class of Service
- DIDL	8-39 0-31	Direct Inward Dial Trunk Long line Class of Service
- T2WT	8-39 0-31	TIE trunk 2-Wire TRC Class of Service
- T2WN	8-39 0-31	TIE trunk 2-Wire NTC Class of Service
- T2WV	8-39 0-31	TIE trunk 2-Wire VNL Class of Service
- T4WT	8-39 0-31	TIE trunk 4-Wire TRC Class of Service
- T4WN	8-39 0-31	TIE trunk 4-Wire NTC Class of Service
- T4WV	8-39 0-31	TIE trunk 4-Wire VNL Class of Service
- PAGT	0-31	Paging Trunk
- RANR	8-39	Recorded Announcement trunk
- ALUS	0-31 8-39	Analog Line card Unit Short line Class of Service
- ALUL	0-31 8-39	Analog Line card Unit Long line Class of Service

SUPL: Superloop parameters data block

Prompt	Response	Comment
REQ	aaa	Request (CHG, END, PRT)
TYPE	SUPL	Type = SUPL (Superloop)
SUPL	0-156	Superloop number in multiples of 4
	0-252	Option 81C with Fiber Network Fabric
SLOT	a	Network Card is in Left or Right Slot (x = (L) or R)
SUPT	aaaa	Superloop type (aaaa = (STD), CARR, or FIBR)
XPE0	x y z	Extended Peripheral Equipment controller 0 (STD)
XPE1	x y z	Extended Peripheral Equipment controller 1 (STD)
XPEC	1-95	Extended Peripheral Equipment Controller (CARR or FIBR)

SYSM: System Parameters for MSDL/MISP card

Prompt	Response	Comment
REQ	aaa	Req = CHG or PRT
TYPE	SYSM	Type = SYSM (System parameters for MSDL/MISP cards)
FDLC	p1 p2 p3 p4	Fast Download Control parameters

SYSP: System parameters for Peripheral Equipment

Prompt	Response	Comment
REQ	aaa	Req = CHG or PRT
TYPE	SYSP	Type = SYSP (System parameters for Peripheral equipment)
INTN	(NO) YES	International companding law
CODE	(0)-3	Quite Code is used by Network Card firmware
CONT	1-(4)-32767	Continuity
CRCF	1-(4)-32767	Cyclic Redundancy Check (CRC) Failures
FLSH	(120)-168	Flash timing
TOHV	0-(250)-1275	Timer - Off-Hook Validation
TDP	(15)-1275	Timer - Dial Pulse
TID	0-(150)-1275	Timer - InterDigit
TDPO	15-(150)-1275	Timer - Dial Pulse On
TPF	0-(200)-1275	Timer - Post Flash
MFRL	0-(2)-3	Multifrequency minimum Receiver Level
MFLT0	(0)-15	Multifrequency transmit level code for Identifier 0 for Option 11C
MFLT1	(0)-15	Multifrequency transmit level code for Identifier 1 for Option 11C
P10R	(50)-70	Pulse 10 Ratio
P12R	(50)-70	Pulse 12 Ratio
P20R	(50)-70	Pulse 20 Ratio
INSO	(NO) YES	Installation Options
- DEFS	(NO) YES	Default sets
-- DEF 2006 xx	yy	New default model number, 2006 set
-- DEF 2008 xx	yy	New default model number, 2008 set
-- DEF 2216 xx	yy	New default model number, 2216 set
-- DEF 2616 xx	yy	New default model number, 2616 set
-- DEF 2000 xx	yy	New default model number, 2000 set
-- DEF 500 xx	yy	New default model number, 500 set

LD 97

- - DEF 2500 xx yy		New default model number, 2500 set
FNUMwww	zzzz	First DN in the default numbering plan
ISM	(NO) YES	Incremental Software Management
- TNS	0-1000	Maximum number of Terminal Numbers
- AGNT	0-1000	Maximum number of ACD Agents
- ACDN	0-100	Maximum number of ACD Directory numbers
- AST	0-100	Maximum number of Associate Sets
- DSL	0-32767	Maximum number of Digital Subscriber Loops
- LTID	0-32767	Maximum number of Logical Terminal IDs
- MOPT	0-11	Meridian mail Option
- KEY1	(xxxxxxx)	Eight digit security key 1 provided by NT
- KEY2	(xxxxxxx)	Eight digit security key 2 provided by NT
- KEY3	(xxxxxxx)	Eight digit security key 3 provided by NT
FDLC	p1 p2 p3 p4	Fast Download Control parameters

XCTP: Conference/TDS/MF Sender card parameters data block

Prompt	Response	Comment
REQ	aaa	Request (CHG, END, PRT)
TYPE	XCTP	Type = XCTP (Conference/TDS/MF Sender card parameters)
CPAD	x	Conference PAD (x = (0) or 1)
DTMF	0-(14)-255	Dual Tone Multifrequency
CFWT	(NO) YES	Conference Warning Tone to be provided
INTU	(NO) YES	Intrusion tone
P10P	0-(30)-255	Primary 10 Pulses per second
S10P	0-(31)-255	Secondary 10 Pulses per second
20PP	0-(32)-255	20 Pulses Per second

XPE: Extended Peripheral Equipment shelf data block

Prompt	Response	Comment
REQ	aaa	Request (aaa = CHG, END, PRT)
TYPE	XPE	Type = XPE (Extended Peripheral Equipment shelves)
XPEC	(0)-95	Extended Peripheral Equipment Controller
	1-99	Option 81C with Fiber Network Fabric
LOC	xxxxxx	Location code for Peripheral Controller
MED	(COP)	Connection Media to Peripheral Controller
RGTP	x	Ringng Generator Type (x = (8) or 16)

Print information on Superloop or Extended PE shelves

Prompt	Response	Comment
REQ	PRT	Req = PRT
TYPE	aaaa	Type = SUPL or XPE
SUPL	0-156	Superloop number in multiples of 4
	2-252	Option 81C with Fiber Network Fabric
XPEC	1-95	Extended Peripheral Equipment controller
	0-252	Option 81C with Fiber Network Fabric

LD 97

Alphabetical list of prompts

Prompt	Response	Comment	Pack/Rel
20PP	0-(32)-255	20 Pulses Per second Tone table index for primary 20 pulses per second (pps) digit set. Use 32 for North American tones. Tone tables are defined in LD 56.	xct-15
ACDN	0-100 0-32767	Maximum number of ACD Directory Numbers Maximum number of ACD Directory Numbers	xpe-16
AGNT	0-1000 0-32767	Maximum number of ACD Agents Maximum number of ACD Agents	xpe-16
ALUL	0-31 8-39	Analog Line card Unit Long line Class of Service Enter the coded Relative Input/Output Levels; the 1st field is the Receive (A/D) entry; the 2nd field is the Transmit (D/A) entry. Prompted if TTYP = STAT	xpe-18
ALUS	0-31 8-39	Analog Line card Unit Short line Class of Service Enter the coded Relative Input/Output Levels; the 1st field is the Receive (A/D) entry; the 2nd field is the Transmit (D/A) entry. Prompted if TTYP = STAT.	xpe-18
AST	0-100 0-32767	Maximum number of Associated Sets Maximum number of Associated Sets	csi-16
BCAD		Busy Tone Cadence Your entry determines the on phase length and the off phase length during the cycle.	xpe-16
	0000-(350)-1500	0000-(350)-1500 PH1 (ON cycle) and PH2 (OFF cycle)	
	0000-(500)-1500	0000-(500)-1500 PH1 (ON cycle) and PH2 (OFF cycle) for Japan (when Japan package 97 is enabled)	
		The values for each phase can be from 0 to 1.5 seconds (1500 ms) and are entered as milliseconds. The input values are rounded to the nearest multiple of 25 ms.	

Prompt	Response	Comment	Pack/Rel
		Entering all 0's indicates continuous tone. (Continuous tones lasts for 3.2 seconds or longer) The smallest cadence is 50 ms even though 25 ms can be entered. The stored values will be echoed.	
BRK	(0)-240	<p>Break Duration (maximum) for 1st Dial Tone. Input is a multiple of 16 ms:</p> <ul style="list-style-type: none"> • 0 = 0 ms • 16 = 16 ms • 32 = 32 ms • ... • 240 = 240 ms <p>Input that is not a multiple of 16 is rounded down to a valid multiple of 16. Recommended country specific BRK values follow:</p> <ul style="list-style-type: none"> • CountryBRK • Denmark000 ms • France030 ms • Germany000 ms • HollandTBD • New ZealandTBD • Norway000 ms • Spain000 ms • Sweden000 ms • Switzerland000 ms • U.K. 33/50000 ms • U.K. 330/440000 ms 	xpe-16
BTDD	(BOTH)	Busy Tone Detection on both incoming and outgoing calls	xpe-16
	INC	Busy Tone Detection on incoming calls only	

LD 97

Prompt	Response	Comment	Pack/Rel
BTD	(0) - 7	<p>Busy Tone Detection Table</p> <p>Table 0 can be changed but cannot be removed. Table 0 always exists (when the BTD package is equipped) and is initialized to default values for China and Japan.</p> <p>When creating alternate tables, table 0's values are used to fill the table and these can be changed.</p> <p>If table 0 does not exist, the Japanese BCAD defaults (500 500) are used when creating it.</p> <p>Enter X in front of the table number to remove the table.</p>	btd-21
CAD	(0)-15	<p>Cadence type for 1st Dial Tone. Where:</p> <ul style="list-style-type: none">• 0 = no cadence or continuous tone• 1 = Italian complex cadence• 2-15 reserved for future use <p>Recommended country specific CAD values follow:</p> <ul style="list-style-type: none">• CountryCAD• Denmark00• France00• Germany00• Holland00• New Zealand00• Norway00• Spain00• Sweden00• Switzerland00• U.K. 33/5000• U.K. 330/44000	xpe-16
CFWT	(NO) YES	<p>Conference Warning Tone is not provided</p> <p>Conference Warning Tone is provided</p>	basic-21
CODE	(0)	<p>Quite Code is used by Network Card firmware</p> <p>0 is the only valid entry. Entries 1-3 are for future use.</p>	xpe-15
CONT	1-(4)-32767	<p>Continuity. Maintenance threshold for number of continuity faults per timeslot.</p>	xpe-15

Prompt	Response	Comment	Pack/Rel
COTL	8-39 0-31	Central Office Trunk Long line Class of Service Enter the coded Relative Input/Output Levels; the first field is the Receive (A/D) entry; the second field is the Transmit (D/A) entry.	xpe-18
COTS	8-39 0-31	Central Office Trunk Short line Class of Service Enter the coded Relative Input/Output Levels; the first field is the Receive (A/D) entry; the second field is the Transmit (D/A) entry.	xpe-18
CPAD	(0) 1	Conference PAD Use software PAD values Use PAD values defined by switch settings on pack (NT8D17). The CNFC command in LD 38 will not do the attenuation testing when CPAD = 1.	xct-15
CRCF	1-(4)-32767	Cyclic Redundancy Check (CRC) Failures	xpe-15
DEF 500 xx	yy	Enter new default model number (yy) for 500 set (where: xx is old default)	xpe-16
DEF 2000 xx	yy	Enter new default model number (yy) for 2000 set (where: xx is old default)	xpe-16
DEF 2006 xx	yy	Enter new default model number (yy) for 2006 set (where: xx is old default)	xpe-16
DEF 2008 xx	yy	Enter new default model number (yy) for 2008 set (where: xx is old default)	xpe-16
DEF 2216 xx	yy	Enter new default model number (yy) for 2216 set (where: xx is old default)	xpe-16
DEF 2500 xx	yy	Enter new default model number (yy) for 2500 set (where: xx is old default)	xpe-16
DEF 2616 xx	yy	Enter new default model number (yy) for 2616 set (where: xx is old default)	xpe-16
DEFS	(NO) YES	Default Sets	xpe-16

LD 97

Prompt	Response	Comment	Pack/Rel
DFQ	0-(4)-15	<p>Dial Tone Frequency band for 1st dial tone. Input is frequency band as described below:</p> <ul style="list-style-type: none">• 0 = 300-500 Hz• 1 = 350-500 Hz• 2 = 320-630 Hz• 3 = 0-500 Hz• 4 = 355-550 Hz• 5-15 = reserved for future use <p>With UK package (190) default value for DFQ = 0. Recommended country specific DFQ values follow:</p> <ul style="list-style-type: none">• CountryDFQ• Denmark1• France0• Germany1• HollandTBD• New Zealand1• Norway1• Spain2• Sweden11• Switzerland4• U.K. 33/503• U.K. 330/4400	xpe-16
DIDL	8-39 0-31	<p>Direct Inward Dial (or Direct Outward Dial [DOD]) trunk Long line Class of Service</p> <p>Enter the coded Relative Input/Output Levels; the first field is the Receive (A/D) entry; the second field is the Transmit (D/A) entry.</p>	xpe-18
DIDS	8-39 0-31	<p>Direct Inward Dial (or Direct Outward Dial [DOD]) trunk Short line Class of Service</p> <p>Enter the coded Relative Input/Output Levels; the first field is the Receive (A/D) entry; the second field is the Transmit (D/A) entry.</p>	xpe-18
DSL	0-32767	Maximum number of Digital Subscriber Loops	xpe-18
DTMF	0-(14)-255	Dual Tone Multifrequency (Tone table index of the first DTMF digit to be used). Use 14 for North American tones.	xct-15

Prompt	Response	Comment	Pack/Rel
DTYP	(PRED) CSTM DISL	<p>Predefined Dynamic Loss Switching Table Customized Dynamic Loss Switching Table (user will be prompted to input required PORT TYPE LI LO values) Disable current active table (Disables Dynamic Loss Switching)</p> <p>If the DTYP was previously DISL then entering a Predefined Table number or Customized Table will ENABLE the Dynamic Loss Switching feature.</p> <p>Only 1 Dynamic Loss Switching table, either predefined or customized, exists within the system. When Dynamic Loss Plan Switch is ENABLED then the Static Loss Plan Table is used as the "base level" table of values.</p> <p>If an entry is customized, other entries in this table and in the Base Table (TTYP = STAT) should be re-examined in case possible adjustment is necessary. Dynamic Pad Switching continues for non-B34 cards (EPE, XUT, XEM).</p>	xpe-18
FDAY	d n	<p>Day and number of time intervals for download. Prompted only if FDTM = YES.</p> <p>d = (0-6) Day of week, Sunday to Saturday n = (0-4) Number of time intervals where 0 = no download for that day.</p> <p>Note: If two or more intervals are specified, they must be non overlapping, non consecutive and in increasing order. Day is re-prompted until <CR> is entered.</p>	arie-25
FDDN	c d1 d2	<p>Flash Download Prime Directory Number range. Prompted only if FDNR = YES Where:</p> <p>c = Customer number d1 = starting prime DN d2 = ending prime DN</p>	arie-25

Prompt	Response	Comment	Pack/Rel
FDLC	p1 p2 p3 p4		xpe/msdl-15

Fast Download Control parameters. Where **p1** can be:

1. (ALL) = All cards listed below
2. AML = Applications Module Link
3. BRIE = BRI Trunk Universal ISDN Protocol Engine
4. BRIL = BRI Line cards
5. BRIT = Basic Rate Interface Trunk
6. DCH = D-Channel cards
7. FNET = Fibre Network Card (NT1P61)
8. FPEC = Fibre Peripheral Equipment Controller card (NT1P62)
9. LCRI = Carrier Remote IPE
10. MISP = Multipurpose ISDN Signaling Link cards
11. MSDL = Multipurpose Serial Data Link cards
12. PRIE = Primary Rate Interface Universal ISDN Protocol Engine
13. SDI = Serial Data Interface cards
14. XNET = Network cards
15. XPEC = Controller cards (includes Carrier Remote IPE RCI)
16. XXXX = Data file for specific ISDN interface type (e.g. DQSG data file for QSIG; DTCZ data file for TCNZ)

Where **p2** can be:

1. (C) = Conditional download (only if there is a major fault in the firmware or after a power failure). "C" is the recommended setting.
2. F = Force download after initialization. Entering "F" only applies to the first INIT following the entry. After the INIT, the system reverts to C (conditional).

Where **p3** can be:

1. (C) = Current version
2. L = Latest version
3. S = Specified version

Prompt	Response	Comment	Pack/Rel
		Where p4 is : <ul style="list-style-type: none"> xx (version number, if p3 = S). See LD 20-22 to print versions.	
FDLT	10 - 315	Frequency delta, gives the tolerance of the tone to be detected in +/- hertz. Valid entries will be in multiples of 5Hz. For dual Busy Tone Detection on pack (NT5D31), the same maximum and minimum levels applies to both tones.	btd-23
FDNR	(NO) YES	DN range restriction option for Flash Download. No DN restriction Specify DN range	arie-25
FDTM	(NO) YES	Time interval restriction for Flash Download. No change to time intervals Change time intervals Note: Flash download is automatically paused one hour before virtual midnight (refer to TODR in Ovi 17) to allow midnight routines to run. This option is not applicable to reporting.	arie-25
FDTP	t	M3900 set selected for download. Where t = (NONE) No M3900 flash download 3902 - M3902 sets 3903 - M3903 sets 3904 - M3904 sets 3905 - M3905 sets ALL - all M3900 sets	arie-25
FETN	l s c u c u	Ending Terminal Number for Flash Download. Prompted only if FTNR = YES General TN format: l s c u = loop, shelf, card, unit Option 11C TN format: c u = card, unit	arie-25
FINT	s l	Starting hour and length for a time interval. Prompted n times if n>0. Where: s = (0-23) Starting hour using 24 hour format l = (1-24) Length of interval in hours	arie-25

LD 97

Prompt	Response	Comment	Pack/Rel
FLSH	(120)-768	Flash timing Switchhook Flash timing (<i>SUPP package 131 not equipped</i>). Establishes Switchhook Flash time in milliseconds for 500/2500 sets (NT8D PE only)	xpe-15
	xxx yyyy	Switchhook Flash timing (<i>SUPP package 131 equipped</i>) Establishes minimum and maximum Switchhook Flash timer in milliseconds for 500/2500 sets (NT8D PE only), where: <ul style="list-style-type: none">• xxx = 20-(45)-768• yyyy = xxx value-(896)-1275 The timing specified will be used for extended peripheral equipment only. Non-extended peripheral equipment will use the FLSH specified in LD 15.	
FLVL_MAX	0 - 15	Maximum Frequency Tone level to be detected. Valid entries will be in multiples of 5dBm. For dual Busy Tone Detection on pack (NT5D31), the same level applies to both tones.	btd- 23
FLVL_MIN	20 - 35	Minimum Frequency Tone level to be detected. Valid entries will be in multiples of 5dBm. For dual Busy Tone Detection pack (NT5D31), the same level applies to both tones.	btd- 23
FNUM	www zzzz	First DN in the default numbering plan (<i>www</i> is current setting)	xpe-16
FRCE	(NO) YES	System-wide flash download control option. Conditional. System-wide flash download (via FDLS in OVL 32) applies only to a M3900 set whose flash firmware version is different from version currently found on the system disk. Forced. Force system-wide flash download to all the specified M3900 sets regardless of their current flash firmware versions. Note: Use this option with caution! Once the download tree is built (after FDLS in OVL 32) this option is automatically reverted to NO (conditional). Not applicable to reporting.	arie-25

Prompt	Response	Comment	Pack/Rel
FREQ_0	350 - 655	Frequency of Busy Tone for Frequency 0 of a dual Busy Tone Detection to be detected in Hz. Valid entries will be in multiples of 5Hz.	btd- 23
FREQ_1	350 - 655	Frequency of Busy Tone for Frequency 1 of a dual Busy Tone Detection to be detected in Hz. Valid entries will be in multiples of 5Hz. For a single busy tone FREQ_1 must be set the same as FREQ_0.	btd- 23
FSTN	I s c u c u	Starting Terminal Number for Flash Download. Prompted only if FTNR = YES General TN format: I s c u = loop, shelf, card, unit Option 11C TN format: c u = card, unit	arie-25
FTNR	(NO) YES	TN range restriction option for Flash Download. No TN restriction Specify TN range	arie-25
FVER	(0)-99	Flash firmware version specified for full report. Where: (0) = Report all Flash firmware version 1-99 = Selected Flash firmware version	arie-25
INSO	(NO) YES	Installation Options Change installation options, do not modify installation options	xpe-16
INTN	(NO) YES	μ- International companding Law A- International companding Law	xpe-15
INTU	(NO) YES	Intrusion tone (insert Intrusion tone in conferences) Note : To invoke any changes, the Option 11C must be initialized.	xpe-16
ISM	(NO) YES	Incremental Software Management ISM and all of its subprompts (prompts TNS through KEY3) are not prompted for Option 11C. To change the system ISM parameters on an Option 11C, the installation program must be used.	xpe-16
KEY1	(xxxxxxx)	8 digit security key 1 provided by NT	xpe-16
KEY2	(xxxxxxx)	8 digit security key 2 provided by NT	xpe-16

LD 97

Prompt	Response	Comment	Pack/Rel
KEY3	(xxxxxxx)	8 digit security key 3 provided by NT	xpe-16
LOC	xxxxxx	Location code for Peripheral Controller (0-6 characters) Should be equal to the column number assigned to the System Monitor and the Universal Equipment Module (UEM) that contains the Controller. For example: CxxMy Where: <ul style="list-style-type: none">• xx = column number• y = UEM number	xpe-15
LTID	0-32767	Maximum number of Logical Terminal IDs	xpe-18
MDL	10-(20)-40	Minimum Detect Level for 1st Dial Tone. Input is absolute value of the minimum detect level. Input is a multiple of 2 dBm: <ul style="list-style-type: none">• 10 = -10 dBm• 12 = -12 dBm• 14 = -14 dBm• ...• 40 = -40 dBm Odd input is rounded down. With UK package (190) default value for MDL = 30 (-30 dBm). Recommended country specific MDL values follow: <ul style="list-style-type: none">• <u>CountryMDL</u>• Denmark-26 dBm• France-24 dBm• Germany-22 dBm• Holland-26 dBm• New ZealandTBD• Norway-30 dBm• Spain-32 dBm• Sweden-28 dBm• Switzerland-30 dBm• U.K. 33/50-30 dBm• U.K. 330/440-30 dBm	xpe-16

Prompt	Response	Comment	Pack/Rel
MED	(COP)	Connection Media to Peripheral Controller (copper cabling)	xpe-17
MFLT0	(0)-15	<p>Multifrequency transmit level code for Identifier 0 for Option 11C. The code and level values listed below apply to MFLT0 and MFLT1.</p> <p>CodesLevel Values</p> <p>0-8 dBmO</p> <p>1-11 dBmO</p> <p>2-12 dBmO</p> <p>3-13 dBmO</p> <p>4-14 dBmO</p> <p>5-15 dBmO</p> <p>6-16 dBmO</p> <p>7-31 dBmO</p> <p>8-4 dBmO</p> <p>9-5 dBmO</p> <p>10-6 dBmO</p> <p>MF transmit level changes will take effect on Card 0 only if the command ENLX 0 is entered in LD 34. For XMFC packs, MF transmit level changes take effect immediately.</p>	basic-22
MFLT1	(0)-15	Multifrequency transmit level code for Identifier 1 for Option 11C. Refer to the the MFLT0 prompt for a listing of codes and level values for MFLT1.	basic-22
MFRL	0-(2)-3	<p>Multifrequency minimum Receiver Level for XMFC/XMFE (NT5K21) for only Meridian 1 (superloop)</p> <p>Codes Level Values</p> <p>0-28 dBmO</p> <p>1-32 dBmO</p> <p>2-36 dBmO</p> <p>3-40 dBmO</p>	xpe-16

LD 97

Prompt	Response	Comment	Pack/Rel
MINL	3-(42)-48	<p>Minimum accept Level for Digitone receivers. Input is a multiple of 3 dBm:</p> <ul style="list-style-type: none">• 3 = -3 dBm• 6 = -6 dBm• 9 = -9 dBm• ...• 48 = -48 dBm <p>Input that is not a multiple of 3 is rounded down to a valid multiple of 3. With UK package (190) default value for MINL = 45 (-45 dBm). Recommended country specific MINL values follow:</p> <ul style="list-style-type: none">• CountryMINL• Denmark-45 dBm• France-30 dBm• Germany-30 dBm• Holland-30 dBm• New Zealand-45 dBm• Norway-45dBm• Spain-30 dBm• Sweden-28 dBm• Switzerland-30 dBm• U.K. 33/50-45 dBm• U.K. 330/440-45 dBm	xpe-16
MOPT	0-11	Meridian Mail Option	xpe-16

Prompt	Response	Comment	Pack/Rel
MVT	100-(400)-1600	<p>Minimum Validation Time for 1st Dial Tone Input is a multiple of 100 ms:</p> <ul style="list-style-type: none"> • 100 = 100 ms • 200 = 200 ms • 300 = 300 ms • ... • 1600 = 1600 ms (1.6 sec) <p>Input that is not a multiple of 100 is rounded down to a valid multiple of 100. With UK package (190) default value for MVT = 300. Recommended country specific MVT values follow:</p> <ul style="list-style-type: none"> • CountryMVT • Denmark1200 ms • France1000 ms • Germany0900 ms • Holland1200 ms • New ZealandTBD • Norway1000 ms • Spain1000 ms • Sweden0300 ms • Switzerland0400 ms • U.K. 33/500300 ms • U.K. 330/4400300 ms 	xpe-16
NATP	(NO) YES	North American Transmission Plan for generic XFCOT	xpe-18
NNDC	5-(7)-8	<p>No-New-Data-Calls condition Threshold</p> <p>NNDC defines the bit error rate (BER) for Signal Degrade, calculated by the loadware. The actual range is 10^{-5} to 10^{-8}. The value entered here is the absolute value to the power of 10 (logarithmic scale).</p>	rem_ipe-22
P10P	0-(30)-255	<p>Primary 10 Pulses per second</p> <p>Tone table index for primary 10 pulses per second (pps) digit set. Use 30 for North American tones.</p>	xct-15

LD 97

Prompt	Response	Comment	Pack/Rel
P10R	(50)-70	<p>Pulse 10 Ratio (make-break ratio for 10 PPS dial pulse dialing)</p> <p>Range is 50% to 70%, in steps of 1. For example, at 70% the signal is on for 30 ms and off for 70 ms producing the 100 ms cycle for one pulse.</p> <p>To use on individual XUT, XUTJ and XEM trunks, set CLS to P10 in LD 14. For either XUT, XUTJ and XEM trunks specified or Option 11C DTI2 trunks.</p>	xpe-16
P12R	(50)-70	<p>Pulse 12 Ratio (make-break ratio for 12 PPS dial pulse dialing)</p> <p>Range is 50% to 70%, in steps of 1. For example, at 70% the signal is on for 30 ms and off for 70 ms producing the 100 ms cycle for one pulse.</p> <p>To use on individual XUT, XUTJ and XEM trunks, set CLS to P12 in LD 14. For either XUT, XUTJ and XEM trunks specified or Option 11C DTI2 trunks.</p>	xpe-16
P20R	(50)-70	<p>Pulse 20 Ratio (make-break ratio for 20 PPS dial pulse dialing)</p> <p>Range is 50% to 70%, in steps of 1. For example, at 70% the signal is on for 15 ms and off for 35 ms producing the 50 ms cycle for one pulse.</p> <p>To use on individual XUT, XUTJ and XEM trunks, set CLS to P20 in LD 14. For either XUT, XUTJ and XEM trunks specified or Option 11C DTI2 trunks.</p>	xpe-16
PAGT	0-31	<p>Paging Trunk. Enter the coded Transmit (D/A) Input/Output Relative Level.</p>	xpe-18
PWD2	xxxx	<p>Password 2</p> <p>Second Level Administration Password as defined in LD 17. This password is required to "Disable" an active Table or "Create" a customized Table.</p> <p>PWD2 is prompted if STYP or DTYP = CSTM or DISL, or if the user is not logged in using Loss Planning Allowed password.</p>	
RANR	8-39	<p>Recorded Announcement trunk</p> <p>Enter the coded Receive (A/D) Input/Output Relative Level.</p>	xpe-18

Prompt	Response	Comment	Pack/Rel
REQ	CHG END PRT	Request Modify existing data Exit overlay Print data block	xpe-15
RGTP	(8) 16	<p>Ring Generator Type (8 or 16 concurrent ringers; 16 requires NT6D42CA Ringing Generator). This prompt determines the maximum number of 500/2500 telephones which can be in the active ringing state at the same time.</p> <p>CAUTION: Do not set RGTP = 16 if you do not have the NT6D42 ringing generator. Exceeding the ringer capacity may cause intermittent overload alarms on the ringing generator.</p> <p>The value is not passed to the Peripheral Controller card immediately after service change. That information is downloaded when the card is enabled.</p>	xpe-18
S10P	0-(31)-255	<p>Secondary 10 Pulses per second</p> <p>Tone table index for secondary 10 pulses per second (pps) digit set. Use 31 for North American tones. Tone tables are defined in LD 56.</p>	xct-15
SLOT	(L) R	<p>Network Card is in Left or Right slot</p> <p>Enter L (left) if the Network Card is located in the lower numbered network pair. For example, in superloop 0, enter L if the Network Card sits in the slot for network loops 0/1, enter R (right) for 2/3.</p>	xpe-15

LD 97

Prompt	Response	Comment	Pack/Rel
SSC	(0)-15	Second Stage Configuration. Where: <ul style="list-style-type: none">• 0 = Second Stage Dial Tone Detection and uses same parameters as defined for first stage.• 1-15 = Reserved for future use. Recommended country specific SCC values follow: <ul style="list-style-type: none">• CountrySSC• Denmark0• France0• Germany0• Holland0• New Zealand0• Norway0• Spain0• Sweden0• Switzerland0• U.K. 33/500• U.K. 330/4400	xpe-16
STYP	(PRED)	Predefined Static Loss Plan table	xpe-18
	CSTM	Customized Static Loss Plan table (user will be prompted to input required PORT TYPE LI LO values)	
	DISL	Disable current active table (disables Static Loss Plan downloading) Only 1 Static Loss Plan table, either predefined or customized, exists within the system. When Dynamic Loss Switching is ENABLED then the Static Loss Plan Table is used as the "B34 DYNAMIC LOSS SWITCHING BASE TABLE" of values. If an entry is customized, other entries in this table and in the Alternative Table (TTYP = DYNM) should be re-examined in case possible adjustment is necessary. Dynamic Pad Switching continues for non-B34 cards (EPE, XUT, XEM).	
SUPL	0-156 N0-N156 N96-N112 0-252	Superloop number in multiples of 4 Precede loop number with N to create a phantom loop In multiples of 4 (Option 11C) Option 81C with Fiber Network Fabric	xpe-20 fnf-25

Prompt	Response	Comment	Pack/Rel
	Vxxx	Virtual superloop number in multiples of 4. Where: <ul style="list-style-type: none"> xxx = 0 - 156 and multiple of 4 for large systems without Network Capacity Expansion package. xxx = 0 - 252 and multiple of 4 for 81C systems with Fiber Nertwork Fabric package. xxx = 96 - 112 and multiple of 4 for 11C systems. 	mit-25
SUPT	(STD)	Standard Superloop type (normal copper cable connecting an XNET to XPEC)	rem_ipe-21
	CARR	Carrier Link Superloop type: this connects an Local Carrier Interface (LCI) to a Remote Carrier Interface (RCI)	
	FIBR	Fibre Link [connects a Fibre Network NT1P61 Card (FNET) to a Fibre PE Controller Card NT1P62 (FPEC)]	
T2WN	8-39 0-31	TIE trunk 2-Wire NTC (Non-Transmission Compensated) Class of Service Enter the coded Relative Input/Output Levels; the first field is the Receive (A/D) entry; the second field is the Transmit (D/A) entry.	xpe-18
T2WT	8-39 0-31	TIE trunk 2-Wire TRC (Transmission Compensated) Class of Service Enter the coded Relative Input/Output Levels; the first field is the Receive (A/D) entry; the second field is the Transmit (D/A) entry.	xpe-18
T2WV	8-39 0-31	TIE trunk 2-Wire VNL (Via Network Loss) Class of Service Enter the coded Relative Input/Output Levels; the first field is the Receive (A/D) entry; the second field is the Transmit (D/A) entry.	xpe-18
T4WN	8-39 0-31	TIE trunk 4-Wire NTC (Non-Transmission Compensated) Class of Service Enter the coded Relative Input/Output Levels; the first field is the Receive (A/D) entry; the second field is the Transmit (D/A) entry.	xpe-18

LD 97

Prompt	Response	Comment	Pack/Rel
T4WT	8-39 0-31	TIE trunk 4-Wire TRC (Transmission Compensated) Class of Service Enter the coded Relative Input/Output Levels; the first field is the Receive (A/D) entry; the second field is the Transmit (D/A) entry.	xpe-18
T4WV	8-39 0-31	TIE trunk 4-Wire VNL (Via Network Loss) Class of Service Enter the coded Relative Input/Output Levels; the first field is the Receive (A/D) entry; the second field is the Transmit (D/A) entry.	xpe-18
TDP	(15)-1275	Timer - Dial Pulse Minimum time for dial pulse for Extended Flexible Analog Line Card (XFALC) NT5K02. Inputs in increments of 5 milliseconds. CDP must be greater than Minimum Switchhook Flash.	xpe-18
TDPO	15-(150)-1275	Timer - Dial Pulse On Maximum time for dial pulse for Extended Flexible Analog Line Card (XFALC) NT5K02. Inputs in increments of 5 milliseconds. TDPO must be greater than or equal to TDP.	xpe-18
TID	0-(150)-1275	Timer - InterDigit. Interdigit time for Extended Flexible Analog Line Card (XFALC) NT5K02. Inputs in increments of 5 milliseconds.	xpe-18
TNS	0-1000 0-32767	Maximum number of Terminal Numbers Maximum number of Terminals	xpe-18

Prompt	Response	Comment	Pack/Rel
TNUM	xx	<p>Predefined Table Number to be used. Prompted if PRED is selected. There is no default. Where:</p> <ul style="list-style-type: none">• xx = 1-27 when TTYP = STAT• xxx = 1-5 when TTYP = DYNM <p>Following is the list of predefined tables.</p> <p>A table noted as ETSI Mode of Operation should only be used on systems where all Peripheral cards are equipped with the B34 Codec.</p> <p>A table noted as Existing Mode of Operation should be used on systems where all Peripheral cards are not equipped with the B34 Codec.</p>	xpe-18

For TTYP = STAT , the predefined tables are:

TNUM	Country	Mode
1	Austria & Greece	ETSI
2	Austria	Existing
3	Belgium	ETSI
4	Belgium	Existing
5	Denmark	ETSI
6	Denmark	Existing
7	Finland	ETSI
8	Germany	ETSI/Existing
9	Italy	ETSI
10	Italy	Existing
11	Netherlands	ETSI
12	Netherlands	Existing
13	Norway	ETSI
14	Norway	Existing
15	Portugal	ETSI
16	Greece & Portugal	Existing
17	Spain	ETSI/Existing
18	Sweden	ETSI/Existing
19	Switzerland	ETSI
20	Switzerland	Existing
21	U.K.	ETSI/Existing
22	France	ETSI
23	France	Existing
24	New Zealand	Existing
25	Australia	Existing
26	China - hybrid	EPE and IPE
27	China - pure	IPE system

For TTYP = DYNM the predefined tables are:

TNUM	Country	Mode
1	New Zealand	Existing
2	Australia	Existing
3	Italy	Existing
4	China	EPE and IPE
5	China	IPE system

Prompt	Response	Comment	Pack/Rel
TOHV	0-(250)-1275	<p>Timer - Off-Hook Validation</p> <p>Off-Hook Validation timer for Extended Flexible Analog Line Card (XFALC) NT5K02. Inputs in increments of 5 milliseconds.</p>	xpe-18
TPF	0-(200)-1275	<p>Timer - Post Flash</p> <p>Post Flash timer for Extended Flexible Analog Line Card (XFALC) NT5K02. Inputs in increments of 5 milliseconds. Prompted with Multi-Party Operations (MPO) package 141.</p>	xpe-18
TTYP	(STAT) DYNM	<p>B34 Static Loss Plan Table Type to be installed/modified</p> <p>B34 Dynamic Loss Plan Alternative Level Table Type to be installed/modified</p> <p>A B34 Static Loss Plan Table must be installed before B34 Dynamic Loss Switching can be enabled. Therefore, if TTYP= DYNM, and the existing STYP = "DISL", then error message SCH5838 will be printed, and TTYP will be re-prompted.</p>	xpe-18
TYPE		<p>Type of data block</p> <p>When modifying PE system parameters, the system must initialize for the changes to come into effect. The loop number for the NT8D17 Conference/TDS/MFS card is defined by prompt XCT in LD 17.</p>	xpe/ msdl-18
	BTD	Busy Tone Detection	
	DTD	Dial Tone Detection parameters	
	DTR	Digitone Receiver parameters	
	FIRP	Fibre Remote Parameters	
	LOSP	Loss Plan Tables	
	SYSM	System parameters for MSDL/MISP cards.	
	SYSP	System parameters. When modifying the PE system parameters, the system must initialize for the changes to come into effect.	
	SUPL	Superloop parameters	
	XCTP	Conference/TDS/MF Sender card parameters. The loop number for the NT8D17 Conference/TDS/MFS card is defined by prompt XCT in LD 17.	
	XPE	Extended Peripheral Equipment shelves	

LD 97

Prompt	Response	Comment	Pack/Rel
XNPD	28	Network loop number for Extended Network/ Peripheral equipment controller/ Digitone receiver (XNPD) card The NT8D18 card contains a superloop and 8 Digitone Receivers. The Digitone Receivers are defined in LD 13.	xpe-15
XPE	1-95 <cr>	Extended Peripheral Equipment controller All Extended Peripheral Equipment controllers The output format for Peripheral Controller data is: SO S1 S2 S3LOC DISRGTP xxyyyyyyyyyyyy zzzYES/NO rr Where: <ul style="list-style-type: none">• xx = Controller number• yyy = superloop number for each segment• zzz = location code entered with prompt LOC• DIS = YES or NO (Peripheral Controller disabled)• RGTP = 8 or 16 (Ringing Generator Type)	xpe-15
XPE0	1-99 x y z	Option 81C with Fiber Network Fabric Extended Peripheral Equipment controller 0 Peripheral Controller number, starting segment and ending segment Define the superloop configuration, where: <ul style="list-style-type: none">• x = Controller number (1-95) for superloop's shelf 0• y = starting shelf segment number (0-3)• z = ending shelf segment number (0-3) Enter: X to remove XPE0 or <cr> Return to REQ prompt.	fnf-25 xpe-15
XPE1	x y z	Extended Peripheral Equipment controller 1 Peripheral Controller number, starting segment and ending segment Define the superloop configuration, where: <ul style="list-style-type: none">• x = Controller number (1-95) for superloop's shelf 1• y = starting shelf segment number (0-3)• z = ending shelf segment number (0-3) Enter: <ul style="list-style-type: none">• X to remove XPE1• <cr> Return to REQ prompt.	xpe-15

Prompt	Response	Comment	Pack/Rel
XPEC	(0)-95	<p>Extended Peripheral Equipment Controller (assign Peripheral Controller numbers; 0 for automatic)</p> <p>Block is built with segments of the peripheral shelf (RCI or FXPEC) which are associated with this SUPL (LCI or FXNET)</p> <p>Where:</p> <p>0 = Automatically assign Controller numbers. The system assigns the next available Controller number. 0 cannot be assigned for XPND.</p> <p>1-95 = Manually assign Controller numbers</p> <p>Precede with X to remove. Remove all cards/TNs in the Controller shelf first. XPEC is prompted if SUPT=CARR or FIBR.</p>	xpe-15
	1-95	<p>Extended Peripheral Equipment Controller if SUPT = CARR or FIBR.</p> <p>If SUPT = CARR, the superloop block is built with all segments (0-3) of the peripheral shelf (RCI) and associated with this SUPL (LCI). This ensures that one LCI is configured to only one RCI, and that all segments on the RCI are associated with the LCI.</p> <p>If SUPT = FIBR, the superloop block is built with default Fibre remote parameters and all segments (0-3) of the peripheral shelf (FPEC) are associated with this SUPL (FNET).</p>	rem_ipe-21
XSMN	(0)-63	XSM address on the remote shelf. (0) means not configured. XSMN applies only to Wall-Mounted remotes.	rem_ipe-22

LD 97

Prompt	Response	Comment	Pack/Rel
XTDT	(0)-7	<p>Extended Tone Detection Table</p> <p>XTDT table number in which all the following parameters are stored.</p> <p>Table 0 can be changed but must not be removed. Table 0 always exists and is initialized to default values. With UK package (190) Table 0 defaults are:</p> <p><u>Parameter</u>Value</p> <p>DFQ 0 MDL - 30 dBm MVT 300 ms BRK 0 ms CAD 0 SSC 0</p> <p>Without UK package (190) Table 0 defaults are:</p> <p><u>Parameter</u>Value</p> <p>DFQ 4 MDL -20 dBm MVT 400 ms BRK 0 ms CAD 0 SSC 0</p>	xpe-16

Index of Prompts

Symbols

(LD 18), 515
* (LD 18), 515

Numerics

0+RT (LD 28), 684
0-RT (LD 28), 684
1RT (LD 28), 684
20PP (LD 97), 982
2DT (LD 16), 350
3ANI (LD 19), 527
500B (LD 17), 439
500L (LD 73), 802

A

A (LD 18), 515
A_FILTER (LD 17), 441
A1MR (LD 16), 350
AAA (LD 95), 964
AACD (LD 10), 84
AACQ (LD 23), 614
AACR (LD 21), 585
AACS (LD 20), 559
AADN (LD 12), 191
AANI (LD 16), 350
AATT (LD 15), 265
ABAN (LD 12), 191
ABAN (LD 16), 350

ABCD (LD 17), 439
ABDN (LD 15), 265
ABOR (LD 17), 439
ABST (LD 56), 738
AC1 (LD 86), 875
AC2 (LD 15), 265
AC2 (LD 86), 875
ACAA (LD 23), 614
ACC (LD 93), 922
ACCD (LD 15), 265
ACDN (LD 23), 614
ACDN (LD 97), 982
ACDR (LD 88), 898
ACFT (LD 56), 738
ACKW (LD 16), 350
ACLE (LD 88), 898
ACMP (LD 16), 350
ACNI (LD 16), 350
ACNO (LD 16), 350
ACNO (LD 56), 738
ACNS (LD 15), 265
ACNT (LD 23), 614
ACO (LD 73), 802
ACOD (LD 16), 351
ACOD (LD 21), 585
ACPQ (LD 23), 614
ACPS (LD 58), 775
ACPT (LD 58), 775
ACRC (LD 73), 802
ACT_BUSY (LD 15), 265
ACT_IDLE (LD 15), 266
ACTN (LD 56), 738
ADAN (LD 17), 439

ADAY (LD 10), 84
ADAY (LD 11), 131
ADCP (LD 11), 131
ADCP (LD 15), 266
ADCP (LD 16), 351
ADD (LD 73), 802
ADDG (LD 15), 266
ADDG (LD 16), 351
ADDITIONAL_PORT (LD 17),
441
ADDP (LD 16), 351
ADFT (LD 19), 527
ADHT (LD 15), 266
ADID (LD 14), 209
ADJUST PAPER THEN (LD
20), 559
ADJUST PAPER THEN (LD
22), 597
ADJUST PAPER THEN (LD
81), 843
ADJUST PAPER THEN (LD
82), 863
ADJUST PAPER THEN (LD
83), 866
ADLD (LD 15), 266
ADMIN_PORT (LD 17), 441
ADMN (LD 57), 762
AEFD (LD 11), 131
AEHT (LD 11), 131
AENI (LD 23), 614
AF_STATUS (LD 17), 441
AFBT (LD 15), 266
AFCO (LD 15), 266

AFD (LD 11), 131
 AFNT (LD 15), 267
 AFX (LD 73), 802
 AGCD (LD 17), 441
 AGNO (LD 93), 922
 AGNT (LD 97), 982
 AHNT (LD 11), 131
 AHOL (LD 10), 84
 AHOL (LD 11), 131
 AIA (LD 16), 351
 AID (LD 23), 614
 AIOD (LD 16), 351
 ALARM (LD 17), 441
 ALDN (LD 15), 267
 ALEN (LD 88), 898
 ALL (LD 57), 762
 ALOG (LD 23), 614
 ALOW (LD 19), 527
 ALOW (LD 49), 695
 ALOW (LD 90), 910
 ALOW (LD 93), 922
 ALPD (LD 12), 191
 ALRM (LD 15), 267
 ALRM (LD 16), 351
 ALRM (LD 17), 441
 ALRM (LD 18), 515
 ALRM (LD 73), 802
 ALRM (LD 74), 835
 ALST (LD 86), 875
 ALT (LD 86), 875
 ALUL (LD 97), 982
 ALUS (LD 97), 982
 AML (LD 17), 441
 AML_DATA (LD 15), 267
 ANAT (LD 15), 267
 ANDN (LD 15), 266
 ANDN (LD 16), 352
 ANDT (LD 16), 352
 ANFT (LD 16), 352
 ANI_DATA (LD 15), 267
 ANIC (LD 16), 353
 ANIE (LD 10), 84
 ANIE (LD 11), 131
 ANIE (LD 16), 353
 ANIE (LD 27), 662
 ANII (LD 19), 527
 ANIT (LD 19), 527
 ANKP (LD 16), 353
 ANLD (LD 15), 267
 ANSZ (LD 16), 353
 ANTK (LD 16), 353
 ANUM (LD 12), 191
 ANUM (LD 93), 922
 AOBT (LD 56), 738
 AOCs (LD 15), 268
 AODN (LD 15), 268
 AODN (LD 93), 922
 AOLR (LD 17), 442
 AOM (LD 11), 132
 APAD (LD 15), 268
 APL (LD 15), 268
 APL (LD 23), 614
 APPL (LD 17), 442
 APPL (LD 27), 662
 APPL_DN (LD 15), 269
 APRF (LD 15), 269
 APRT (LD 17), 442
 APVL (LD 17), 442
 AQT (LD 15), 269
 AQT (LD 93), 922
 ARBK (LD 56), 738
 ARDL (LD 87), 889
 ARDL_ACCEPT (LD 15), 269
 ARDL_ATTEMPT (LD 15),
 269
 ARDL_RETRY (LD 15), 269
 ARE YOU SURE? (LD 95), 964
 AREM (LD 57), 762
 ARLI (LD 90), 910
 ARNO (LD 16), 353
 ARRN (LD 90), 910
 ART (LD 56), 738
 ARTO (LD 10), 84
 ARTO (LD 11), 132
 ASID (LD 20), 559
 ASID (LD 21), 585
 ASID (LD 23), 614
 ASPCT (LD 15), 269
 ASRC (LD 57), 762
 AST (LD 10), 84
 AST (LD 11), 132
 AST (LD 14), 209
 AST (LD 23), 615
 AST (LD 97), 982
 ASTM (LD 15), 270
 ASTP (LD 16), 353
 ASUM (LD 02), 58
 ASUP (LD 16), 354
 ATAC (LD 15), 270
 ATCH (LD 15), 270
 ATDA (LD 57), 762
 ATDD (LD 57), 762
 ATDN (LD 14), 209
 ATDN (LD 15), 270
 ATDN (LD 16), 354
 ATGT (LD 16), 354
 ATIM (LD 15), 270
 ATO (LD 73), 803
 ATRC (LD 15), 270
 ATRN (LD 17), 442
 ATRR (LD 16), 354
 ATT (LD 94), 955
 ATT_DATA (LD 15), 270
 ATTK (LD 16), 354
 AUDN (LD 16), 354
 AUDT (LD 17), 443
 AUT (LD 11), 132
 AUTB (LD 11), 132
 AUTH (LD 10), 84
 AUTH (LD 11), 132
 AUTH (LD 16), 354
 AUTH (LD 49), 695
 AUTH (LD 57), 762
 AUTHCOD_ALRM (LD 88),
 898
 AUTM (LD 16), 354
 AUTO (LD 16), 354
 AUTO (LD 88), 898
 AUTO_AUDIT (LD 17), 443

AUTO_BIMP (LD 14), 209
 AUTR (LD 15), 270
 AUTR (LD 24), 638
 AWU (LD 15), 271
 AWU_DATA (LD 15), 271
 AWUA (LD 57), 762
 AWUD (LD 57), 762
 AWUT (LD 56), 738
 AWUV (LD 57), 762
 AXID (LD 15), 271
 AXQI (LD 17), 443
 AXQO (LD 17), 443

B

B (LD 18), 515
 B1 (LD 27), 663
 B1CT (LD 27), 663
 B2 (LD 27), 664
 B2CT (LD 27), 664
 BAND (LD 16), 355
 BANR (LD 17), 443
 BATT (LD 17), 443
 BAUD (LD 11), 132
 BCAD (LD 97), 982
 BCAP (LD 15), 271
 BCAP (LD 17), 443
 BCH (LD 27), 664
 BCHI (LD 17), 444
 BCHL (LD 17), 444
 BCOT (LD 16), 355
 BCST (LD 17), 444
 BDCT (LD 16), 355
 BDI (LD 15), 271
 BDSP (LD 16), 355
 BGTH (LD 52), 708
 BILN (LD 16), 355
 BIMP (LD 10), 85
 BIMP (LD 14), 209
 BIPC (LD 73), 803
 BIPV (LD 73), 803
 BITL (LD 17), 444
 BKGD (LD 17), 444

BLEN (LD 16), 355
 BLOC (LD 50), 701
 BNE (LD 86), 875
 BNRA (LD 57), 762
 BNRD (LD 57), 762
 BNUM (LD 16), 355
 BOTO (LD 15), 271
 BPS (LD 17), 445
 BPSS (LD 15), 271
 BPV (LD 73), 804
 BRIL (LD 73), 805
 BRIP (LD 16), 355
 BRIT (LD 73), 805
 BRK (LD 97), 983
 BRSC (LD 27), 664
 BRST (LD 88), 898
 BRST PARM (LD 74), 835
 BSCW (LD 23), 615
 BSFE (LD 15), 271
 BSGC (LD 15), 271
 BSSU (LD 16), 355
 BTCG (LD 16), 355
 BTDD (LD 97), 983
 BTDT (LD 14), 210
 BTDT (LD 97), 984
 BTID (LD 14), 210
 BTT (LD 16), 355
 BTUA (LD 16), 355
 BUSY (LD 23), 615
 BUSY (LD 56), 738
 BWTM (LD 02), 58
 BYPS (LD 49), 695
 BYPS (LD 58), 775
 BYTH (LD 23), 615

C

C (LD 18), 515
 C CLR (R) (LD 73), 805
 C CLR (S) (LD 73), 805
 C SUPO(S) (LD 73), 808
 C6DS (LD 57), 762
 CAB (LD 17), 445
 CAB (LD 56), 738
 CAC (LD 10), 85
 CAC (LD 16), 356
 CAC (LD 27), 665
 CAC (LD 88), 898
 CAC_CIS (LD 10), 85
 CAC_CIS (LD 11), 133
 CAC_CIS (LD 16), 356
 CAC_CIS (LD 27), 665
 CAC_CIS (LD 88), 898
 CAC_CONV (LD 16), 356
 CAC_MFC (LD 10), 85
 CAC_MFC (LD 11), 133
 CAC_MFC (LD 27), 665
 CAC0 (LD 15), 271
 CAC1 (LD 15), 272
 CAC2 (LD 15), 272
 CAC3 (LD 15), 272
 CAC4 (LD 15), 272
 CAC5 (LD 15), 272
 CAC6 (LD 15), 272
 CAC7 (LD 15), 272
 CAC8 (LD 15), 273
 CAC9 (LD 15), 273
 CACC (LD 15), 273
 CACC (LD 16), 356
 CACD (LD 16), 356
 CACD (LD 94), 955
 CAD (LD 97), 984
 CALB (LD 20), 559
 CALB (LD 21), 585
 CALB (LD 23), 615
 CAMP (LD 56), 738
 CANC (LD 15), 273
 CARD (LD 27), 665
 CAS (LD 15), 273
 CAS_DATA (LD 15), 273
 CAST (LD 56), 739
 CAT (LD 16), 356
 CBCR (LD 16), 356
 CBQ (LD 16), 356
 CBQ (LD 86), 875
 CBQ (LD 87), 889

CBTL (LD 87), 889
 CCAN (LD 19), 527
 CCAR (LD 73), 805
 CCB (LD 16), 357
 CCB1 (LD 16), 357
 CCB2 (LD 16), 357
 CCBA (LD 16), 357
 CCBA (LD 23), 616
 CCBA (LD 24), 638
 CCBA (LD 87), 889
 CCDO (LD 15), 273
 CCFA (LD 57), 762
 CCFD (LD 57), 762
 CCFWDN (LD 15), 273
 CCGD (LD 73), 805
 CCLS (LD 19), 528
 CCNI (LD 16), 357
 CCO (LD 16), 357
 CCRS (LD 15), 274
 CCS_DATA (LD 15), 274
 CDAN (LD 19), 528
 CDCT (LD 16), 357
 CDEN (LD 10), 85
 CDEN (LD 11), 133
 CDEN (LD 12), 191
 CDEN (LD 13), 201
 CDEN (LD 14), 211
 CDEN (LD 20), 559
 CDN (LD 23), 616
 CDNC (LD 56), 739
 CDNO (LD 17), 445
 CDP (LD 86), 875
 CDPC (LD 16), 358
 CDPC (LD 18), 515
 CDPL (LD 15), 274
 CDPR (LD 15), 274
 CDR (LD 15), 274
 CDR (LD 16), 358
 CDR (LD 27), 665
 CDR_DATA (LD 15), 274
 CDRB (LD 16), 358
 CDRC (LD 57), 762
 CDRX (LD 16), 358
 CDRY (LD 16), 358
 CDT (LD 56), 740
 CDTI2 (LD 73), 806
 CDTO (LD 15), 274
 CEIL (LD 23), 616
 CEPT (LD 57), 762
 CEQP (LD 73), 806
 CEQU (LD 17), 446
 CFBA (LD 57), 763
 CFDD (LD 57), 763
 CFDT (LD 56), 740
 CFHO (LD 57), 763
 CFLP (LD 14), 211
 CFMW (LD 56), 740
 CFN0 (LD 15), 275
 CFN1 (LD 15), 275
 CFN2 (LD 15), 275
 CFNA (LD 15), 275
 CFNA (LD 95), 964
 CFSN (LD 56), 740
 CFTA (LD 15), 275
 CFTN (LD 10), 85
 CFTN (LD 11), 134
 CFWA (LD 57), 763
 CFWD (LD 57), 763
 CFWD (LD 95), 964
 CFWI (LD 57), 763
 CFWR (LD 16), 358
 CFWS (LD 17), 446
 CFWT (LD 56), 740
 CFWT (LD 97), 984
 CFWV (LD 57), 763
 CGPC (LD 16), 358
 CH (LD 27), 665
 CHANGE MAP? (LD 29), 687
 CHDN (LD 15), 275
 CHID (LD 14), 211
 CHLN (LD 15), 275
 CHMN (LD 15), 275
 CHRG (LD 16), 358
 CHTY (LD 16), 358
 CIC (LD 19), 528
 CIS_ANI (LD 15), 275
 CIS_ENT (LD 15), 276
 CISFW (LD 73), 806
 CISR (LD 16), 359
 CIST (LD 14), 211
 CITM (LD 02), 58
 CLAS (LD 88), 898
 CLASS_FMT (LD 15), 276
 CLDN (LD 15), 276
 CLEA (LD 73), 806
 CLEN (LD 16), 359
 CLID (LD 15), 276
 CLID (LD 16), 359
 CLID (LD 17), 446
 CLIP (LD 27), 665
 CLK (LD 11), 134
 CLK (LD 16), 359
 CLKN (LD 73), 806
 CLN (LD 56), 740
 CLOK (LD 17), 447
 CLOK (LD 27), 665
 CLR (LD 19), 528
 CLRB (R) (LD 73), 806
 CLRB (S) (LD 73), 806
 CLRF (R) (LD 73), 807
 CLRF (S) (LD 73), 807
 CLS (LD 10), 85
 CLS (LD 14), 211
 CLS (LD 16), 359
 CLS (LD 27), 666
 CLS1 (LD 15), 276
 CLS2 (LD 15), 276
 CLTP (LD 90), 910
 CMD (LD 29), 687
 CMF (LD 14), 216
 CMS (LD 17), 447
 CMS (LD 23), 616
 CNAT (LD 15), 277
 CNCS (LD 15), 277
 CNDN (LD 15), 277
 CNDR (LD 94), 955
 CNEG (LD 16), 360
 CNEG (LD 17), 447
 CNF_NAME (LD 15), 277

CNFD (LD 15), 277	COS (LD 88), 899	CSHF (LD 57), 764
CNFFIELD (LD 15), 277	COT (LD 56), 740	CSQI (LD 17), 450
CNFG (LD 95), 964	COTL (LD 97), 985	CSQO (LD 17), 450
CNI (LD 15), 277	COTR (LD 16), 361	CT (LD 27), 667
CNI (LD 17), 447	COTS (LD 97), 985	CTOC (LD 16), 362
CNIE (LD 16), 360	CPAC (LD 57), 764	CTRC (LD 15), 279
CNIP (LD 15), 278	CPAD (LD 14), 216	CTVN (LD 15), 279
CNIT (LD 16), 360	CPAD (LD 97), 985	CTYP (LD 11), 147, 539, 559
CNT (LD 56), 740	CPAR (LD 19), 528	CTYP (LD 16), 362
CNTL (LD 16), 360	CPAS (LD 15), 278	CTYP (LD 17), 450
CNTL (LD 23), 616	CPCI (LD 15), 278	CTYP (LD 27), 667
CNTL (LD 74), 835	CPDC (LD 16), 361	CTYP (LD 86), 876
CNTP (LD 15), 278	CPFXS (LD 16), 362	CUST (LD 10), 97
CNTR (LD 74), 836	CPG (LD 93), 922	CUST (LD 11), 147
CNTY (LD 16), 360	CPGS (LD 93), 922	CUST (LD 12), 191
CNTY (LD 17), 448	CPNC (LD 56), 740	CUST (LD 14), 216
CNV (LD 86), 875	CPND (LD 10), 96	CUST (LD 15), 279
CNVT (LD 16), 361	CPND (LD 11), 146	CUST (LD 16), 363
CO_TYPE (LD 17), 449	CPND (LD 12), 191	CUST (LD 17), 451
COAT (LD 16), 361	CPND_LANG (LD 10), 97	CUST (LD 18), 515
CODE (LD 17), 448	CPND_LANG (LD 11), 146	CUST (LD 19), 528
CODE (LD 57), 763	CPND_LANG (LD 95), 964	CUST (LD 20), 560
CODE (LD 88), 899	CPOQ (LD 56), 740	CUST (LD 21), 585
CODE (LD 97), 984	CPP (LD 16), 362	CUST (LD 22), 597
COLP (LD 27), 667	CPP (LD 57), 764	CUST (LD 23), 617
COLR (LD 50), 701	CPPO (LD 57), 764	CUST (LD 24), 638
COND (LD 57), 764	CPRD (LD 23), 616	CUST (LD 25), 646
CONF (LD 15), 278	CPRK (LD 57), 764	CUST (LD 26), 650
CONF (LD 17), 449	CPTM (LD 50), 701	CUST (LD 27), 667
CONF (LD 79), 840	CRC (LD 17), 449	CUST (LD 28), 684
CONF_DSP (LD 15), 278	CRC (LD 73), 807	CUST (LD 49), 695
CONG (LD 15), 278	CRCF (LD 97), 985	CUST (LD 50), 701
CONN (LD 14), 216	CRCS (LD 10), 97	CUST (LD 56), 740
CONN (R) (LD 73), 807	CRCS (LD 24), 638	CUST (LD 57), 764
CONN (S) (LD 73), 807	CRDAY (LD 15), 278	CUST (LD 58), 775
CONT (LD 18), 515	CRHOL (LD 15), 278	CUST (LD 79), 840
CONT (LD 97), 984	CRNO (LD 49), 695	CUST (LD 81), 843
COPC (LD 02), 58	CRQS (LD 23), 616	CUST (LD 82), 863
COPN (LD 02), 58	CRT0 (LD 15), 279	CUST (LD 83), 866
COPS (LD 02), 58	CRT1 (LD 15), 279	CUST (LD 86), 876
COPT (LD 86), 876	CRT2 (LD 15), 279	CUST (LD 87), 889
CORT (LD 28), 684	CRT3 (LD 15), 279	CUST (LD 88), 899
COS (LD 24), 638	CRTOD (LD 15), 279	CUST (LD 90), 911

CUST (LD 93), 923
CUST (LD 95), 964
CWBZ (LD 15), 280
CWBL (LD 93), 923
CWCL (LD 15), 280
CWCL (LD 93), 923
CWGA (LD 57), 764
CWGD (LD 57), 764
CWLW (LD 23), 617
CWLW (LD 23), 617
CWNC (LD 23), 617
CWNT (LD 23), 617
CWT, 740
CWT (LD 56), 740
CWTM (LD 23), 617
CWTM (LD 15), 280
CWTM (LD 93), 923
CWTT (LD 23), 617
CWUP (LD 15), 280
CY45 (LD 17), 451
CYCS (LD 56), 741

D

D (LD 18), 515
DACT_BUSY (LD 15), 280
DACT_IDLE (LD 15), 281
DAL (LD 23), 617
DAPC (LD 12), 191
DAPC (LD 15), 281
DAPC (LD 16), 363, 365
DASC (LD 15), 281
DATA_CORRECT (LD 17),
451
DATE (LD 15), 281
DATE (LD 20), 560
DATE (LD 22), 597
DATE (LD 81), 843
DATE (LD 82), 863
DATE (LD 83), 866
DAY (LD 15), 281
DAY0 (LD 15), 281
DAY1 (LD 15), 282

DAY2 (LD 15), 282
DAY3 (LD 15), 282
DAYS (LD 86), 876
DAYS (LD 88), 899
DBA (LD 11), 147
DBCS (LD 56), 741
DBK (LD 86), 877
DBNC (LD 73), 808
DBRC (LD 15), 283
DCAD (LD 56), 741
DCD (LD 11), 147
DCD (LD 16), 363
DCDR (LD 16), 363
DCH (LD 16), 363
DCHI (LD 16), 363
DCHI (LD 17), 451
DCHL (LD 17), 452
DCHR (LD 58), 775
DCLP (LD 10), 97
DCMX (LD 15), 283
DCNO (LD 16), 363
DCNO (LD 49), 695
DCNO (LD 95), 964
DCO (LD 73), 808
DCTI (LD 16), 363
DCUS (LD 17), 452
DDCS (LD 17), 452
DDCS (LD 74), 836
DDD (LD 90), 911
DDGT (LD 24), 638
DDGT (LD 56), 741
DDMI (LD 16), 363
DDO (LD 16), 364
DDSL (LD 14), 216
DDSL (LD 74), 836
DEAF (LD 57), 764
DEF 2000 (LD 97), 985
DEF 2006 (LD 97), 985
DEF 2008 (LD 97), 985
DEF 2216 (LD 97), 985
DEF 2500 (LD 97), 985
DEF 2616 (LD 97), 985
DEF 500 (LD 97), 985

DEFS (LD 97), 985
DEL (LD 86), 877
DEL (LD 87), 889
DELETE_VMB (LD 10), 97
DELETE_VMB (LD 11), 147
DEM (LD 11), 147
DEM (LD 16), 364
DENS (LD 17), 453
DENY (LD 19), 528
DENY (LD 49), 695
DENY (LD 56), 741
DENY (LD 87), 889
DENY (LD 90), 911
DENY (LD 93), 923
DES (LD 10), 97
DES (LD 11), 148
DES (LD 14), 216
DES (LD 16), 364
DES (LD 17), 453
DES (LD 20), 560
DES (LD 22), 597
DES (LD 27), 667
DES (LD 81), 843
DES (LD 82), 863
DES (LD 84&85), 868
DES (LD 95), 964
DEST (LD 25), 646
DEXT (LD 16), 364
DFCL (LD 24), 639
DFDN (LD 23), 617
DFDN (LD 27), 668
DFLN (LD 95), 964
DFLT (LD 15), 283
DFLT (LD 18), 515
DFLT (LD 56), 741
DFLT (LD 73), 809
DFLT (LD 94), 955
DFN0 (LD 15), 283
DFN1 (LD 15), 283
DFN2 (LD 15), 283
DFNA (LD 15), 283
DFNR (LD 15), 284
DFQ (LD 97), 986

DGRP (LD 11), 148	DMI (LD 87), 889	DROL (LD 17), 454
DGRP (LD 15), 284	DMI (LD 90), 912	DSAC (LD 23), 618
DGRP (LD 20), 560	DMOD (LD 16), 364	DSBL (LD 16), 365
DGTO (LD 19), 529	DMPH (LD 27), 668	DSC (Distant Steering Code), 881
DGTP (LD 16), 364	DMWM (LD 15), 285	DSC (LD 87), 889
DGTS (LD 24), 639	DN (LD 10), 98	DSEL (LD 16), 366
DGTS (LD 56), 741	DN (LD 11), 148	DSET (LD 73), 809
DIO (LD 56), 741	DN (LD 20), 561	DSL (LD 27), 669
DIAL (LD 56), 742	DN (LD 22), 597	DSL (LD 97), 986
DIAL_PLAN (LD 15), 284	DN (LD 24), 639	DSP (LD 87), 890
DID (LD 56), 742	DN (LD 27), 668	DSPD (LD 16), 366
DID (LD 90), 911	DN (LD 82), 863	DSPL (LD 11), 149
DIDD (LD 16), 364	DN (LD 95), 965	DSPT (LD 11), 149
DIDD (LD 17), 453	DNAM (LD 16), 365	DSPT (LD 16), 366
DIDL (LD 97), 986	DNAN (LD 11), 148	DSTL (LD 25), 646
DIDN (LD 15), 284	DNAN (LD 12), 192	DTAO (LD 11), 149
DIDS (LD 97), 986	DNAT (LD 27), 668	DTCR (LD 14), 216
DIDT (LD 15), 284	DNDA (LD 56), 742	DTCS (LD 17), 454
DIG (LD 10), 98	DNDH (LD 15), 285	DTCS (LD 74), 836
DIG (LD 95), 964, 965	DNDI (LD 12), 192	DTD (LD 16), 366
DIG# (LD 16), 364	DNDL (LD 15), 286	DTDF (LD 16), 366
DIGS (LD 16), 364	DNDR (LD 11), 148	DTDT (LD 17), 454
DIND (LD 15), 285	DNDT (LD 15), 286	DTI2 (LD 17), 454
DISD (LD 15), 285	DNIC (LD 27), 668	DTIB (LD 17), 455
DISPLAY NEW MAP? (LD 29), 687	DNIS (LD 16), 365	DTIC (LD 17), 455
DISPLAY_FMT (LD 10), 98	DNIS (LD 23), 617	DTMF (LD 15), 286
DISPLAY_FMT (LD 11), 148	DNLG (LD 15), 286	DTMF (LD 97), 986
DISPLAY_FMT (LD 95), 965	DNLN (LD 58), 775	DTMK (LD 11), 149
DITI (LD 15), 285	DNPS (LD 58), 775	DTO (LD 13), 201
DLAT (LD 15), 285	DNRI (LD 11), 149	DTO (LD 73), 809
DLDN (LD 15), 285	DNRO (LD 11), 149	DTOB (LD 17), 455
DLEN (LD 12), 192	DNRT (LD 23), 618	DTOC (LD 16), 366
DLNG (LD 11), 148	DNSZ (LD 16), 365	DTOS (LD 16), 366
DLNT (LD 24), 639	DNSZ (LD 18), 515	DTPI (LD 16), 366
DLOP (LD 17), 453	DNUM (LD 17), 454	DTPn (LD 56), 742
DLT (LD 15), 285	DOW (LD 23), 618	DTPO (LD 16), 367
DLTN (LD 16), 364	DPNS (LD 17), 454	DTR (LD 11), 149
DLTN (LD 86), 877	DPPI (LD 16), 365	DTR (LD 16), 367
DMC (LD 10), 98	DPPO (LD 16), 365	DTRB (LD 17), 456
DMC (LD 20), 560	DPSD (LD 27), 668	DTRK (LD 16), 367
DMEM (LD 20), 560	DPVS (LD 57), 764	DTSL (LD 14), 216
DMI (LD 86), 877	DRAT (LD 17), 454	DTSL (LD 74), 836
	DRNG (LD 16), 365	

DTT (LD 73), 809
DTYP (LD 11), 150
DTYP (LD 16), 367
DTYP (LD 97), 987
DUP (LD 11), 150
DUP (LD 16), 367
DUPX (LD 17), 456
DUR5 (LD 17), 456
DURT (LD 23), 618

E

E CONN (R) (LD 73), 809
E CONN (S) (LD 73), 809
E SEZ (R) (LD 73), 810
E SEZ (S) (LD 73), 810
E_FILTER (LD 17), 459
EBLF (LD 12), 192
ECC1 (LD 15), 286
ECC2 (LD 15), 287
ECDN (LD 15), 287
ECDN (LD 93), 924
ECDR (LD 15), 287
ECHG (LD 10), 99
ECHG (LD 11), 150
EDGE (LD 73), 810
EECD (LD 94), 955
EES (LD 23), 618
EESD (LD 15), 287
EEST (LD 15), 287
EEST (LD 56), 742
EFCS (LD 73), 810
EFD (LD 11), 150
EFD (LD 27), 669
EFLL (LD 15), 287
EFLL (LD 93), 924
EHNO (LD 20), 561
EHR (LD 23), 618
EHT (LD 11), 151
EHT (LD 27), 669
ELAN (LD 17), 456
ELKA (LD 57), 764
ELKD (LD 57), 764

ELKP (LD 10), 99
ELKP (LD 11), 151
ELPL (LD 15), 288
EMGY (LD 16), 367
EML (LD 16), 367
EMRT (LD 23), 618
EMTY (LD 14), 216
ENBL (LD 19), 529
ENBS (LD 19), 529
END (LD 56), 742
ENL (LD 17), 456
ENS (LD 15), 288
ENTR (LD 86), 877
ENTRY (LD 15), 288
EOS (LD 16), 367
EOVR (LD 57), 764
EQA (LD 87), 890
EQAR (LD 16), 367
ERDT (LD 86), 878
ERR (LD 52), 708
ERRM (LD 17), 457
ERWT (LD 56), 742
ERWT (LD 86), 878
ESA_APDN (LD 15), 288
ESA_HLCL (LD 15), 288
ESA_INHN (LD 15), 288
ESCALATE (LD 17), 457
ESDI (LD 17), 457
ESDN (LD 24), 639
ESN (LD 11), 151
ESN (LD 16), 368
ESRT (LD 24), 640
ETOD (LD 86), 878
EXP (LD 86), 878
EXT_NAME (LD 15), 288
EXT0 (LD 17), 457
EXT1 (LD 17), 458
EXTFIELD (LD 15), 288
EXTR (LD 58), 775
EXTT (LD 15), 288

F

FACN (LD 16), 368
FACY (LD 16), 368
FADR (LD 23), 618
FADT (LD 23), 619
FAEL (LD 52), 708
FAER (LD 52), 708
FALT (LD 16), 368
FALT (R) (LD 73), 810
FALT (S) (LD 73), 810
FAP (LD 73), 810
FCAF (LD 15), 288
FCAR (LD 10), 99
FCAR (LD 11), 151
FCAR (LD 14), 217
FCDR (LD 17), 459
FCFT (LD 23), 619
FCI (LD 86), 878
FCI (LD 87), 890
FCNC (LD 15), 288
FCR_DATA (LD 15), 288
FCTH (LD 23), 619
FCWD (LD 15), 289
FDID (LD 49), 695
FDLC (LD 97), 988
FDLT (LD 97), 989
FDN (LD 11), 151
FDN (LD 27), 669
FEAT (LD 27), 669
FEAT (LD 73), 811
FEAT (LD 81), 843
FEAT (LD 86), 878
FEAT (LD 87), 890
FEAT (LD 90), 912
FEATID (LD 27), 670
FEDC (LD 16), 368
FFC_DATA (LD 15), 289
FFCS (LD 15), 289
FFCT (LD 56), 743
FFCT (LD 57), 764
FGNO (LD 16), 369
FGNO (LD 19), 529

FLEN (LD 15), 289
 FLEN (LD 87), 890
 FLEN (LD 90), 912
 FLOW (LD 17), 459
 FLOW CNTL (LD 74), 836
 FLOW_TYPE (LD 17), 459
 FLSH (LD 15), 289
 FLSH (LD 97), 990
 FLTA (LD 17), 459
 FLTH (LD 17), 459
 FLVL_MAX (LD 97), 990
 FLVL_MIN (LD 97), 990
 FMOP (LD 15), 289
 FMT_OUTPUT (LD 17), 460
 FNAD (LD 15), 289
 FNAL (LD 15), 290
 FNAT (LD 15), 290
 FNCF (LD 23), 619
 FNP (LD 15), 290
 FNUM (LD 97), 990
 FOPT (LD 15), 290
 FOR (LD 20), 561
 FORC (LD 23), 619
 FORM (LD 16), 369
 FRAN (LD 15), 290
 FRCE (LD 49), 696
 FREQ_0 (LD 97), 991
 FREQ_1 (LD 97), 991
 FRFW (LD 73), 812
 FRIN (LD 16), 369
 FRL (LD 16), 369
 FRL (LD 86), 878
 FRL (LD 87), 890
 FROA (LD 23), 619
 FROM (LD 49), 696
 FRPT (LD 17), 460
 FRRC (LD 16), 369
 FRRD (LD 16), 370
 FRRS (LD 16), 370
 FRRT (LD 15), 290
 FRRT (LD 23), 619
 FRRT (LD 93), 924
 FRT (LD 15), 290

FRT (LD 23), 620
 FRT (LD 93), 924
 FSNI (LD 86), 878
 FSNI (LD 87), 890
 FSVL (LD 11), 152
 FTOP (LD 15), 290
 FTR (LD 10), 99
 FTR_DATA (LD 15), 290
 FTYP (LD 17), 460
 FUNC (LD 17), 460
 FWTM (LD 02), 58
 FWTM (LD 14), 217

G

GBCS (LD 56), 743
 GCAD (LD 56), 743
 GCR (LD 16), 370
 GHTA (LD 57), 765
 GHTD (LD 57), 765
 GP02 (LD 15), 292
 GP03 (LD 15), 292
 GP04 (LD 15), 292
 GP05 (LD 15), 292
 GP06 (LD 15), 292
 GP07 (LD 15), 292
 GP08 (LD 15), 292
 GP09 (LD 15), 292
 GP10 (LD 15), 293
 GP11 (LD 15), 293
 GP12 (LD 15), 293
 GP13 (LD 15), 293
 GP14 (LD 15), 293
 GP15 (LD 15), 293
 GP2 (LD 73), 812
 GPNO (LD 26), 650
 GPXX (LD 15), 291
 GRCL (LD 57), 765
 GRD (LD 16), 370
 GRHP (LD 57), 765
 GRNO (LD 18), 516
 GRNO (LD 20), 561
 GRP (LD 17), 461

GRP (LD 18), 516
 GRP (LD 20), 561
 GRP (LD 52), 708
 GRPC (LD 18), 516
 GRPF (LD 57), 765
 GRPx (LD 26), 650

H

HBSC (LD 56), 743
 HCAD (LD 56), 743
 HCC (LD 15), 293
 HCCT (LD 56), 743
 HDID (LD 10), 105
 HDLC (LD 11), 152
 HDLC (LD 16), 370
 HDOPT (LD 15), 293
 HDTM (LD 15), 293
 HIDN (LD 57), 765
 HLCL (LD 15), 293
 HLCL (LD 16), 370
 HLDC (LD 56), 743
 HLOC (LD 15), 293
 HLOC (LD 90), 912
 HMDN (LD 10), 105
 HMDN (LD 15), 293
 HMDN (LD 81), 857
 HMSB (LD 23), 620
 HMTL (LD 15), 293
 HNPA (LD 15), 294
 HNPA (LD 90), 912
 HNTN (LD 15), 294
 HNTN (LD 16), 371
 HNXX (LD 15), 294
 HOL_OPT (LD 15), 294
 HOLD (LD 16), 371
 HOLD (LD 57), 765
 HOML (LD 23), 620
 HOSP (LD 15), 294
 HOSP (LD 49), 696
 HOST (LD 17), 461
 HOT (LD 11), 152
 HOUR (LD 15), 294

HOUR (LD 16), 371
 HOUR (LD 21), 585
 HOWL (LD 56), 744
 HPIB (LD 17), 461
 HPQ (LD 23), 620
 HRCL (LD 15), 294
 HREL (LD 57), 765
 HRLR (LD 17), 462
 HSID (LD 23), 620
 HSP_DATA (LD 15), 294
 HTLR (LD 17), 462
 HTNO (LD 20), 561
 HTYP (LD 57), 765
 HTYP (LD 74), 836
 HUNT (LD 10), 105
 HUNT (LD 11), 152
 HUNT (LD 27), 670
 HUNT (LD 95), 965
 HWTT (LD 15), 294

I

IABS (LD 16), 371
 IADN (LD 12), 192
 IADR (LD 17), 462
 IAMP (LD 16), 371
 IANI (LD 16), 371
 IAPG (LD 10), 105
 IAPG (LD 11), 153
 IAPG (LD 14), 217
 IBCS (LD 56), 744
 IC (LD 27), 671
 ICAD (LD 56), 744
 ICCR (LD 15), 294
 ICDL (LD 15), 295
 ICDN (LD 15), 295
 ICDN (LD 16), 371
 ICDN (LD 93), 924
 ICDR (LD 12), 192
 ICFA (LD 57), 765
 ICFD (LD 57), 765
 ICFV (LD 57), 765
 ICI (LD 15), 295

ICI (LD 93), 925
 ICIS (LD 16), 372
 ICMM (LD 15), 296
 ICNP (LD 16), 372
 ICNT (LD 16), 372
 ICOG (LD 16), 372
 ICOG (LD 94), 955
 ICP (LD 12), 193
 ICP (LD 15), 296
 ICP (LD 23), 621
 ICP_DATA (LD 15), 296
 ICPA (LD 57), 765
 ICPD (LD 15), 296
 ICPD (LD 57), 765
 ICPO (LD 57), 765
 ICPP (LD 57), 765
 ICPR (LD 15), 296
 ICPR (LD 23), 621
 ICPR (LD 93), 925
 ICPS (LD 15), 296
 ICPS (LD 16), 372
 ICPS (LD 23), 621
 ICPS (LD 93), 925
 ICR (LD 88), 899
 ICS (LD 73), 813
 ICT (LD 10), 105
 ICT (LD 11), 153
 ICT (LD 12), 193
 ICTD (LD 15), 296
 ICWN (LD 15), 296
 ID (LD 16), 373
 ID (LD 52), 708
 ID (LD 86), 878
 ID1 (LD 56), 744
 ID2 (LD 56), 744
 IDBB (LD 86), 879
 IDBZ (LD 15), 296
 IDC (LD 16), 373
 IDC (LD 95), 965
 IDCA (LD 15), 296
 IDD (LD 56), 744
 IDE (LD 56), 744
 IDEF (LD 15), 297

IDEF (LD 16), 373
 IDGT (LD 49), 696
 IDLB (LD 23), 621
 IDLE (R) (LD 73), 813
 IDLE (S) (LD 73), 813
 IDLE_DISP_CHAR (LD 17),
 462
 IDLE_DISP_STRING (LD 17),
 463
 IDLE_SET_DISPLAY (LD 17),
 463
 IDLP (LD 17), 463
 IDLT (LD 02), 58
 IDOP (LD 16), 373
 IDR (LD 15), 297
 IDTB (LD 16), 373
 IDUB (LD 23), 621
 IEC (LD 16), 373
 IFC (LD 16), 373
 IFC (LD 17), 463
 IFDN (LD 23), 621
 IFLS (LD 15), 297
 IFTO (LD 19), 529
 IHT (LD 16), 374
 IIT (LD 19), 529
 IITP (LD 19), 530
 ILIN (LD 56), 744
 ILLR (LD 16), 375
 ILOU (LD 56), 744
 IMA (LD 15), 297
 IMA (LD 23), 622
 IMBI (LD 16), 376
 IMCB (LD 16), 376
 IMPH (LD 15), 297
 IMS (LD 15), 297
 IMS (LD 23), 622
 IMS (LD 57), 765
 IMS_DATA (LD 15), 297
 INAC (LD 16), 376
 INC (LD 14), 217
 INC (LD 16), 376
 INC_T306 (LD 16), 376
 INC_T306 (LD 17), 465

INDMF (LD 16), 376
 INDX (LD 10), 105
 INFO (LD 20), 562
 INIT (LD 17), 465
 INIT (LD 19), 530
 INIT (LD 49), 697
 INPL (LD 90), 913
 INSO (LD 97), 991
 INST (LD 16), 377
 INST (LD 57), 765
 INST (LD 86), 879
 INT (LD 11), 153
 INT (LD 15), 297
 INT (LD 16), 377
 INT_DATA (LD 15), 297
 INT_NAME (LD 15), 298
 INTC (LD 16), 377
 INTFIELD (LD 15), 297
 INTL (LD 15), 297
 INTL (LD 17), 465
 INTM (LD 58), 776
 INTN (LD 97), 991
 INTR (LD 19), 530
 INTR (LD 58), 776
 INTU (LD 56), 745
 INTU (LD 97), 991
 INVC (LD 02), 58
 INVN (LD 02), 58
 INVS (LD 02), 58
 IOHQ (LD 86), 879
 IPRI (LD 14), 217
 IPTN (LD 14), 217
 IPUB (LD 16), 377
 IRFP (LD 15), 298
 IRFR (LD 15), 298
 IRNG (LD 15), 298
 ISAP (LD 23), 622
 ISAR (LD 16), 377
 ISDM (LD 86), 879
 ISDN (Integrated Service Digital
 Network), 613
 ISDN (LD 15), 298
 ISDN (LD 16), 377

ISDN_MCNT (LD 17), 465
 ISDN_MCNT (LD 27), 671
 ISET (LD 86), 879
 ISLM (LD 17), 465
 ISM (LD 97), 991
 ITBP (LD 73), 813
 ITDN (LD 16), 377
 ITED (LD 90), 913
 ITEI (LD 86), 879
 ITEI (LD 90), 913
 ITEM (LD 10), 105
 ITEM (LD 11), 153
 ITH2 (LD 15), 299
 ITH3 (LD 15), 299
 ITHC (LD 02), 58
 ITHS (LD 02), 58
 ITNA (LD 11), 153
 ITOH (LD 87), 890
 ITOH (LD 90), 913
 ITOL (LD 16), 377
 ITPP (LD 73), 813
 ITXX (LD 57), 765
 IVMS (LD 23), 622
 IVR (LD 23), 622

J

JDGT (LD 16), 377
 JDMI (LD 17), 465

K

KBA (LD 11), 153
 KBD (LD 11), 154
 KEEP_MSGS (LD 10), 106
 KEEP_MSGS (LD 11), 154
 KEY (LD 11), 154
 KEY (LD 12), 193
 KEY1 (LD 97), 991
 KEY2 (LD 97), 991
 KEY3 (LD 97), 992
 KLS (LD 11), 175

L

L2_RST (LD 74), 837
 LA11 (LD 15), 299
 LA12 (LD 15), 299
 LA21 (LD 15), 299
 LA22 (LD 15), 299
 LA31 (LD 15), 299
 LA32 (LD 15), 299
 LA41 (LD 15), 299
 LA42 (LD 15), 299
 LA51 (LD 15), 299
 LA52 (LD 15), 299
 LAAC (LD 19), 530
 LADN (LD 15), 299
 LANG (LD 11), 175
 LANG (LD 12), 196
 LANG (LD 95), 966
 LANGUAGE (LD 17), 465
 LAPB (LD 27), 671
 LAPD (LD 17), 466
 LAPD (LD 27), 671
 LAPW (LD 17), 466
 LAST (LD 16), 378
 LCKT (LD 15), 299
 LCLB (LD 73), 813
 LCMT (LD 17), 466
 LCN1 (LD 27), 671
 LCN2 (LD 27), 671
 LCNO (LD 16), 378
 LCTL (LD 17), 466
 LD 11 program, 627
 LD 23 program
 queue priorities, 625
 LDA0 (LD 15), 299
 LDA1 (LD 15), 299
 LDA2 (LD 15), 299
 LDA3 (LD 15), 300
 LDA4 (LD 15), 300
 LDA5 (LD 15), 300
 LDAC (LD 19), 531
 LDBZ (LD 15), 300
 LDDD (LD 90), 914

LDID (LD 90), 914
 LDN (LD 10), 106
 LDN (LD 11), 175
 LDN (LD 27), 671
 LDN (LD 56), 745
 LDN (LD 90), 914
 LDN_DATA (LD 15), 300
 LDN0 (LD 15), 300
 LDN0 (LD 93), 925
 LDN1 (LD 15), 300
 LDN1 (LD 93), 926
 LDN2 (LD 15), 300
 LDN2 (LD 86), 879
 LDN2 (LD 93), 926
 LDN3 (LD 15), 300
 LDN3 (LD 93), 926
 LDN4 (LD 15), 300
 LDN4 (LD 93), 926
 LDN5 (LD 15), 301
 LDN5 (LD 93), 926
 LDNT (LD 15), 301
 LDOP (LD 14), 217
 LDTT (LD 15), 301
 LEC (LD 15), 301
 LEC (LD 16), 378
 LEND (LD 15), 301
 LEVL (LD 17), 466
 LFAC (LD 73), 813
 LFAL (LD 52), 708
 LFAL (LD 73), 814
 LFAR (LD 52), 708
 LFFD (LD 15), 301
 LFTN (LD 15), 301
 LGTH (LD 16), 378
 LHK (LD 11), 175
 LID (LD 16), 378
 LILO (LD 57), 765
 LIMIT (LD 56), 745
 LINK (LD 15), 302
 LINT (LD 52), 708
 LIST (LD 87), 890
 LLID (LD 17), 466
 LLT (LD 15), 302

 LM0 (LD 52), 708
 LM1 (LD 52), 709
 LM2 (LD 52), 709
 LM3 (LD 52), 709
 LMNL (LD 16), 378
 LNAME_OPTION (LD 17), 467
 LNRS (LD 10), 106
 LNRS (LD 11), 175
 LOC (LD 90), 914
 LOC (LD 97), 992
 LOCD (LD 16), 378
 LOCK (LD 17), 468
 LOCK (LD 88), 899
 LOCL (LD 15), 302
 LOG (LD 23), 622
 LOGIN_NAME (LD 17), 468
 LOOP (LD 27), 671
 LOOP (LD 52), 709
 LOOP (LD 73), 814
 LOUT (LD 16), 378
 LOUT (LD 17), 468
 LPIB (LD 17), 468
 LPK (LD 11), 176
 LPWD (LD 17), 468
 LSC (LD 15), 302
 LSC (LD 87), 890
 LSC (Local Steering Code), 881
 LSNO (LD 18), 516
 LSNO (LD 20), 562
 LSNO (LD 57), 766
 LSNO (LD 81), 858
 LSSL (LD 74), 837
 LTEI (LD 27), 672
 LTER (LD 86), 880
 LTHR (LD 17), 469
 LTID (LD 97), 992
 LTN (LD 11), 176
 LVNO (LD 94), 955

M

 M911_ABAN (LD 16), 383
 M911_ANI (LD 16), 383
 M911_FORM (LD 16), 383
 M911_TONE (LD 16), 383
 M911_TRK_TYPE (LD 16),
 383
 MAGT (LD 17), 469
 MAIN (LD 15), 302
 MAND (LD 73), 814
 MANO (LD 16), 379
 MANU (LD 17), 469
 MAP (LD 29), 687
 MARP (LD 10), 106
 MARP (LD 11), 176
 MARP (LD 17), 469
 MAT (LD 17), 469
 MAT_READ_ONLY (LD 17),
 469
 MATT (LD 15), 302
 MAUT (LD 10), 106
 MAUT (LD 11), 176
 MAX (LD 16), 379
 MAXP (LD 23), 622
 MAXT (LD 15), 302
 MAXT (LD 94), 955
 MAXU (LD 14), 217
 MBG (LD 15), 303
 MBGA (LD 16), 379
 MBGA (LD 17), 469
 MBGS (LD 93), 926
 MBNR (LD 15), 303
 MCAL (LD 27), 672
 MCCD (LD 16), 379
 MCDC (LD 15), 303
 MCDT (LD 16), 379
 MCFD (LD 23), 622
 MCFN (LD 17), 470
 MCLR (LD 15), 303
 MCM (LD 73), 814
 MCNT (LD 17), 470
 MCR (LD 15), 303
 MCRT (LD 15), 303
 MCTM (LD 16), 379
 MCTS (LD 16), 379
 MDID (LD 15), 303

MDL (LD 97), 992	MLWU_LANG (LD 11), 176	MRT (LD 16), 382
MDMP (LD 16), 379	MMDN (LD 58), 776	MSBA (LD 57), 766
MDTD (LD 16), 379	MMSN (LD 15), 304	MSBD (LD 57), 766
MED (LD 97), 993	MNDN (LD 14), 219	MSCC (LD 86), 880
MEM (LD 17), 470	MNG1 (LD 73), 815	MSCD (LD 15), 304
MEMB (LD 27), 672	MNG2 (LD 73), 815	MSCL (LD 17), 471
MFAO (LD 73), 814	MNT (LD 57), 766	MSDT (LD 17), 471
MFC (LD 16), 380	MNTC (LD 57), 766	MSG (LD 29), 687
MFC_ENT (LD 15), 303	MNXX (LD 90), 915	MSSC (LD 15), 305
MFCG (LD 15), 303	MOD (LD 11), 177	MTAR (LD 15), 305
MFCI (LD 16), 380	MOD (LD 16), 381	MTEI (LD 27), 673
MFCO (LD 16), 380	MODE (LD 16), 381	MTFM (LD 27), 673
MFEA (LD 16), 380	MODE (LD 17), 470	MTN (LD 14), 219
MFED (LD 16), 380	MODE (LD 27), 673	MTND (LD 16), 382
MFEI (LD 16), 380	MODIFY (LD 17), 471	MTO (LD 58), 776
MFEQ (LD 16), 380	MODL (LD 10), 106	MTRC (LD 57), 766
MFF (LD 73), 814	MODL (LD 11), 177	MTRO (LD 17), 471
MFID (LD 15), 304	MODL (LD 14), 219	MTSP (LD 27), 673
MFKI (LD 16), 380	MODL (LD 20), 562	MUD_DN (LD 15), 305
MFKO (LD 16), 380	MON (LD 16), 381	MUD_SRV (LD 15), 305
MFL (LD 14), 217	MONT (LD 19), 531	MULT (LD 16), 383
MFLI (LD 14), 218	MOPT (LD 97), 994	MULTI_USER (LD 17), 471
MFLT0 (LD 97), 993	MPED (LD 17), 471	MURT (LD 15), 305
MFLT1 (LD 97), 993	MPH (LD 15), 304	MURT (LD 23), 623
MFPD (LD 14), 218	MPH (LD 27), 673	MURT (LD 50), 701
MFRL (LD 86), 880	MPHC (LD 27), 673	MURT (LD 93), 926
MFRL (LD 97), 993	MPHI (LD 11), 177	MUS (LD 15), 305
MFSD (LD 17), 470	MPHI (LD 20), 562	MUS (LD 16), 383
MFSL (LD 73), 815	MPL (LD 87), 891	MUSR (LD 15), 305
MFSS (LD 16), 380	MPO_DATA (LD 15), 304	MVSG (LD 25), 646
MFVN (LD 15), 304	MPOP (LD 15), 304	MVT (LD 97), 995
MFVO (LD 15), 304	MPR (LD 11), 177	MWAN (LD 56), 745
MGCR (LD 17), 470	MPRI (LD 87), 891	MWC (LD 23), 623
MHLD (LD 15), 304	MQA (LD 23), 623	MWDT (LD 56), 745
MIN (LD 11), 176	MQAP (LD 23), 623	MWFB (LD 15), 305
MIN (LD 16), 381	MQAS (LD 23), 623	MWIF (LD 17), 471
MINL (LD 97), 994	MQC_FEAT (LD 16), 381	MWIF (LD 74), 837
MINP (LD 73), 815	MQC_FEAT (LD 17), 471	MWNS (LD 15), 305
MINT (LD 56), 745	MQCF (LD 23), 623	MWRA (LD 57), 766
MISP (LD 27), 672	MQUE (LD 57), 766	MWUA (LD 57), 766
MLDN (LD 17), 470	MR (LD 16), 382	MWUD (LD 57), 766
MLIO (LD 57), 766	MRAT (LD 16), 382	MWUN (LD 10), 106
MLWU_LANG (LD 10), 106	MRPS (LD 58), 776	MXDM (LD 86), 880

MXFC (LD 86), 880
 MXFS (LD 86), 880
 MXIX (LD 86), 880
 MXLC (LD 86), 880
 MXLN (LD 95), 966
 MXRL (LD 86), 880
 MXSC (LD 86), 880
 MXSD (LD 86), 881
 MXTI (LD 16), 383

N

N1 (LD 17), 471
 N1 (LD 27), 674
 N2 (LD 17), 472
 N2 (LD 27), 674
 N200 (LD 17), 472
 N200 (LD 27), 674
 N201 (LD 17), 472
 N201 (LD 27), 674
 N2X4 (LD 17), 472
 N2X4 (LD 27), 674
 NACC (LD 16), 383
 NACT (LD 20), 562
 NACT (LD 22), 598
 NACT (LD 81), 858
 NACT (LD 82), 863
 NACT (LD 83), 866
 NADT (LD 16), 384
 NAGN (LD 93), 926
 NALT (LD 86), 881
 NAME (LD 10), 107
 NAME (LD 11), 177
 NAME (LD 95), 966
 NAS_ ACTV (LD 15), 305
 NAS_ ATCL (LD 15), 305
 NASA (LD 16), 384
 NASA (LD 17), 472
 NATL (LD 16), 384
 NATP (LD 97), 995
 NAUT (LD 15), 306
 NBCS (LD 56), 745
 NBLK (LD 15), 306

NCAD (LD 56), 745
 NCDP (LD 86), 881
 NCFW (LD 23), 624
 NCG1 (LD 73), 815
 NCG2 (LD 73), 815
 NCNA (LD 16), 384
 NCNI (LD 16), 384
 NCOS (LD 10), 107
 NCOS (LD 11), 177
 NCOS (LD 14), 219
 NCOS (LD 15), 306
 NCOS (LD 16), 384
 NCOS (LD 18), 516
 NCOS (LD 19), 531
 NCOS (LD 24), 640
 NCOS (LD 27), 674
 NCOS (LD 81), 858
 NCOS (LD 87), 891
 NCOS (LD 88), 899
 NCPU (LD 17), 472
 NCR (LD 17), 472
 NCRD (LD 16), 385
 NCS1 (LD 15), 306
 NCS2 (LD 15), 306
 NCSD (LD 73), 815
 NCTH (LD 16), 385
 NCWL (LD 23), 624
 NDCH (LD 17), 472
 NDFL (LD 23), 624
 NDGT (LD 16), 385
 NDGT (LD 18), 517
 NDID (LD 15), 306
 NDIG (LD 16), 385
 NDIS (LD 17), 472
 NDNO (LD 16), 385
 NDP (LD 16), 385
 NDR1 BCS (LD 56), 745
 NDR1 PBX (LD 56), 746
 NDR2 BCS (LD 56), 746
 NDR2 PBX (LD 56), 746
 NDR3 BCS (LD 56), 746
 NDR3 PBX (LD 56), 746
 NDR4 BCS (LD 56), 746

NDR4 PBX (LD 56), 746
 NDRG (LD 17), 473
 NDRI (LD 16), 386
 NEDC (LD 16), 386
 NET_DATA (LD 15), 306
 NEW DATA PLANNED? (LD 29), 687
 NFCR (LD 15), 306
 NFNA (LD 15), 306
 NFNS (LD 15), 306
 NGRP (LD 14), 219
 NINV (LD 15), 307
 NIPN (LD 15), 307
 NIT (LD 15), 307
 NIT_DATA (LD 15), 307
 NIT1 (LD 15), 307
 NIT1 (LD 93), 927
 NIT2 (LD 15), 307
 NIT2 (LD 93), 927
 NIT3 (LD 15), 307
 NIT3 (LD 93), 927
 NIT4 (LD 15), 307
 NIT4 (LD 93), 927
 NIT5 (LD 15), 307
 NITC (LD 95), 966
 NITE (LD 14), 219
 NITR (LD 15), 307
 NLPW (LD 17), 473
 NMAP (LD 86), 881
 NMBR (LD 88), 899
 NMNL (LD 16), 386
 NMSG (LD 16), 386
 NND (LD 52), 709
 NNDC (LD 97), 995
 NNT (LD 15), 307
 NOLS (LD 18), 517
 NOOS (LD 73), 815
 NORTEL_BRAND (LD 17), 473
 NOTI (LD 15), 307
 NOUT (LD 16), 386
 NPA (LD 16), 386
 NPA (LD 19), 531

NPA (LD 87), 891
NPA (LD 90), 915
NPI (LD 15), 307
NPID (LD 16), 386
NPID_TBL_NUM (LD 16), 386
NPW1 (LD 17), 473
NPW2 (LD 17), 473
NPWC (LD 17), 473
NRAC (LD 23), 624
NRCV (S) (LD 73), 815
NRDY (LD 57), 766
NRES (LD 15), 307
NRMT (LD 56), 747
NRNG (LD 87), 891
NRRT (LD 23), 624
NRT (LD 16), 386
NRT (LD 23), 624
NRWU (LD 15), 308
NSC (LD 87), 891
NSCC (LD 90), 915
NSCP (LD 15), 308
NSF (LD 16), 386
NSO (LD 15), 308
NSTO (LD 58), 776
NT2 (LD 74), 837
NTBL (LD 93), 927
NTC (LD 73), 815
NTCD (LD 50), 701
NTN (LD 27), 674
NTN1 (LD 27), 674
NTN2 (LD 27), 674
NTNO (LD 27), 674
NTOF (LD 16), 386
NTOL (LD 16), 387
NTT (LD 94), 955
NUMD (LD 17), 473
NWIF (LD 27), 674
NWT (LD 15), 308
NXX (LD 19), 531
NXX (LD 87), 891
NXX (LD 90), 915

O

OABS (LD 16), 387
OACn (LD 56), 747
OAL (LD 16), 387
OAMP (LD 16), 387
OAN (LD 16), 387
OAS_DATA (LD 15), 308
OBKT (LD 56), 747
OBTN (LD 23), 624
OC (LD 27), 674
OCAC (LD 17), 474
OCB1 (LD 15), 308
OCB2 (LD 15), 308
OCB3 (LD 15), 308
OCBA (LD 57), 766
OCBD (LD 57), 766
OCBV (LD 57), 766
OCLI (LD 15), 308
OCN (LD 23), 625
ODN0 (LD 15), 309
ODN1 (LD 15), 309
ODN2 (LD 15), 309
ODN3 (LD 15), 309
ODN4 (LD 15), 309
ODN5 (LD 15), 309
ODN6 (LD 15), 309
ODN7 (LD 15), 309
ODN8 (LD 15), 309
ODN9 (LD 15), 309
OFFC (LD 90), 916
OFFP (LD 88), 899
OGDN (LD 16), 387
OGIS (LD 16), 387
OGNP (LD 16), 387
OGNT (LD 16), 388
OGPS (LD 16), 388
OHAS (LD 15), 309
OHID (LD 10), 107
OHID (LD 11), 177
OHQ (LD 16), 388
OHQ (LD 56), 747
OHQ (LD 86), 881

OHQ (LD 87), 891
OHQT (LD 16), 388
OHT (LD 16), 388
OHTD (LD 16), 388
OHTL (LD 87), 892
OHTT (LD 16), 388
OK (LD 17), 474
OMPH (LD 15), 309
ONP (LD 73), 816
OOSC (LD 73), 816
OPA (LD 16), 388
OPCB (LD 16), 388
OPD (LD 16), 389
OPDL (LD 16), 389
OPE (LD 11), 177
OPE (LD 16), 389
OPER (LD 19), 531
OPER (LD 58), 776
OPP (LD 16), 389
OPR (LD 16), 389
OPR (LD 20), 586
OPRI (LD 14), 219
OPT (LD 15), 310
OPT (LD 17), 474
OPT (LD 27), 675
OPT (LD 29), 687
OPX (LD 73), 816
ORUR (LD 17), 475
OSDN (LD 24), 640
OSG1 (LD 73), 816
OSG2 (LD 73), 816
OSGD (LD 73), 816
OTBF (LD 17), 475
OTCR (LD 15), 316
OTH (LD 56), 747
OTL (LD 16), 389
OUT_T306 (LD 16), 390
OUT_T306 (LD 17), 476
OUTS (LD 23), 625
OVBU (LD 23), 626
OVDN (LD 23), 626
OVFL (LD 23), 626
OVFL (LD 56), 747

OVLA (LD 17), 476
OVLL (LD 86), 881
OVL P (LD 19), 531
OVL R (LD 16), 390
OVL R (LD 17), 476
OVLS (LD 16), 390
OVLS (LD 17), 476
OVL T (LD 16), 390
OVL T (LD 17), 476
OVL Y (LD 17), 476
OVRD (LD 56), 747
OVRD (LD 57), 767
OVTH (LD 23), 627

P

P BRLS (R) (LD 73), 816
P BRLS (S) (LD 73), 816
P BURS (R) (LD 73), 816
P BURS (S) (LD 73), 817
P CALL (R) (LD 73), 817
P CAS (R) (LD 73), 817
P CAS (S) (LD 73), 817
P DIGT (R) (LD 73), 817
P DIGT (S) (LD 73), 817
P EOS (R) (LD 73), 817
P EOSB (S) (LD 73), 817
P EOSF (S) (LD 73), 818
P ESNW (R) (LD 73), 818
P ESNW (S) (LD 73), 818
P FRLS (R) (LD 73), 818
P FRLS (S) (LD 73), 818
P METR (R) (LD 73), 818
P NXFR (R) (LD 73), 819
P NXFR (S) (LD 73), 819
P OPCA (R) (LD 73), 819
P OPRC (R) (LD 73), 819
P OPRS (R) (LD 73), 819
P RCOD (S) (LD 73), 819
P RCTL (R) (LD 73), 819
P RCTL (S) (LD 73), 819
P RRC (S) (LD 73), 820
P WNKS (R) (LD 73), 820

P WNKS (S) (LD 73), 820
P10 (LD 56), 747
P10P (LD 97), 995
P10R (LD 97), 996
P12R (LD 97), 996
P20R (LD 97), 996
PADL (LD 16), 390
PADT (LD 16), 390
PAGE (LD 20), 562
PAGE (LD 22), 598
PAGE (LD 23), 627
PAGE (LD 81), 858
PAGE (LD 82), 863
PAGE (LD 83), 866
PAGE (LD 95), 966
PAGT (LD 97), 996
PANI (LD 15), 316
PANN (LD 58), 776
PANS (LD 16), 390
PAR (LD 11), 178
PAR (LD 16), 390
PARM (LD 17), 477
PARY (LD 17), 477
PATH (LD 58), 776
PATI (LD 56), 747
PBCS (LD 56), 747
PBDO (LD 11), 178
PBDO (LD 16), 391
PBLK (LD 15), 316
PBUZ (LD 15), 317
PBXH (LD 17), 477
PCAD (LD 56), 748
PCDL (LD 15), 317
PCDR (LD 17), 477
PCDS (LD 15), 317
PCMC (LD 15), 317
PCML (LD 14), 220
PCML (LD 17), 477
PCML (LD 52), 709
PCMM (LD 23), 627
PCMR (LD 52), 709
PCWT (LD 56), 748
PDCA (LD 14), 220

PDCA (LD 27), 675
PDCA (LD 73), 820
PDCH (LD 17), 477
PECL (LD 16), 391
PELK (LD 15), 317
PER (LD 86), 881
PERS (LD 73), 820
PFAN (LD 15), 317
PFNA (LD 15), 317
PFX1 (LD 15), 317
PFX2 (LD 15), 317
PGAP (LD 57), 767
PGBY (LD 29), 687
PGIP (LD 57), 767
PGMM (LD 29), 688
PGPN (LD 16), 391
PGPN (LD 27), 675
PGSP (LD 57), 767
PH (LD 27), 675
PHDT (LD 15), 318
PHIP (LD 15), 318
PICP (LD 15), 318
PII (LD 16), 391
PINT (LD 15), 318
PINX_CUST (LD 17), 478
PINX_DN (LD 15), 318
PKND (LD 15), 318
PKUP (LD 95), 966
PLAT (LD 18), 517
PLDN (LD 18), 517
PLDN (LD 57), 767
PLEV (LD 10), 107
PLEV (LD 11), 178
PLEV (LD 16), 391
PMCR (LD 17), 478
PMIN (LD 17), 478
PMSI (LD 17), 478
PNDL (LD 16), 391
PNI (LD 15), 318
PNI (LD 16), 392
PNNC (LD 16), 392
PNNC (LD 56), 748
PNPS (LD 16), 392

POLR (LD 13), 201
 PORT (LD 15), 319
 PORT (LD 17), 478
 POS (LD 10), 107
 POS (LD 11), 178
 POST (LD 16), 392
 POST (LD 18), 517
 PPID (LD 14), 220
 PPM_DATA (LD 15), 319
 PPMD (LD 15), 319
 PPMD (LD 73), 820
 PR_RTN (LD 16), 393
 PR_RTN (LD 17), 482
 PR_TRIGS (LD 16), 393
 PR_TRIGS (LD 17), 482
 PRBK (LD 56), 748
 PRCS (S) (LD 73), 820
 PRDL (LD 16), 392
 PRDN (LD 14), 220
 PRE (LD 18), 517
 PRED (LD 18), 517
 PREF (LD 15), 319
 PREF (LD 73), 821
 PREF CK0 (LD 73), 821
 PREF CK1 (LD 73), 822
 PREM (LD 56), 748
 PREO (LD 15), 319
 PRES (LD 12), 196
 PRES (LD 19), 531
 PRES (LD 27), 675
 PRET (LD 58), 777
 PRFX (LD 27), 675
 PRI (LD 10), 107
 PRI (LD 11), 178
 PRI (LD 17), 479
 PRI (LD 27), 676
 PRI (LD 73), 822
 PRI_CH (LD 27), 676
 PRI2 (LD 17), 480
 PRI2 (LD 73), 822
 PRID (LD 27), 676
 PRIM (LD 17), 481
 PRIM (LD 23), 627

PRIO (LD 14), 220
 PRIO (LD 23), 627
 PRIV (LD 16), 392
 PRIV (LD 74), 837
 PRM (LD 11), 178
 PRMT (LD 15), 319
 PROG (LD 16), 393
 PROG (LD 17), 481
 PROM (LD 87), 892
 PRTD (LD 19), 531
 PRTY (LD 17), 482
 PSAL (LD 58), 777
 PSDS (LD 11), 178
 PSDS (LD 16), 394
 PSEL (LD 11), 178
 PSEL (LD 16), 394
 PSIZ (LD 27), 677
 PST (LD 18), 517
 PSTN (LD 15), 319
 PTMR (LD 17), 482
 PTTY (LD 15), 320
 PTUT (LD 16), 394
 PTYP (LD 16), 394
 PUDN (LD 57), 767
 PUGR (LD 57), 767
 PULS (LD 56), 748
 PURN (LD 57), 767
 PUTYP (LD 11), 179
 PVC (LD 27), 677
 PVCN (LD 27), 677
 PWD (LD 17), 482
 PWD_DATA (LD 15), 320
 PWD2 (LD 15), 320
 PWD2 (LD 17), 483
 PWD2 (LD 22), 598
 PWD2 (LD 29), 688
 PWD2 (LD 97), 996
 PWnn (LD 17), 483
 PWTP (LD 17), 483

Q

QCHID (LD 17), 483

QDIS (LD 12), 196
 QREC (LD 16), 395
 QTHM (LD 12), 196
 QUE (LD 86), 882

R

R_ENTRY (LD 15), 321
 R_SIZE (LD 15), 323
 R2BN (LD 15), 320
 R2ED (LD 15), 320
 R2MD (LD 16), 395
 RACD (LD 16), 395
 RADR (LD 17), 483
 RADT (LD 87), 892
 RAGT (LD 23), 627
 RAIE (LD 73), 822
 RALL (LD 15), 320
 RALM (LD 73), 822
 RAN (LD 23), 628
 RAN1 (LD 15), 320
 RAN2 (LD 15), 320
 RAN2 (LD 88), 899
 RANC (LD 87), 892
 RANE (LD 87), 892
 RANF (LD 15), 320
 RANG (LD 58), 777
 RANR (LD 15), 320
 RANR (LD 16), 395
 RANR (LD 24), 640
 RANR (LD 58), 777
 RANR (LD 88), 899
 RANR (LD 97), 996
 RANX (LD 16), 395
 RAO (LD 23), 628
 RATE (LD 27), 677
 RATE (LD 74), 837
 RATS (LD 73), 822
 RBCS (LD 56), 748
 RBTD (LD 86), 882
 RCAD (LD 56), 748
 RCAL (LD 16), 395
 RCAL (LD 18), 517

RCAL (LD 58), 777	REQ (LD 12), 197	RGAI (LD 23), 629
RCAP (LD 16), 396	REQ (LD 13), 201	RGAR (LD 56), 749
RCAP (LD 17), 484	REQ (LD 14), 221	RGAV (LD 57), 768
RCFA (LD 57), 767	REQ (LD 16), 398	RGBK (LD 56), 749
RCFD (LD 57), 767	REQ (LD 17), 487	RGFL (LD 16), 398
RCFV (LD 57), 767	REQ (LD 18), 517	RGNA (LD 15), 322
RCLE (LD 15), 320	REQ (LD 19), 531	RGTP (LD 97), 997
RCLS (LD 16), 398	REQ (LD 21), 586	RICI (LD 15), 322
RCNT (LD 15), 321	REQ (LD 22), 598	RICI (LD 93), 927
RCO (LD 10), 108	REQ (LD 23), 628	RING (LD 56), 749
RCO (LD 11), 179	REQ (LD 24), 640	RLA (LD 15), 322
RCRG (LD 58), 777	REQ (LD 25), 646	RLCR (LD 15), 323
RCTI (LD 58), 777	REQ (LD 26), 650	RLDN (LD 14), 221
RCVP (LD 17), 487	REQ (LD 27), 677	RLI (LD 15), 323
RCY1 (LD 15), 321	REQ (LD 28), 684	RLI (LD 86), 882
RCY2 (LD 15), 321	REQ (LD 29), 688	RLI (LD 87), 893
RDLN (LD 57), 767	REQ (LD 49), 697	RLI (LD 90), 916
RDNA (LD 23), 628	REQ (LD 50), 702	RLS (LD 17), 488
RDNE (LD 57), 767	REQ (LD 52), 709	RLS (LD 50), 702
RDNL (LD 16), 398	REQ (LD 56), 748	RLSM (LD 16), 399
RDR_DATA (LD 15), 321	REQ (LD 57), 767	RMOV (LD 26), 650
RDSN (LD 57), 767	REQ (LD 58), 777	RMST (LD 57), 768
RDST (LD 57), 767	REQ (LD 73), 822	RNGE (LD 20), 563
RECA (LD 50), 701	REQ (LD 74), 838	RNGE (LD 21), 586
RECD (LD 15), 321	REQ (LD 79), 840	RNGE (LD 90), 916
RECV (LD 94), 955	REQ (LD 81), 858	RNPG (LD 10), 109
REF (LD 16), 398	REQ (LD 82), 863	RNPG (LD 11), 180
REF0 (LD 15), 321	REQ (LD 83), 866	RNPG (LD 81), 858
REF1 (LD 15), 321	REQ (LD 86), 882	ROA_DATA (LD 15), 323
REF2 (LD 15), 321	REQ (LD 87), 892	ROLR (LD 17), 489
REF3 (LD 15), 321	REQ (LD 88), 900	ROPT (LD 15), 323
REMD (LD 17), 487	REQ (LD 90), 916	ROPT (LD 23), 629
REMO (LD 17), 487	REQ (LD 93), 927	ROUT (LD 16), 399
REMQ (LD 17), 487	REQ (LD 94), 956	ROUT (LD 19), 532
REP (LD 16), 398	REQ (LD 95), 966	ROUT (LD 21), 586
REP* (LD 57), 767	REQ (LD 97), 997	ROUT (LD 27), 677
REPL PARM (LD 74), 838	RESN (LD 95), 966	ROUT (LD 56), 749
REPT (LD 73), 822	RETC (LD 87), 892	ROUT (LD 58), 777
REQ	RETT (LD 87), 892	ROUT (LD 86), 882
(LD 10), 108	RFQ (LD 23), 629	ROUT (LD 87), 893
(LD 11), 179	RGAA (LD 57), 768	ROUT (LD 93), 927
(LD 15), 322	RGAB (LD 56), 748	RPA (LD 15), 323
(LD 20), 562	RGAD (LD 57), 768	RPA (LD 16), 399

RPAN (LD 57), 768
 RPAR (LD 58), 777
 RPAW (LD 56), 749
 RPAX (LD 57), 768
 RPAX (LD 58), 778
 RPCT (LD 56), 749
 RPEB (LD 17), 489
 RPF (LD 52), 709, 710
 RPNS (LD 15), 323
 RPPM (LD 16), 399
 RPRT (LD 23), 629
 RPTO (LD 58), 778
 RR (LD 15), 323
 RRBS (LD 16), 399
 RRPA (LD 87), 893
 RSAC (LD 28), 684
 RSND (LD 23), 630
 RTCL (LD 86), 882
 RTIM (LD 15), 323
 RTIM (LD 58), 778
 RTMB (LD 14), 221
 RTMR (LD 24), 641
 RTN (LD 16), 399
 RTNO (LD 86), 882
 RTPC (LD 23), 630
 RTQO (LD 23), 630
 RTQT (LD 23), 630
 RTRY (LD 88), 900
 RTS (LD 11), 180
 RTSA (LD 15), 324
 RTXX (LD 57), 768
 RTYP (LD 16), 399
 RUCF (LD 16), 400
 RUCS (LD 16), 401
 RURC (LD 16), 401
 RVDL (LD 56), 749
 RVSD (LD 16), 402
 RWTA (LD 87), 893
 RXMT (LD 17), 489

S

S_ENTRY (LD 15), 325

S_SIZE (LD 15), 326
 S10P (LD 97), 997
 S2 (LD 74), 838
 SAC (LD 19), 532
 SACP (LD 15), 324
 SADS (LD 57), 768
 SAEN (LD 57), 768
 SALK (LD 57), 768
 SAMM (LD 15), 324
 SARC (LD 88), 900
 SASU (LD 73), 822
 SAT (LD 16), 402
 SAT (LD 74), 838
 SATD (LD 15), 324
 SATN (LD 17), 489
 SATT (LD 73), 823
 SAUN (LD 57), 768
 SAVE (LD 90), 916
 SAVE NEW MAP? (LD 29),
 688
 SBA_ADM_INS (LD 17), 489
 SBA_USER (LD 17), 489
 SBLF (LD 15), 324
 SBN (LD 16), 402
 SBOC (LD 86), 882
 SBUP (LD 15), 324
 SCBQ (LD 87), 893
 SCCI (LD 86), 882
 SCCT (LD 56), 749
 SCDL (LD 15), 324
 SCDR (LD 88), 900
 SCDT (LD 16), 402
 SCFT (LD 02), 58
 SCI (LD 10), 109
 SCI (LD 11), 180
 SCNO (LD 20), 563
 SCNT (LD 94), 956
 SCNV (LD 86), 882
 SCOD (LD 24), 641
 SCPC (LD 57), 768
 SCPL (LD 15), 325
 SCPW (LD 10), 109
 SCPW (LD 11), 180

SCPW (LD 27), 677
 SCR (LD 16), 402
 SCTL (LD 02), 58
 SDA (LD 18), 518
 SDCH (LD 14), 221
 SDFL (LD 15), 325
 SDID (LD 49), 697
 SDNB (LD 23), 630
 SDRR (LD 90), 916
 SDST (LD 02), 58
 SDTA (LD 02), 58
 SDTT (LD 73), 823
 SECOND_DN (LD 10), 109
 SECOND_DN (LD 11), 180
 SECR (LD 88), 900
 SECU (LD 17), 489
 SEIZ (LD 14), 221
 SEIZ (LD 16), 402
 SEMT (LD 17), 490
 SER (LD 50), 702
 SERV (LD 88), 900
 SET (LD 94), 956
 SETN (LD 12), 197
 SEVERITY (LD 17), 490
 SEZA (R) (LD 73), 823
 SEZA (S) (LD 73), 823
 SEZD (R) (LD 73), 823
 SEZD (S) (LD 73), 823
 SEZV (R) (LD 73), 823
 SEZV (S) (LD 73), 824
 SFAC (LD 57), 768
 SFDN (LD 10), 109
 SFDN (LD 11), 180
 SFEX (LD 14), 221
 SFLT (LD 10), 110
 SFLT (LD 11), 180
 SFMT (LD 10), 110
 SFMT (LD 11), 181
 SFNB (LD 20), 563
 SFNB (LD 21), 586
 SFNB (LD 23), 630
 SFRB (LD 20), 563
 SFRQ (LD 23), 631

SGL (LD 16), 402	SOPC (LD 02), 58	SRCD (LD 15), 325
SGRP (LD 10), 110	SOPN (LD 02), 58	SRCH (LD 16), 404
SGRP (LD 11), 182	SOPS (LD 02), 58	SRCL (LD 25), 648
SGRP (LD 12), 197	SOS (LD 73), 825	SREF (LD 14), 223
SGRP (LD 16), 402	Source Timed Local Flow-in	SREF (LD 73), 826
SGRP (LD 27), 677	queue, 625	SREF CK0 (LD 73), 826
SGRP (LD 81), 859	Source Timed Overflow queue,	SREF CK1 (LD 73), 827
SGRP (LD 88), 900	625	SRIM (LD 73), 827
SGRP (LD 93), 928	SPAR (LD 52), 710	SRMM (LD 73), 827
SHAN (LD 19), 532	SPCC (LD 57), 768	SRNT (LD 73), 827
SHCD (LD 25), 647	SPCE (LD 57), 768	SRPM (LD 16), 404
SHR (LD 23), 631	SPCL (LD 56), 749	SRPT (LD 23), 632
SHRT (LD 95), 967	SPCP (LD 23), 631	SRRT (LD 15), 326
SHSG (LD 25), 647	SPCT (LD 16), 403	SRRT (LD 23), 632
SICA (LD 14), 221	SPCU (LD 57), 768	SRRT (LD 93), 928
SICA (LD 73), 824	SPDN (LD 50), 702	SRT (LD 15), 326
SID (LD 16), 403	SPID (LD 10), 110	SRT (LD 16), 404
SID (LD 17), 490	SPID (LD 11), 182	SRT (LD 23), 632
SIDE (LD 16), 403	SPID (LD 27), 678	SRT (LD 56), 750
SIDE (LD 17), 490	SPN (LD 16), 404	SRT (LD 93), 928
SIDE (LD 74), 838	SPN (LD 87), 893	SRTK (LD 73), 828
SIGL (LD 14), 222	SPN (LD 90), 917	SRVC (LD 16), 404
SIGL (LD 16), 403	SPRE (LD 15), 325	SRVR_DN (LD 15), 326
SIGL (LD 74), 838	SPRI (LD 87), 893	SRVR_LOC (LD 15), 326
SIGO (LD 16), 403	SPTO (LD 16), 404	SSC (LD 97), 998
SITM (LD 02), 58	SPVC (LD 15), 325	SSCL (LD 90), 917
SIZE (LD 15), 325	SPWD (LD 10), 111	SSDG (LD 18), 518
SIZE (LD 17), 490	SPWD (LD 11), 182	SSDT (LD 17), 491
SIZE (LD 18), 518	SPWD (LD 15), 325	SSHC (LD 02), 58
SIZE (LD 21), 586	SPWD (LD 20), 563	SSHS (LD 02), 58
SL1B (LD 17), 490	SPWD (LD 24), 641	SSID (LD 02), 58
SLCT (LD 16), 403	SPWD (LD 88), 900	SSL (LD 16), 405
SLLC (LD 02), 58	SRAN (LD 15), 325	SSL (LD 18), 518
SLOT (LD 97), 997	SRC (LD 25), 647	SSLK (LD 56), 750
SLP (LD 73), 824	SRC (LD 56), 749	SSPU (LD 57), 768
SLV3 (LD 19), 532	SRC1 (LD 56), 750	SSRV_ETSI (LD 27), 678
SLV6 (LD 19), 532	SRC2 (LD 56), 750	SSRV_N1 (LD 27), 678
SMAS (LD 14), 223	SRC3 (LD 56), 750	SST (LD 16), 405
SMEM (LD 17), 491	SRC4 (LD 56), 750	SSU (LD 11), 182
SMFC (LD 94), 956	SRC5 (LD 56), 750	SSU (LD 12), 197
SNUM (LD 58), 778	SRC6 (LD 56), 750	SSUC (LD 18), 518
SOHQ (LD 87), 893	SRC7 (LD 56), 750	SSUP (LD 17), 491
SOLR (LD 17), 491	SRC8 (LD 56), 750	STAD (LD 02), 58

STAL (LD 95), 967
 STAR (LD 88), 901
 STCB (LD 15), 326
 STE (LD 15), 326
 STEP (LD 16), 405
 STHC (LD 02), 58
 STHS (LD 02), 58
 STIO (LD 23), 632
 STND (LD 16), 406
 STO (LD 58), 778
 STOP (LD 17), 491
 STOP (LD 88), 901
 STOR (LD 18), 519
 STOR (LD 26), 650
 STRG (LD 15), 326
 STRI (LD 14), 223
 STRK (LD 16), 406
 STRK (LD 90), 917
 STRL (LD 15), 326
 STRO (LD 14), 225
 STRT (LD 16), 406
 STSG (LD 25), 648
 STUN (LD 25), 648
 STYP (LD 14), 225
 STYP (LD 16), 406
 STYP (LD 97), 998
 SUB (LD 19), 532
 SUPL (LD 97), 998
 SUPL_SVC (LD 27), 679
 SUPN (LD 14), 227
 SUPPORTED_TEXT_ONLY
 (LD 17), 492
 SUPPRESS (LD 17), 492
 SUPT (LD 97), 999
 SVFL (LD 16), 406
 SWP (LD 16), 406
 SXS (LD 14), 227
 SYNC (LD 17), 492
 SYNM (LD 17), 492
 SZNI (LD 73), 828

T

T_TN (LD 14), 227
 T1 (LD 17), 492
 T1 (LD 27), 679
 T10/T20 (LD 27), 679
 T100 (LD 15), 326
 T100 (LD 16), 406
 T11/T21 (LD 27), 679
 T12/T22 (LD 27), 679
 T13/T23 (LD 27), 679
 T2 (LD 17), 492
 T2 (LD 27), 679
 T200 (LD 17), 492
 T200 (LD 27), 679
 T203 (LD 17), 493
 T203 (LD 27), 679
 T23 (LD 17), 493
 T2WN (LD 97), 999
 T2WT (LD 97), 999
 T2WV (LD 97), 999
 T3 (LD 17), 493
 T3 (LD 27), 679
 T310 (LD 17), 493
 T310 (LD 27), 679
 T4WN (LD 97), 999
 T4WT (LD 97), 1000
 T4WV (LD 97), 1000
 TABL (LD 16), 406
 TABL (LD 23), 632
 TABL (LD 56), 750
 TABT (LD 58), 778
 TARG (LD 16), 406
 TASK (LD 52), 710
 TAWU (LD 15), 326
 TBL (LD 15), 326
 TBL (LD 16), 407
 TBL (LD 86), 883
 TBNO (LD 18), 519
 TBNO (LD 20), 564
 TBNO (LD 94), 956
 TBTR (LD 58), 778
 TC (LD 27), 679
 TCFT (LD 02), 58
 TCPP (LD 16), 407
 TCRS (LD 16), 407
 TDET (LD 16), 407
 TDET (LD 86), 883
 TDG (LD 16), 407
 TDNS, 632
 TDNS (LD 23), 632
 TDP (LD 97), 1000
 TDPO (LD 97), 1000
 TDS (LD 17), 493
 TDSH (LD 56), 750
 TDST (LD 02), 58
 TDTA (LD 02), 58
 TEI (LD 27), 680
 TEM (LD 20), 564
 TEMP (LD 20), 564
 TEN (LD 10), 111
 TEN (LD 11), 182
 TEN (LD 17), 493
 TEN (LD 20), 564
 TEN (LD 93), 928
 TERD (LD 17), 493
 TERM (LD 17), 494
 TERQ (LD 17), 494
 TEST (LD 56), 750
 TFAS (LD 57), 768
 TFD (LD 16), 407
 TFDL (LD 15), 327
 TGAR (LD 10), 111
 TGAR (LD 11), 182
 TGAR (LD 14), 227
 TGAR (LD 16), 407
 TGAR (LD 24), 641
 TGAR (LD 27), 680
 TGAR (LD 86), 883
 TGAR (LD 88), 901
 TGLD (LD 15), 327
 TGLR (LD 73), 828
 TGR1 (LD 15), 327
 TGR2 (LD 15), 327
 THIRD_DN (LD 10), 111
 THIRD_DN (LD 11), 182

TID (LD 97), 1000
TIDM (LD 15), 327
TIDY (LD 16), 408
TIE (LD 56), 750
TIE (LD 94), 956
TIER (LD 16), 408
TIM_DATA (LD 15), 327
TIM1 (LD 15), 327
TIM1 (LD 93), 928
TIM2 (LD 15), 327
TIM2 (LD 93), 928
TIM3 (LD 15), 327
TIM3 (LD 93), 928
TIM4 (LD 15), 327
TIM4 (LD 93), 928
TIME (LD 15), 327
TIME (LD 73), 828
TIMP (LD 10), 111
TIMP (LD 14), 227
TIMR (LD 16), 408
TIMR (LD 17), 494
TIMR (LD 27), 680
TITE (LD 17), 494
TITH (LD 16), 414
TITM (LD 02), 58
TKID (LD 14), 228
TKTP (LD 16), 414
TKTP (LD 27), 680
TLLC (LD 02), 58
TLP (LD 56), 750
TLPT (LD 56), 750
TMAT (LD 56), 751
TMDI (LD 17), 494
TMON (LD 15), 327
TMOT (LD 56), 751
TMRK (LD 17), 494
TN (LD 10), 112
TN (LD 11), 183
TN (LD 12), 197
TN (LD 13), 202
TN (LD 14), 228
TN (LD 17), 494
TN (LD 20), 564
TN (LD 22), 599
TN (LD 27), 680
TN (LD 50), 702
TN (LD 84&85), 868
TNDM (LD 15), 328
TNDM (LD 18), 519
TNDN (LD 57), 768
TNLS (LD 73), 830
TNS (LD 97), 1000
TNUM (LD 97), 1001
TO (LD 49), 697
TOBO (LD 16), 416
TOD (LD 86), 883
TODR (LD 17), 494
TODS (LD 86), 883
TOFT (LD 23), 633
TOGP (LD 26), 650
TOGR (LD 18), 519
TOHQ (LD 87), 893
TOHV (LD 97), 1003
TOLL (LD 18), 520
TOLL (LD 73), 830
TOLR (LD 17), 495
TOLS (LD 18), 520
TOLT (LD 73), 830
TON (LD 15), 328
TONE (LD 56), 751
TONE (LD 86), 883
TONES (LD 56), 751
TOPC (LD 02), 58
TOPN (LD 02), 58
TOPS (LD 02), 58
TORT (LD 19), 532
TOT4 (LD 23), 633
TOTN (LD 10), 112
TOTN (LD 11), 184
TOTN (LD 12), 198
TOTN (LD 13), 202
TOTN (LD 14), 229
TOV (LD 11), 184
TOV (LD 16), 416
TPF (LD 97), 1003
TPO (LD 17), 495
TRAN (LD 11), 184
TRAN (LD 16), 416
TRAN (LD 58), 778
TRAN (LD 90), 917
TRANS (LD 27), 680
TRC (LD 73), 831
TRCL (LD 15), 328
TRCR (LD 15), 328
TRDN (LD 23), 633
TRDN (LD 58), 778
TRGT (LD 23), 633
TRIGGER (LD 17), 495
TRLL (LD 17), 495
TRMB (LD 16), 416
TRMD (LD 57), 768
TRMT (LD 16), 417
TRMT (LD 27), 681
TRNS (LD 17), 495
TRNX (LD 15), 328
TRO (LD 16), 417
TRRL (LD 16), 417
TRSH (LD 17), 495
TRSH (LD 73), 831
TRVS (LD 57), 768
TSC (LD 87), 893
TSET (LD 27), 681
TSFT (LD 23), 633
TSHC (LD 02), 58
TSHS (LD 02), 58
TSID (LD 02), 59
TSO (LD 17), 496
TST (LD 16), 417
TST_DATA (LD 15), 328
TST0 (LD 15), 328
TST1 (LD 15), 328
TST2 (LD 15), 328
TST3 (LD 15), 329
TSTL (LD 15), 329
TSUT (LD 56), 751
TTA (LD 16), 417
TTAD (LD 02), 59
TTBL (LD 15), 329
TTBL (LD 16), 417

TTHC (LD 02), 59
 TTHS (LD 02), 59
 TTY (LD 17), 496
 TTY_TYPE (LD 17), 496
 TTYLOG (LD 17), 496
 TTYP (LD 97), 1003
 TUBO (LD 17), 496
 TW_INC_CLID (LD 16), 417
 TW_ROUTE (LD 16), 417
 TWSP (LD 58), 778
 TYNM (LD 29), 688
 TYPE
 , 113
 (LD 10), 113
 (LD 15), 329
 (LD 20), 566
 TYPE (LD 12), 198
 TYPE (LD 13), 202
 TYPE (LD 14), 229
 TYPE (LD 16), 417
 TYPE (LD 17), 496
 TYPE (LD 18), 520
 TYPE (LD 19), 532
 TYPE (LD 21), 586
 TYPE (LD 22), 600
 TYPE (LD 23), 633
 TYPE (LD 24), 641
 TYPE (LD 26), 650
 TYPE (LD 27), 681
 TYPE (LD 28), 684
 TYPE (LD 49), 697
 TYPE (LD 50), 702
 TYPE (LD 52), 710
 TYPE (LD 56), 751
 TYPE (LD 57), 769
 TYPE (LD 58), 779
 TYPE (LD 73), 831
 TYPE (LD 74), 838
 TYPE (LD 79), 840
 TYPE (LD 86), 883
 TYPE (LD 87), 894
 TYPE (LD 88), 901
 TYPE (LD 90), 918

TYPE (LD 93), 928
 TYPE (LD 94), 956
 TYPE (LD 95), 967
 TYPE (LD 97), 1003

U

UBRI (LD 15), 330
 UCFS (LD 73), 831
 UCST (LD 15), 330
 UMG (LD 15), 330
 UMG (LD 23), 634
 UMT (LD 23), 634
 UPDT (LD 49), 697
 USCR (LD 57), 769
 USE (LD 57), 769
 USER (LD 17), 497
 USER (LD 27), 681
 USER (LD 56), 751
 USER (LD 57), 769
 USFB (LD 20), 571
 USFB (LD 21), 588
 USFB (LD 23), 634
 USID (LD 27), 682
 USR (LD 17), 500
 UST (LD 15), 330
 UST (LD 23), 634
 USTA (LD 57), 769

V

V25 (LD 11), 186
 V25 (LD 16), 417
 VAS (LD 17), 500
 VCNA (LD 17), 500
 VCRD (LD 17), 500
 VDCH (LD 86), 883
 VDMI (LD 86), 883
 VHST (LD 22), 602
 VISI (LD 11), 186
 VLL (LD 11), 186
 VMB (LD 10), 113

VMB (LD 11), 186
 VMB_COS (LD 10), 113
 VMB_COS (LD 11), 186
 VMB_STATE (LD 20), 571
 VNDN (LD 79), 840
 VNL (LD 73), 832
 VNR (LD 15), 330
 VNS (LD 86), 884
 VNSC (LD 17), 500
 VNSM (LD 17), 500
 VNSP (LD 17), 500
 VOLR (LD 17), 500
 VRAT (LD 16), 418
 VSID (LD 15), 330
 VSID (LD 17), 501
 VSID (LD 23), 634
 VSIG (LD 17), 501
 VSIT (LD 10), 113
 VTLF (LD 57), 769
 VTLN (LD 57), 769
 VTRK (LD 86), 884
 VTRO (LD 17), 501

W

WAIT (LD 15), 330
 WAIT (LD 16), 418
 WAIT (LD 93), 929
 WATR (LD 16), 418
 WCAD (LD 56), 751
 WDG (LD 16), 418
 WIRE (LD 11), 186
 WKDY (LD 15), 330
 WRLS (LD 10), 113
 WRT (LD 18), 520
 WSIZ (LD 27), 682
 WTON (LD 56), 752
 WTYP (LD 10), 113
 WUD (LD 15), 331

X

X25P (LD 27), 682
XCAD (LD 56), 752
XCT (LD 17), 502
XDIC (LD 14), 231
XEM (LD 73), 832
XFER (LD 95), 967
XLAT (LD 18), 521
XLST (LD 10), 114
XLST (LD 11), 186
XLST (LD 27), 682
XMIT (LD 94), 957
XNPD (LD 97), 1004
XNUM (LD 17), 502
XPDN (LD 49), 697
XPE (LD 97), 1004
XPE0 (LD 97), 1004
XPE1 (LD 97), 1004
XPEC (LD 97), 1005
XPLN (LD 10), 114
XPLN (LD 11), 187
XPLN (LD 95), 967
XPVC (LD 27), 682
XRFP (LD 15), 331
XRFR (LD 15), 331
XSM (LD 17), 502
XSMN (LD 97), 1005
XTDT (LD 13), 203
XTDT (LD 16), 418
XTDT (LD 97), 1006
XTMR (LD 17), 503
XTON (LD 56), 752
XTRK (LD 14), 231
XUT (LD 73), 832
XXX (LD 87), 894

Z

ZONE (LD 11), 187
ZONE (LD 14), 232

Y

YALM (LD 17), 503

Meridian 1
Software Input/Output Guide
X11 Administration

Copyright © 1995–2000 Nortel Networks
All Rights Reserved
Information is subject to change without notice. Nortel Networks reserves the right to make changes in design or components as progress in engineering and manufacturing may warrant. This equipment has been tested and found to comply with the limits for a Class A digital device pursuant to Part 15 of the FCC rules, and the radio interference regulations of Industry Canada. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy, and if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.
SL-1 and Meridian 1 are trademarks of Nortel Networks.
Publication number: 553-3001-311
Document release: Standard 7.00
Date: April 2000
Printed in Canada



How the world shares ideas.